BCD104-EVS

BCDVideo Enterprise 1U 4-Bay Rackmount Video Recording Server

POWERFUL AND VERSATILE ENTERPRISE 1U RACKMOUNT SERVER


Manufactured for enterprise IP video surveillance applications and fully customizable for individual project requirements, the BCD104-EVS enterprise video server provides unrivaled value and performance.

With bi-directional, dual port SAS drives providing up to 64TB of raw storage, the latest Intel® Xeon® E series and Silver processors, and up to 64GB of DDR4 RAM, the BCD104-EVS guarantees the throughput needed for any project.

Redundant, hot swappable power supplies and RAID 5/6 storage options provide high system availability. A pair of M.2 solid state drives for the operating system and applications provide reliability and fast application load times for added performance, while a five-year, on-site, next business day, Keep Your Hard Drive warranty guarantees peace of mind.





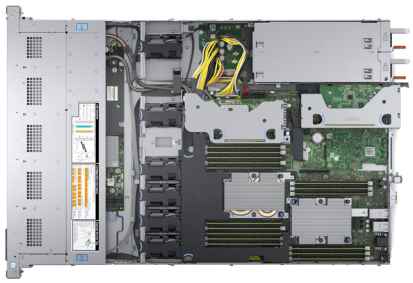

KEY FEATURES

- Up to 64TB of Raw Storage
- Intel® Xeon® E Series & Silver Processors
- Windows Server 2019
- iDRAC Express
- SSD & SAS Drives
- Redundant Power
- RAID Options 0, 1, 5, 6, 10
- 5-Year Keep Your Hard Drive Warranty

harmonize Bridge
POWERED BY TIGER TECHNOLOGY
Inside

FOR MORE INFORMATION: bcdvideo.com | sales@bcdinc.com | +1.888.305.4993
TECH SUPPORT: support@bcdinc.com

BCD104-EVS R1.0 Copyright © 2021, BCD. All rights reserved. This document is provided for information purposes only.
Intel, the Intel logo, the Intel Inside logo and Xeon are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries.

BCD104-EVS

BCDVideo Enterprise 1U 4-Bay Rackmount Video Recording Server

SYSTEM

Operating System
Windows Server 2019

Memory
Single CPU: 16GB (2x 8GB)
Dual CPU: 32GB (4x 8GB)
Maximum Configuration: Up to 64GB
(4x DDR4 DIMM Slots)

Processor(s)
Intel® Xeon® E-2236
(6 cores, 12 threads @ 3.40GHz)
Intel® Xeon® Silver 4210
(10 cores, 20 threads @ 3.20GHz)

Processor Passmark
Intel® Xeon® E-2236: 14,333
Intel® Xeon® Silver 4210: 14,507
Dual Intel® Xeon® Silver 4210: 23,437

Networking
Single CPU: (2) 1GbE RJ45 Ports
Dual CPU: (2) 1GbE RJ45 Ports &
(2) 10GbE SFP+ Ports

Expansion Slots
2x PCIe Gen 3.0 slots: (1) x8 slot low- profile, half-length with x4 slot width, (1) x16 slot low-profile/full-height, half- length with x8 bandwidth

USB(s)
Rear (2) USB 3.0, Front (1) USB 2.0

Video Outputs
(1) VGA

Remote Management
iDRAC Express

MECHANICAL

Form Factor
1U Rackmount

Power Supply(s)
Single CPU: 350W (100-240VAC) 80 Plus Platinum
Dual CPU: (2) 550W (100-240VAC) 80 Plus Platinum

Operating Temperature
(Min) 50°F - (Max) 95° F [(Min) 10°C - (Max) 35° C]

Operating Humidity
10 ~ 80% (non-condensing)

Heat Dissipation
Single CPU: 955 Max BTU/hr
Dual CPU: 1500 Max BTU/hr

Dimensions (WxDxH)
Xeon® E-2236: 17.08" (434mm) x 22.58" (573.6mm) x 1.68" (42.8mm)
Xeon® Silver 4210: 17.08" (434mm) x 28.13" (714.62mm) x 1.68" (42.8mm)

Max. Weight
Xeon® E-2236: 29.98 lbs. (13.6 kg)
Xeon® Silver 4210: 38.9 lbs (17.6 kg)

Warranty
5-Year, On-site, Next Business Day, Keep Your Hard Drive Warranty

Manufacturer
BCD

STORAGE

Hard Drive Bays
(4) 3.5" Hot Swappable Bays &
(2) M.2 SSD Slots

Hard Drives Supported
PCIe NVMe & SAS

RAID
OS RAID: 0, 1
Data RAID: 0, 1, 5 6, 10

RAID Controller
PERC H730P (2GB NV Cache)

Maximum Storage
Up to 64TB

FOR MORE INFORMATION: bcdvideo.com | sales@bcdinc.com | +1.888.305.4993
TECH SUPPORT: support@bcdinc.com

BCD104-EVS R1.0 Copyright © 2021, BCD. All rights reserved. This document is provided for information purposes only.
Intel, the Intel logo, the Intel Inside logo and Xeon are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries.