
NF141208AU

14x12x8 Fiberglass Weatherproof NEMA 4X Enclosure with 100-240 VAC Universal Power Outlets

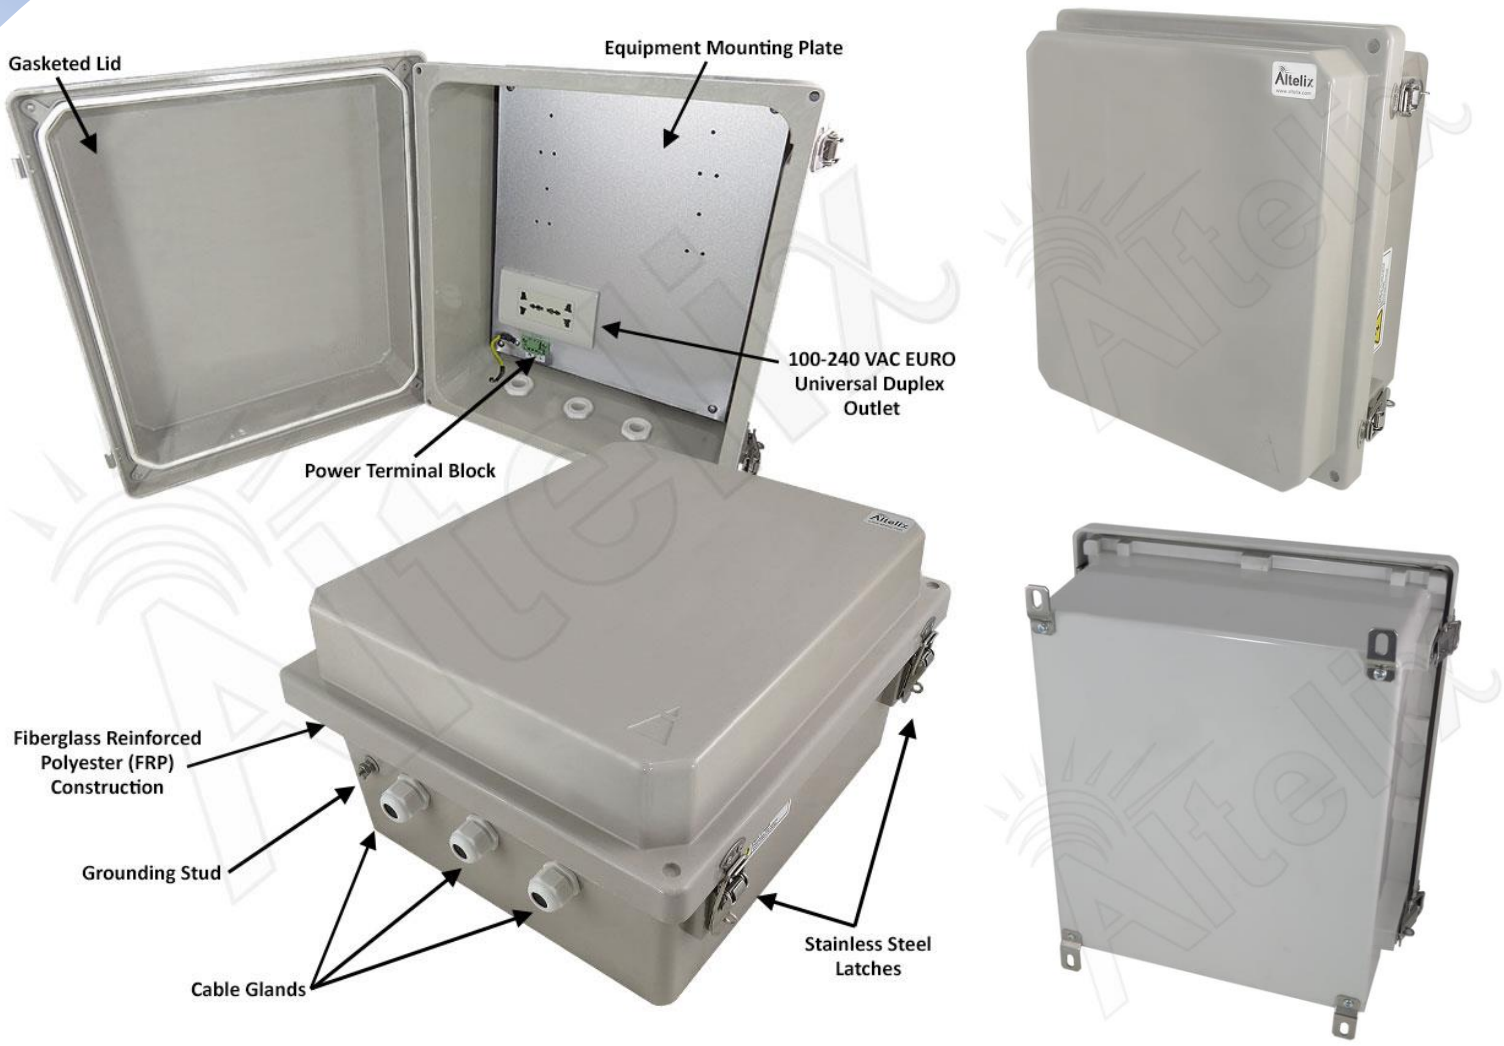

Features

- (2) Pre-Wired Universal 100-240VAC Outlets
- Removable Power Terminal Block
- Aluminum Equipment Mounting Plate
- Extended Lid for Increased Equipment Clearance
- Stainless Steel Hinge and Quick Release Latches with Padlock Hasps
- Fiberglass Reinforced Polyester, FRP
- Weatherproof, UV Stable and Highly Corrosion Resistant
- Meets NEMA 1, 2, 4, 4X, 12, 13, and IP65, IP66
- Includes Cable Glands and Stainless-Steel Mounting Feet
- RF Transparent Enclosure
- Pole Mounting Kit Available

Altelix LLC USA: 866-660-9434 +1 561-660-9434 sales@altelix.com www.altelix.com
Copyright (C) 2023 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.

Description

The **Altelix NF141208AU** NEMA 4X enclosure features a 100-240VAC universal power outlet supporting multiple international power standards in addition to the USA:

- 110VAC 50/60Hz
- 115VAC 50/60Hz
- 220VAC 50/60Hz
- 230VAC 50/60Hz
- 240VAC 50/60Hz

Universal Power Outlet
The universal 100-240 VAC power outlet is compatible with the following plug types:

- UK/Ireland BS 1363
- Italy CEI 23-16/VII
- Denmark Afsnit 107-2-D1
- Euro plug (2-pin) CEE 7/16
- Australia Type I
- India BS 546
- *Swiss (2-pin) SEV 1011
- *Israel SI 32
- *North America (2-pin) NEMA 1-15 and (3-pin) NEMA 5-15
- *Continental Europe (Schuko) CEE 7
- *France/Belgium CEE 7

*Please refer to the safety notes in the Technical Specs

Extreme Protection Built to Last
This rugged JIC style NEMA box is molded from durable UV stable and corrosion resistant fiberglass reinforced polyester (FRP) with a UL94-5V flame rating. The FRP material is dent-proof, non-conductive and RF transparent for compatibility with wireless equipment. It can be easily drilled and modified by the installer as needed. It features a gasketed door with stainless steel continuous hinge and stainless-steel quick release latches with padlock hasps. The generous size of this enclosure and the extended lid accommodate a wide range of equipment.

Aluminum Equipment Mounting Plate with Removable Power Terminal Block
The enclosure includes an aluminum equipment mounting plate. The enclosure and plate can be drilled by the installer to suit unique site requirements. This enclosure features our top entry power terminal block. It is easily removable which helps simplify on-site wiring. It can accept wires sizes from 12 to 18 AWG. The wires are secured by side terminal screws.

Copyright (C) 2023 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.

Specifications

Material	Fiberglass Reinforced Polyester
Color	Gray
Voltage	110VAC 50/60Hz 115VAC 50/60Hz 220VAC 50/60Hz 230VAC 50/60Hz 240VAC 50/60Hz
Universal Outlet Compatibility	UK/Ireland BS 1363 Italy CEI 23-16/VII Denmark Afsnit 107-2-D1 Euro plug (2-pin) CEE 7/16 India BS 546 Australia Type I Swiss (2-pin) SEV 1011* Israel SI 32* North America (2-pin) NEMA 1-15* North America (3-pin) NEMA 5-15* Continental Europe (Schuko) CEE 7* France/Belgium CEE 7*
Terminal Block Wire Range	12-18 AWG
Terminal Block Wire Strip Length	6-7mm
Outer Dimensions	15.7 x 13.8 x 8.6 Inches (401 x 352 x 219 mm)
Inner Dimensions*	13.0 x 11.0 x 6.7 Inches (330 x 279 x 171 mm)
Mounting Plate Material	0.10 in (2.5 mm) Aluminum
Mounting Plate Dimensions	10.9 x 12.8 in. (276 x 324 mm)
Weight	10.8 lbs. (4.9 kg)
Ratings*	NEMA Type 4, 4X / IP66
Flame Rating	UL94-5V

*Notes
1) Enclosure ports must be properly sealed to maintain NEMA Type 4, 4X / IP66 rating.
2) See drawing for detailed dimensions of maximum space available for equipment.

Safety Notes:

1. In some countries (Swiss, Israel, and North America) there may be polarity differences. To avoid possible damage to a device, check the polarity of your power supply and that of your device before plugging it in to the Universal AC outlet and switching it on.

2. Some devices require they be grounded. Use caution with plugs from Continental Europe (Schuko) and France/Belgium for the Universal AC outlet does not allow for the grounding tabs or grounding pin.

Altelix LLC USA: 866-660-9434 +1 561-660-9434 sales@altelix.com www.altelix.com
Copyright (C) 2023 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.