

AMG255 SERIES INDUSTRIAL MAINS POWERED MEDIA CONVERTERS WITH 120W POE



Industrial Ethernet Solutions

AMG's media converters provide a multirate 100Mb/Gigabit Ethernet uplink across fibre via the SFP port with 120W available PoE. Available with an integrated mains PSU in both single and dual channel models along with a single channel model with dual RJ45 ports provides for maximum flexibility.



							
10/100 up to x2	Gigabit up to x2	100/1000 up to x2	Temp -40°C~+75°C	Mounting DIN/Surface	PSU AC & DC	Protection IP40	NDA/TAA Compliant

[AMG255 Series]

OVERVIEW

Designed in a compact DIN rail or wall mount housing, the AMG255 series mains powered media converters are ideally suited for connecting equipment to Ethernet networks over long distances using all types of fibre through the integrated SFP port(s). Fibre connectivity is determined by separate SFP device selection, providing application and site flexibility.

Available as PoE models for IEEE802.3at/bt 30/60/90W they are suitable for powering the latest high powered PoE devices over a wide industrial operating temperature range.

Fitted with an integrated fully industrial mains power supply along with a redundant DC power input and power failure alarm relay ensures maximum operating reliability and the highest levels of performance. The integrated mains power supply can also provide any remaining power as a standard DC voltage output to power 3rd party external devices.

A wide range of models are available to suit all design requirements.

SFPs need to be ordered separately.

FEATURES

- Compact size – ideal for confined spaces, including camera poles and roadside cabinets
- -40°C to +75°C temperature maintains performance in extreme conditions
- Plug & Play – no need for any user configuration
- DIN rail mountable – quick to install and remove for maintenance
- All SFP ports are multirate 100Mb/Gigabit – support single and multimode, single or dual fibre options up to 120Km
- Integrated mains power supply with 54V_{DC} @ 120W output and a 2nd DC power input for redundancy
- Fault relay for dual power input failure notification
- Supports 15W, 30W, 60W and 90W PoE
- Designed in the USA & UK. Manufactured in the United Kingdom
- AMG Lifetime Support Warranty

Specifications.

Standards.

IEEE802.3i	10Base-T
IEEE802.3u	100Base-TX & 100Base-FX
IEEE802.3ab	1000Base-T
IEEE802.3z	1000Base-X
IEEE802.3af	15W PoE
IEEE802.3at	30W PoE+
IEEE802.3bt	60 & 90W PoE
IEEE802.3x	Flow Control

Jumbo Frames	9.2Kbytes
Address Table	2K MAC Entries

Interface.

LED Indicators	2x Power DC Power Output SFP Link/Activity RJ45 Link/Activity PoE
RJ45 Ports	1 or 2x 10/100TX RJ45 or 1 or 2x 10/100/1000T(X) RJ45 with Auto MDI/MDI-X and 1.5 kV Isolation Protection
SFP Slot	1 or 2x 100/1000FX SFP
Mains Power	1x IEC C14 Socket with locking security bracket or 1x 3-Way Barrier Screw Terminal
DC Power/Relay	1x 6 pin removable terminal block with locking screws

Power.

Power Inputs	2
Input 1 Voltage	85-264V _{AC} or 120-370V _{DC}
Input 1 Frequency	47-63 Hz
Input 1 Current:	2A (115V _{AC}) / 1A (230V _{AC})
Input 1 Fuse	3.15A/250V Slow-Blow
Input 2 Voltage:	52-56V _{DC}
Power Consumption:	
Single Channel	2W Max (without PoE Load)
Dual Channel	4W Max (without PoE Load)
Integrated PSU Type	54V _{DC} @ 120W (Refer to derating chart)
PSE Mode	Mode A, Mode B
Protection	Reverse Polarity (DC Input Only), Overload Current
Fault Relay	Form A, 60V @ 2A Max

Packaging.

Shipping Weight	0.94kg / 2.07lb (Barrier Terminal Model) 1.13kg / 2.49lb (IEC Model)
Dimensions	(W x D x H) 220 × 170 × 80 mm 8.66 × 6.69 × 3.15 in

Mechanical.

Housing	Anodised Aluminium
Dimensions:	(W x D x H) 73 × 88 × 107 mm 2.87 × 3.46 × 4.21 in
Excluding DIN & Wall Mounts	
IP Rating	IP40
Installation	Wall Mount or DIN-Rail
Weight	0.75kg / 1.65lb


Environmental.

Operating Temp.	-40 to +75°C / -40 to +167°F
Storage Temp.	-40 to +85°C / -40 to +185°F
Humidity	20% to 90% (non-condensing)
MTBF	>300,000 hours
MTBF Standard	MIL-HDBK-217F GB 25°C
Heat Dissipation	314 BTU/h (1Ch 90W PoE, No Ext. Load) 409 BTU/h (1Ch 90W PoE + 1Ch 30W PoE, No Ext. Load)
Cooling	Passive Cooling
Noise Level	0 dBA



Regulatory.

Safety	EN 62368-1 Class II
EMI	EN 55032 Class B CISPR 32
	FCC Part 15B Class B
EMS	EN 61000-4-2 (ESD) EN 61000-4-3 (RS) EN 61000-4-4 (EFT) EN 61000-4-5 (Surge) EN 61000-4-6 (CS) EN 61000-4-11 (Dips)
Shock	IEC 60068-2-27
Free Fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Environmental	Reach RoHS WEEE
Traffic	NEMA TS2
Supply Chain	NDAA & TAA Compliant
Designed to meet	EN 50121-4

Application Diagram.

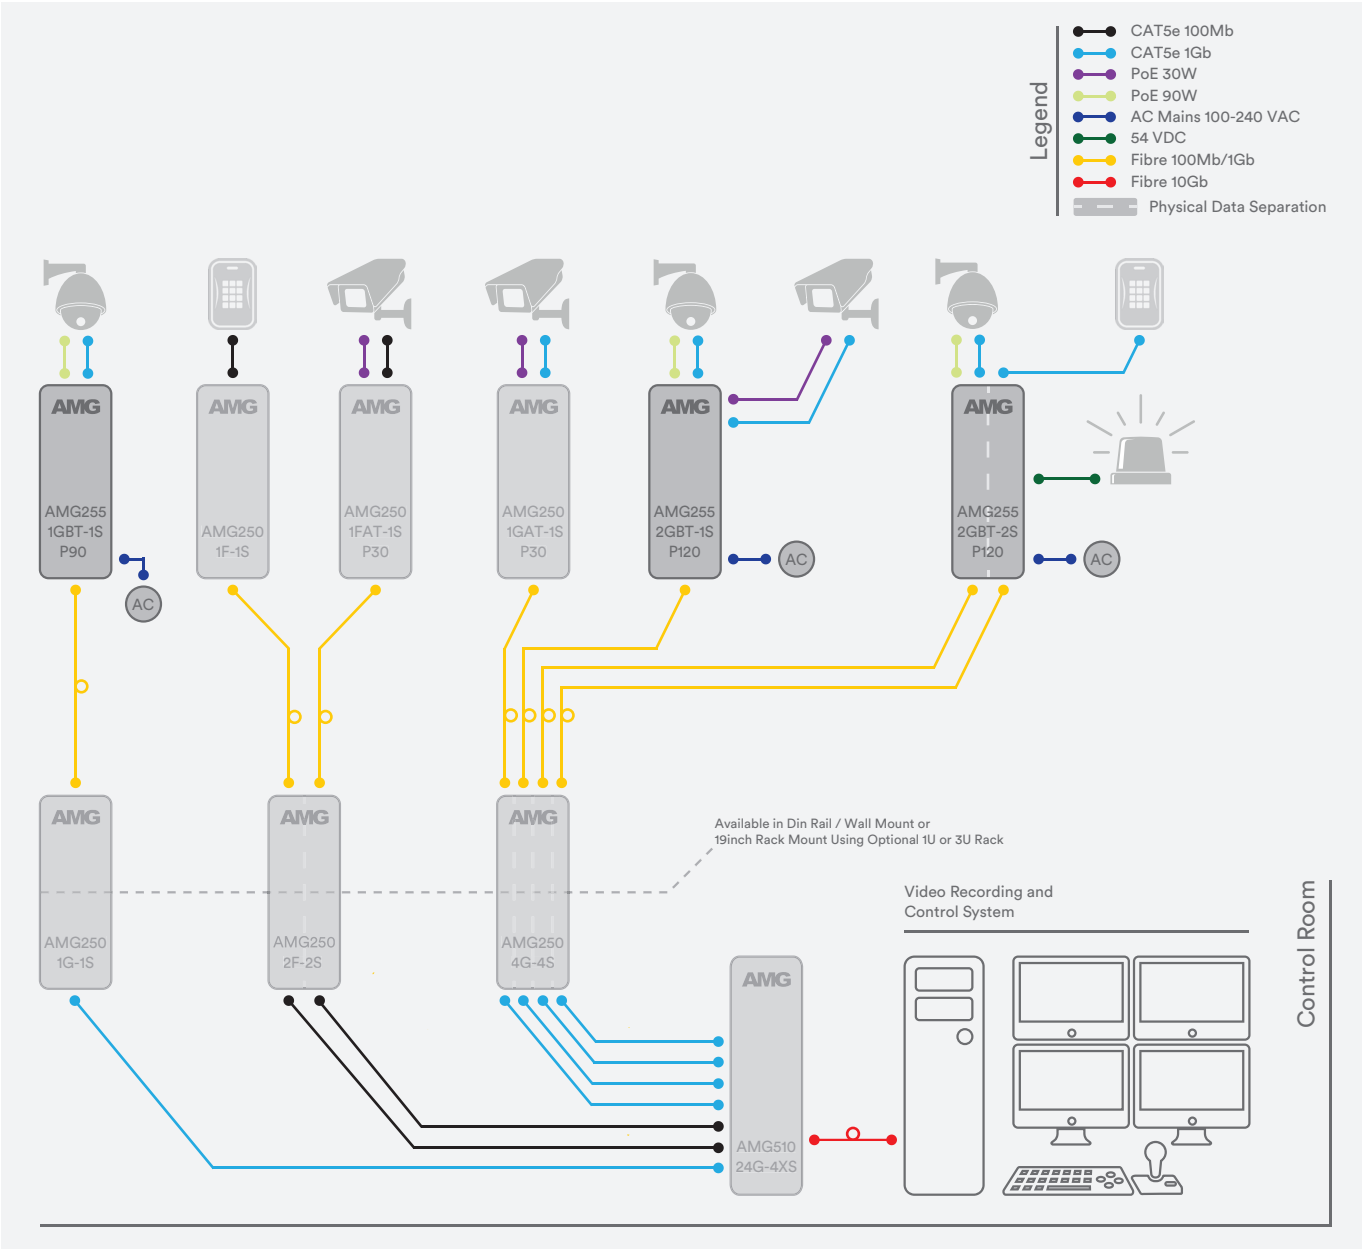

Product Characteristic Curves.

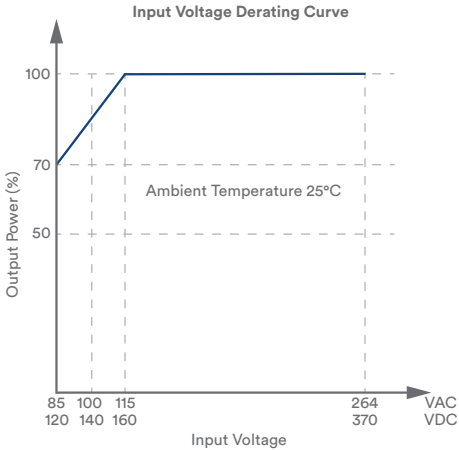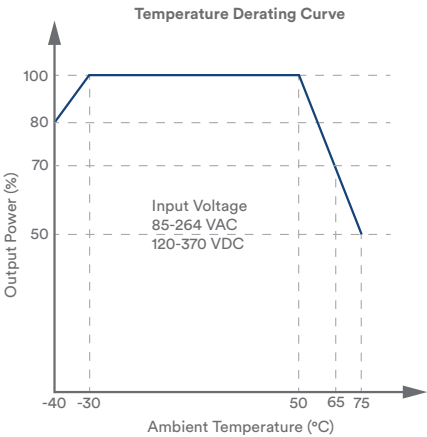

Part Numbers.

Single Channel Mains Powered Media Converters (1+1)

AMG255-1FBT-1S-P90	1 × 10/100BaseT(x) RJ45 with 30/60/90W PoE, 1 × 100/1000BaseFx SFP, 120W PSU
AMG255-1GBT-1S-P90	1 × 10/100/1000BaseT(x) RJ45 with 30/60/90W PoE, 1 × 100/1000BaseFx SFP, 120W PSU

Single Channel Mains Powered Dual Port Media Converters (2+1)

AMG255-2FBT-1S-P120	2 × 10/100BaseT(x) RJ45 with 30/60/90W PoE, 1 × 100/1000BaseFx SFP, 120W PSU
AMG255-2GBT-1S-P120	2 × 10/100/1000BaseT(x) RJ45 with 30/60/90W PoE, 1 × 100/1000BaseFx SFP, 120W PSU

Dual Channel Mains Powered Media Converters (2+2)

AMG255-2FBT-2S-P120	2 × 10/100BaseT(x) RJ45 with 30/60/90W PoE, 2 × 100/1000BaseFx SFP, 120W PSU
AMG255-2GBT-2S-P120	2 × 10/100/1000BaseT(x) RJ45 with 30/60/90W PoE, 2 × 100/1000BaseFx SFP, 120W PSU

All of the above model numbers ship with an IEC C14 mains connector on the product as standard.

For the optional Barrier Terminal Block mains connector add -T to the end of the part code. Example: **AMG255-1FBT-1S-P90-T**

Recommended Redundant PSUs.

AMGPSU-I48-P120	DIN-Rail Mounting Industrial Grade PSU, 48-53VDC, 120W
AMGPSU-I48-P120-IEC	DIN-Rail Mounting Industrial Grade PSU, 48-53VDC, 120W, IEC Input Connector

Notes.

Included Accessories:	Left Angle Region Specific IEC Line Cord (For Barrier Terminal Block Models No Line Cord Is Included) , Wall Mounting Brackets, DIN Rail Clip, IEC Plug Locking Bracket* (*IEC Models Only)
Optional Accessories:	SFP modules - Optical/Copper see separate list, need to be ordered separately, Secure Locking Region Specific Line Cords

In a continuing effort to improve and advance technology, product specifications are subject to change without notice. Please visit www.amgsystems.com for the latest product specifications.

AMG Systems Ltd. 4 Pioneer Way, Castleford, WF10 5QU, UK T: +44 (0) 1767 600 777 E: sales@amgsystems.com
AMG Systems Inc. 62 Spring Hill Road, Trumbull, CT 06611, USA T: +1-855-AMGPOE1 (855-264-7631) E: sales@amgsystems.com
D33467-03 amgsystems.com

Proud to be a British
Manufacturer 

AMG