

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Compact > Cloud Gateway Ultra



Cloud Gateway Ultra

UCG-Ultra




Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

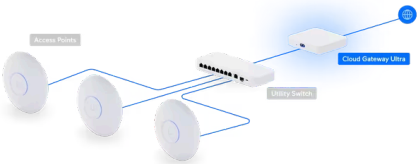

^ Overview

Dimensions 141.8 x 127.6 x 30 mm
(5.6 x 5 x 1.2")

UniFi Application Suite

Network ⓘ	✓
Managed UniFi Devices	30+
Simultaneous Users Connected	300+
Max. WAN Port Count	4

Port Layout

1 GbE RJ45	4 (1G/100M/10M)
2.5 GbE RJ45	1 (2.5G/1G/100M/10M)

IDS/IPS Throughput 1 Gbps

Form Factor Compact desktop

^ **Security**

Stateful Firewall	✓
Application-Aware Layer 7 Firewall	✓
DPI & Traffic Identification	✓
Zone-Based Firewall Advanced Filtering (Regions, Domains, Apps)	✓
Content Filtering	✓
Intrusion Prevention (IPS/IDS)	✓
Ad Blocking	✓
IDS/IPS Signatures	55,000+ with CyberSecure
VLAN/Subnet-based Traffic Segmentation	✓

^ **VPN & SD-WAN**

License-Free SD-WAN	✓
Site-to-Site VPN	
Site Magic	✓
IPsec	✓
OpenVPN	✓
VPN Server	
Identity Endpoint One-Click VPN	✓

WireGuard	✓
OpenVPN	✓
L2TP	✓
VPN Client	
OpenVPN	✓
WireGuard	✓
^ Networking	
Multi-WAN Load Balancing	✓
Dynamic Routing	
OSPF	✓
BGP	✓
Advanced QoS	✓
Multicast DNS (mDNS)	✓
Advanced NAT (SNAT / DNAT / Masquerade / NAT Pooling / 1-to-1 NAT)	✓
Integrated RADIUS Server	✓
RADIUS over TLS (RadSec)	✓
Additional Internet Failover with UniFi LTE Backup	✓
Internet Quality and Outage Reporting	✓
MAC Address Table Size	2,000
Policy-based WAN and VPN Routing	✓
Customizable DHCP Server	✓
IPv6 ISP Support	✓
IGMP Proxy	✓
Virtual Network Override	✓

Max. Power Consumption	6.2W
Power Method	USB type C (5V DC/3A)
Power Supply	USB type C (5V DC/3A) (Adapter included)
Supported Voltage Range	100-240V AC
Heat Dissipation	21 BTU/hr
Processor	Quad-core ARM® Cortex®-A53 at 1.5 GHz
System Memory	3 GB
On-board Storage	16 GB
Weight	520 g (1.1 lb)
Enclosure Material	Polycarbonate
LCM Display	0.96" status display
Management	Ethernet Bluetooth
LEDs	
Ethernet	✓
Button	(1) Factory reset
Ambient Operating Temperature	-10 to 40° C (14 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 04653-24-08356, SRRC

^ **Software**

Application Requirements

Mobile App	UniFi iOS™: Version 10.12.0 and later UniFi Android™: Version 10.11.2 and later
------------	--

Stay in Touch

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.