

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Bridging > [Device Bridge IoT](#)



Device Bridge IoT



UDB-IoT

Datasheet

In The Box

Marketing Images

Installation Guide

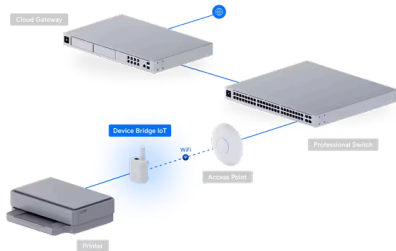

Overview

Dimensions

Device: 63 x 44.5 x 25.5 mm
(2.5 x 1.8 x 1")
With external antenna: 89 x 44.5 x 25.5 mm
(3.5 x 1.8 x 1")

WiFi Standard

WiFi 4

Spatial Streams

2

Mounting Locations

Wall, DIN rail

Mounting

Included mount

^ Performance

MIMO

2.4 GHz 2 x 2

Max. Data Rate

2.4 GHz 300 Mbps (BW40)

Antenna Gain

2.4 GHz Internal: 4dBi
External omni: 3dBi

Max. TX Power

2.4 GHz 20 dBm

Max. Conducted TX Power

20 dBm (Combined)

Supported Data Rates

802.11n 6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)

Wireless Security

WPA2 AES (Always On)

^ Hardware

Max. Power Consumption

2.3W

Supported Voltage Range

USB-C: 5V DC
Socket: 9-30V DC

Networking Interface

(1) 10/100M RJ45 port

Antennas

(1) Internal antenna
(1) RP-SMA connector for external omni-antenna

Management

WiFi

Channel Bandwidth

20/40 MHz

Weight

Device: 45 g (1.6 oz)
With external antenna: 53 g (1.9 oz)

Enclosure Material

Polycarbonate

Mount Material

Polycarbonate



LEDs

System	(4) Blue: signal (1) White/blue: indicator
NDAA Compliant	✓
Certifications	CE, FCC, IC
Ambient Operating Temperature	-10 to 50° C (14 to 122° F)
Ambient Operating Humidity	5 to 95% noncondensing

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.