

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Large Scale > [Dream Machine Pro](#)



Dream Machine Pro

UDM-Pro


Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

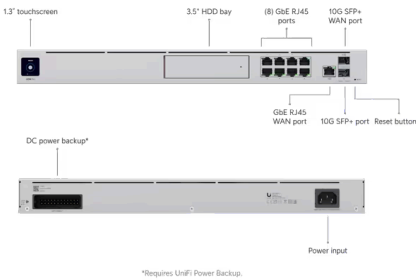

^ Overview

Dimensions

442.4 x 43.7 x 285.6 mm
(17.4 x 1.7 x 11.2")

UniFi Application Suite

- Network ⓘ

Protect ⓘ

Access ⓘ

Talk ⓘ

Connect ⓘ
- ✓

✓

✓

✓

✓

Managed Cameras	(24) HD
	(14) 2K
	(8) 4K
Managed Access Hubs i	150
Simultaneous Users Connected	1,000+
Max. WAN Port Count	8
Default WAN Ports	(1) 10G SFP+
	(1) GbE RJ45
Port Layout	
1 GbE RJ45	9 (1G/100M/10M)
10G SFP+	2 (10G/1G)
IDS/IPS Throughput	3.5 Gbps
Form Factor	Rack mount (1U)
Redundancy	Shadow Mode (VRRP) Gateway Failover
	DC Power Backup i
^ Security	
Stateful Firewall	✓
Application-Aware Layer 7 Firewall	✓
DPI & Traffic Identification	✓
Zone-Based Firewall Advanced Filtering (Regions, Domains, Apps)	✓
Content Filtering	✓
Intrusion Prevention (IPS/IDS)	✓
Ad Blocking	✓
IDS/IPS Signatures	55,000+ with CyberSecure
VLAN/Subnet-based Traffic Segmentation	✓

License-Free SD-WAN	✓
Site-to-Site VPN	
Site Magic	✓
IPsec	✓
OpenVPN	✓
VPN Server	
Identity Endpoint One-Click VPN	✓
Teleport Zero-Configuration VPN	✓
WireGuard	✓
OpenVPN	✓
L2TP	✓
VPN Client	
OpenVPN	✓
WireGuard	✓
^ Networking	
Multi-WAN Load Balancing	✓
Shadow Mode (VRRP) High Availability	✓
LACP Port Aggregation	✓ ⓘ
Dynamic Routing	
OSPF	✓
BGP	✓
Advanced QoS	✓
Multicast DNS (mDNS)	✓
Advanced NAT (SNAT / DNAT / Masquerade / NAT Pooling / 1-to-1 NAT)	✓
Integrated RADIUS Server	✓

Additional Internet Failover with UniFi
LTE Backup

✓

Internet Quality and Outage Reporting

✓

MAC Address Table Size

4,000

Policy-based WAN and VPN Routing

✓

Customizable DHCP Server

✓

IPv6 ISP Support

✓

IGMP Proxy

✓

Virtual Network Override

✓

All Traffic Flows

✓

^ Hardware

NVR Storage

(1) 3.5" NVR HDD bay

Max. Power Consumption

33W

Power Method

(1) Universal AC input, 100-240V AC, 50/60 Hz
(1) USP-RPS DC input

Power Supply

AC/DC, internal, 50W

Supported Voltage Range

100-240V AC

Heat Dissipation

112 BTU/hr

Processor

Quad-core ARM® Cortex®-A57 at 1.7 GHz

System Memory

4 GB

On-board Storage

16 GB

Weight

3.9 kg (8.6 lb)

Enclosure Material

Aluminium CNC, SGCC steel

Mount Material

SGCC steel

LCM Display

1.3" touchscreen

Management

Ethernet
Bluetooth



Ethernet	✓
SFP+	✓
RPS	✓
PSU	✓
HDD	✓
Button	(1) Factory reset
ESD/EMP Protection	Air: ± 15kV, contact: ± 8kV
Ambient Operating Temperature	-10 to 40° C (14 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 01136-20-08356, SRRC

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.