

UniFi

UISP

Branding

🔍 Search UniFi products

loud Gateways

Switching

WiFi

Physical Security

Door Access

Integrations

Accesssc

Enterprise > Enterprise Campus 48S PoE



Enterprise Campus 48S PoE

ECS-48S-PoE

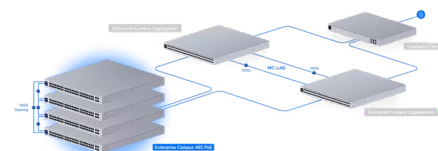
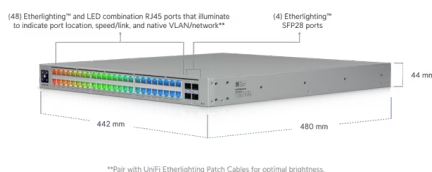
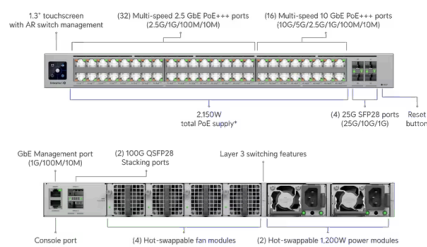
Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

[^] Overview

Dimensions

442.4 x 44 x 496 mm
(17.4 x 1.7 x 19.5")

Port Layout

1 GbE RJ45

1
(1G/100M/10M) ⓘ

2.5 GbE RJ45

32 (All PoE+++)
(2.5G/1G/100M/10M) ⓘ

10 GbE RJ45

16 (All PoE+++)
(10G/5G/2.5G/1G/100M/10M) ⓘ

100G QSFP28	2 (100G) ⓘ
Console	1
Max. PoE Output	Up to PoE+++
Total PoE Availability	200-240V AC Shared Mode: 2,150W 100-120V AC Shared Mode: 1,750W 200-240V AC Redundant Mode: 950W 100-120V AC Redundant Mode: 750W
Redundancy	Switch Stacking (2) Hot-Swappable PSUs (4) Hot-Swappable Fans
Layer 3	✓
Form Factor	Rack Mount (1U, Full-Depth) ⓘ
Etherlighting™	✓

^ Performance

Switching Capacity	680 Gbps
Total Non-Blocking Throughput	340 Gbps
Forwarding Rate	506 Mpps
Supported VLANs	1,000
MAC Address Table Size	32,000
IPv4 Static Routes	512
Packet Buffer Size	8 MB

Access Lists

IPv4	256
MAC	256

^ Layer 3 Features

DHCP Server (Local Networks)	✓
DHCP Relay	✓

Static Routing (Local Networks)	✓
---------------------------------	---

^ Layer 2 Features

LACP Port Aggregation	✓
-----------------------	---

Stacking	✓ ⓘ
----------	-----

Cross-Stack LAG	✓ ⓘ
-----------------	-----

STP & RSTP	✓
------------	---

QoS (DSCP)	✓
------------	---

Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron)	✓
--	---

Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
--	---

IGMP Snooping	✓
---------------	---

802.1X Control	✓
----------------	---

MAC-Based ACLs & Device Isolation	✓
-----------------------------------	---

DHCP Snooping & Guarding	✓
--------------------------	---

Egress Rate Limit	✓
-------------------	---

Flow Control	✓
--------------	---

Storm Control	✓
---------------	---

Multicast & Broadcast Rate Limiting	✓
-------------------------------------	---

MAC Address Blocking	✓
----------------------	---

IP-Based ACLs & Network Isolation	✓
-----------------------------------	---

MAC-Based Port Restriction	✓
----------------------------	---

Port Isolation	✓
----------------	---

Port Mirroring	✓
----------------	---

Jumbo Frames	✓
--------------	---

LLDP-MED	✓
----------	---

Voice VLAN	✓
------------	---

Virtual Network Override

✓

^ **Hardware**

PoE Ports

PoE+++

48

Max. PoE Wattage per Port by PSE

PoE

15.4W

PoE+

30W

PoE++

60W

PoE+++

90W ⓘ

Max. Power Consumption

250W (Excluding PoE Output)
2,400W (Including PoE Output)

Power Method

(2) Universal input, 100-240V AC, 50/60 Hz

Power Input Method

(2) AC input, Hot-swappable power modules

Power Supply

(2) Hot-swappable AC/DC 1,200W power modules

Supported Voltage Range

100-240V AC

Management

Ethernet
OOB Management port
Serial Console
AR

Heat Dissipation

853 BTU/hr (Excluding PoE Output)

Weight

Without mounting brackets: 9.5 kg (20.9 lb)
With mounting brackets: 9.6 kg (21.1 lb)

Enclosure Material

SGCC steel

Mount Material

SGCC steel

Supported Rack Depth

482.6 mm (19") four-post racks
Posts depths ranging from 650 to 1,000 mm (25.6-39.4")

LCM Display

1.3" touchscreen

Fan Method

(4) Hot-swappable fan modules ⓘ



Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Etherlighting™	
Ethernet	✓
SFP28	✓
LEDs	
Ethernet	✓
SFP28	✓
System	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC
^ Software	
Application Requirements	
UniFi Network	Version 10.6.101 and later

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.