

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Utility > Flex 2.5G



Flex 2.5G
USW-Flex-2.5G-8



Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

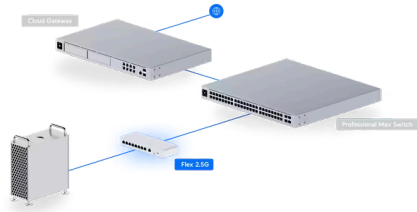

Overview

Dimensions

212.9 x 76 x 33.5 mm
(8.4 x 3 x 1.3")

Port Layout

2.5 GbE RJ45

8
(2.5G/1G/100M/10M)

10 GbE RJ45

1
(10G/5G/2.5G/1G/100M) ⓘ

10G SFP+

1
(10G/1G) ⓘ

Form Factor

Compact Desktop, wall, DIN, magnetic ⓘ



Switching Capacity	60 Gbps
Total Non-Blocking Throughput	30 Gbps
Forwarding Rate	45 Mpps
Supported VLANs	256
MAC Address Table Size	4,000
^ Layer 2 Features	
STP & RSTP	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
Loop Protection	✓
^ Hardware	
Max. Power Consumption	14W with PoE input 14W with AC adapter input
Power Method	(1) USB Type-C, 5V DC, 3A (1) PoE+
Power Input Method	USB Input PoE
Power Supply	AC/DC, external, 15W
Supported Voltage Range	4.8—5.2V DC/USB 44V—57V PoE
Management	Ethernet
Weight	395 g (0.87 lb)



Mount Material	Polycarbonate
Ambient Operating Temperature	-20 to 45° C (-4 to 113° F)
Ambient Operating Humidity	10 to 90% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel
^ Software	
Application Requirements	
UniFi Network	Version 9.0.114 and later

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.