

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Utility > Industrial




Industrial
USW-Industrial

Datasheet

In The Box

Marketing Images

Installation Guide

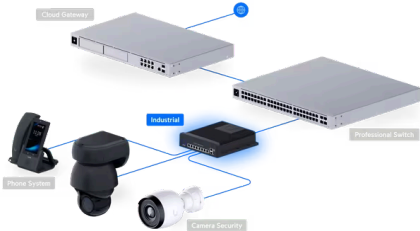

Overview

Dimensions	252.5 x 238 x 60 mm (9.9 x 9.4 x 2.4")
Port Layout	
1 GbE RJ45	10 (8 PoE++) (1G/100M/10M)
Max. PoE Output	Up to PoE++
Total PoE Availability	430W
Form Factor	Compact desktop, wall

Switching Capacity	20 Gbps
Total Non-Blocking Throughput	10 Gbps
Forwarding Rate	15 Mpps
Supported VLANs	256
MAC Address Table Size	4,000
^ Layer 2 Features	
STP & RSTP	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
Loop Protection	✓
Virtual Network Override	✓
^ Hardware	
PoE Ports	
PoE++	8
Max. PoE Wattage per Port by PSE	
PoE++	60W
Max. Power Consumption	20W (Excluding PoE Output) 450W (Including PoE Output)
Power Method	Universal input, 100-240V AC, 50/60 Hz
Power Input Method	AC input
Power Supply	AC/DC, internal, 450W

Management	Ethernet
Heat Dissipation	68.2 BTU/hr (Excluding PoE Output)
Weight	3.9 kg (8.5 lb)
Enclosure Material	Die-cast aluminum with black powder coated finish
ESD Protection	Air: ± 24kV, contact: ± 24kV
Ambient Operating Temperature	Internal AC/DC @ 450W: -40 to 50° C (-40 to 122° F) Internal AC/DC @ 240W: -40 to 60° C (-40 to 140° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC
^ Software	
Application Requirements	
UniFi Network	Version 7.2.94 and later

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.