



[UniFi](#) [UISP](#) [Branding](#)

[Cloud Gateways](#)

[Switching](#)

[WiFi](#)

[Physical Security](#)

[Door Access](#)

[Integrations](#)

[Access](#)

Power Tech > [Power Distribution Hi-Density](#)




Power Distribution Hi-Density

USP-PDU-HD

Datasheet

In The Box	Marketing Images	Installation Guide
------------	------------------	--------------------



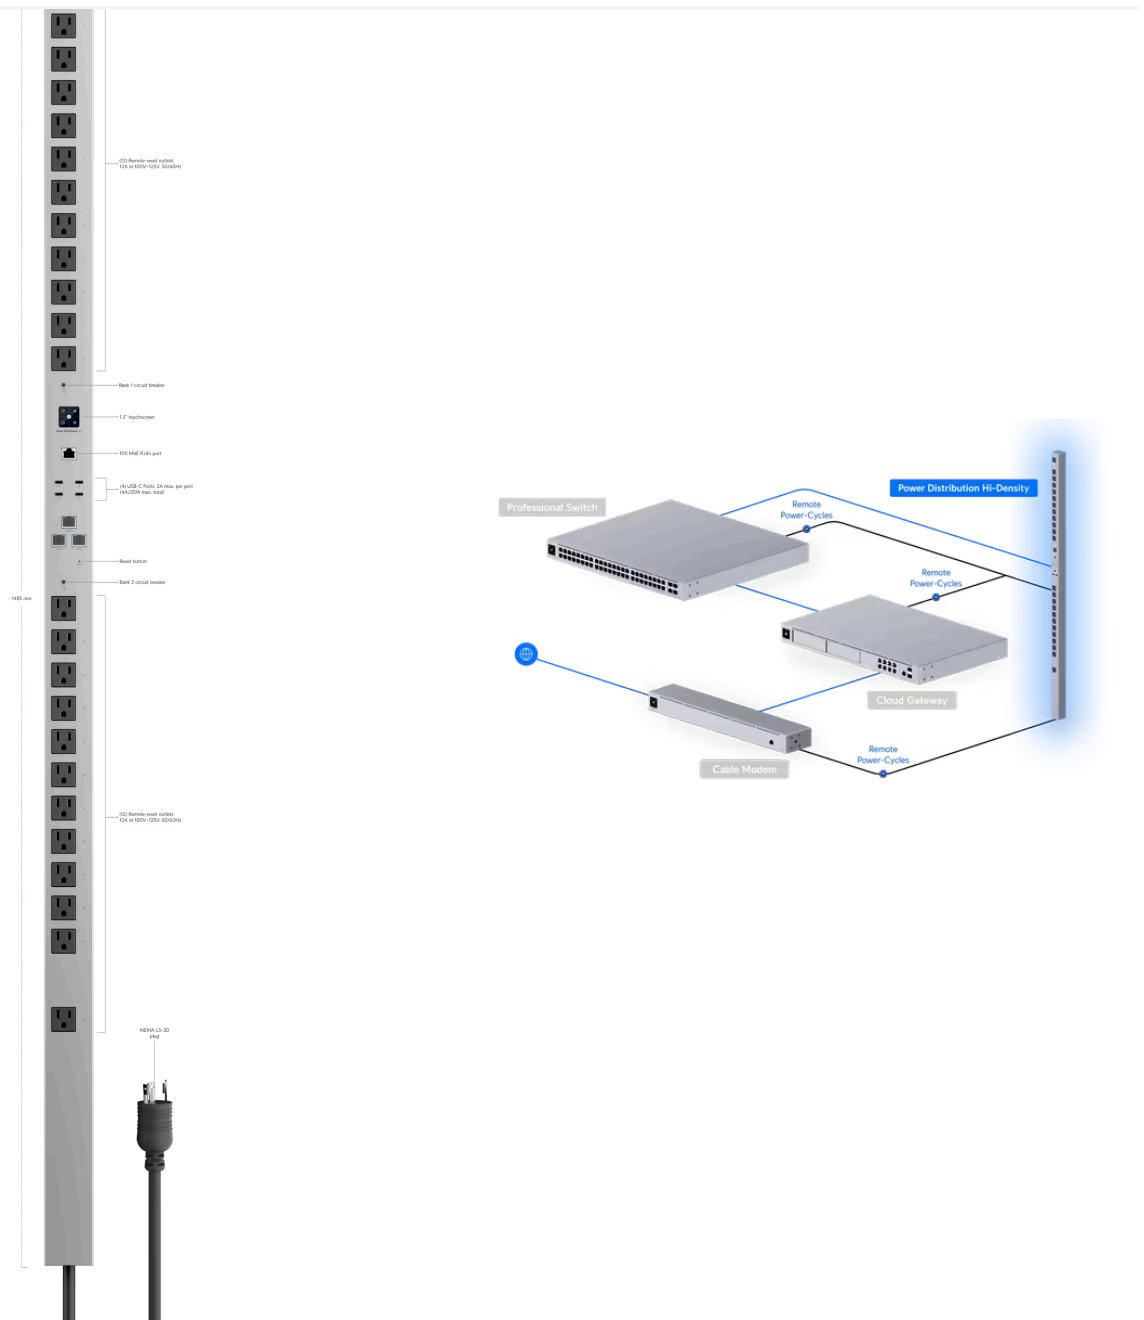

^ Mechanical

Dimensions

1485 x 55 x 56 mm
(58.5 x 2.17 x 2.2")

Weight

6.3 kg (13.9 lb)

Enclosure Material

SGCC steel

^ Hardware

Management

Ethernet

Power Method	100-125V AC, 30A Max. (Derated to 24A), 50/60 Hz (NEMA L5-30P)
Power Output	(24) Power control outlets: Per Bank (Bank1: port 1 to 12, Bank2: port 17 to 28): Rating output current: 12A at 125V AC (1500W) Max. output current: 15A at 125V AC (1875W) Total: Rating output current: 24A at 125V AC (3000W) Max. output current: 30A at 125V AC (3750W) (4) USB type C ports: 5VDC 2A per port, total 20W Max. power
ESD/EMP Protection	Air: ± 8kV, contact: ± 4kV
Display	1.3" touchscreen
Buttons	(1) Factory reset (1) Circuit breaker
Ambient Operating Temperature	0 to 40° C (32 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
NDAA Compliant	✓
Certifications	FCC, IC
^ Software	
Application Requirements	
Mobile Apps	UniFi iOS™ and 10.11.0 and later Android™ 10.11.0 and later
UniFi Network	Version 8.0.24 and later

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.