



UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Utility > Pro 8 PoE



Pro 8 PoE
USW-Pro-8-PoE



Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

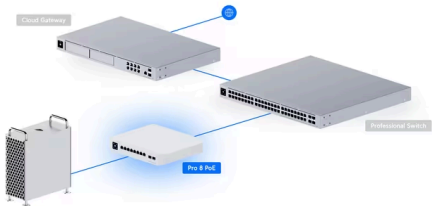

Overview

Dimensions	200 x 248 x 44 mm (7.9 x 9.8 x 1.7")
Port Layout	
1 GbE RJ45	8 (6 PoE+; 2 PoE++) (1G/100M/10M)
10G SFP+	2 (10G/1G)
Max. PoE Output	Up to PoE++
Total PoE Availability	120W

Form Factor	Compact desktop, wall
-------------	-----------------------

^ Performance

Switching Capacity	56 Gbps
Total Non-Blocking Throughput	28 Gbps
Forwarding Rate	42 Mpps
Supported VLANs	1,000
MAC Address Table Size	16,000
IPv4 Static Routes	256
Packet Buffer Size	1.5 MB
Access Lists	
IPv4	128
MAC	128

^ Layer 3 Features

DHCP Server (Local Networks)	✓
DHCP Relay	✓
Inter-VLAN Routing (Local Networks)	✓
Static Routing (Local Networks)	✓

^ Layer 2 Features

LACP Port Aggregation	✓
STP & RSTP	✓
Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓

Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓
Virtual Network Override	✓
^ Hardware	
PoE Ports	
PoE+	6
PoE++	2
Max. PoE Wattage per Port by PSE	
PoE	15.4W
PoE+	32W
PoE++	64W
Max. Power Consumption	30W (Excluding PoE Output) 150W (Including PoE Output)
Power Method	Universal input, 100-240V AC, 50/60 Hz
Power Input Method	AC input
Power Supply	AC/DC, internal, 150W



Management	Ethernet AR
Heat Dissipation	102.4 BTU/hr (Excluding PoE Output)
Weight	2.1 kg (4.6 lb)
Enclosure Material	Polycarbonate, metal
Mount Material	Polycarbonate
Supported Rack Depth	400~1200 mm (15.7-47.2")
LCM Display	1.3" touchscreen
Ambient Operating Temperature	-5 to 45° C (23 to 113° F)
Ambient Operating Humidity	10 to 90% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 05214-24-08356
^ Software	
Application Requirements	
UniFi Network	Version 7.5.176 and later

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.