

UniFi UISP Branding

Q Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Professional Max & XG > [Pro Max 16 PoE](#)



Pro Max 16 PoE
USW-Pro-Max-16-PoE


Datasheet

In The Box



Marketing Images

Accessories

Installation Guide

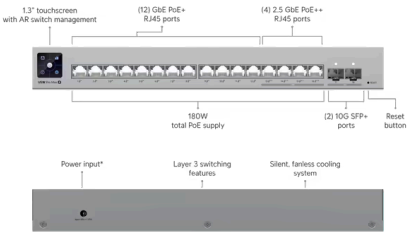

*54V, 210W DC power adapter included.

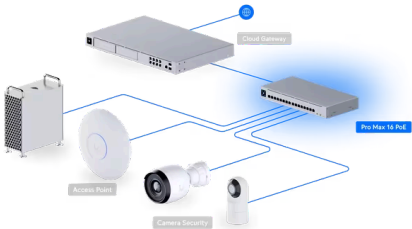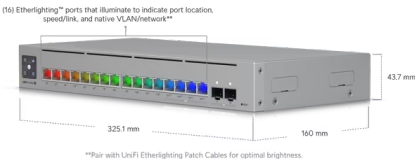

Overview

Dimensions

325.1 x 160 x 43.7 mm
(12.8 x 6.3 x 1.7")

Port Layout

1 GbE RJ45

12 (All PoE+)
(1G/100M/10M)

2.5 GbE RJ45

4 (All PoE++)
(2.5G/1G/100M/10M)

10G SFP+

2
(10G/1G)

Total PoE Availability	180W
Layer 3	✓
Form Factor	Rack mount (1U), desktop, wall ⓘ
Etherlighting™	✓
^ Performance	
Switching Capacity	84 Gbps
Total Non-Blocking Throughput	42 Gbps
Forwarding Rate	62 Mpps
Supported VLANs	1,000
MAC Address Table Size	16,000
IPv4 Static Routes	256
Packet Buffer Size	1.5 MB
Access Lists	
IPv4	128
MAC	128
^ Layer 3 Features	
DHCP Server (Local Networks)	✓
DHCP Relay	✓
Inter-VLAN Routing (Local Networks)	✓
Static Routing (Local Networks)	✓
^ Layer 2 Features	
LACP Port Aggregation	✓
STP & RSTP	✓
QoS (DSCP)	✓
Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron)	✓

IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓
Virtual Network Override	✓

^ **Hardware**

PoE Ports

PoE+	12
PoE++	4

Max. PoE Wattage per Port by PSE

PoE	15.4W
PoE+	32W

Max. Power Consumption	25W (Excluding PoE Output) 210W (Including PoE Output)
Power Method	AC Adapter
Power Input Method	AC input
Power Supply	AC/DC, external, 210W
Supported Voltage Range	50-54V DC
Management	Ethernet AR
Heat Dissipation	68 BTU/hr (Excluding PoE Output)
Weight	2.1 kg (4.6 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel
Supported Rack Depth	400~1200 mm (15.7-47.2")
LCM Display	1.3" touchscreen
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Etherlighting™	
Ethernet	✓
SFP+	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 08953-24-08356

^ Software

Application Requirements

UniFi Network	Version 8.1.127 and later
---------------	---------------------------

Stay in Touch

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.