

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Professional Max & XG > [Pro XG 48 PoE](#)



Pro XG 48 PoE
USW-Pro-XG-48-PoE




Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

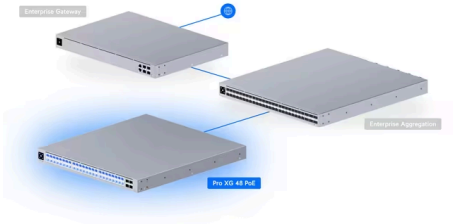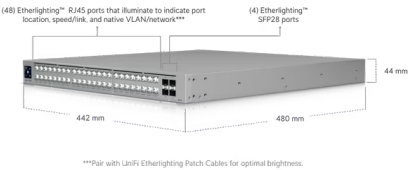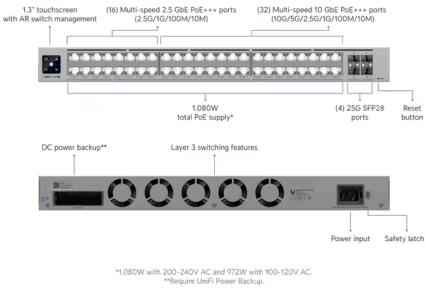

Overview

Dimensions

442 x 480 x 44 mm
(17.4 x 18.9 x 1.7")

Port Layout

2.5 GbE RJ45

16 (All PoE+++)
(2.5G/1G/100M/10M) ⓘ

10 GbE RJ45

32 (All PoE+++)
(10G/5G/2.5G/1G/100M/10M) ⓘ

25G SFP28

4
(25G/10G/1G)

Total PoE Availability	200-240V AC: 1080W 100-120V AC: 972W
------------------------	---

Redundancy	DC Power Backup ⓘ
------------	-------------------

Layer 3	✓
---------	---

Form Factor	Rack mount (1U)
-------------	-----------------

Etherlighting™	✓
----------------	---

^ Performance

Switching Capacity	920 Gbps
--------------------	----------

Total Non-Blocking Throughput	460 Gbps
-------------------------------	----------

Forwarding Rate	684 Mpps
-----------------	----------

Supported VLANs	1,000
-----------------	-------

MAC Address Table Size	32,000
------------------------	--------

IPv4 Static Routes	512
--------------------	-----

Packet Buffer Size	8 MB
--------------------	------

Access Lists	
--------------	--

IPv4	256
------	-----

MAC	256
-----	-----

^ Layer 3 Features

DHCP Server (Local Networks)	✓
------------------------------	---

DHCP Relay	✓
------------	---

Inter-VLAN Routing (Local Networks)	✓
-------------------------------------	---

Static Routing (Local Networks)	✓
---------------------------------	---

^ Layer 2 Features

LACP Port Aggregation	✓
-----------------------	---

STP & RSTP	✓
------------	---

QoS (DSCP)	✓
------------	---



Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓
Virtual Network Override	✓

^ **Hardware**

PoE Ports

PoE+++	48
--------	----

Max. PoE Wattage per Port by PSE

PoE	15.4W
PoE+	30W

PoE+++	90W
	200W (Excluding PoE Output)
Max. Power Consumption	200-240V: 1,280W / 100-120V AC: 1,172W (Including PoE Output)
Power Method	(1) Universal input, 100-240V AC, 50/60 Hz (1) USP RPS DC input
Power Input Method	AC input
Power Supply	AC/DC, internal, 1,350W
Supported Voltage Range	100-240V AC
Management	Ethernet AR
Weight	Without mounting brackets: 8.7 kg (19.2 lb) With mounting brackets: 8.8 kg (19.4 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel
Supported Rack Depth	482.6 mm (19") four-post racks Posts depths ranging from 600 to 1,066 mm (23.6-42")
LCM Display	1.3" touchscreen
ESD Protection	Air: ± 30kV, contact: ± 20kV
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Etherlighting™	
Ethernet	✓
SFP28	✓
LEDs	
RPS	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 04322-25-08356



Application Requirements

UniFi Network

Version 9.1.120 and later

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.