

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Power Tech > Redundant Power




Redundant Power
USP-RPS

Datasheet

In The Box

Marketing Images

Installation Guide

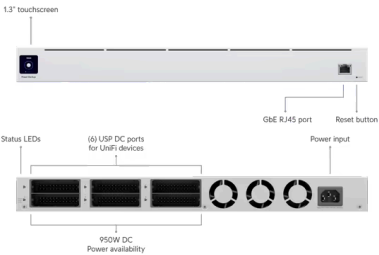

^ Mechanical

Dimensions

442.4 x 325.6 x 43.7 mm
(17.4 x 12.8 x 1.7")

Weight

Without mount brackets : 5.5 kg (12.1 lb)
With mount brackets: 5.6 kg (12.3 lb)

Enclosure Material

SGCC steel

^ Hardware

Management

Ethernet

Networking Interface

(1) GbE RJ45 port

Power Method

(1) Universal AC input, 100-240V AC

Supported Voltage Range	100-240V AC
Max. Power Consumption	995W
Power Output	(6) RPS DC ports
Max. Power Output	52V DC: 11.54A (600W) 11.5V DC: 30.44A (350W)
Max. Output Power per RPS Port	52V DC: 11.54A (600W) 11.5V DC: 30.44A (350W)
ESD/EMP Protection	Air: ± 16kV, contact: ± 12kV
Display	1.3" touchscreen
Buttons	(1) Factory reset
LEDs	
System	Status
USP RPS	Activity
Ambient Operating Temperature	-5 to 45° C (23 to 113° F)
Ambient Operating Humidity	10 to 90% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC

Stay in Touch

Email

Subscribe

