

CSS332: Microcontrollers and Applications

Midterm Mock Exam

curated by The Peanuts

Name.....ID.....Section.....Seat No.....

Conditions: Semi-Closed Book

Directions:

1. This exam has 15 pages (including this page).
2. If you finish early, stare at your paper like it's a masterpiece.
3. Write your name clearly, even microcontrollers need proper initialization.
4. Reading the problem is optional but highly recommended.
5. Answers must be written in a structured format. Random noise (scribbles) will not be processed correctly.
6. Going to the toilet may deduct your score, hold it like your grades depend on it.

For solution, click here.

Problem 1

Answer the following questions:

Convert binary 1101 1011 to decimal

Convert decimal 123 to binary and hexadecimal

Convert hexadecimal 0xA7 to binary and decimal

For the addition of 8-bit unsigned numbers: $0xF7 + 0x19$, determine:

- a) The result in hexadecimal
- b) The state of the Carry (C) flag
- c) The state of the Zero (Z) flag
- d) The state of the Half-carry (H) flag

For the subtraction of signed 8-bit numbers: $0x65 - 0x8A$, determine:

- a) The result in hexadecimal
- b) The state of the Negative (N) flag
- c) The state of the Overflow (V) flag
- d) Is this result correct from a signed arithmetic perspective? Explain.

Problem 2

Consider the following AVR assembly program:

```
.ORG 0
LDI R16, HIGH(RAMEND)
OUT SPH, R16
LDI R16, LOW(RAMEND)
OUT SPL, R16

LDI R20, 0x5A
LDI R21, 0x3F
LDI R22, 0x81
PUSH R20
PUSH R21
PUSH R22
POP R23
POP R24
POP R25
```

- a) What values will be stored in registers R23, R24, and R25 after executing this program?

- b) Show the values stored and the stack pointer position each time at *three* points: after all three PUSH instructions, after the first POP instruction, and after all three POP instructions.

0x08FB		0x08FB		0x08FB	
0x08FC		0x08FC		0x08FC	
0x08FD		0x08FD		0x08FD	
0x08FE		0x08FE		0x08FE	
0x08FF		0x08FF		0x08FF	

- c) What would happen if the PUSH and POP instructions were executed without initializing the stack pointer (the first four instructions)? Explain.

Calculate the total time delay (in milliseconds) for the delay sub-routine, assuming the microcontroller is running at 16MHz:

DELAY:

LDI R20, 160

L1:

LDI R21, 200

L2:

LDI R22, 250

L3:

NOP

NOP

DEC R22

BRNE L3

DEC R21

BRNE L2

DEC R20


BRNE L1

RET

Show your calculations step by step, counting instruction cycles accurately.

Problem 3

The circuit below shows an *Arduino UNO* connected to two switches and two LEDs:

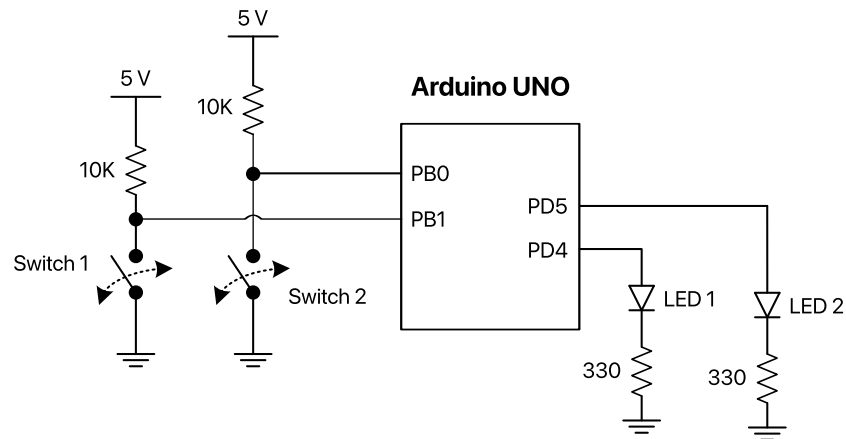

Write a complete assembly program that implements the following functionality:

- Correctly configures the I/O pins (PB0, PB1 as inputs with pull-up resistors; PD4, PD5 as outputs)
- When Switch 1 is pressed (closed state, LOW signal), LED 1 turns ON
- When Switch 1 is not pressed (open state, HIGH signal), LED 1 turns OFF
- Similarly, when Switch 2 is pressed (closed state, LOW signal), LED 2 turns ON
- When Switch 2 is not pressed (open state, HIGH signal), LED 2 turns OFF

This page is intentionally left blank for writing code

Problem 4

Using the 7-segment display pinout provided in the appendix:

Write a complete assembly program that displays your student ID one digit at a time on a common cathode 7-segment display connected to PORTD.


For example, if your student ID is *6622772422*, the program should display each digit sequentially with a delay between digits and loop continuously.



This page is intentionally left blank for writing code

Problem 5

Write a complete assembly program using macros to create a LED sequence on 8 LEDs connected to PORTD (PD0-PD7). The LEDs should light up in a pattern where a single LED appears to move back and forth across the row of LEDs.

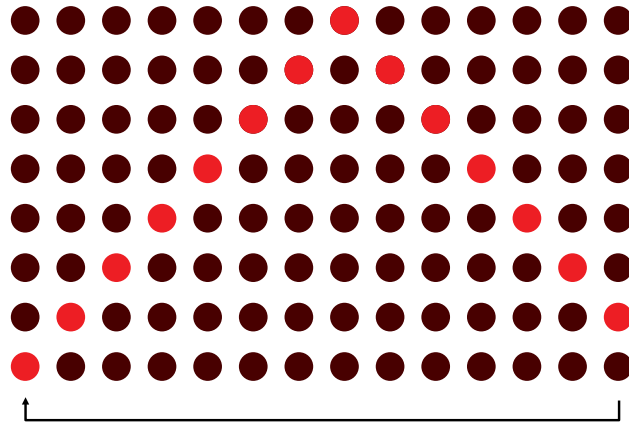

Use the following macros in your program:

```

.MACRO DELAY
    LDI    R20, @0
L1:  LDI    R21, @1
L2:  LDI    R22, @2
L3:  NOP
      NOP
      DEC   R22
      BRNE  L3
      DEC   R21
      BRNE  L2
      DEC   R20
      BRNE  L1
.ENDMACRO

.MACRO SETTLED
    LDI    R16, @0
    OUT    PORTD, R16
.ENDMACRO


```

This page is intentionally left blank for writing code

Appendix


Arduino UNO Pin Layout

Label	Port
A0	PC0(ADC0)
A1	PC1(ADC1)
A2	PC2(ADC2)
A3	PC3(ADC3)
A4	PC4(ADC4)
A5	PC5(ADC5)

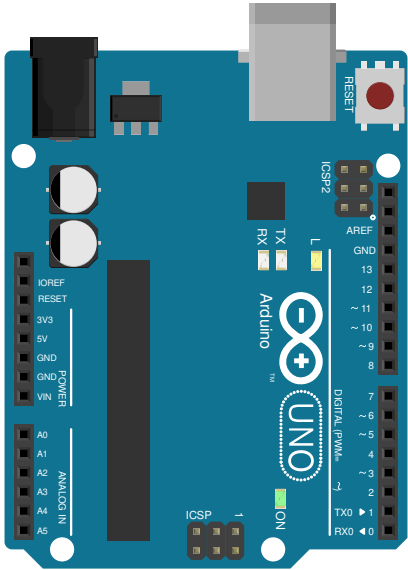

Label	Port
SCL	PC5(ADC5/SCL)
SDA	PC4(ADC4/SDA)
AREF	AREF
GND	GND
13	PB5(SCK)
12	PB4(MISO)
11	PB3(MOSI)
10	PB2(OC1B)
9	PB1(OC1A)
8	PB0
7	PD7
6	PD6
5	PD5
4	PD4
3	PD3(INT1)
2	PD2(INT0)
1	PD1(TXD)
0	PD0(RXD)

7-Segment Display Pinout

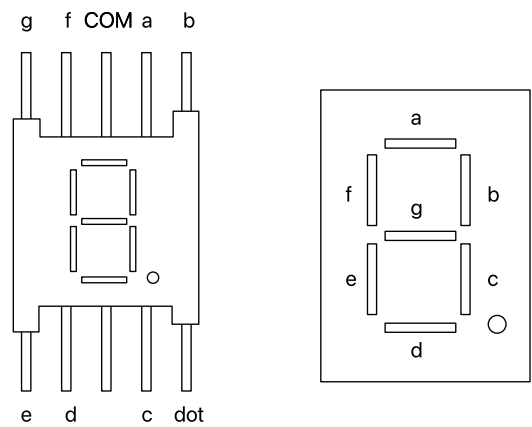

Number	g	f	e	d	c	b	a
0	0	1	1	1	1	1	1
1	0	0	0	0	1	1	0
2	1	0	1	1	0	1	1
3	1	0	0	1	1	1	1
4	1	1	0	0	1	1	0
5	1	1	0	1	1	0	1
6	1	1	1	1	1	0	1
7	0	0	0	0	0	1	1
8	1	1	1	1	1	1	1
9	1	1	0	1	1	1	1

Mnemonics	Operands	Description	Operation	Flags	#Clock
Arithmetic and Logic Instructions					
ADD	Rd, Rr	Add two registers	$Rd \leftarrow Rd + Rr$	Z,C,N,V,H	1
ADC	Rd, Rr	Add with carry	$Rd \leftarrow Rd + Rr + C$	Z,C,N,V,H	1
ADIW	Rdl, K	Add immediate to word	$Rdh:Rdl \leftarrow Rdh:Rdl + K$	Z,C,N,V,S	2
SUB	Rd, Rr	Subtract registers	$Rd \leftarrow Rd - Rr$	Z,C,N,V,H	1
SUBI	Rd, K	Subtract immediate	$Rd \leftarrow Rd - K$	Z,C,N,V,H	1
SBC	Rd, Rr	Subtract with carry	$Rd \leftarrow Rd - Rr - C$	Z,C,N,V,H	1
SBCI	Rd, K	Subtract with carry imm.	$Rd \leftarrow Rd - K - C$	Z,C,N,V,H	1
SBIW	Rdl, K	Subtract imm. from word	$Rdh:Rdl \leftarrow Rdh:Rdl - K$	Z,C,N,V,S	2
AND	Rd, Rr	Logical AND	$Rd \leftarrow Rd \times Rr$	Z,N,V	1
ANDI	Rd, K	AND with immediate	$Rd \leftarrow Rd \times K$	Z,N,V	1
OR	Rd, Rr	Logical OR	$Rd \leftarrow Rd \vee Rr$	Z,N,V	1
ORI	Rd, K	OR with immediate	$Rd \leftarrow Rd \vee K$	Z,N,V	1
EOR	Rd, Rr	Exclusive OR	$Rd \leftarrow Rd \oplus Rr$	Z,N,V	1
COM	Rd	One's complement	$Rd \leftarrow 0xFF - Rd$	Z,C,N,V	1
NEG	Rd	Two's complement	$Rd \leftarrow 0x00 - Rd$	Z,C,N,V,H	1
INC	Rd	Increment	$Rd \leftarrow Rd + 1$	Z,N,V	1
DEC	Rd	Decrement	$Rd \leftarrow Rd - 1$	Z,N,V	1
Branch Instructions					
RJMP	k	Relative jump	$PC \leftarrow PC + k + 1$	None	2
JMP	k	Direct jump	$PC \leftarrow k$	None	3
RCALL	k	Relative call	$PC \leftarrow PC + k + 1$	None	3
CALL	k	Direct call	$PC \leftarrow k$	None	4
RET		Return from subroutine	$PC \leftarrow STACK$	None	4