

Variability of Hydraulic Properties and Hydrophobicity in a Coarse-Textured Inceptisol Cultivated with Maize in the Mediterranean Area of Chile

Nicolás Riveras-Muñoz ^{1,2,*}, Carla Silva ¹, Osvaldo Salazar ¹, Thomas Scholten ², Steffen Seitz ² and Oscar Seguel ¹

¹ Universidad de Chile, Departamento de Ingeniería y Suelos, Facultad de Ciencias Agronómicas, Av. Santa Rosa 11315, La Pintana, Santiago, Chile

² University of Tübingen, Department of Geosciences, Soil Science and Geomorphology, Rümelinstrasse 19–23, 72070 Tübingen, Germany

* Correspondence: nicolas-andres.riveras-munoz@uni-tuebingen.de

Abstract: The O'Higgins Region, in central Chile, concentrates 40% of the country's maize production, mainly under ~~intensive-conventional~~ tillage. This has generated soil physical degradation modifying water movement on it, which vary even in short distances. In this study we wanted to evaluate the spatial variability of different physical and hydraulic properties and its relations of an Inceptisol under agricultural use. The study was conducted on a farm in central Chile, in a fallow-maize rotation under conventional tillage. Penetration resistance (PR) was measured using systematic sampling, defining areas of high and low PR, where soil samples were collected in places with frequent crossing of machinery (+M) and places without crossing (-M) in the wheel-track (TT) and out-of-the-wheel-track (OT); and on T_{topsoil} and s_{subsoil}, establishing four treatments: TT-+M -T_{topsoil}, +M -TT-_ssubsoil, -M -OT-T_{topsoil}, and OT-M-s_{subsoil}. Organic matter (OM), texture, bulk density (BD), hydraulic conductivity (K) and hydrophobicity (R) were measured. The soil order was Inceptisol with sandy-loam texture. PR ranged from 200000 to 2000000 Pa on topsoil and 600000 to 2400000 Pa in subsoil, and OM content was higher with low PR. K varied from 0.6 to 18 cm h⁻¹, being greater in depth, as tillage disturbs the topsoil stabilized during the season—. A linear relationship was found between K and R, explaining differences between high and low PR sites. There was an association between K_{sat} with position (subsoil/topsoil) and PR (high/low) which may allow using PR as a proxy for K.

Keywords: soil physical functioning; hydraulic conductivity; conventional tillage; penetration resistance; ~~repellency index~~hydrophobicity

1. Introduction

One of the main economic activities in Central Chile is agriculture, with maize production at the first position with 78% of the total crop surface and indicating O'Higgins Region as the largest agricultural planting area at national level [1]. The average regional yield of 11.7 Mg ha⁻¹ is above the national average of 10.6 Mg ha⁻¹, but below the potential yield of 22.0 Mg ha⁻¹ that Pioneer [2] has reported.

While Chile shares with other Mediterranean regions dominance of cloudless skies during the growing season, it has two advantages for maize production: (i) the cooling influence of the Humboldt Current that flows north along the western coast of South America, providing cool temperatures ~~o~~n summer and promoting the accumulation of biomass and (ii) in most of the world, maize is grown as a rainfed crop, while in Chile and some other very limited regions it is irrigated, resulting in yields far above the world average and making difficult ~~a~~ straightforward comparisons with other regions [3].

Formatted: Font: (Default) Palatino Linotype, 9 pt, Font color: Black

Citation: Lastname, F.; Lastname, F.; Lastname, F. Title. *Soil Syst.* **2022**, *6*, x. <https://doi.org/10.3390/xxxxx>

Academic Editor: Firstname Lastname

Received: date
Accepted: date
Published: date

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

Despite the very favorable conditions, the gap with the potential yield indicates the presence of limitations. In this sense, Taylor and Brar [4], point out root decreases and soil compaction as one of the main issues affecting the yield of maize, while Hamza and Anderson [5] attribute hydraulic properties, such as reduction in infiltration and available water, as determining factors in crop yield and root growth. In this regard, maize farmers associated to the Cooperativa Campesina Intercomunal de Peumo (COOPEU-MO), in the context of a Clean Production Agreement (CPA), indicated the presence of compaction and surface runoff problems, likely related to long-term monoculture and intensive tillage [6].

Tillage represents one of the most influential disturbances of the soil surface, resulting in changes of varying intensity for different soil properties [7]. Although the general physical restrictions generated by overcultivation are well studied, their characterization and applied assessment is difficult due to their unknown spatial distribution and high variability [8]. Soil mechanical and hydraulic processes are interrelated and affect each other. Therefore, when the soil structure and pore distribution are modified, water retention and hydraulic conductivity (K) should change [9]. The magnitude of these changes depends on external factors such as: (i) the duration and frequency of the tillage operations; and (ii) the compaction produced by the transit of agricultural machinery and/or animal trampling [10].

Sandy alluvial soils have a high K at low pressures (close to saturation), due to their greater amount of macropores ($> 10\mu\text{m}$), provided by the space between the coarse particles. However, when the pores are quickly depleted, they are filled with air, which results in a sharp decrease in the water conduction, reflected in low values of unsaturated hydraulic conductivity (K_h) [11].

A widely spread and sustainable way to avoid those harmful effects on the soil in the agricultural production is the organic matter addition. Organic matter stabilizes the contact points between soil particles through cementing and the hydrophobic effect, which prevents solutes from being dissolved by water. [12], and being the main structuring agent in the case of coarse texture dominated soils [13].

However, due to the physicochemical characteristics of certain organic compounds that coat the solid particles and have a hydrophobic effect, it can result in a reduction of the wetting rate and water repellency in the soil [14]. Cuevas Becerra [15] describes this phenomenon, as a process of high relevance since its existence is associated to preferential flows and surface runoff.

Finally, it has to be considered that ~~excessive the long-term repeated~~ tillage and incorporation of organic residues into cereal production systems leads to compaction problems that can hinder the capacity of fluid transmission in the soil [16]. Additionally with changes in local hydrology, related to the effect of hydrophobicity and the destruction of the porous system by farming, where its distribution and variability are unknown [17], we hypothesized that in a coarse textured soil under ~~a~~ long-term tillage and maize monoculture the ~~penetration resistance and its spatial distribution are directly related to the of the hydraulic conductivity and properties is associated with the state of compaction and~~ hydrophobicity of the soil. The aims of the study were (i) to ~~spatially~~ quantify the ~~mechanical resistance of the soil state of soil compaction and its distribution both vertically and horizontally in areas of high and low mechanical resistance, (places with frequent crossing and places without crossing of machinery, in and out of the tire track as well as at the topsoil and subsoil) through properties of physical functionality,~~ in areas of high and low mechanical resistance and (ii) evaluate the hydraulic conductivity and hydrophobicity depending on the spatial variability of the soil and its dependence on soil compaction, for a coarse textured soil under a long-term tillage and maize monoculture.

2. Materials and Methods

Formatted: Font: (Default) Palatino Linotype, Font color: Black

Formatted: Font: (Default) Palatino Linotype, Font color: Black

Site Description

The study was carried out during the 2013–2014 season on a 2.9 ha site belonging to an associate of the Cooperativa Campesina Intercomunal de Peumo (COOPEUMO), located at San Luis in the Central Valley of Chile, O'Higgins Region, Commune of Pichidegua (Figure 1). The soil was classified as Typic Haploxerepts (Inceptisols after US Soil Taxonomy) on alluvial terraces [18] with textural classes varying from mainly loam at the surface to sand at 30 cm depth. Topsoil (0–15 cm) is characterized by neutral soil pH (*i.e.* 6.93), low OM content (OM = 1.47%), non-saline (EC = 1.59 dS m⁻¹) and low cation exchange capacity (CEC = 9.65 cmol(+) kg⁻¹) according to Salazar, *et al.* [19]. At the study site, long-term tillage and maize monoculture has been carried out (> 15 year), when maize is cultivated between the months of September and March, while the rest of the year the soil is fallow. [20]



Figure 1. Location map of San Luis (277399 E- 6192699 S), experimental site (Google Earth, datum WSG 1984).

The Commune of Pichidegua is under a semi-arid Mediterranean climate. It has an average annual air temperature of 14.6°C, a monthly maximum of 26.3°C in the month of January and a monthly minimum of 6.1°C in August. Precipitations are concentrated from May to October and average about 550 mm year⁻¹, with a potential evapotranspiration of 940 mm year⁻¹ [20].

At the study site, long-term tillage and maize monoculture has been carried out (> 15 year). The soil is prepared using a disc plough in September and maize is sown in October and harvested in early April/May. During the growing season, 470 kg N ha⁻¹ were applied as urea and compound fertilizer (N–P₂O₅–K₂O: 25–10–10), and a N balance estimated 200 kg N ha⁻¹ surplus were available for nitrate leaching [21]. Corn-Maize production is done under furrow irrigation with traditional-conventional tillage management, as described by and Salazar, *et al.* [22]. Soil preparation with a disc plough is carried out immediately after the harvest or before planting, with the number of tractor passes varying from 5 to 8 times, using the same routes, making it possible to identify areas where the places with frequent crossing of machinery transited, directly in the wheel track (+MT) and places without crossing outside the wheel track of it (-OTM). The grain yield in 2012 was 15 Mg ha⁻¹. Stubble and plant residues from the previous season are consumed by cattle through direct grazing and the remnant is incorporated to the soil.

Study Design

In November 2013, with the maize crop in the eighth leaf, an initial diagnosis of the state of compaction of the study site was realized. Soil penetration resistance (PR) was

Formatted: Font: (Default) Palatino Linotype, Font color: Black

Formatted: Font: (Default) Palatino Linotype, Font color: Black

measured identifying areas of high and low PR (according to the 0–5 cm layer). In each zone, four experimental units of 1 m² each were delimited randomly ($n = 8$). Within each experimental unit, the zone related to the passage of machinery was identified, with places of frequent crossing of it (+M) and places with no crossing of machinery (–M). Within each experimental unit, the area relative to the passage of machinery was identified, designating the in the wheel track (IT) and outside the wheel track (OT) treatments. Moreover, due to repeated handling over several seasons, based on visual characteristics and mechanical resistance, it was possible to identify the limit of the plow layer (approximately 30 cm), using these criteria to separate in topsoil and subsoil layers. From the combination of the tire tracks of the machinery and the limit of the arable layer, four treatments were established: T1: –M – OT – IT Topsoil; T2: –M – OT – IT Subsoil; T3: +M – IT – IT Topsoil; T4: +M – IT – IT Subsoil. In each PR zone, K was measured on the field for all four treatments with four replicates ($n = 32$). Complementary to each K measurement were collected undisturbed soil cylinders (height = 5 cm, diameter = 5.9 cm, volume = 136.7 cm³) for the determination of hydrophobicity, disturbed soil samples at depths of 0–10 cm and 30–40 cm, and three disturbed cylinders for BD. Hydraulic conductivity was measured in both PR zones and all four treatments with 4 replicates each ($n = 32$). Undisturbed soil samples from the topsoil and subsoil layers were collected in cylinders 5 cm high and 5.9 cm in diameter for the determination of hydrophobicity. Disturbed soil samples were collected at depths of 0–10 cm and 30–40 cm.

Soil Property Measurements

Soil compaction was characterized as the spatial variability of penetration resistance (PR) with a Penetrologger (Eijkelkamp, Giesbeek, The Netherlands), with measurements distributed in a regular 30 m x 30 m grid. All the measurements were taken in the same position of the furrow, avoiding the tractor tread, to prevent distortions of the values. The device was equipped with a GPS and data storage memory, allowing to spatially locate the evaluated points.

Considering that mechanical loads exert their greatest effect in the topsoil layer, PR mean values from 0–5 cm were interpolated by kriging, generating a spatial distribution map of PR. The measurement was performed 2 days after an irrigation, with a water content close to field capacity and a penetration down to 80 cm depth. The results were used to identify two classes of penetration resistance (high and low) using the median PR as threshold.

Texture was measured according to the Bouyoucos hydrometer method and bulk density (BD) by the cylinder method [23], while the content of organic matter (OM) was determined by calcination [24].

Unsaturated hydraulic conductivity (K_h) measurements were conducted in the field between April and May 2014 and prior to farmers soil preparation for the next season. It was measured with mini disk infiltrometers (Decagon Devices, Pullman, WA, USA). A fine sand layer was added to ensure the contact of the porous plate to the ground. The infiltrated water was measured every 30 seconds for a period of 10 minutes, for 100, 200, 400 and 600 Pa of soil water pressure. The obtained data was processed by the method of Zhang [25] to determine K_h as function of the applied soil water pressure, defined as:

$$K_h = C_1/A \quad (1)$$

where C_1 corresponds to curvature of the parabola at pressures of 100, 200, 400 and 600 Pa, obtained from a quadratic regression between the accumulated infiltration and the root of time, and A is the factor of van Genuchten [26] and depends of soil texture and the sorption.

With the distribution of K_h as a function of the supplied pressure, linear adjustments were made to extrapolate the saturated hydraulic conductivity (K_{sat}) to 0 Pa pressure.

Formatted: Superscript

Hydrophobicity was evaluated by the repellency index (R) according to the methodology described by Tillman, *et al.* [27]. A self-made sorptivity equipment device based on the specifications of Leeds-Harrison, *et al.* [28]. The device consists of a network of 4 mm capillaries that conduct the liquid from a container to an air-dry soil sample in close contact via a sponge, setting at the end a negative pressure (h) of 1 cm of water column or -100 Pa, which causes a suction that makes the liquid flow through the capillary. The amount of liquid held in the sample and the capillary system is registered with a precision balance, and from the ratio of water and ethanol 95% was obtained the R index.

First the test was performed infiltrating water, then the sample was air dried and finally the ethanol infiltration test was repeated. The infiltration of each liquid was measured every 15 seconds, until 75 seconds, and from the density of each liquid, the final infiltration volume was determined. With the data recorded, the volume of water was plotted as a function of time, obtaining the liquid flow rate. From this, we estimated the sorptivity in water and ethanol considering a capillary of 4 mm diameter, factor $b = 0.55$ and $f = 1.0$ according to the proposed by Hallett and Young [29], determining the index R by:

$$R = 1.95 * (S_e/S_w) \quad (2)$$

where S_e corresponds to sorptivity in ethanol, S_w to sorptivity in water and 1.95 is due to the constant that considers the properties of water and ethanol (viscosity, surface tension).

Soils were considered hydrophobic, if R was greater than 1.95 and hydrophilic, if it was less than 1.95 [27].

Statistical Analysis

First, a penetration resistance (PR) map was generated to determine the distribution of this property in the study site. For this, a linear interpolation with ordinary kriging was made in R using the package gstat 2.0-9 [30] with the software Surfer 10. Areas of high PR and low PR were calculated based in the median (485000 Pa) of the PR as threshold value and then used as blocking criteria.

A randomized complete block design (RCBD) was established, using areas with high and low PR as blocking criteria. In each block, a 2-factorial treatment was applied, from the combination of (i) two relative positions to the tractor's track (places with frequent crossing of machinery (+M) and places without crossing (-M) in the wheel track (IT) and outside the wheel track (OT)) and (ii) two relative positions to the plow layer (topsoil and subsoil) with a total of 4 treatments. Four repetitions of each treatment were randomly distributed in each block.

To determine the treatment effect, an ANOVA was conducted with a confidence level of 95% using the Infostat software [31]. In case of significant differences, the treatments were analyzed with the test of multiple comparisons of the Least Significant Difference (LSD) ($\alpha \leq 0.05$). Results of hydraulic conductivity (K) were determined based on a linear regression of K_h by the supplied tension (100, 200, 400 and 600 Pa). Then the regression coefficients were compared through a t-test, comparing pairs with the slopes and intercepts of the linear model. Moreover, a generalized linear mixed model (GLMM) was performed with the whole set of data (K_h for four repetitions at four soil water pressure stages, $n = 16$) and normalized distributions, when data did not show normal distribution and therefore the assumptions for errors were not fulfilled [32]. Because both approaches gave comparable results, the first statistical analysis is presented as representative of the K_h , but GLMM was used to determine the confidence intervals for intercepts (95%), equivalent to K_{sat} .

Dependence between variables was explored through stepwise regression using the stats package of R 3.5.3 [33]. Model selection was made based on simplicity, Akaike Information Criterion (AIC) and avoiding collinearity between variables.

Formatted: Font: Italic

Formatted: Font: Not Italic

Formatted: Font: (Default) Palatino Linotype, Font color: Black

Formatted: Line spacing: single

Formatted: Font: Italic

Finally, a correlation analysis was performed between hydrophobicity (R index) and saturated hydraulic conductivity (K_{sat}), to determine if the water repellency alters the water flow in the soil. For this, a logarithmic adjustment of the variable K_{sat} was performed as a function of the R index, achieving an adjustment with a significance of 95%.

3. Results and

State of Soil Compaction and Related Physical Soil Properties

The depth trend of PR can be clearly distinguished between high and low zone (Figure 2). As for the area of low PR, this presents lower values on the surface, but in depth it is constantly increasing. Above the plow foot, there is greater heterogeneity and no clear difference between high PR and low PR.

Penetration Resistance (PR)
When looking at how the PR behaves vertically (Figure 2), it increases up to approximately 40 cm, which coincides with the plowing depth. A clear difference of approximately 400000 Pa can be seen between the low and high PR zones, with higher values in the latter. More profound than 40 cm, PR tends to decrease in depth, with heterogeneous but similar values between high and low PR.

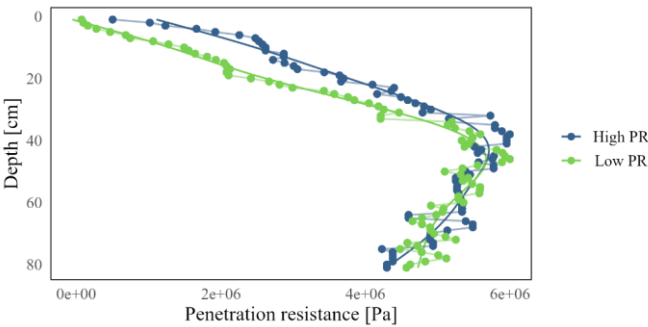


Figure 2. Average values of high (blue) and low (green) PR along the soil profile, defined in the 0–5 cm soil layer.

The areas of high and low PR can be clearly identified on the spatial distribution map of PR obtained in field (). Low PR zones range from 156000 Pa to 485000 Pa, which corresponds to the median of the values between 0–5 cm, while high PR zones range from 485000 to 263000 Pa. High PR zone coincides with the entrance of the field, which presents higher values of penetration resistance, were continuous traffic has caused a deterioration of the soil structure and the porous system [34].

Formatted: Space Before: 12 pt

Formatted: Font: Not Bold

Formatted: Indent: First line: 0,75 cm

Field Code Changed

Formatted: Not Highlight

Formatted: MDPI_2.3_heading3, Justified, Indent: First line: 0,75 cm

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Figure 2. Average areas of high (blue) and low (green) PR, defined in the 0–5 cm

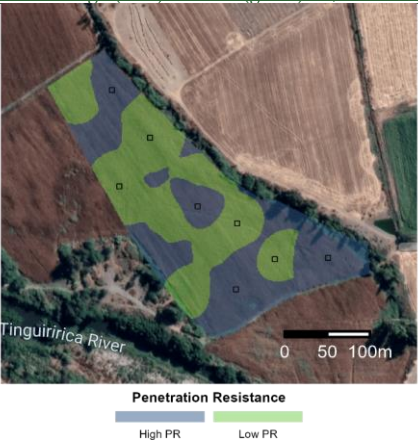


Figure 3. Spatial distribution of PR (0–5 cm) at the study site. Areas of high PR (blue) and low PR (green). Sampling sites has been included with a black square. Cut-off threshold corresponds to the median value (485000 Pa)

Texture

The granulometric analysis of the soil allowed defining a class of sandy loam texture (SL) for the whole study site, with an average percentage of clay of 7.4% (i). It was a trend of increasing sand content and decreasing silt content with depth. In addition, there were differences for clay and sand between the high and low PR areas (Table 1). The high PR area presented a higher average value of sand and lower average value of clay than the zone of low PR. Even so, within each analyzed area there is a high textural homogeneity, which allows to compare the treatments as result of management.

Table 1. Granulometry at the topsoil (0–10 cm) and subsoil (30–40 cm) for each area of the study site, places with frequent crossing of machinery (+M) and places without crossing (-M). Mean ± SD.

Zone	Treat.	Position	Depth	Texture ^a			Textural class (USDA) ^b
				Sand	Silt	Clay	
				------(%)-----			
High PR	T1	-M	topsoil	57.6 ± 2.2	34.9 ± 1.9	7.5 ± 1.8	SL
	T2	-M	subsoil	64.7 ± 2.1	28.8 ± 17.2	6.5 ± 3.9	SL
	T3	+M	topsoil	57.0 ± 5.6	35.9 ± 10.2	7.2 ± 2.2	SL
	T4	+M	subsoil	64.6 ± 15.9	30.5 ± 9.2	4.9 ± 0.6	SL
				61.0 ± 4.3 <u>a</u>	32.5 ± 3.4 <u>a</u>	6.5 ± 1.1 <u>b</u>	SL
Low PR	T1	-M	topsoil	51.8 ± 5.1	40.4 ± 2.9	7.9 ± 2.7	SL
	T2	-M	subsoil	57.0 ± 7.9	35.2 ± 6.1	7.8 ± 2.1	SL
	T3	+M	topsoil	50.5 ± 2.1	40.4 ± 2.8	9.2 ± 1.3	SL
	T4	+M	subsoil	55.2 ± 4.9	36.4 ± 4.3	8.4 ± 0.9	SL
				53.6 ± 3.0 <u>b</u>	38.1 ± 2.7 <u>a</u>	8.3 ± 0.6 <u>a</u>	SL

^a Different letter between averages of high and low PR areas for the same particle size denote statistically significant differences (p < 0.05).

^b SL: Sandy loam.

Formatted: Font: (Default) Palatino Linotype, 9 pt, Font color: Black

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted Table

Formatted: Font: Not Bold, Not Italic

Formatted: Font: Not Bold, Not Italic

Formatted: Font: Not Bold, Not Italic

Bulk Density (BD)

Thus, in sectors in the wheel track (IT), higher BD values are expected compared to areas outside the wheel track (OT); results that could not be observed in every case in the presented study (Figure 4). In addition, the values of BD in both sampling areas do not present great variability, so there are no differences attributable to the treatments in the areas of high and low PR. BD values in general show great variability, so no significant differences attributable to treatments were obtained (Figure 4). Although a higher BD was expected in places with frequent crossings than in non-crossed areas, this was only true for the high PR areas. Slightly higher values were observed in the subsoil. The areas of low PR showed lower values of BD in places with frequent crossing (+M) compared to places without crossing (-M). However, these values were measured approximately 6 months after tillage, so they were probably higher than those recorded immediately after soil preparation.

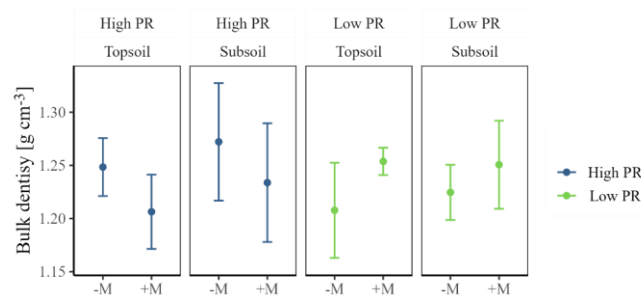


Figure 4. Bulk density (BD) depending on the treatments of the study. Average \pm standard deviation values. There were no statistically significant differences ($p > 0.05$).

Soil Organic Matter (OM)

In this study, OM contents differed between the treatments in different PR zones (Figure 5). When comparing high and low PR areas, the high PR sector showed a lower level of OM of $1.78 \pm 0.48\%$ than the low PR area with $2.23 \pm 0.30\%$ ($\alpha \leq 0.05$). On average, the low PR area had 0.45% more OM than the high PR site, equivalent to approximately 22 Mg ha^{-1} organic C between 0–40 cm depth. At the study site, practices of incorporation of crop residues are frequently carried out, and mechanical chipping work has replaced the burning of stubble. However, in the present study, the recorded contents of OM did not show great variability among treatments and presented levels which are considered as low ($<2.5\%$).

Formatted: Font color: Auto, Not Highlight

Formatted: Font color: Auto, Not Highlight

Formatted: Font color: Auto, Not Highlight

Formatted: Highlight

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: Font: 10 pt, Not Highlight

Formatted: MDPI_5.1_figure_caption, Indent: First line: 0,8 cm, Space After: 0 pt

Formatted: Font: 10 pt

Formatted: Font: 10 pt, Superscript

Formatted: Font: 10 pt

Formatted: Font: 10 pt, Not Highlight

Formatted: Font: 10 pt

Formatted: Font: 10 pt

Formatted: Font: 10 pt, Not Highlight

Formatted: Font: Bold, Not Highlight

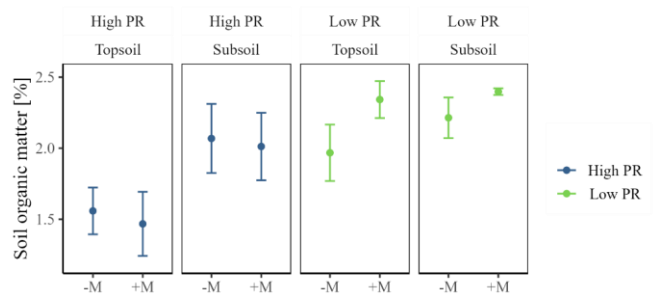


Figure 5. Organic matter content (OM in %) as a function of position and depth. Average \pm standard deviation values. In each zone, there were no statistically significant differences ($p > 0.05$) between treatments.

Hydraulic Functionality of the Soil

Unsaturated Hydraulic Conductivity (K_h)

Casanova, *et al.* [35] proposed to describe the behavior of the K_h as function of the water pressure with an adjustment of two straight lines: a first one describing the behavior of K_h close to the minimum size of mesopores and a second line describing the behavior close to saturation, associated to macropores, the latter being more pronounced in clay soils. In the present study, given the textural class of the soil and the low water supply pressures, the behavior within the first section of rectilinear character was considered (Figure 6), which allows extrapolating the saturated hydraulic conductivity (K_{sat}) to the value of zero pressure by linear adjustment (Table 2). The average results obtained in the field, showed that the K_h was greater in the subsoil than in the topsoil, since in depth there is an increased content of sand (Table 1). In addition, at the time of taking the measurements, the formation of a laminar layer of fine particles that sealed the soil against the entry of water was observed on the surface

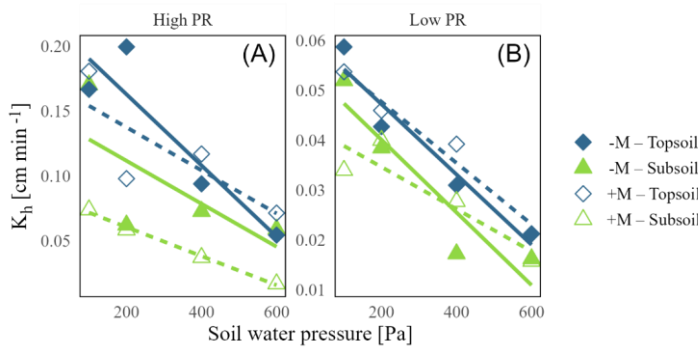


Figure 6. Unsaturated hydraulic conductivity (K_h) measured in the soil at pressures of 100, 200, 400 and 600 Pa. Figure (A) corresponds to the High PR area and (B) to the Low PR zone. The legend applies to both figures. Note the scale change of the Y axis.

The average K_h obtained in the field, showed that it was greater in the subsoil than in the topsoil, as there is a higher sand content at depth (Table 1). In addition, at the time of taking the measurements, the formation of a laminar layer of fine particles that sealed the soil against the entry of water was observed on the surface.

Table 2. Equations Linear model and its coefficients for unsaturated hydraulic conductivity (K_h) as a function of the supply pressure (Pa) for a linear model from the averages of the replicates. Different letters denote indicate statistically significant differences ($p < 0.05$) according to t-test.

Zone	Treat.	Position	Depth	K_h (cm min^{-1})	P- Value	t-test
High PR	T1	OT-M	Topsoil	$T1 = -0.017x + 0.145$	0.1459	ab
	T2	OT-M	Subsoil	$T2 = -0.027x + 0.218$	0.0065	a
	T3	IT-M	Topsoil	$T3 = -0.011x + 0.083$	0.0003	b
	T4	IT-M	Subsoil	$T4 = -0.017x + 0.171$	0.1693	ab
Low PR	T1	OT-M	Topsoil	$T1 = -0.007x + 0.055$	0.0409	ab
	T2	OT-M	Subsoil	$T2 = -0.007x + 0.062$	0.0007	a
	T3	IT-M	Topsoil	$T3 = -0.004x + 0.043$	0.1329	b
	T4	IT-M	Subsoil	$T4 = -0.006x + 0.060$	0.0323	ab

The linear regression coefficients (Table 2) of the relation between soil water pressure and unsaturated hydraulic conductivity (Figure 6) presents a negative slope, indicating an inverse relation between those variables. However, due to the high variability, not all cases fit well to the rectilinear model. The slope and the intercept are greater in the places with frequent crossing of machinery (+M) than in the places without crossing of it (-M) outside the wheel track (OT) zone than in the wheel track (IT) at the same depth, more notoriously in the high PR zone. The saturated hydraulic conductivity can be obtained from the extrapolation of soil water pressure to 40 Pa. It maintains higher values in the subsoil for the IT condition, statistically validated by t-tests.

Saturated hydraulic conductivity (K_{sat})

As expected, the K_{sat} presented values that increased in depth, given the increase in both the content and the size of the sands (Table 3). The K_{sat} collected data show the same no effect on the places with frequent crossing of machinery (+M) and places without crossing (-M), but a significant decrease of it in low PR in the wheel track (IT) and outside the wheel track (OT) conditions and also and between areas of high and low PR topsoil, related to their respective complements. The K_{sat} is considered as high, since they are within the range of 0.06 to 0.6 cm min^{-1} .

Table 3. Saturated hydraulic conductivity (mean, upper limit and lower limit derived by GLMM) as a function of depth in high and low PR areas and for samples under the track and outside the tractor track.

Position	Depth (cm)	K_{sat} (cm min^{-1})	
		High PR (UL;LL)	Low PR (UL;LL)
IT+M	Topsoil	0.083 (-0.021; 0.191)	0.043 (-0.028; 0.116)
	Subsoil	0.171 (0.069; 0.281)	0.060 (0.031; 0.092)
OT-M	Topsoil	0.144 (0.073; 0.224)	0.055 (0.005; 0.107)
	Subsoil	0.218 (0.117; 0.329)	0.061 (-0.009; 0.135)

Formatted: Indent: First line: 0,8 cm

Formatted: Not Highlight

Formatted: MDPI_3.1_text, Left

Formatted: Do not check spelling or grammar

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Space Before: 12 pt

Formatted: Not Highlight

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Superscript/ Subscript, Not Highlight

Formatted: Not Highlight

Formatted: Not Superscript/ Subscript, Not Highlight

The confidence intervals showed a great dispersion (Table 4). Consequently, the K_{sat} values behave independently of the positions and depths at which they were measured (Table 3).

Water Repellency Index (R)

Based on a previous diagnosis [6] and because water repellency tends to increase in coarse-textured soils [36], it was expected to find this phenomenon at the study site. Nevertheless, treatments did not show water repellency or hydrophobicity (Table 4), except treatment 3 of the low PR area, with a R value slightly higher than 2. However, there were no differences ($p > 0.05$) between treatments or between high and low PR areas.

Table 4. Repellency index (R, dimensionless) obtained by the method proposed by Tillman, et al. [27] in air-dried samples.

Zone	Treat.	Position	Depth (cm)	R-Index
High PR	T1	-M	topsoil	1.33 (± 0.37)
	T2	-M	subsoil	1.57 (± 0.38)
	T3	+M	topsoil	1.64 (± 0.42)
	T4	+M	subsoil	1.39 (± 0.40)
Low PR	T1	-M	topsoil	1.70 (± 0.63)
	T2	-M	subsoil	1.58 (± 0.69)
	T3	+M	topsoil	2.02 (± 0.70)
	T4	+M	subsoil	1.70 (± 0.26)

4. Discussion

State of Soil Compaction and Related Physical Soil Properties

Penetration Resistance (PR)

The knowledge of the spatial distribution of soil penetration resistance is useful to identify compacted areas. With this problem stated, management measures can be generated to minimize negative effects, such as decrease in crop yields or the risk of erosion due to increased surface runoff [37]. According to ~~this~~our results, the identification of the variability of the soil mechanical resistance allowed to determine two zones: high PR and low PR (based in 0 – 5 cm depth). Accordingly, we then performed evaluations of the other soil properties for each zone separately, to obtain homogeneous treatments and to decrease the variability between the samples.

The depth trend of PR can be clearly distinguished between high and low zone (Figure 2). The area of high PR near the entrance to the field is a consequence of repeated and concentrated traffic at the site and the long-term use of it in maize production associated with the field entrance. This continuous traffic use has also caused a deterioration of the soil structure and the porous system [34] with a reorganization of the particles, generating a plow pan to 430 cm depth approximately. As for the area of low PR, this presents lower values on the surface, but in depth it is constantly increasing. Above the plow foot, there is greater heterogeneity and no clear difference between high PR and low PR. The plow pan also leads to a alteration of this change of the tendency general trend, from a clear differentiation of the PR in the topsoil to a homogenization in the subssoil, that can be explained due to by the stratification product of the pedogenesis or to processes of compaction as result of by mechanization [38]. Even if PR does not exceed 6000000 Pa, it is considered as being at a very high level according to Schoeneberger, et al. [39]

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: MDPI_3.1_text

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Font: Italic, Not Highlight

Formatted: Not Highlight

Formatted: Space After: 12 pt

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Field Code Changed

Formatted: Highlight




Figure 2. Average areas of high (blue) and low (green) PR, defined in the 0–5 cm soil layer.

The areas of high and low PR can be clearly identified on the spatial distribution map of the PR obtained in the field (Figure 3). High PR zone corresponds to the entry of the field, which presents higher values of penetration resistance, given the greater traffic frequency resulting from the maneuvers of seasonal work. On the other hand, The variability of the surface PR zone can be the area of low PR, presents values related to lower exposure to traffic. Furthermore, be explained by the natural variability within the textural classes of the soil that is intervening in the response to compaction processes (cf. Horn [40]; see below).



Figure 3. Spatial distribution of PR (0–5 cm) at the study site. Areas of high PR (blue) and low PR (green).

It is known that the effect of the number of tractor passages of a tractor is cumulative and that the PR increases with the intensity of the traffic [10]. This was evaluated by Usovicz and Lipiec [37], who determined that the maximum effect occurs between the first and third passage of the tractor at a depth range of 0–60 cm and that this effect decreases to a greater depth. Thus, consequences are manifested predominantly near the soil surface. In addition, Horn and Fleige [41] showed that tires with a load of 3.3 Mg exert an average normal stress of approximately 50000 Pa to the 40 cm depth layer and increasing this load to 6.5 Mg leads to tensions of more than 100000 Pa even down to 60 cm depth. The same authors clarified that a loamy soil presents a greater sensitivity to the external loads than a sandy or clayish soil due to differences in the pore size distribution.

The effects on root growth as result of increased mechanical strength were studied by Taylor and Brar [4], who determined a linear decrease in root elongation with PR values higher than 500000 Pa. On the other hand, Pérez, *et al.* [42] consider that root growth equals zero with a soil penetration resistance of approximately 5000000 Pa and, in the specific case of the maize crop, Hadas [43] reported no root growth values in a

Formatted: Highlight

Formatted: Highlight

Formatted: Font: Not Bold, Highlight

Formatted: Font: Not Bold, Highlight

Formatted: Font: Not Bold, Highlight

Formatted: Font: Not Bold, Highlight

Formatted: Font: Not Bold, Highlight

Formatted: Font: Not Bold, Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: Font: Not Bold, Highlight

Formatted: Font: Not Bold, Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: Space After: 12 pt

Formatted: Space After: 12 pt

Formatted: Font: Not Bold

Formatted: Font: Not Bold

Formatted: Space After: 12 pt

range of 1600000 to 3700000 Pa. Feldman [44] indicates that the typical rooting depth of maize varies between 150 and 180 cm, depending on the textural class of the soil. This finding indicates that at the sites of low PR, the rooting of maize will be affected under 10 cm of depth (Figure 2), resulting in low exploration of the plant roots and reduction and heterogeneity of the maize yields at the study site.

Texture

The texture influences the mechanical behavior and ease of soil tillage, the amount of water and air it can hold and the speed with which water penetrates and moves in it [45]. The particle size is determined by the parent material and the pedogenesis, and accordingly affect erosion processes including other properties such as structure, porosity, and consistency. The granulometric analysis of the soil allowed defining a class of sandy loam texture (SL) for the whole study site, with an average percentage of clay of 7.4% (Table 1). This result allows inferences regarding the structure and stability of the aggregates. It is known that soils dominated by sand tend to have a weak structure grade, while clay soils have more stable aggregates, indicating a more complex structure [11]. This is explained by the electrochemical charge of the fine particles, which bind with cementing agents such as organic matter, maintaining the bonds and increasing the effective stress [46]. Finally, there is a direct relationship between the flows in the profile. Well-structured soils will have continuous pores, fostering the flow of water and the exchange of gases, while soils with weak structure, such as sands, show water flow in the space between particles [47]. Therefore, soil compressibility, which corresponds to the proportion of a soil mass decreasing its volume when supporting a load, will be lower in coarse soils [46].

Table 1. Granulometry at the soil surface (0–10 cm) and below the plow horizon (30–40 cm) for each area of the study site, in the wheel track (IT) and outside the wheel track (OT). Mean ± SD.

	IT	OT
Clay (> 2 μm)	7.4 ± 1.2	7.1 ± 1.1
Silt (2–63 μm)	12.5 ± 2.1	12.8 ± 2.3
Sand (> 63 μm)	80.1 ± 3.4	80.1 ± 3.5
Organic matter	0.5 ± 0.1	0.5 ± 0.1

Field Code Changed

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Formatted: MDPI_3.1_text, Space After: 12 pt

Formatted: MDPI_3.1_text, Left, Space After: 12 pt

Due to the tillage practices at this study site, BD is a property that varies within the same season [48]. These variations reflect changes in soil structure, which are closely related to total porosity, the latter being highly sensitive to the content of organic matter (OM) and to the management [46]. This occurs because any load applied to the soil sur-

face is transmitted in three dimensions through the solid, liquid, and gaseous phases. If the air permeability is high enough to allow the immediate deformation of the air-filled pores, soil settlement will primarily affect the flow of water [40].

Thus, in sectors in the wheel track (IT), higher BD values are expected compared to areas outside the wheel track (OT); results that could not be observed in every case in the presented study (Figure 4). In addition, the values of BD in both sampling areas do not present great variability, so there are no differences attributable to the treatments in the areas of high and low PR. Sandoval, et al. [23] indicated for a sandy loam textural class, values of BD ranging from 1.4 to 1.8 Mg m⁻³; these values were low in relation to what was expected higher than the values we observed. On the other hand, it is necessary to consider that sand has a lower compressibility compared to clay soils when subjected to external loads [46], so that depending on their shape, size and mixture they can maintain their values relatively stable in front of these mechanical load events [49].

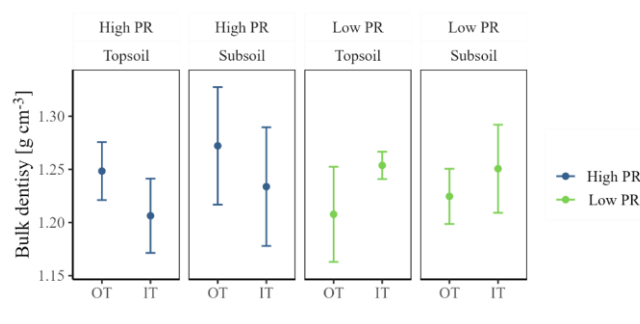


Figure 4. Bulk density (BD) depending on the treatments of the study. Average \pm standard deviation values. There were no statistically significant differences ($p > 0.05$).

Although the area of high PR presented lower values of BD at the position inside the track, this tendency would not correspond to the expected values due to exposure to strong pressures caused by the passage of machinery in the area under the wheel track. This may be related to the plowing that loosens the soil, inverting and releasing compacted areas. For the case of the high PR site, having a higher sand content, the first pass of the machinery generates its final settlement [40]. Preventing the subsequent rearrangement of particles; while places without machinery crossing (-M) outside the wheel track (OT), the particles continue to settle with the successive cycles of wetting and drying generated by the irrigations [50]. The low PR area, as expected, showed lower values of BD outside the track compared to inside the track. However, these values were measured approximately 6 months after tillage, so they were probably higher than those recorded immediately after soil preparation. In this regard the sense of the time after the soil tillage, Osunbitan, et al. [48] reported constant BD increases in different tillage systems after soil preparation, reaching values up to 55% higher after a few weeks.

Finally, to reduce the effect of the pressure exerted by the constant use of machinery for tillage, Horn and Fleige [41] recommend that this must be adjusted to the load capacity of soil and that the wheel load does not exceeds 3.3 Mg, a condition that is generally fulfilled in maize production systems in Chile.

Formatted: Space After: 12 pt

Soil Organic Matter (OM)

Soil organic matter has been applied as a wide term to describe all materials of biological origin in the soil [51]. From the point of view of carbon fluxes, agriculture is defined as the anthropic manipulation of carbon through the absorption, fixation, emission and transfer of C between the different deposits [52], and its main effect is the emission of CO₂ into the atmosphere due to the microbiological combustion of the OM, together with the stratification of organic waste by tillage systems [53]. However, the long-term incorporation of organic matter to the soil reduces erosion and air pollution by stabilizing the structure and improving the mechanical and hydraulic behavior to disturbances [52]. ~~In this study, OM contents differed between the treatments in different PR zones (Figure 5).~~




Figure 5. Organic matter content (OM in %) as a function of position and depth. Average \pm standard deviation values. In each zone, there were no statistically significant differences ($p > 0.05$) between treatments.

~~At the study site, practices of incorporation of crop residues are frequently carried out, and mechanical work has replaced the burning of stubble. However, in the present study, the recorded contents of OM did not show great variability among treatments and presented levels which are considered as low (2.1–5%). An OM content lower than 2.5% is considered low, leading to soils with poor biological and physical condition for soils of central Chile, according to Ortega and Diaz [54]. Despite of this, the values are within the ranges expected for Inceptisols [52], which indicates that repeated handling management tillage and stubble incorporation has not diminished this property at the time of the study.~~

When comparing high and low PR areas, the high PR sector showed a lower level of OM of $1.78 \pm 0.48\%$, than the low PR area with $2.23 \pm 0.30\%$ ($\alpha \leq 0.05$). The low PR area had in average 0.45% more OM than the high PR site, which is equivalent to approximately 22% higher OM content. This indicates that the low PR area has a higher OM content, which is equivalent to approximately 22% higher OM content. This indicates that the low PR area has a higher OM content, which is equivalent to approximately 22% higher OM content.

Hydraulic Functionality of the Soil

Unsaturated Hydraulic Conductivity (K_h)

~~The observed~~ The average results obtained in the field, showed that the K_h was greater in the subsoil than in the topsoil, since in depth there is an increased content of sand (Table 1). In addition, at the time of taking the measurements, the formation of a laminar layer of fine particles that sealed the soil against the entry of water was observed on the surface. Higher values of K_h in the subsoil, relative to the topsoil can be explained by the higher amount of sand in depth. There can be also a reduction of K_h in the topsoil due to an initial clogging of the pores. This was probably due as result of to the dispersion process of the soil particles due to low soil stability in water. In addition, plowing contributes to a complete homogenization of the A_p horizon, increasing the total porosity of the porous system but not the continuity [55], altering reducing the K_h due to a continuity discontinuity with the subsurface macroporosity [56].

Formatted: Subscript

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Subscript, Not Highlight

Formatted: Not Highlight

Formatted: Subscript, Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Subscript

Formatted: Not Highlight

Formatted: Subscript, Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

Casanova, Messing and Joel [33] proposed to describe the behavior of the K_u as function of the water pressure, an adjustment with two straight lines; a line describing the behavior close to the minimum size of mesopores and another line describing the behavior close to saturation, associated to macropores, the latter being more pronounced in clay soils. In the present study, given the textural class of the soil and the low water supply pressures, the behavior within the first section of rectilinear nature (Figure 6) was considered, which allows to extrapolate the saturated hydraulic conductivity (K_{sat}) to the value of zero pressure by linear adjustment (Table 2).

Table 2. Equations of unsaturated hydraulic conductivity (K_u) as a function of the supply pressure (Pa) for a linear model from the averages of the replicates. Different letters denote statistically significant differences ($p < 0.05$) according to t test.

Zone	Treat	Position	Depth	K_u	P	t-test
				($\text{cm} \cdot \text{min}^{-1}$)	Value	
High PR	T1	OT	Topsoil	$T1 = 0.017x + 0.145$	0.1450	ab
	T2	OT	Subsoil	$T2 = 0.027x + 0.218$	0.0065	a
	T3	IT	Topsoil	$T3 = 0.011x + 0.082$	0.0002	b
	T4	IT	Subsoil	$T4 = 0.017x + 0.171$	0.1692	ab
Low PR	T1	OT	Topsoil	$T1 = 0.007x + 0.055$	0.0409	ab
	T2	OT	Subsoil	$T2 = 0.007x + 0.062$	0.0007	a
	T3	IT	Topsoil	$T3 = 0.004x + 0.043$	0.1329	b
	T4	IT	Subsoil	$T4 = 0.006x + 0.060$	0.0322	ab

The linear regression coefficients (Table 2) of the relation between soil water pressure and unsaturated hydraulic conductivity (Figure 6) presents a negative slope indicating an inverse relation between those variables. However, due to the high variability, not all cases fit well to the rectilinear model. The slope and the intercept are greater in the outside the wheel track (OT) zone than in the wheel track (IT) at the same depth, more notoriously in the high PR zone. The saturated hydraulic conductivity can be obtained from the extrapolation of soil water pressure to 0 Pa. It maintains higher values in the subsoil for the IT condition, statistically validated by t tests. This. The subsoil had higher K_u values in both PR conditions, which reflects a primary effect of compaction by tillage and due to machinery transit. In this regard, Seguel, et al. [9] indicate that when comparing the effect of ploughing on K, it presents an effect that is prolonged throughout the season, while the effect of machinery passage is not significant in the same season and requires repeated passes to affect K, as occurs in no-tillage systems.

Saturated hydraulic conductivity (K_{sat}):

The difference in the K_{sat} between high PR and low PR, and between topsoil and subsoil can be explained by the same reason as in the range of unsaturated pores, but enhanced by the exclusion of the effect of the water tension. As expected, the K_{sat} presented values that increased in depth, given the increase in both the content and the size of the sands (Table 3). The K_{sat} collected data show the same effect on the in the wheel track (IT) and outside the wheel track (OT) conditions and also between areas of high and low PR. The lack of differences in K_{sat} between frequently crossed (+M) or non-crossed (-M) sites in both PR zones may be due to a homogenization of the impact of the labors, which would result from a structural deterioration due to excess of tillage.

Table 3. Saturated hydraulic conductivity (mean, upper limit and lower limit derived by GLMM) as a function of depth in high and low PR areas and for samples under the track and outside the tractor track.

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: Indent: Left: 0 cm, First line: 0 cm

Formatted: Not Highlight

Formatted: Subscript, Not Highlight

Formatted: Not Highlight

Formatted: Subscript

Formatted: Subscript

Position	Depth (cm)	K_{sat} (cm min ⁻¹)	
		High PR (UL,LL)	Low PR (UL,LL)
II	Topsoil	0.082 (0.021, 0.191)	0.043 (0.028, 0.116)
	Subsoil	0.171 (0.060, 0.281)	0.060 (0.021, 0.092)
OI	Topsoil	0.144 (0.073, 0.224)	0.055 (0.005, 0.107)
	Subsoil	0.218 (0.117, 0.229)	0.061 (0.009, 0.125)

The high homogeneity between the two zones and treatments could be due to seasonal plowing management. This is valid as proposed by Bhattacharyya, *et al.* [57], who concluded that the conventional tillage systems cause a rupture of the compacted areas generating an increase of the total porosity of the soil, but a decrease of the amount of macropores, besides its stability and continuity in comparison to the systems of no-tillage. This could explain that the results obtained for both high and low PR areas generally classify as high K_{sat} soils, K_{sat} values will range from 0.02 to 0.28 cm min⁻¹. In terms of permeability, the study site is moderately fast, according to Schoeneberger, *et al.* [39]. These results agree with previous studies that have been carried out in the same site, where it has been determined that the soils show a moderate to very fast K_{sat} [58].

The confidence intervals showed a great dispersion (Table 4). Consequently, the K_{sat} values behave independently of the positions and depths at which they were measured (Table 3). The obtained variability of K in time and space is in the expected range. This property varies considerably under conventional tillage, due to the ploughing of the soil, which coincides with the maximum value of K , and decreases during the growing season due to the settlement of the soil particles and formation of structure [59]. In this sense, Strudley, *et al.* [34] recommend performing temporary/annual measurement campaigns to clarify short-term behaviors, since there are multiple factors that influence and determine the behavior of soil hydraulic conductivity (such as tillage, soil compaction, irrigation, waste management, crop type, climate, soil texture and organic matter content, topography, biotic activity, etc.).

Water Repellency Index (R)

Based on a previous diagnosis [6] and because water repellency tends to increase in coarse textured soils [34], it was expected to find this phenomenon at the study site. Nevertheless, treatments did not show water repellency or hydrophobicity (Table 4), except treatment 2 of the low PR area, with a R value slightly higher than 2. However, there were no differences ($p > 0.05$) between treatments or between high and low PR areas.

The values of R were considered low [14], related to poor water stability of the aggregates. Together with the silt content (30–40%, Table 1), it could indicate a tendency to the formation of superficial crusts by a dispersion of aggregates when rapidly wetting [60]. This finding can be explained with the fact that a low repellency is necessary to ensure good stability against wetting events [61], or otherwise, it can cause an increased runoff that can lead to erosion processes and finally a decrease in maize yields.

In the case of excessive repellency or heterogeneous distribution of hydrophobicity, a change in the hydraulic characteristics of the soils would have been expected, leading to the appearance of preferential flows. Fuentes, *et al.* [58] studied the preferential flow of soluble nitrogen forms in the soil at the same study site, demonstrating that the movement of this element is intrinsically related to that of water and the considerable presence of textural porosity, which is abundant in the soils coarse texture. In this re-

Formatted: Indent: Left: 0 cm, First line: 0 cm

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

gard, these authors detected preferential flows, not necessarily attributed to phenomena of hydrophobicity, but also implying an environmental risk due to the potential of contamination of underground water.

Table 4. Repellency index (R, dimensionless) obtained by the method proposed by Tillman, Scotter, Wallis and Clothier [27] in air-dried samples.

Zone	Treat.	Position	Depth (cm)	R-Index
High PR	T1	OT	Topsoil	1.33 (± 0.37)
	T2	OT	Subsoil	1.57 (± 0.38)
	T3	IT	Topsoil	1.64 (± 0.42)
	T4	IT	Subsoil	1.39 (± 0.40)
Low PR	T1	OT	Topsoil	1.70 (± 0.63)
	T2	OT	Subsoil	1.58 (± 0.69)
	T3	IT	Topsoil	2.02 (± 0.70)
	T4	IT	Subsoil	1.70 (± 0.26)

When exploring the dependence of R with the other properties analyzed, the step-wise regression in both directions indicates clays as the best predictor ($R = 8.809 \cdot \text{clay} + 0.9503$), with statistical significance for this linear model analyzed according to ANOVA. The direct relationship of these properties is in contrary to findings of Urbanek, et al. [13], indicating that in coarse textured soils, R tends to be greater. This could eventually be explained by the greater reactivity of clays that retain organic substances. However, OM did not present any kind of correlation or dependence with the other analyzed properties, which could lead to the fact that the cause of this correlation is due to internal characteristics or mineralogy of the clays present in the site, which should be addressed in future studies.

Correlation between Hydraulic Conductivity (K) and Hydrophobicity (R)

The dependence of K_{sat} with respect to the independent variable R (Figure 7) was evaluated. It is known that C content in soils correlates positively with hydraulic conductivity, because it improves the soil structure [62]. However, the presence of hydrophobic substances in soils can considerably reduce the infiltration processes and, depending on the magnitude of the repellency, surface runoff processes can be accelerated. Moreover, it was found that even the growth of the plants can be affected by changed surface water flows [63].

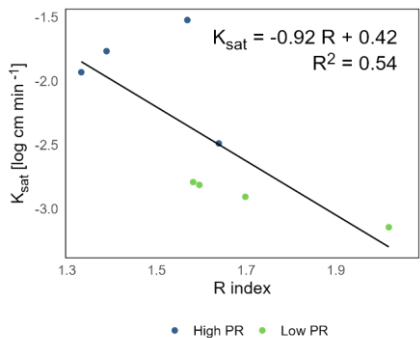


Figure 7. Hydraulic conductivity (Log K) as a function of the repellency index (R).

Although the OM contents of the study site are not high (Figure 5), their presence may be interfering with water repellency, since this is a phenomenon that is related to the specific surface occupied by the coating of the particles. Coarse texture classes will be more affected by hydrophobicity than fine texture classes [36].

In soils dominated by sands, as in the present study, with a lower specific surface than in soils dominated by clay, the generation of a hydrophobic surface will have an impact on a greater proportion of particles than for a soil of fine texture, where the contact surface is up to three times greater [14]. The correlation between both properties was determined using the mean values of the replicates of each of the treatments of both zones (high and low P). There is an inverse linear dependence between these variables (Figure 7). In addition, it is observed that the zone of low PR presents the highest values of water repellency, a condition that would explain the lower values of K with respect to the site of high PR.

It is possible that the laboratory method used to determine the presence of hydrophobicity has not been sufficiently sensitive, so initially the R index did not explain the problems associated with the inflow of water into the profile. However, even when the R index detected a hydrophilic condition of the study soil, small variations have a direct effect on the K_{sat} , indicating that there would be particle dispersion processes due to high wettability. In other words, at the high PR site the effect of the higher sand content would be dominating in relation to the low PR site.

In a context of climate change, with longer periods of drought, it becomes vital to clarify the implications that management has, especially in a resource as closely linked to climate as the soil. In this sense, it becomes relevant to evaluate the critical value of R (> 1.95) for specific local conditions and its temporal distribution along the season, to reduce environmental degradation processes and improve conditions for maize cultivation, making optimal use of soil and water.

5. Conclusions

For an Inceptisol in central Chile under traditional intensive tillage, the mechanical effect of machinery traffic evaluated as penetration resistance (PR) ~~in places with frequent crossing of machinery (+M) and places without crossing (-M) in the wheel track (IT) and outside the wheel track (OT)~~ is not reflected in the same season. It shows a homogeneous distribution, possibly mitigated by annual tillage. However, a deep hardening was observed, reflected as an increase in bulk density and penetration resistance of the soil. ~~This directly affects soil functionality, limiting the ability of the roots to reach water and nutrients, reducing maize yields, but this effect could be eliminated through deep ploughing.~~ It is particularly noteworthy, how the distribution of PR is associated to the clay content of the soil, possibly associated with the higher water and nutrient retention capacity that these particles have, which favors a mayor accumulation of organic matter.

When analyzing soil functionality through hydraulic properties, evaluated as hydraulic conductivity (K) and soil water repellency (R) and associated with the movement of water in the soil, it shows homogeneous values for the different treatments. However, the ~~trend results indicates indicate~~ a reduction in K in the low PR zone, which can be explained by the higher clay content ~~and OM~~. When exploring the distribution in depth, there is an increase in K the subsoil, which can be attributed to the destruction of the coarse porosity generated by the tillage in the topsoil, not being affected in the subsoil. The effect of the passage of machinery ~~(-MOT/+MIT) is likewise the mechanical properties, explained by the uniform alteration of the structures generated by ti~~ was not affecting the K ~~llage~~.

Formatted: Font: (Default) Palatino Linotype, Font color: Black

Findings on water repellency (R) indicated that there ~~is~~ **are no differences in** hydrophobicity at the study site. This result contrasts with the observed correlation between hydraulic conductivity and the R index. This may be due to the sensitivity of the method used, which was not high enough to determine a sufficient degree of soil hydrophobicity. This could be explained by the presence of surface runoff and the problems of water infiltration in the profile identified by farmers. It might be interesting to study this phenomenon more thoroughly and to conduct measurements better distributed throughout the season. Moreover, R shows a dependency with the clay content, not associated with OM or other texture fractions, which could be explained by internal characteristics or mineralogy of the clays present in the site. This result should be addressed in future studies.

Author Contributions: Conceptualization, O.Se., O.Sa. and N.R.M.; methodology, O.Se. and N.R.M.; software, N.R.M.; formal analysis, N.R.M.; investigation, C.S. and N.R.M.; resources, O.Se. and O.Sa.; data curation, C.S.; writing—original draft preparation, N.R.M.; writing—review and editing, St.S. and T.S.; visualization, N.R.M.; supervision, O.Se. and O.Sa.; project administration, O.Sa.; funding acquisition, O.Sa. All authors have read and agreed to the published version of the manuscript.

Funding: This research was partially funded by FONDECYT de Iniciación 2011 grant no. 11110464.

Data Availability Statement: The data presented in this study and the code to reproduce the figures are openly available in FigShare at doi.org, reference number 10.6084/m9.figshare.20533005.

Acknowledgments: The authors thank the Departamento de Ingeniería y Suelos of the Universidad de Chile and the Cooperativa Intercomunal Campesina de Peumo (COOPEUMO) for supporting this study.

Conflicts of Interest: The funders had no role in the design of the study; in the collection, analyses, or interpretation of data; in the writing of the manuscript; or in the decision to publish the results.

References

1. ODEPA. Maíz: producción, precios y comercio exterior. Avance a julio de 2013. Available online: <http://www.odepa.gob.cl/odepaweb/serviciosinformacion/Boletines/BMaiz0713.pdf?jsessionid=0953D27D8C95FA24FE79A17340FDEE93> (accessed on 2013 September 23).

2. Pioneer. Ensayos a potrero para grano: Temporada 2011 – 2012. Available online: http://www.pioneer.com/CMRoot/International/Chile/Products_and_Services/ens_grano_2012.pdf (accessed on 2013 October 22).

3. Fischer, T.; Byerlee, D.; Edmeades, G. Crop Yields and Global Food Security: Will Yield Increase Continue to Feed the World?; Australian Centre for International Agricultural Research: 2014.

4. Taylor, H.M.; Brar, G.S. Effect of Soil Compaction on Root Development. *Soil & Tillage Research* **1991**, *19*, 111–119, doi:10.1016/0167-1987(91)90080-H.

5. Hamza, M.A.; Anderson, W.K. Soil compaction in cropping systems - A review of the nature, causes and possible solutions. *Soil & Tillage Research* **2005**, *82*, 121–145, doi:10.1016/j.still.2004.08.009.

6. Salazar, O.; Rojas, C.; Soto, C. Diagnóstico sectorial y propuesta de producción limpia: productores de maíz de la Región del Libertador Bernardo O'Higgins; Campesina Intercomunal de Peumo (COOPEUMO): 2013.

7. Seitz, S.; Prasuhn, V.; Scholten, T. Controlling Soil Erosion Using No-Till Farming Systems. In *No-till Farming Systems for Sustainable Agriculture*; Springer: 2020; pp. 195–211.

8. Hausherr Lüder, R.-M.; Qin, R.; Richner, W.; Stamp, P.; Streit, B.; Noulas, C. Effect of Tillage Systems on Spatial Variation in Soil Chemical Properties and Winter Wheat (*Triticum aestivum* L.) Performance in Small Fields. *Agronomy* **2019**, *9*, 182, doi:10.3390/agronomy9040182.

9. Seguel, O.; Diaz, D.; Acevedo, E.; Silva, P.; Homer, I.; Seitz, S. Hydraulic Conductivity in a Soil Cultivated with Wheat-Rapeseed Rotation Under Two Tillage Systems. *Journal of Soil Science and Plant Nutrition* **2020**, doi:10.1007/s42729-020-00296-w.

10. Nissen, J.; Quiroz, C.; Seguel, O.; Mac Donald, R.; Ellies, A. Flujo Hídrico no Saturado en Andisoles. *Revista de la ciencia del suelo y nutrición vegetal* **2006**, *6*, 9–19, doi:10.4067/S0718-27912006000100003

11. Warrick, A.W. Soil physics companion; CRC press: 2001.

12. Piccolo, A.; Mbagwu, J.S.C. Role of hydrophobic components of soil organic matter in soil aggregate stability. *Soil Science Society of America Journal* **1999**, *63*, 1801–1810, doi:DOI 10.2136/sssaj1999.6361801x.

13. Urbanek, E.; Hallett, P.; Feeney, D.; Horn, R. Water repellency and distribution of hydrophilic and hydrophobic compounds in soil aggregates from different tillage systems. *Geoderma* **2007**, *140*, 147–155, doi:10.1016/j.geoderma.2007.04.001.

14. Hallett, P. An introduction to soil water repellency. In *Proceedings of the 8th International Symposium on Adjuvants for Agrochemicals (ISAA2007)*, Columbus, Ohio, USA Aug 6–9, 2007; p. 13.

15. Cuevas Becerra, J. Efecto de la materia orgánica y el manejo sobre la hidrofobicidad de suelos volcánicos. *Revista de la ciencia del suelo y nutrición vegetal* **2006**, *6*, 13–27, doi:10.4067/S0718-27912006000200002

16. Horton, R.; Ankeny, M.; Allmaras, R. Effects of compaction on soil hydraulic properties. In *Developments in agricultural engineering*; Elsevier: 1994; Volume 11, pp. 141–165.

17. Buczko, U.; Bens, O. Assessing soil hydrophobicity and its variability through the soil profile using two different methods. *Soil Science Society of America Journal* **2006**, *70*, 718–727, doi:10.2136/sssaj2005.0183.

18. CIREN. Estudio agrológico VI Región : descripción de suelos materiales y símbolos. (Pub. CIREN N°114); Centro de Información de Recursos Naturales: Santiago, Chile, 1996; p. 570.

19. Salazar, O.; Vargas, J.; Najera, F.; Seguel, O.; Casanova, M. Monitoring of nitrate leaching during flush flooding events in a coarse-textured floodplain soil. *Agricultural Water Management* **2014**, *146*, 218–227, doi:10.1016/j.agwat.2014.08.014.

20. Uribe, J.; Cabrera, R.; de la Fuente, A.; Paneque, M. Atlas Bioclimático de Chile; 2012.

21. Salazar, O.; Vargas, J.; Nájera, F.; Seguel, O.; Casanova, M. Monitoring of nitrate leaching during flush flooding events in a coarse-textured floodplain soil. *Agricultural Water Management* **2014**, *146*, 218–227, doi:https://doi.org/10.1016/j.agwat.2014.08.014.

22. Salazar, O.; Najera, F.; Tapia, W.; Casanova, M. Evaluation of the DAISY model for predicting nitrogen leaching in coarse-textured soils cropped with maize in the Mediterranean zone of Chile. *Agricultural Water Management* **2017**, *182*, 77–86, doi:10.1016/j.agwat.2016.12.005.

23. Sandoval, M.; Dörner, J.; Seguel, O.; Cuevas, J.; Rivera, D. Métodos de análisis físicos de suelos; 2012.

24. Sadzawka, A.; Carrasco, M.A.; Grez, R.; Mora, M.; Flores, H.; Neaman, A. Métodos de análisis recomendados para los suelos chilenos. Comisión de Normalización y Acreditación. Sociedad Chilena de la Ciencia del Suelo, Santiago, Chile **2004**, 113.

25. Zhang, R.D. Determination of soil sorptivity and hydraulic conductivity from the disk infiltrometer. *Soil Science Society of America Journal* **1997**, *61*, 1024–1030, doi:10.2136/sssaj1997.03615995006100040005x.

26. Carsel, R.F.; Parrish, R.S. Developing Joint Probability-Distributions of Soil-Water Retention Characteristics. *Water Resources Research* **1988**, *24*, 755–769, doi:DOI 10.1029/WR024i005p00755.

Formatted: Spanish (Chile)

Formatted: Indent: Left: 0,75 cm, Line spacing: single

Formatted

Formatted: MDPI_7.1_References, Indent: Left: 0 cm, Hanging: 0,75 cm

Field Code Changed

Formatted

Formatted: Font: Not Italic

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

27. Tillman, R.W.; Scotter, D.R.; Wallis, M.G.; Clothier, B.E. Water-Repellency and Its Measurement by Using Intrinsic Sorptivity. *Australian Journal of Soil Research* **1989**, *27*, 637–644, doi:10.1071/Sr9890637.

28. Leeds-Harrison, P.B.; Youngs, E.G.; Uddin, B. A device for determining the sorptivity of soil aggregates. *European Journal of Soil Science* **1994**, *45*, 269–272, doi:10.1111/j.1365-2389.1994.tb00509.x.

29. Hallett, P.D.; Young, I.M. Changes to water repellence of soil aggregates caused by substrate-induced microbial activity. *European Journal of Soil Science* **1999**, *50*, 35–40, doi:10.1046/j.1365-2389.1999.00214.x.

30. Gräler, B.; Pebesma, E.J.; Heuvelink, G.B. Spatio-temporal interpolation using gstat. *R J.* **2016**, *8*, 204.

31. Di Rienzo, J.; Robledo, C.; Balzarini, M.; Casanoves, F.; González, L.; Tablada, M. InfoStat Software Estadístico. Available online: <http://www.infostat.com.ar> (accessed on 2015 June 20).

32. Badiella, L. Modelos lineales generalizados mixtos: algunos casos prácticos. In Proceedings of the X Congreso Galego de Estatística e Investigación de Operacións, Pontevedra, Spain, Nov 3–5, 2011; pp. 1–6.

33. Team, R.C. R: A language and environment for statistical computing. R Foundation for Statistical Computing, Vienna, Austria. <http://www.R-project.org/> **2013**.

34. Strudley, M.W.; Green, T.R.; Ascough, J.C. Tillage effects on soil hydraulic properties in space and time: State of the science. *Soil & Tillage Research* **2008**, *99*, 4–48, doi:10.1016/j.still.2008.01.007.

35. Casanova, M.; Messing, I.; Joel, A. Influence of aspect and slope gradient on hydraulic conductivity measured by tension infiltrometer. *Hydrological Processes* **2000**, *14*, 155–164, doi:10.1002/(SICI)1099-1085(200001)14:1<155::AID-HYP917>3.0.CO;2-J.

36. Harper, R.J.; McKissock, I.; Gilkes, R.J.; Carter, D.J.; Blackwell, P.S. A multivariate framework for interpreting the effects of soil properties, soil management and landuse on water repellency. *Journal of Hydrology* **2000**, *231*, 371–383, doi:10.1016/S0022-1694(00)00209-2.

37. Usowicz, B.; Lipiec, J. Spatial distribution of soil penetration resistance as affected by soil compaction: The fractal approach. *Ecological Complexity* **2009**, *6*, 263–271, doi:10.1016/j.ecocom.2009.05.005.

38. Horn, R.; Vossbrink, J.; Peth, S.; Becker, S. Impact of modern forest vehicles on soil physical properties. *Forest Ecology and Management* **2007**, *248*, 56–63, doi:10.1016/j.foreco.2007.02.037.

39. Schoeneberger, P.J.; Wysocki, D.A.; Benham, E.C. Field book for describing and sampling soils; Government Printing Office: 2012.

40. Horn, R. Stress-strain effects in structured unsaturated soils on coupled mechanical and hydraulic processes. *Geoderma* **2003**, *116*, 77–88, doi:10.1016/S0016-7061(03)00095-8.

41. Horn, R.; Fleige, H. Risk assessment of subsoil compaction for arable soils in Northwest Germany at farm scale. *Soil & Tillage Research* **2009**, *102*, 201–208, doi:10.1016/j.still.2008.07.015.

42. Pérez, L.D.; Millán, H.; González-Posada, M. Spatial complexity of soil plow layer penetrometer resistance as influenced by sugarcane harvesting: A prefractal approach. *Soil and Tillage Research* **2010**, *110*, 77–86, doi:10.1016/j.still.2010.06.011.

43. Hadas, A. Soil tilth - the desired soil structural state obtained through proper soil fragmentation and reorientation processes. *Soil & Tillage Research* **1997**, *43*, 7–40, doi:10.1016/S0167-1987(97)00033-0.

44. Feldman, L. The maize root. In *The maize handbook*, Freeling, M., Walbot, V., Eds.; Springer: New York (NY), 1994; pp. 29–37.

45. FAO. Guía para la descripción de suelos - Cuarta edición; FAO: Roma (Italia), 2009; p. 110.

46. Horn, R.; Lebert, M. Soil Compactability and Compressibility. In *Soil Compaction in Crop Production*, Soane, B.D., van Ouwerkerk, C., Eds.; Developments in Agricultural Engineering; Elsevier: 1994; Volume 11, pp. 45–69.

47. Hillel, D.J. *Fundamentals of Soil Physics*; Elsevier Science: 1980.

48. Osunbitan, J.A.; Oyedele, D.J.; Adekalu, K.O. Tillage effects on bulk density, hydraulic conductivity and strength of a loamy sand soil in southwestern Nigeria. *Soil & Tillage Research* **2005**, *82*, 57–64, doi:10.1016/j.still.2004.05.007.

49. Blume, H.-P.; Bruinmer, G.W.; Horn, R.; Kandeler, E.; Kögel-Knabner, I.; Kretschmar, R.; Stahr, K.; Wilke, B.-M.; Scheffer, F.; Schachtschabel, P.; et al. Scheffer/Schachtschabel Lehrbuch der Bodenkunde, 16. Auflage, (Nachdruck) ed.; Springer Spektrum: Berlin Heidelberg, 2010; pp. XIV, 569 Seiten.

50. Seguel, O.; Horn, R. Structure properties and pore dynamics in aggregate beds due to wetting-drying cycles. *Journal of Plant Nutrition and Soil Science* **2006**, *169*, 221–232, doi:10.1002/jpln.200521854.

51. Stolt, M.H.; Drohan, P.J.; Richardson, M.J. Insights and Approaches for Mapping Soil Organic Carbon as a Dynamic Soil Property. *Soil Science Society of America Journal* **2010**, *74*, 1685–1689, doi:10.2136/sssaj2009.0326N.

52. Lal, R. Soil carbon sequestration to mitigate climate change. *Geoderma* **2004**, *123*, 1–22, doi:10.1016/j.geoderma.2004.01.032.

53. Franzluebbers, A.J. Soil organic matter stratification ratio as an indicator of soil quality. *Soil & Tillage Research* **2002**, *66*, 95–106, doi:10.1016/S0167-1987(02)00018-1.

54. Ortega, R.; Díaz, K. Análisis de fertilidad de suelos y recomendación de fertilizantes. In *Agricultura de Precisión. Introducción al Manejo sitio-específico*, INIA, Ed.; Serie Quilamapu; Chillán, Chile, 1999; Volume 129, pp. 135–146.

55. Dörner, J.; Dec, D.; Zúñiga, F.; Sandoval, P.; Horn, R. Effect of land use change on Andosol's pore functions and their functional resilience after mechanical and hydraulic stresses. *Soil and Tillage Research* **2011**, *115–116*, 71–79, doi:10.1016/j.still.2011.07.002.

56. Dexter, A.R.; Czyz, E.A.; Gate, O.P. Soil structure and the saturated hydraulic conductivity of subsoils. *Soil & Tillage Research* **2004**, *79*, 185–189, doi:10.1016/j.still.2004.07.007.

Formatted

Formatted

Formatted

Formatted

Formatted: Spanish (Chile)

Formatted: Default Paragraph Font, Spanish (Chile)

Formatted: Spanish (Chile)

Field Code Changed

Formatted: Font: Not Italic

Formatted: Font: Not Bold

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted: Font: Not Italic

Formatted

Formatted

Formatted

Formatted

Formatted: Font: Not Italic

Formatted

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

Formatted

57. Bhattacharyya, R.; Prakash, V.; Kundu, S.; Gupta, H.S. Effect of tillage and crop rotations on pore size distribution and soil hydraulic conductivity in sandy clay loam soil of the Indian Himalayas. *Soil & Tillage Research* 2006, *86*, 129-140, doi:<https://doi.org/10.1016/j.still.2005.02.018>.

58. Fuentes, I.; Casanova, M.; Seguel, O.; Nájera, F.; Salazar, O. Morphophysical pedotransfer functions for groundwater pollution by nitrate leaching in Central Chile. *Chilean journal of agricultural research* 2014, *74*, 340-348, doi:10.4067/s0718-58392014000300013.

59. Alletto, L.; Coquet, Y. Temporal and spatial variability of soil bulk density and near-saturated hydraulic conductivity under two contrasted tillage management systems. *Geoderma* 2009, *152*, 85-94, doi:10.1016/j.geoderma.2009.05.023.

60. Chenu, C.; Le Bissonnais, Y.; Arrouays, D. Organic matter influence on clay wettability and soil aggregate stability. *Soil Science Society of America Journal* 2000, *64*, 1479-1486, doi:10.2136/sssaj2000.6441479x.

61. Hallett, P.D.; Baumgartl, T.; Young, I.M. Subcritical water repellency of aggregates from a range of soil management practices. *Soil Science Society of America Journal* 2001, *65*, 184-190, doi:10.2136/sssaj2001.651184x.

62. Pathak, P.; Wani, S.; Sudi, R. Long-term effects of management systems on crop yield and soil physical properties of semi-arid tropics of Vertisols, 2011; Volume 02, pp. 435-442.

63. Seguel, O.; Sagardía, S.; Casanova, M. Efecto del exudado de Chaitophorus leucomelas sobre las propiedades hidráulicas del suelo. *Agro Sur* 2013, *41*, 1-7, doi:10.4206/agrosur.2013.v41n2-01.

850

851Formatted: Font: Not Italic

852

853Formatted: Font: Not Bold

854

855Formatted: Font: Not Italic

856

857Formatted: Default Paragraph Font

858

859Formatted: Font: Not Italic

860

861Formatted: Font: Not Bold

862

863Formatted: Font: Not Italic

864

865Formatted: Font: Not Bold

866

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Bold

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Bold

Formatted: Font: Not Italic

Formatted: Spanish (Chile)

Formatted: Font: Not Italic

Formatted: Font: Not Bold

Formatted: Font: Not Italic