



Filamentary transport in high-power H-mode conditions and in no/small-ELM regimes  
to predict heat and particle loads on PFCs for future devices

---

N. Vianello, V. Naulin for Topic-21 Scientific Team

14 November 2017



This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014-2018 under grant agreement No 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission.



Jiri Adamek, Matteo Agostini, Diogo Aguiam, Scott Allan, Matthias Bernert, Daniel Carralero Ortiz, Stefan Costea, Istvan Cziegler, Hugo De Oliveira, Joaquin Galdon-Quiroga, Gustavo Grenfell, Antti Hakola, Codrina Ionita-Schrittwieser, Heinz Isliker, Alexander Karpushov, Jernej Kovacic, Benoît Labit, Florian Laggner, Jens Madsen, Roberto Maurizio, Ken McClements, Fulvio Militello, Jeppe Miki Busk Olsen, Jens Juul Rasmussen, Timo Ravensbergen, Bernd Sebastian Schneider, Roman Schrittwieser, Jakub Seidl, Monica Spolaore, Christian Theiler, Cedric Kar-Wai Tsui, Kevin Verhaegh, Jose Vicente, Nickolas Walkden, Zhang Wei, Elisabeth Wolfrum



Deliverables listed during the call for manning of last December

1. Cross-machine L-Mode shoulder dependence on current both at constant  $B_t$  and at constant  $q_{95}$ .  
Rationale: disentangle the effect of current and parallel connection length
2. Establish robust scenario for density shoulder profile in H-Mode and establish dependence on fuelling/neutral profiles/divertor condition
3. Use the new HHF probe on AUG to study filamentary transport under high-power H-Mode conditions and under different plasma configurations (SN, DN)
4. Study the role of ELM regimes, neutral compression and particle density in filamentary transport and related shoulder formation
5. Identify the contribution of collisionality and seeding on filamentary transport and related shoulder formation
6. Determine the effect of filaments and shoulder formation on target heat loads in different H-mode plasmas




Deliverables listed during the call for manning of last December

1. Cross-machine L-Mode shoulder dependence on current both at constant  $B_t$  and at constant  $q_{95}$ .  
Rationale: disentangle the effect of current and parallel connection length
2. Establish robust scenario for density shoulder profile in H-Mode and establish dependence on fuelling/neutral profiles/divertor condition
3. Use the new HHF probe on AUG to study filamentary transport under high-power H-Mode conditions and under different plasma configurations (SN, DN)
4. Study the role of ELM regimes, neutral compression and particle density in filamentary transport and related shoulder formation
5. Identify the contribution of collisionality and seeding on filamentary transport and related shoulder formation
6. Determine the effect of filaments and shoulder formation on target heat loads in different H-mode plasmas


So far H-Mode operation has been limited to AUG since no operational scenario in high-density NBH heated plasma on TCV has been established

# L-Mode analysis: $I_p$ scan at constant $q_{95}$

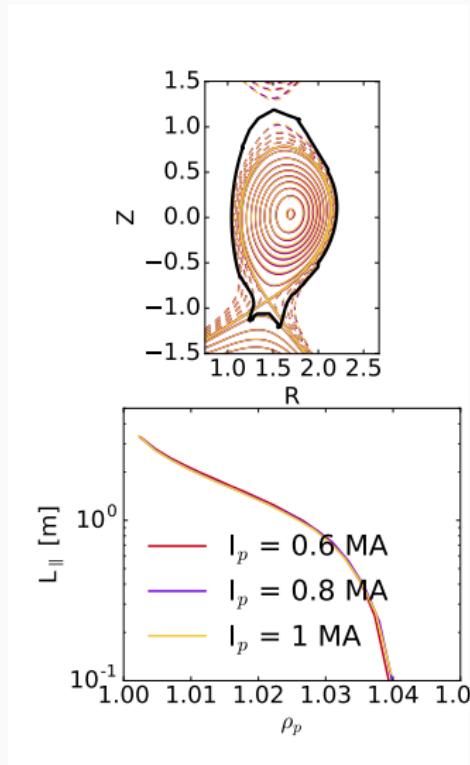


- ✓ AUG: All the shots were performed in the so-called Edge Optimized Configuration (EOC) shape.
- ✓ AUG: We matched correctly the shape and the  $L_{\parallel}$  here shown from outer divertor plate up to X-point

# L-Mode analysis: $I_p$ scan at constant $q_{95}$

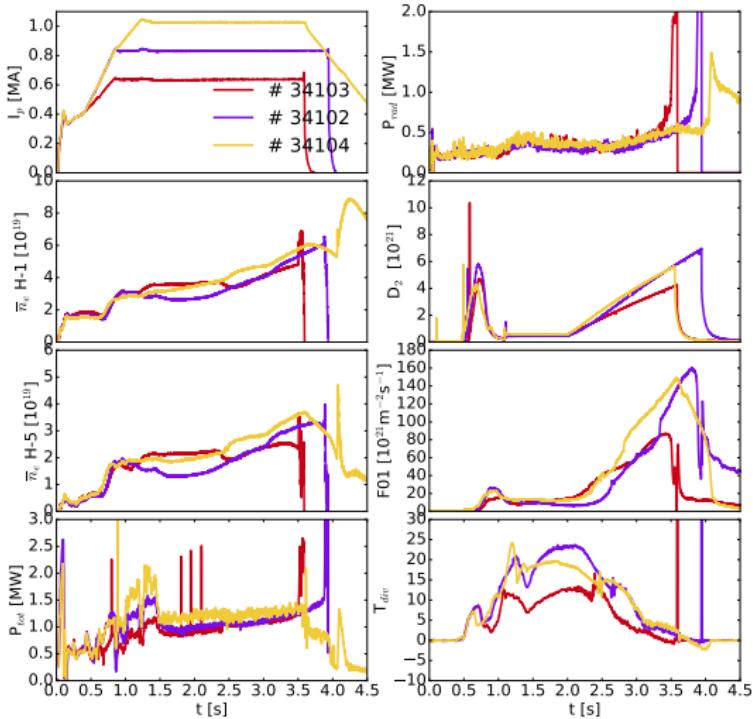

- ✓ AUG: The scan was performed with similar puffing rates for intermediate and higher current (0.8-1 MA) whereas we reduced it at lower current to avoid early disruption
- ✓ AUG: The total power (Ohmic plus NBI) was kept constant throughout the scan
- ✓ AUG: We have comparable edge density, divertor neutral pressure and divertor temperature


# L-Mode analysis: $I_p$ scan at constant $q_{95}$

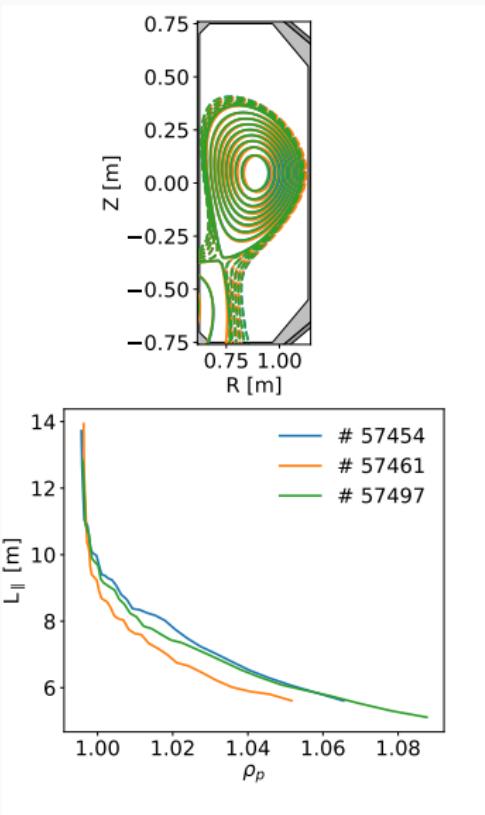

- ✓ TCV: We repeat the same exercise at TCV with a slight difference in the profile of parallel connection length. This required operation at unusual low toroidal field (up to 0.8T)




# L-Mode analysis: $I_p$ scan at constant $q_{95}$

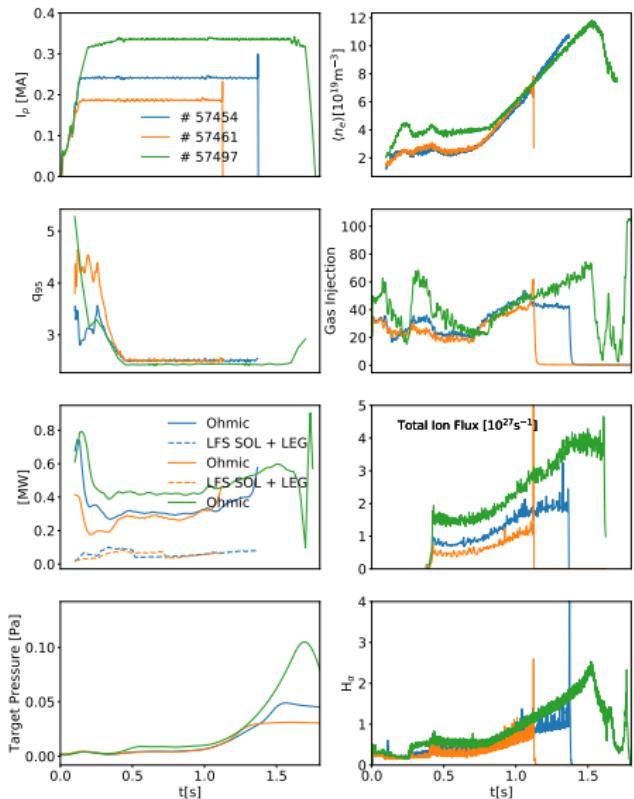


- ✓ TCV: no additional heating has been used. Nevertheless the difference in power crossing the separatrix is small
- ✓ TCV: The difference in target pressure similar to AUG behavior.

# L-Mode analysis: $I_p$ scan at constant $q_{95}$

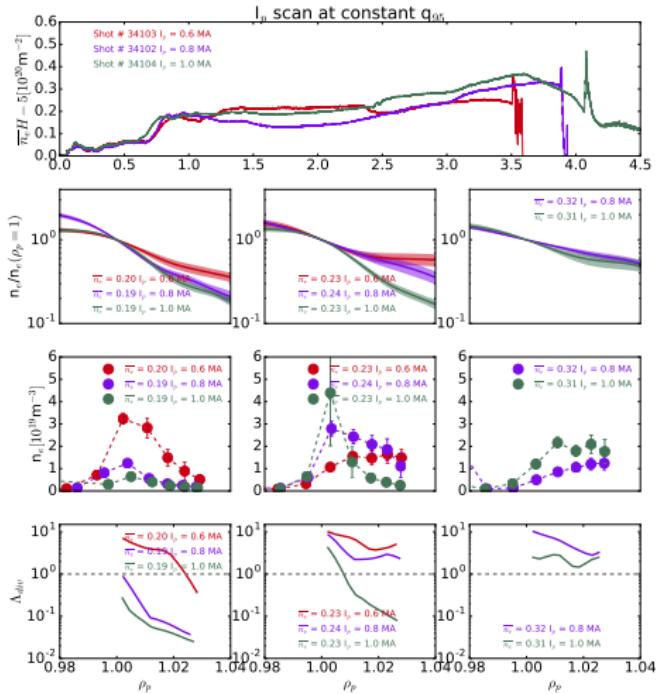


✓ AUG: At comparable edge density Upstream profiles are different with the tendency to develop shoulder easier at lower current. **We have flattening of the upstream profiles only when  $\Lambda_{\text{div}}$  is well above one on all the profile**

# L-Mode analysis: $I_p$ scan at constant $q_{95}$

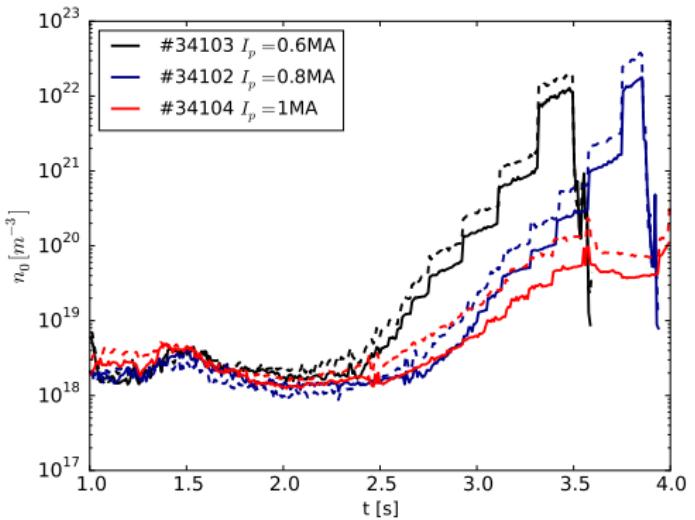


- ✓ AUG: Neutrals estimated using calibrated  $D_\alpha$  cameras coupled with values of density and temperature at the target suggest a larger neutral density at lower current (even with comparable values of edge electron density)

# L-Mode analysis: $I_p$ scan at constant $q_{95}$

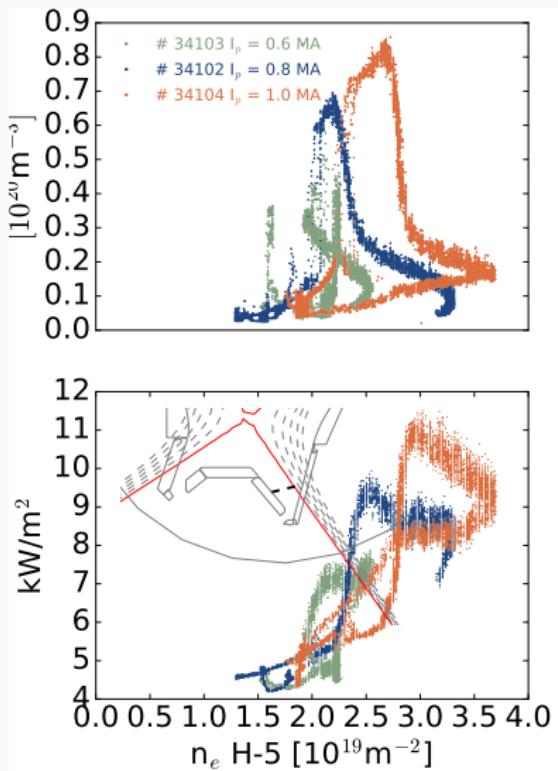


- ✓ AUG: At all the current a clear roll-over in peak density at the target observed and we can also track the radiation front move away from target earlier in density at lower current

# L-Mode analysis: $I_p$ scan at constant $q_{95}$

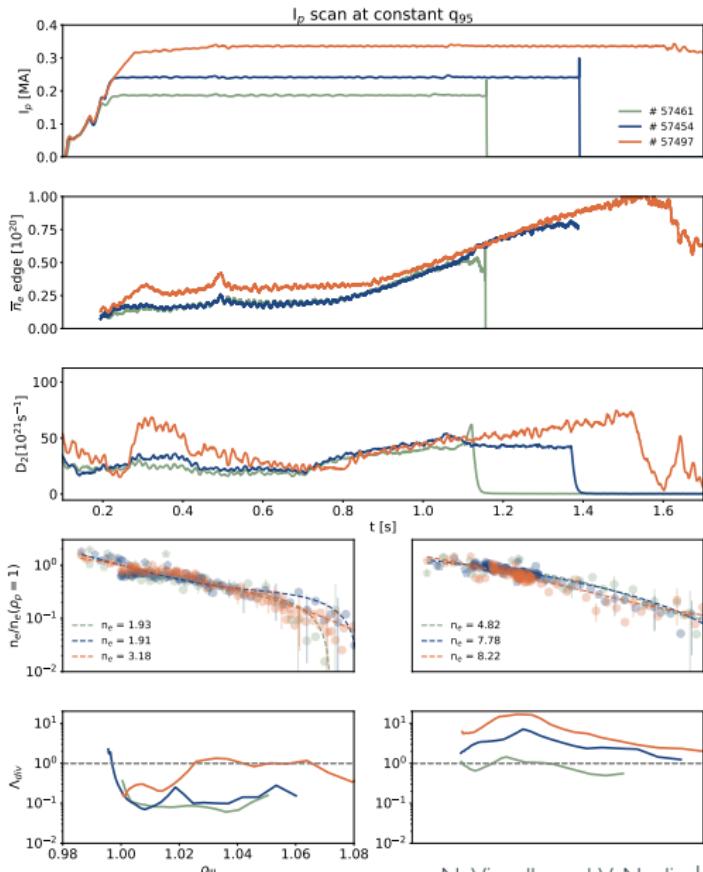


✓ TCV: This tendency is not observed for TCV where profiles seem resilient to modification of  $B_t$  even though we reached pretty high value of  $\Lambda_{div}$  all along the profile.

# L-Mode analysis: $I_p$ scan at constant $q_{95}$

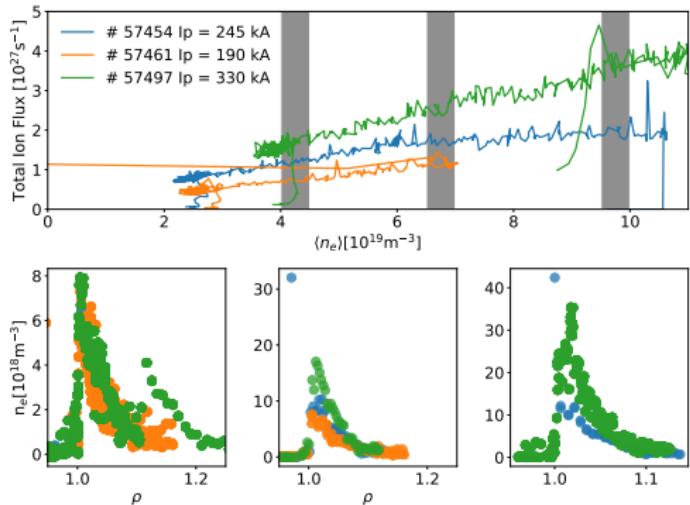


- ✓ TCV: This is due to the fact that we can't observe during the density ramp any signature of rollover or detachment, whereas upstream profile modification at TCV are only observed well after rollover

# L-Mode analysis: $I_p$ scan at constant $q_{95}$

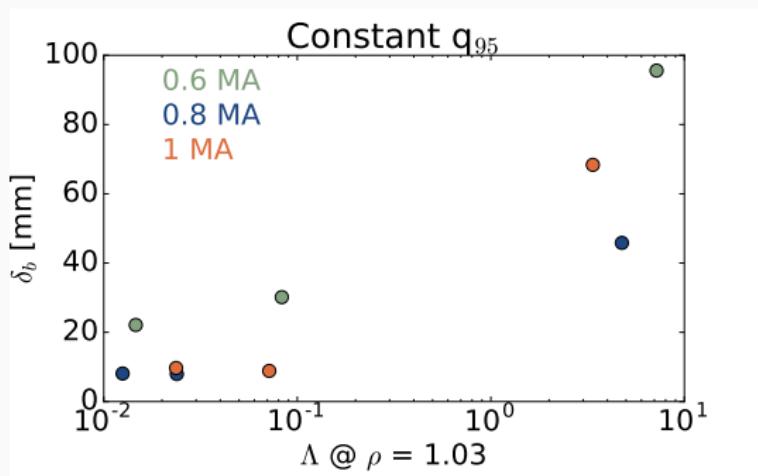


- ✓ AUG: There is the tendency towards larger blobs at lower current at all values of  $\Lambda_{div}$

# L-Mode analysis: $I_p$ scan at constant $q_{95}$

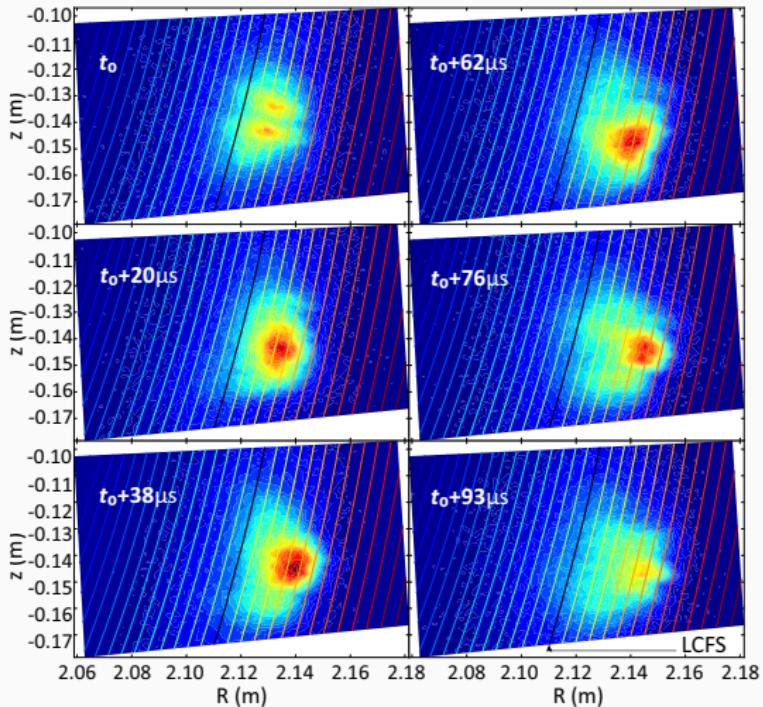


- ✓ AUG: This need to be further confirmed independently by GPI measurements (I. Cziegler et al.). The present setup allows for space resolution of the order of mm with a 397 kframe/s sampling rate. Small amount of He gas flux needed ( $\sim 1.5 \times 10^{17} \text{ atoms/ms}$ )

# L-Mode analysis: $I_p$ scan at constant $q_{95}$

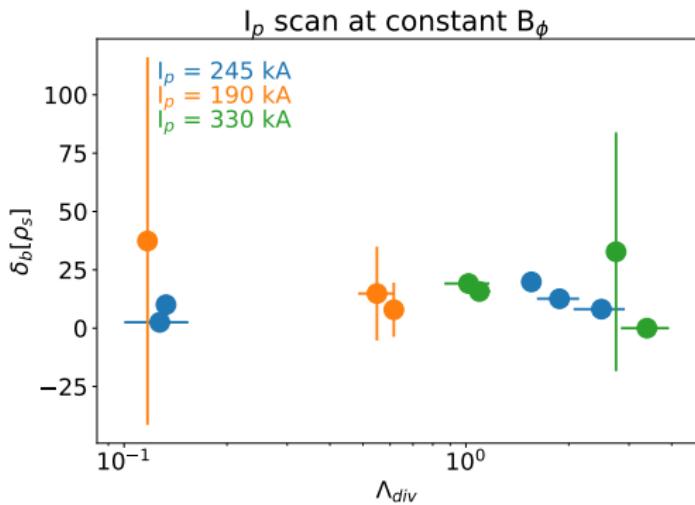


- ✓ TCV: this is not confirmed for TCV where blob sizes is rather constant over a rather large range of  $\Lambda_{div}$ . At the same time we do not observe target density rollover neither upstream profile flattening

# L-Mode analysis: $I_p$ scan at constant $B_t$

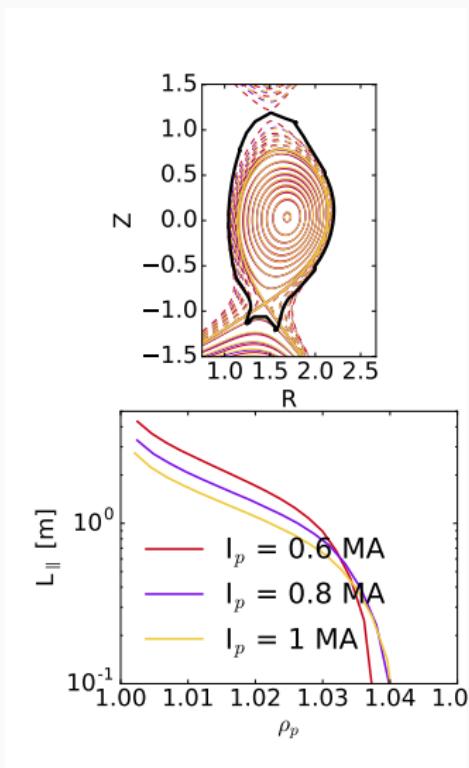


- ✓ AUG: We matched correctly the shape the parallel connection length  $L_{\parallel}$  is modified consistently
- ✓ AUG: The scan was performed with similar puffing rate (0.8-l MA) whereas we reduced it at lower current to avoid early disruption

# L-Mode analysis: $I_p$ scan at constant $B_t$

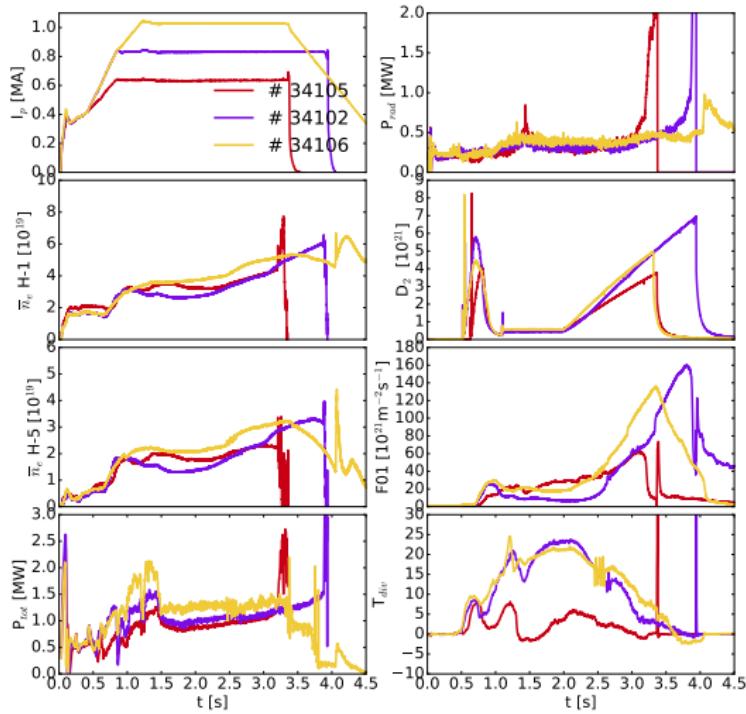


- ✓ AUG: We have comparable edge density and divertor neutral pressure even though pressure increase earlier at higher current
- ✓ AUG: The total power (Ohmic plus NBI) was kept constant throughout the scan

# L-Mode analysis: $I_p$ scan at constant $B_t$

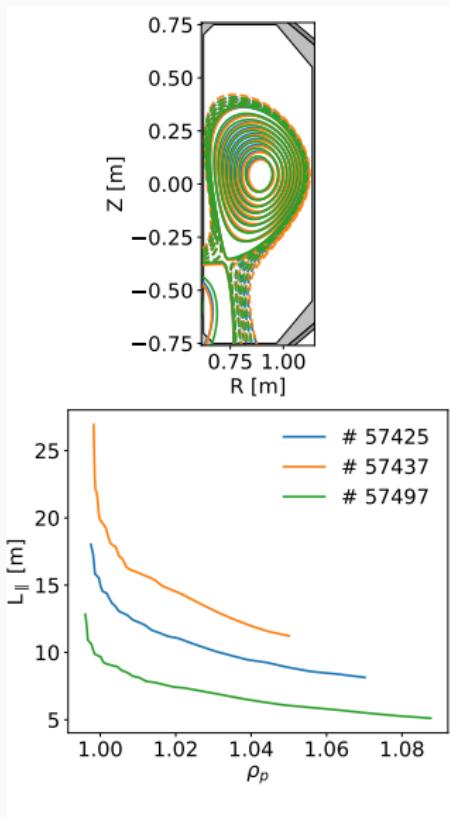


- ✓ TCV: We repeat the same exercise at TCV with a consistent variation of parallel connection length

# L-Mode analysis: $I_p$ scan at constant $B_t$

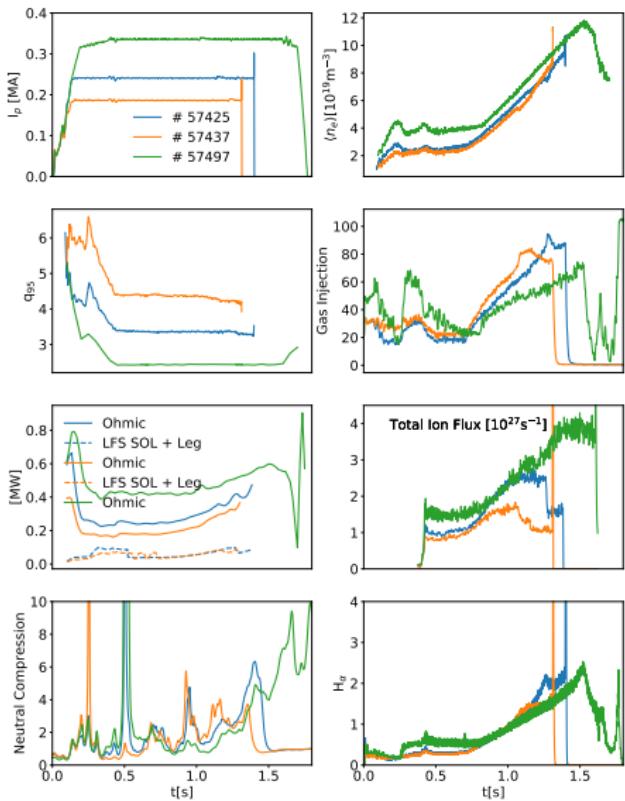


- ✓ TCV: no additional heating used. Nevertheless the difference in power crossing the separatrix is small
- ✓ TCV: Neutral compression is roughly constant between

# L-Mode analysis: $I_p$ scan at constant $B_t$

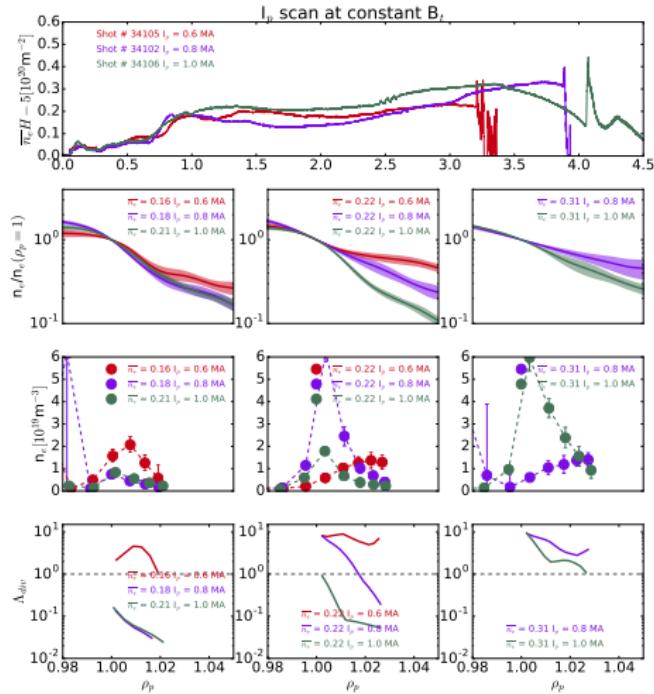


✓ AUG: At comparable edge density Upstream profiles are different with the tendency to develop shoulder easier at lower current. **We have flattening of the upstream profiles only when  $\Lambda_{\text{div}}$  is well above one on all the profile**

# L-Mode analysis: $I_p$ scan at constant $B_t$

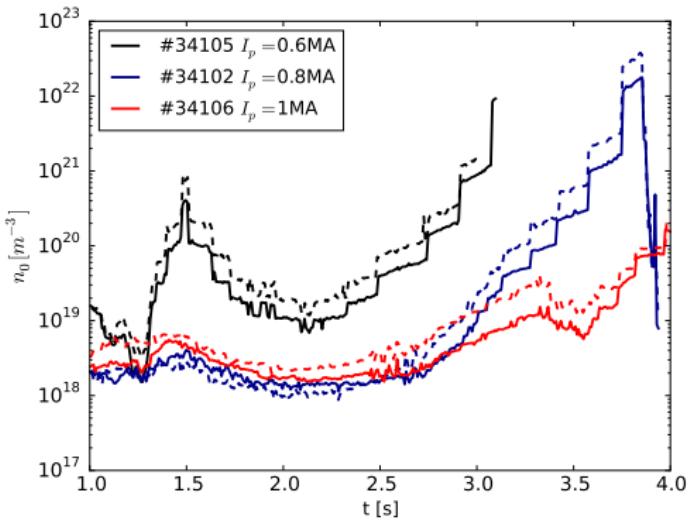


- ✓ AUG: Neutrals at lower current are substantially higher even with similar edge density profiles.

# L-Mode analysis: $I_p$ scan at constant $B_t$

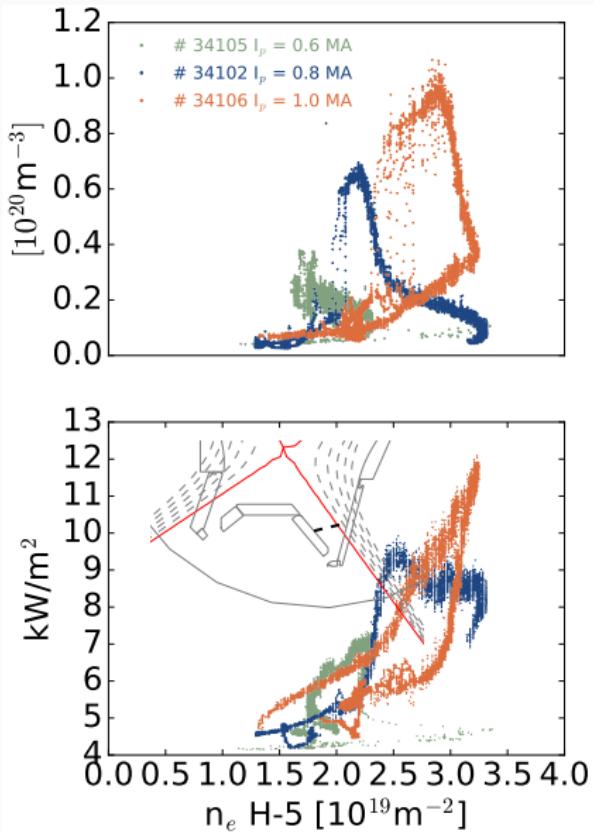


- ✓ AUG: Similarly to the observation at constant  $q_{95}$  target peak density rollover and radiation movement from the target occurs earlier in density at lower plasma current

# L-Mode analysis: $I_p$ scan at constant $B_t$

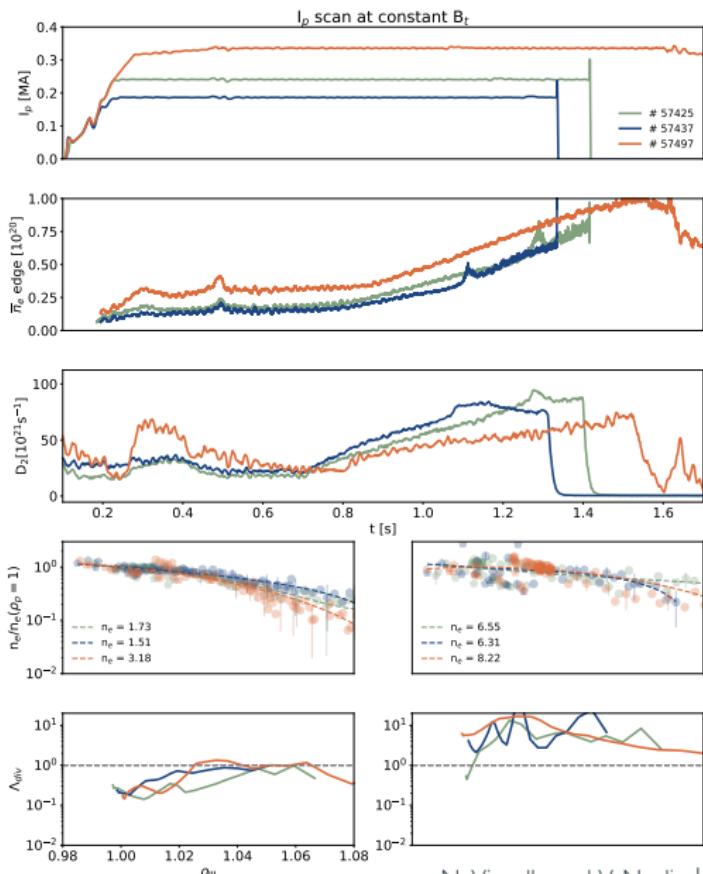


✓ TCV: This tendency is substantially confirmed at TCV where profiles

# L-Mode analysis: $I_p$ scan at constant $B_t$

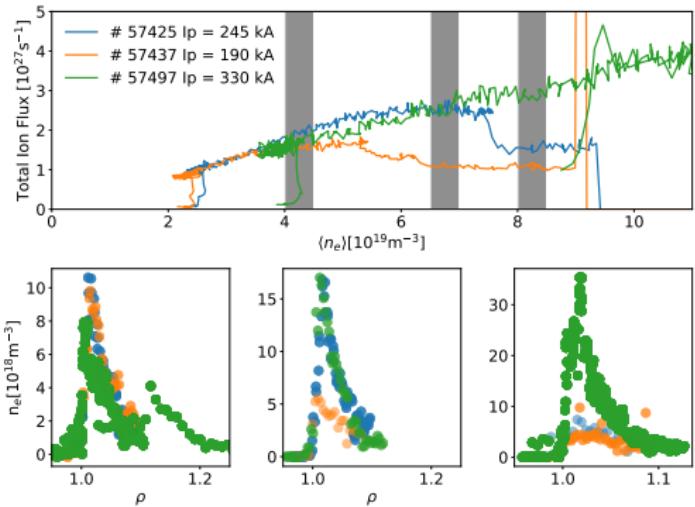


- ✓ TCV: This is consistent with onset of detachment (at least in intermediate and lower current)

# L-Mode analysis: $I_p$ scan at constant $B_t$

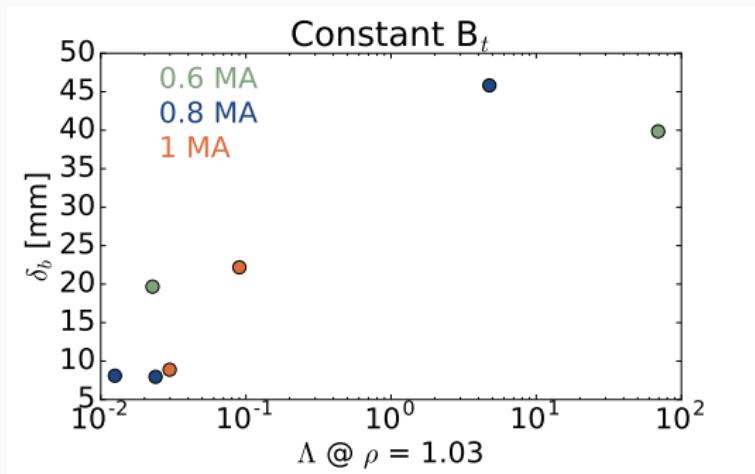


- ✓ AUG: While the general observation of increasing blob size with  $\Lambda_{div}$  is confirmed there are no differences between the current

# L-Mode analysis: $I_p$ scan at constant $B_t$

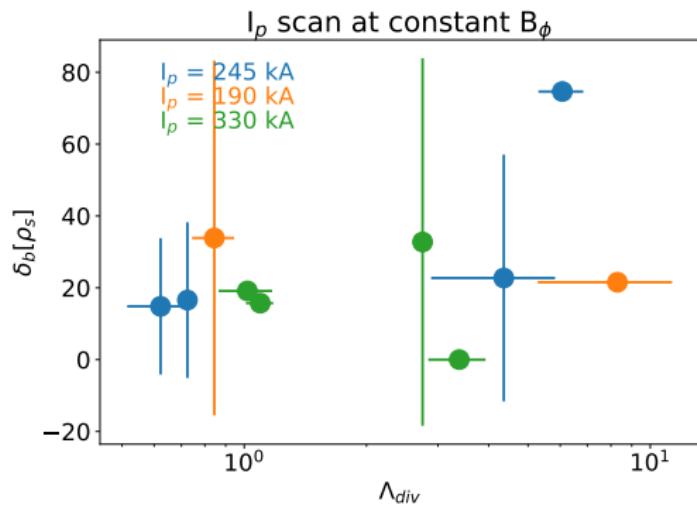


✓ TCV: confirm the observation of AUG.

# LSN vs Double null on TCV

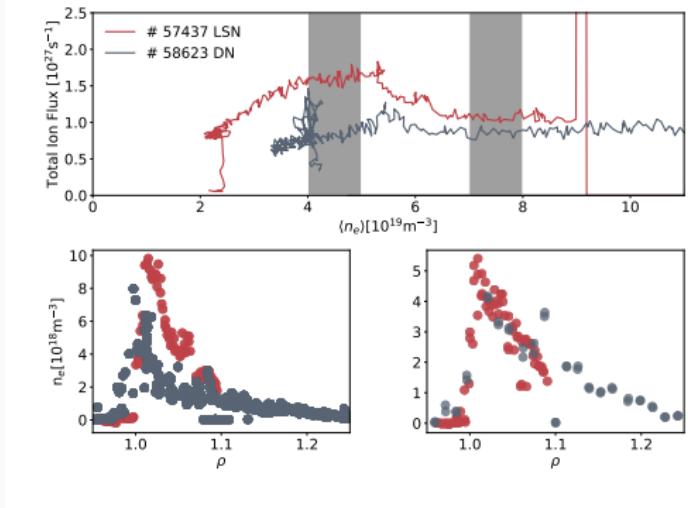


- ✓ Comparing similar L-Mode density ramp at same current in LSN and DN with ion  $\mathbf{B} \times \nabla B$  pointing towards the floor. Lower ion flux to lower target observed in DN and profiles before rollover seem more broad in LSN. After rollover the profiles are actually similar

# LSN vs Double null on TCV

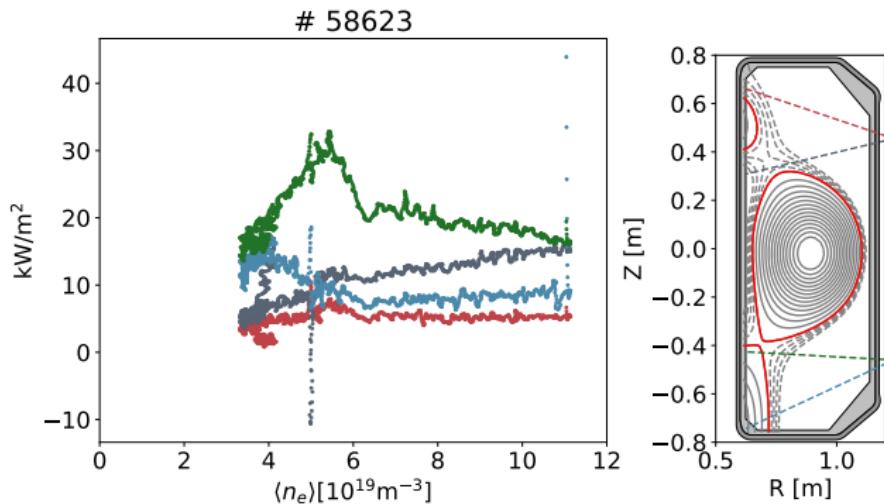


- ✓ From bolometry we can observe an unbalanced movement of the radiation front suggesting a non perfectly balanced DN

# LSN vs Double null on TCV

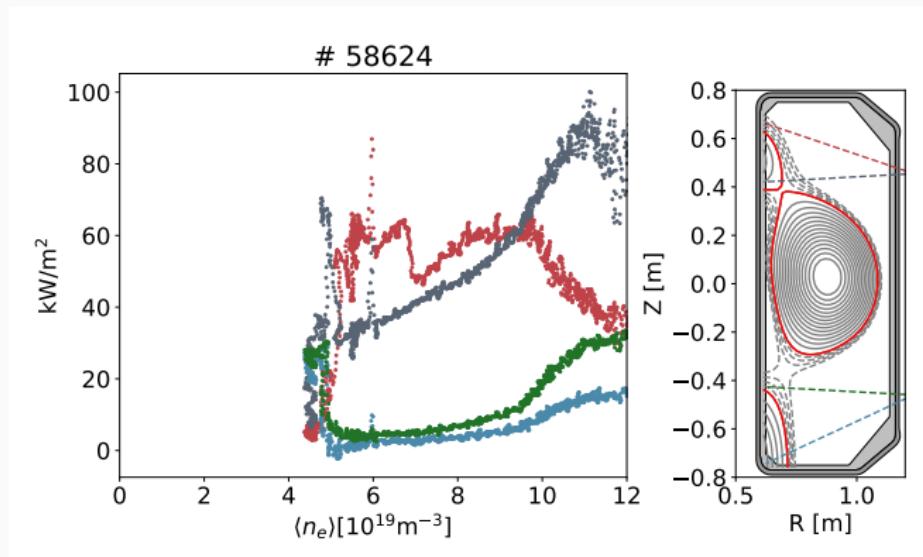


- ✓ This is confirmed at higher current where the more active X-point is the upper one with a consequent higher radiation from bolometry chords

# LSN vs Double null on TCV

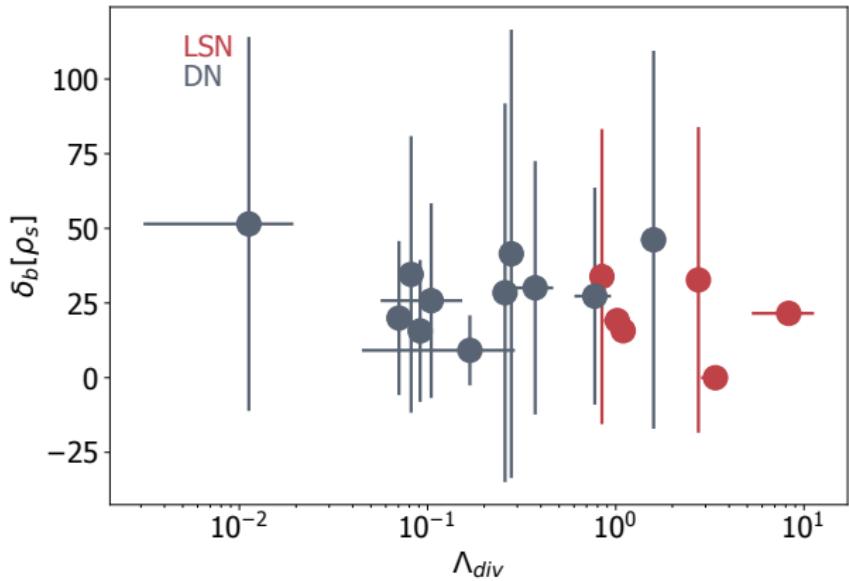


- ✓ No clear difference in blob size but needs further investigation

# H-Mode investigation: puffing location

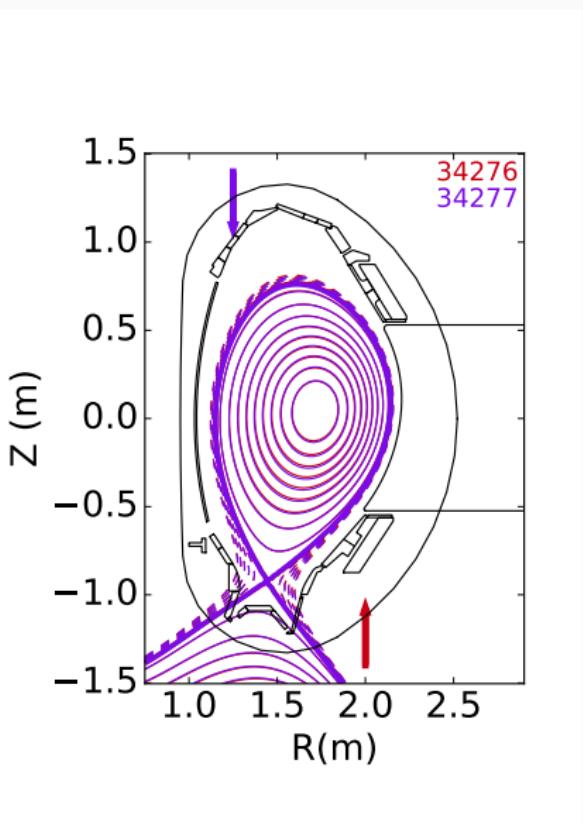


- ✓ Similar puff from Lower and Upper divertor valves (we asked for divertor/midplane valves)

# H-Mode investigation: puffing location

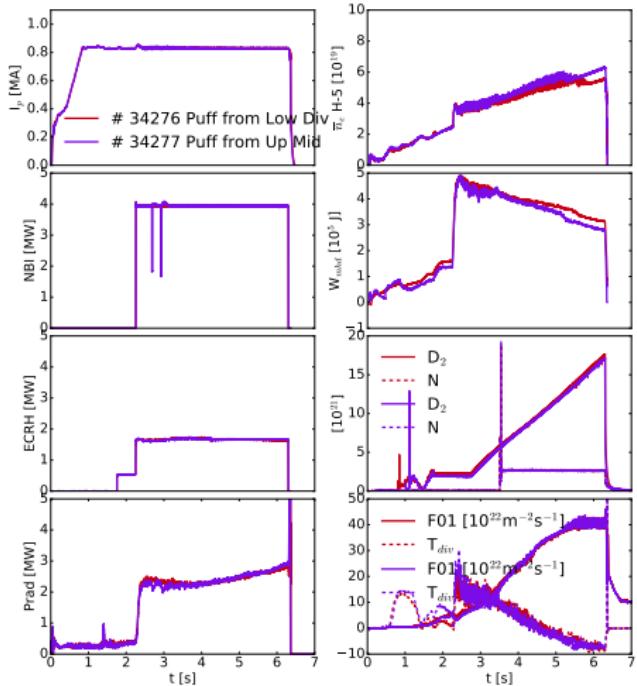

- ✓ Similar puff from Lower and Upper divertor valves (we asked for divertor/midplane valves)
- ✓ Discharge with a total amount 6.5 heating power with equivalent behavior also in the lower divertor independently from the puffing location


# H-Mode investigation: puffing location

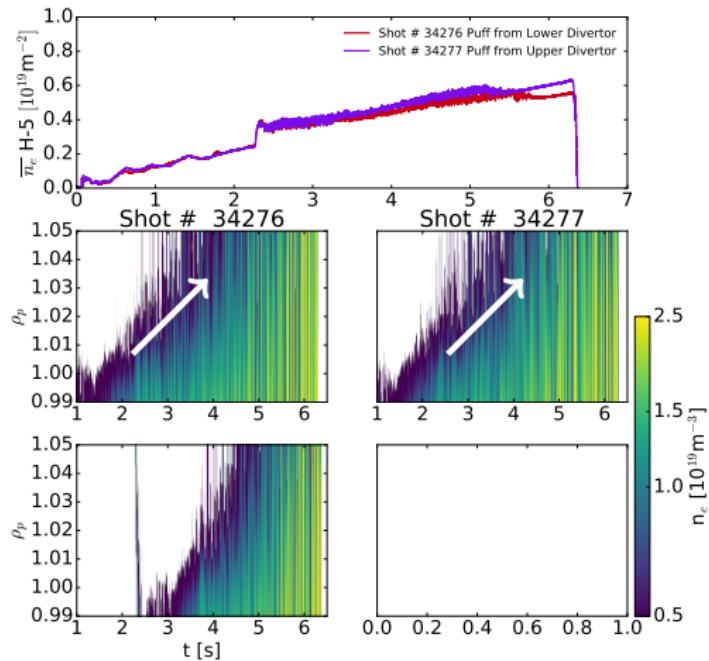

- ✓ Similar puff from Lower and Upper divertor valves (we asked for divertor/midplane valves)
- ✓ Discharge with a total amount 6.5 heating power with equivalent behavior also in the lower divertor independently from the puffing location
- ✓ Edge density profiles from Li-Beam evolution are pretty similar
- ✓ Similar behavior observed from RIC Antenna 4 for the available shot




# Compare fueling with/without cryopumps

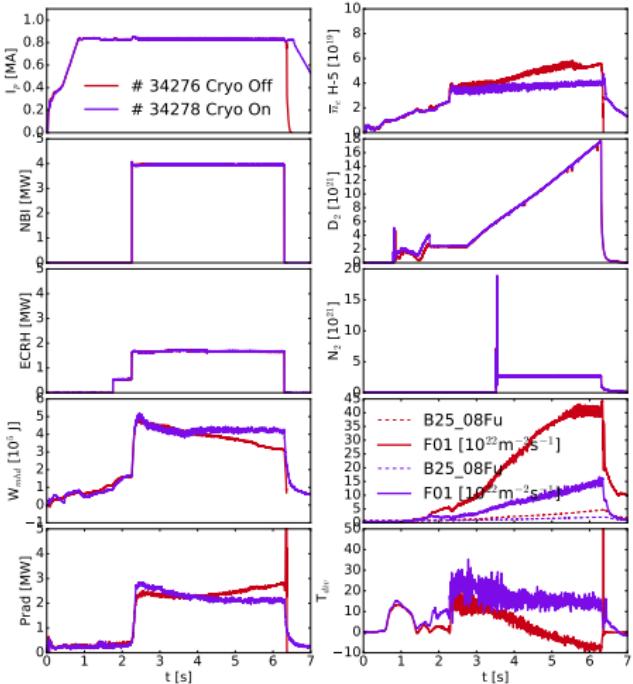


- ✓ Same fueling but with cryo-pumps
- ✓ H-5 density is different and remain constant, both divertor and midplane pressure are reduced (to 1/3 approximately)  
no sign of detachment

# Compare fueling with/without cryopumps

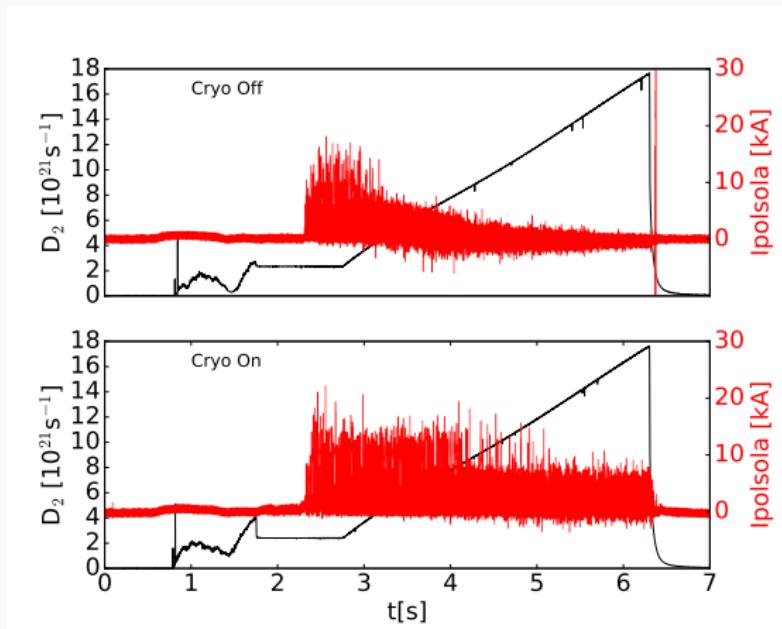

- ✓ Same fueling but with cryo-pumps
- ✓ H-5 density is different and remain constant, both divertor and midplane pressure are reduced (to 1/3 approximately) no sign of detachment
- ✓ Different ELM regimes reached with reduced size and increased frequency without the cryopumps


# Compare fueling with/without cryopumps

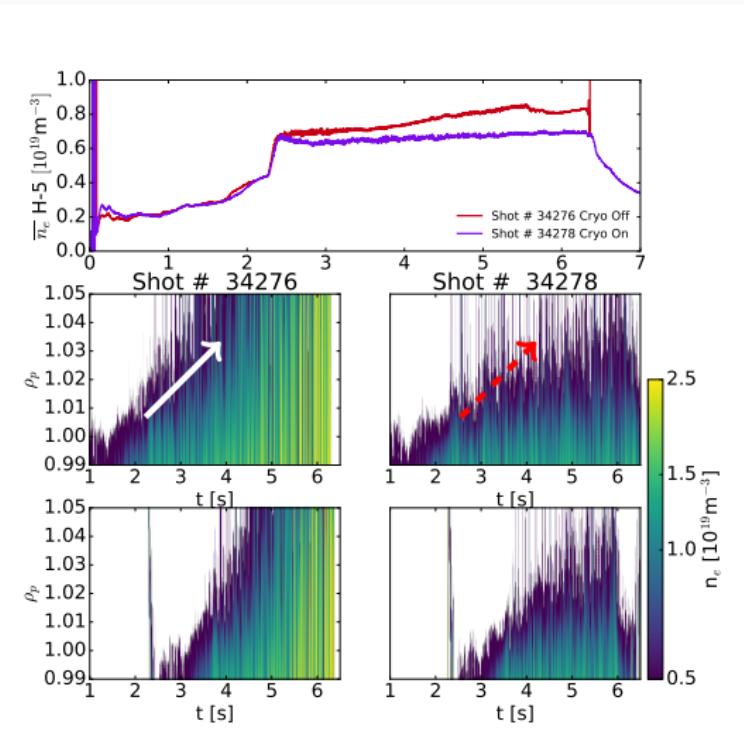

- ✓ Same fueling but with cryo-pumps
- ✓ H-5 density is different and remain constant, both divertor and midplane pressure are reduced (to 1/3 approximately)  
no sign of detachment
- ✓ Different ELMy regimes reached with reduced size and increased frequency without the cryopumps
- ✓ Also with this amount of fueling weaker indication of SOL saturation observed as confirmed by Li-Beam and by RIC (Antenna 4)




# Compare fueling with/without cryopumps

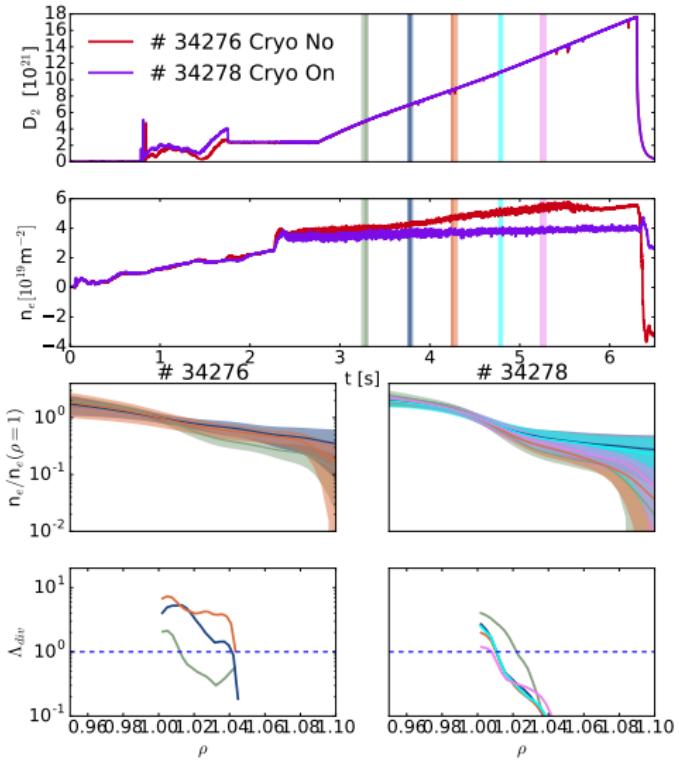

- ✓ Same fueling but with cryo-pumps
- ✓ H-5 density is different and remain constant, both divertor and midplane pressure are reduced (to 1/3 approximately) no sign of detachment
- ✓ Different ELM regimes reached with reduced size and increased frequency without the cryopumps
- ✓ Also with this amount of fueling weaker indication of SOL saturation observed as confirmed by Li-Beam and by RIC (Antenna 4)
- ✓ Inter-ELM resolved profile suggest a flattening even with the cryopumps still even though  $\Lambda_{div}$  is marginal above 1 only in the near SOL




# Matching scenarios with cryo-pumps

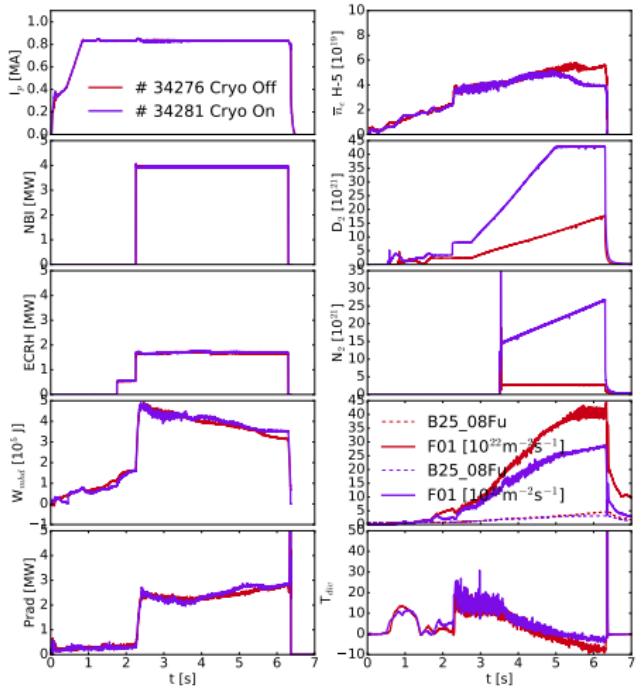

✓ To match similar edge density and divertor pressure and to reach the same level of detachment we increase the fueling by almost a factor of 3, increasing also the rate. In addition to that we also increase substantially the N puffing. Degraded H-Mode reached earlier in density without the cryopumps




# Matching scenarios with cryo-pumps

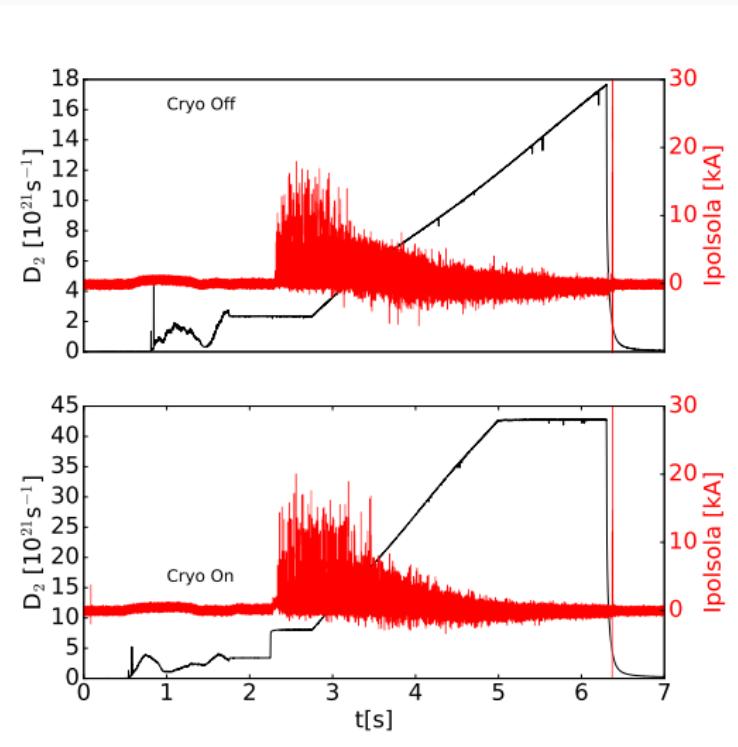

- ✓ To match similar edge density and divertor pressure and to reach the same level of detachment we increase the fueling by almost a factor of 3, increasing also the rate. In addition to that we also increase substantially the N puffing.  
**Degraded H-Mode reached earlier in density without the cryopumps**
- ✓ Similar ELM behavior obtained during the density ramp




# Matching scenarios with cryo-pumps

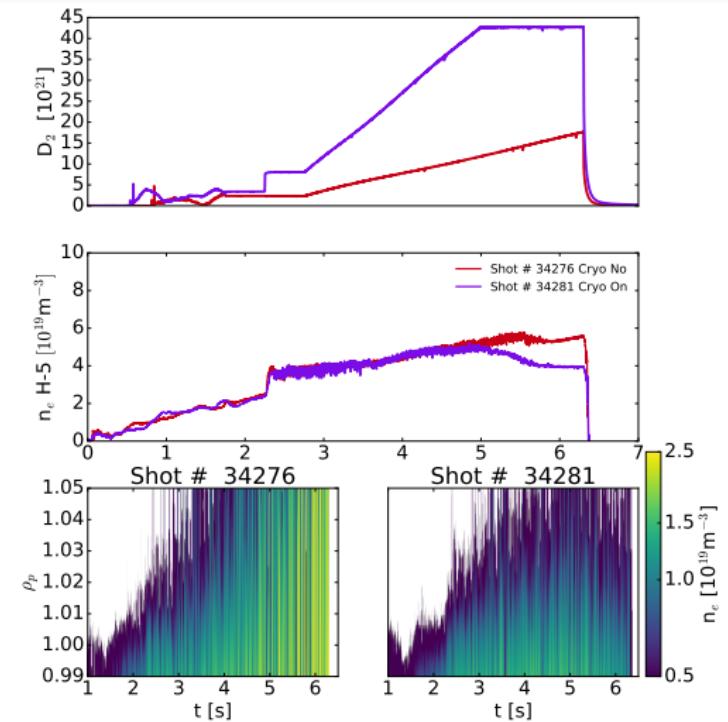

- ✓ To match similar edge density and divertor pressure and to reach the same level of detachment we increase the fueling by almost a factor of 3, increasing also the rate. In addition to that we also increase substantially the N puffing.  
**Degraded H-Mode reached earlier in density without the cryopumps**
- ✓ Similar ELMy behavior obtained during the density ramp
- ✓ Now the scenario suggest a strong profile flattening even with the cryopumps




# Matching scenarios with cryo-pumps

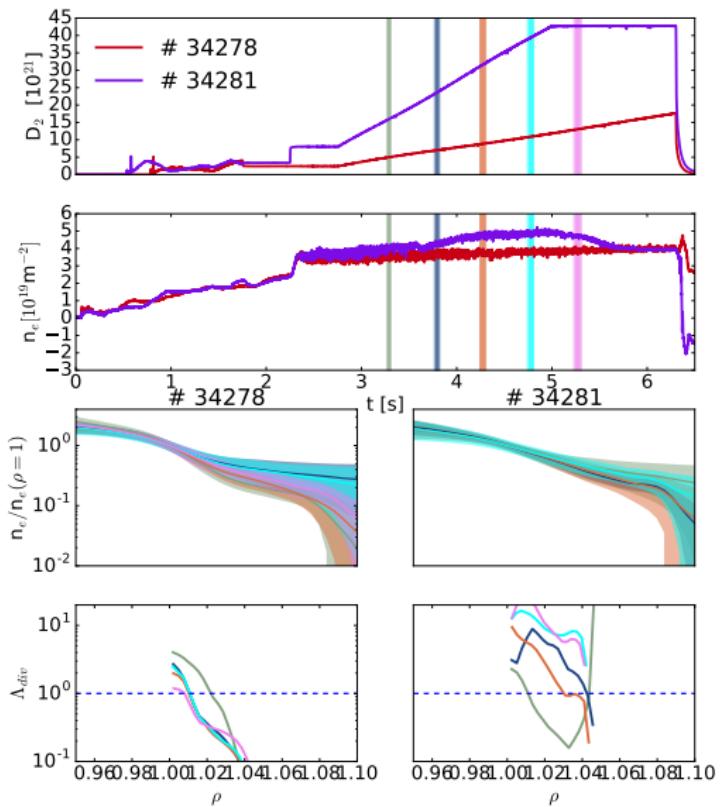


- ✓ To match similar edge density and divertor pressure and to reach the same level of detachment we increase the fueling by almost a factor of 3, increasing also the rate. In addition to that we also increase substantially the N puffing.  
**Degraded H-Mode reached earlier in density without the cryopumps**
- ✓ Similar ELM behavior obtained during the density ramp
- ✓ Now the scenario suggest a strong profile flattening even with the cryopumps
- ✓ Inter-ELM resolved Li-Be profiles confirm this with shoulder formed with similar strength even with the cryopumps in operation.

# Matching scenarios with cryo-pumps

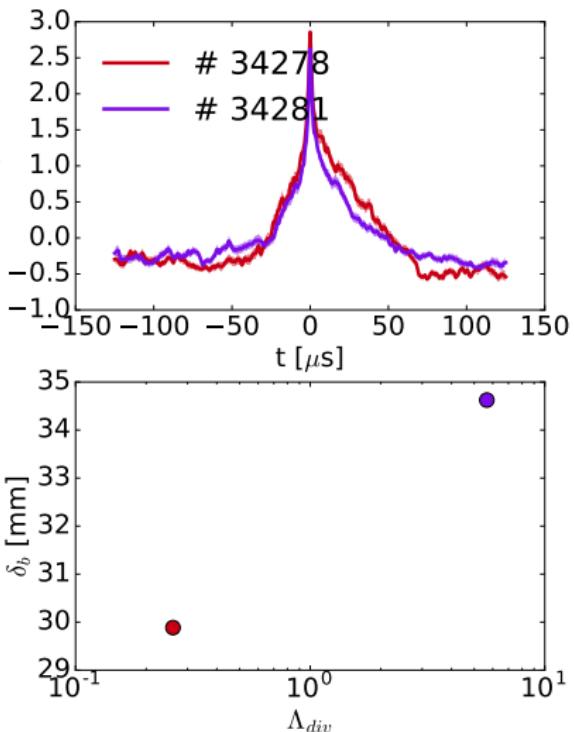


- ✓ To match similar edge density and divertor pressure and to reach the same level of detachment we increase the fueling by almost a factor of 3, increasing also the rate. In addition to that we also increase substantially the N puffing.  
**Degraded H-Mode reached earlier in density without the cryopumps**
- ✓ Similar ELM behavior obtained during the density ramp
- ✓ Now the scenario suggest a strong profile flattening even with the cryopumps
- ✓ Inter-ELM resolved Li-Be profiles confirm this with shoulder formed with similar strength even with the cryopumps in operation.
- ✓ We can also confirm that additional fueling change substantially the blob size which increases consistently with the modification of  $\Lambda_{div}$

# Fast electron generation (K. McClements et al)

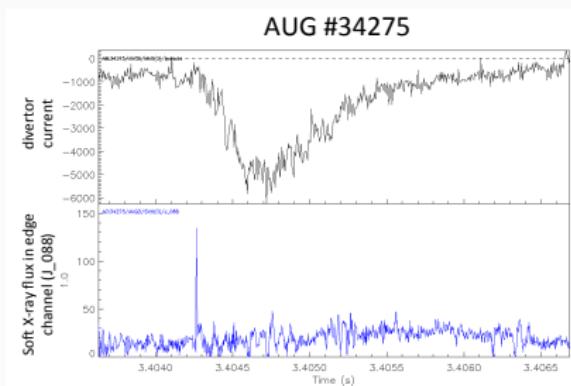

- ✓ Bursts of nonthermal 2nd harmonic electron cyclotron emission and edge soft X-ray emission often occur at start of ELM filament eruption in low collisionality AUG pulses – evidence of filament reconnection
- ✓ Soft X-ray bursts were seen at start of ELM filament eruption in T2I-AUG pulses, but not ECE bursts, probably due to higher collisionality in these pulses
- ✓ Peak nonthermal ECE emission appears to originate from top of pedestal
- ✓ Work is ongoing to determine conditions for occurrence of ECE & SXR bursts, e.g. in terms of pedestal collisionality – there is no clear correlation between ELM size & SXR flux


# Cross-machine: different divertor geometry

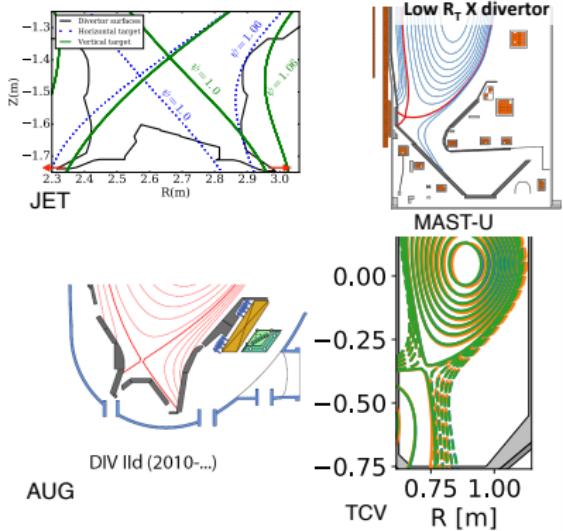

- ✓ Cross-machine experiments (including comparison with possible JET experiment) could help to disentangle how divertor geometry influence upstream profiles in term of neutral compression and recycling
- ✓ f.x. Vertical target on JET and AUG has very different behavior in terms of shoulder formation



- ✓ X-point manipulator (NPH ?) simultaneously with MEM
- ✓ X-point vertical shift in order to have SP at different vertical height at the target. *We will observe similar observation as obtained in JET when moving from horizontal to vertical target?*
- ✓ DN discharges. With slow movement of the second X-point into the vessel to be performed at constant power/density where shoulder already exists. *This is mandatory to complement the information obtained on TCV*
- ✓ USN with midplane/X-point manipulator to monitor the upstream SOL
- ✓ Heat load

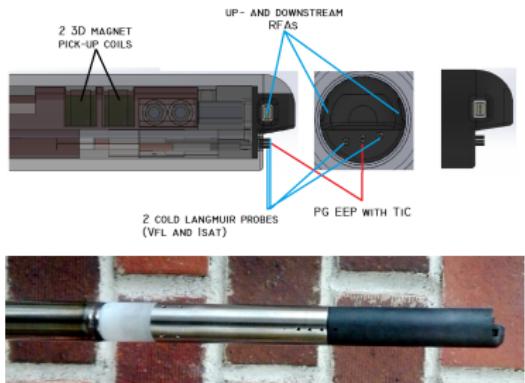

- ✓ MST2 founded project for the realization of a New Probe Head (NPH) (C. Ionita, B. Schneider et al)
- ✓ Simultaneous information on Ion temperature (2 RFAs), Plasma potential and electron temperature (Emissive probe coupled with floating potential) and magnetic fluctuations from 2 3-axial magnetic pick up coil
- ✓ Potentially tested on TCV beginning of 2018 and then moved to other MST1 devices



- ✓ H-Mode
- ✓ Long divertor legs (probe in the lower port) to check if increase of filamentary transport along the divertor leg exists in high density scenarios
- ✓ SnowFlake to monitor the fluctuations in between the 2 separatrix to be done in high density discharges
- ✓ Try to move the second X-point in SN divertor at a different Z position while keeping the same radial distances between the points



- ✓ Current scan at constant q95/constant Bt
- ✓ Influence of neutral recycling source in establishing upstream profiles and comparison between Low-RT and Vertical target. Look also at the heat loads



- ✓ Dedicated simulations with first principles codes (GBS, HESEL)
- ✓ Check if trends can be reproduced
- ✓ potential input for future experiments regarding role of f.x. neutrals and recycling