




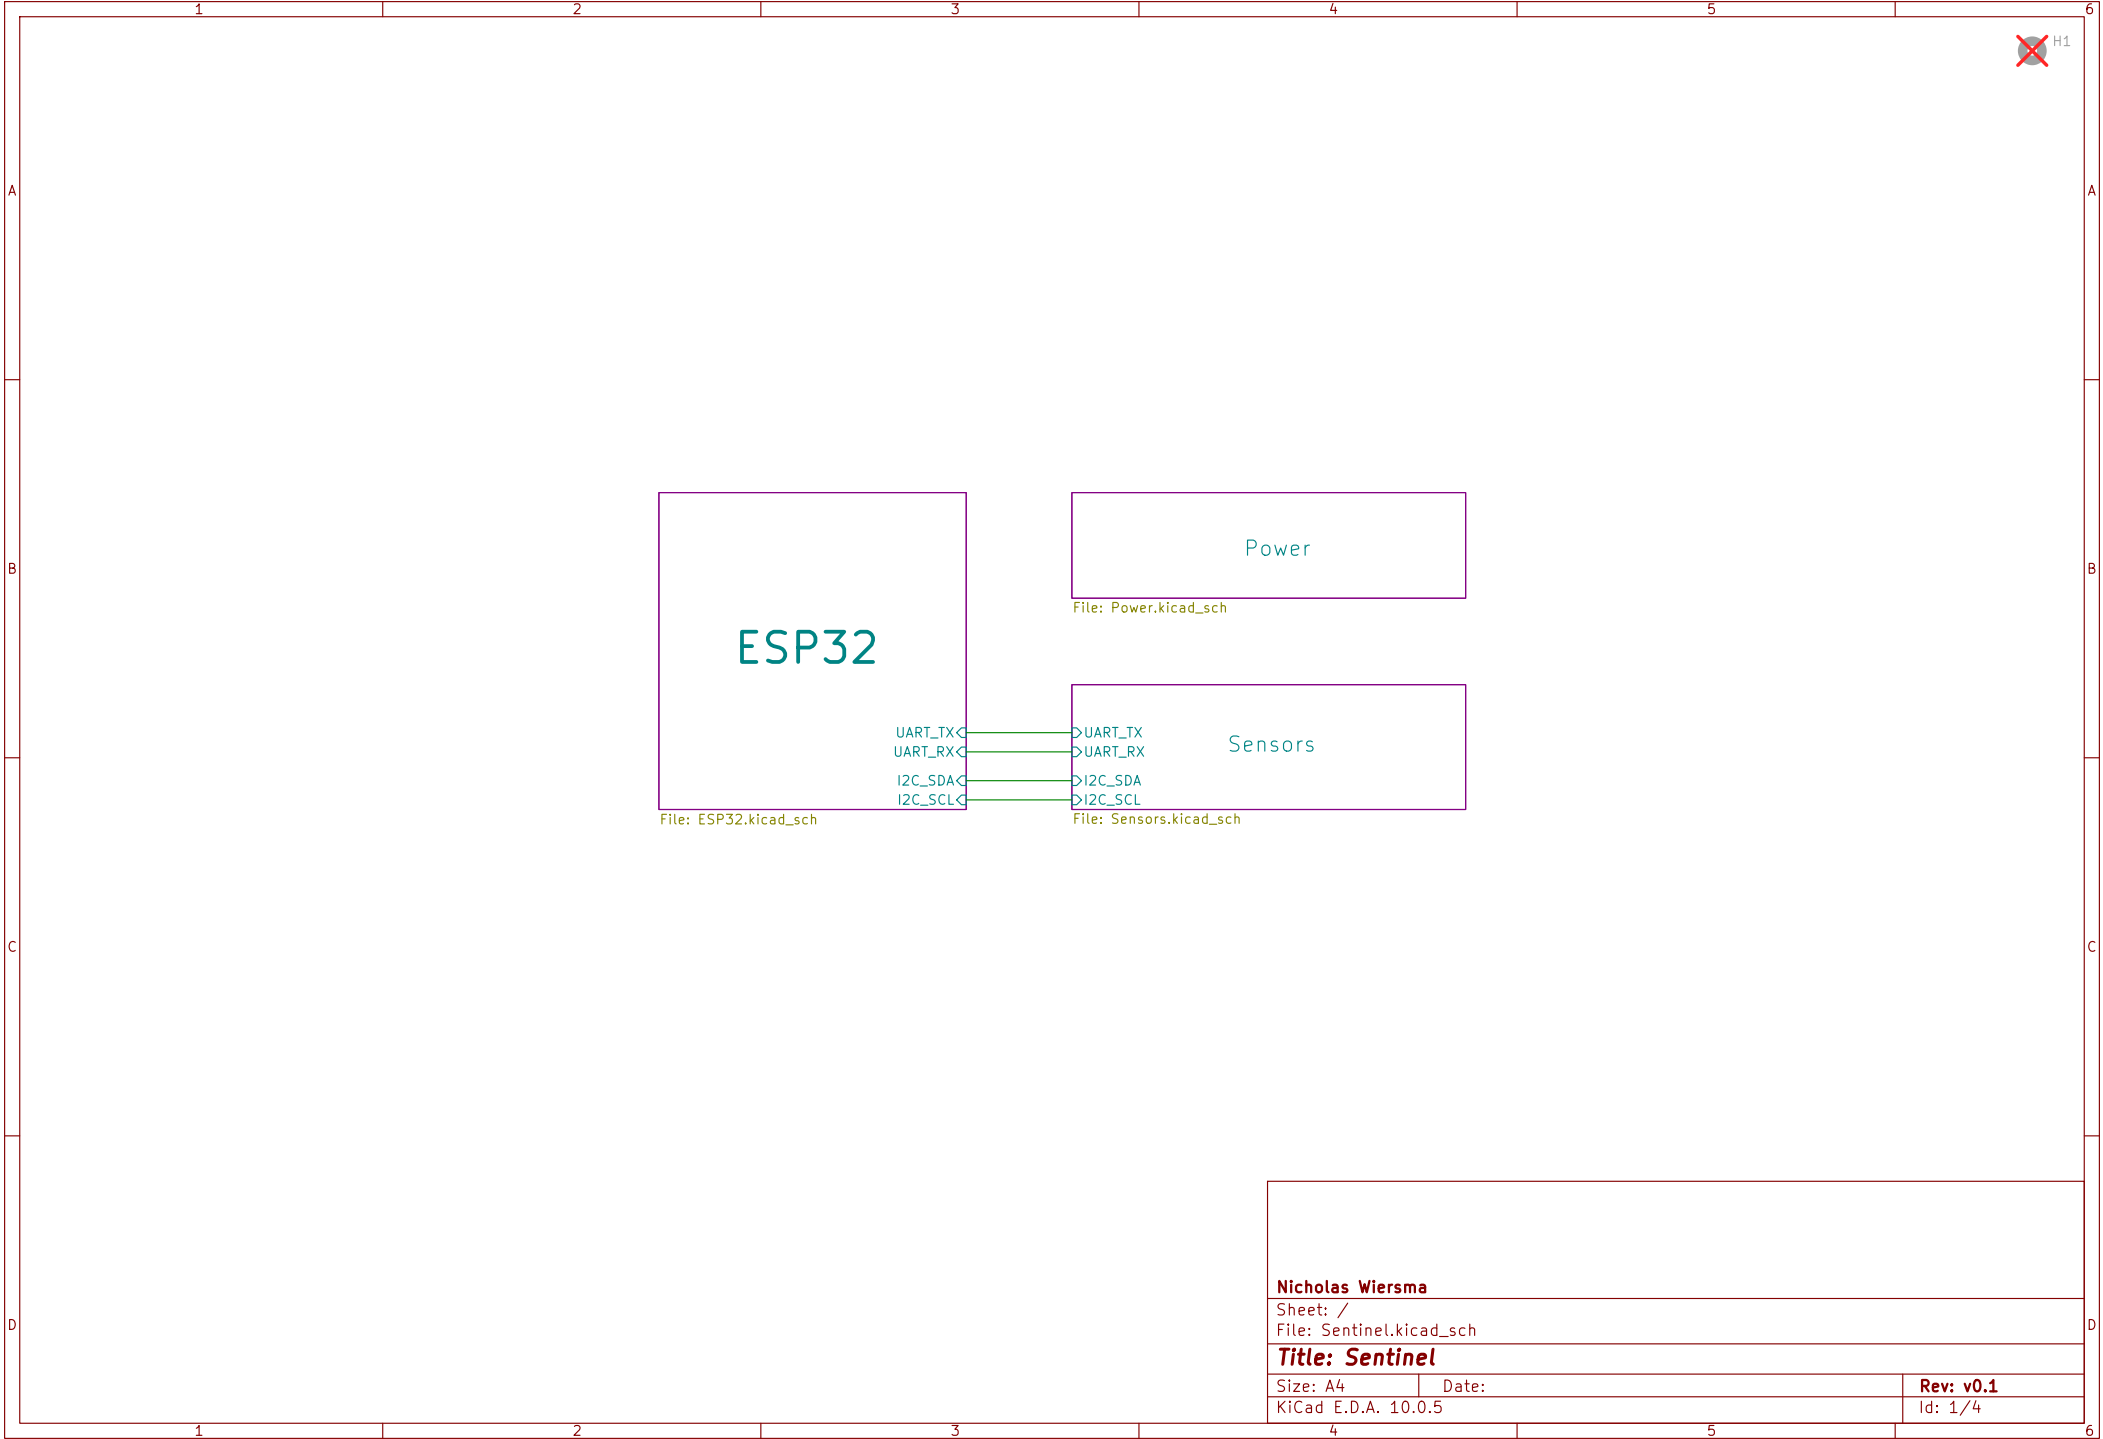


Antenna




40MHz Clock




Reset





Boot Option





RGB LED




I2C Pullup

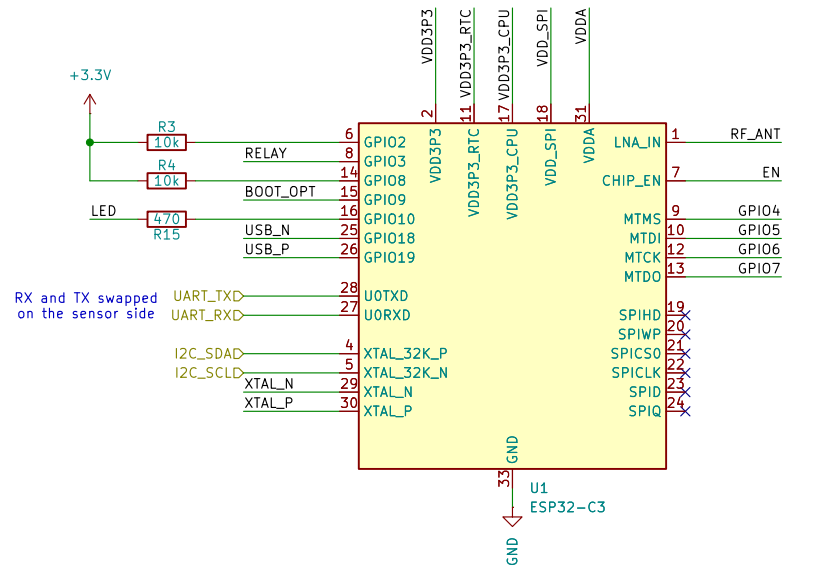

Control

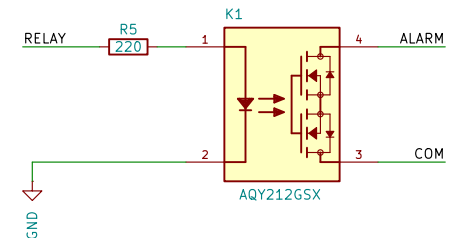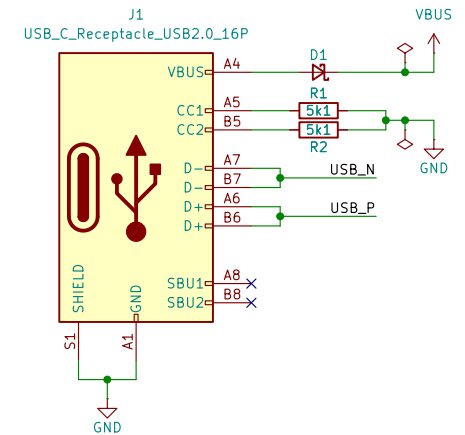

Connectors

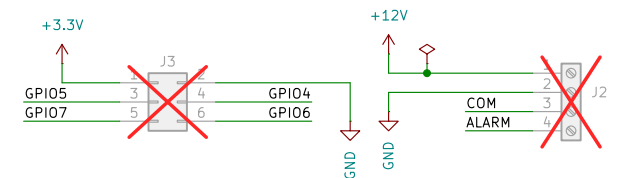

Nicholas Wiersma


Sheet: /ESP32/
File: ESP32.kicad_sch

Title: *Sentinel*


Size: A4	Date:
KiCad E.D.A. 10.0.5	

Rev: v0.1
Id: 2/4


12v -> 5v Converter

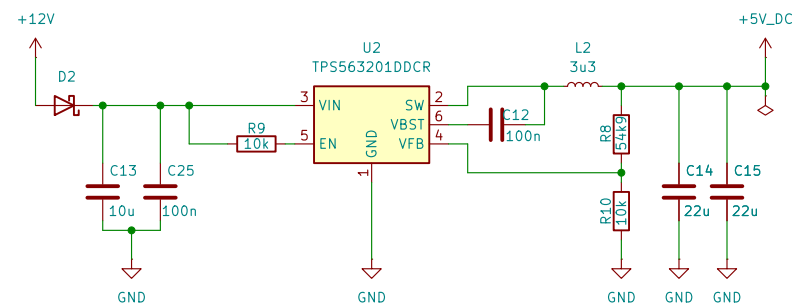

Power MUX

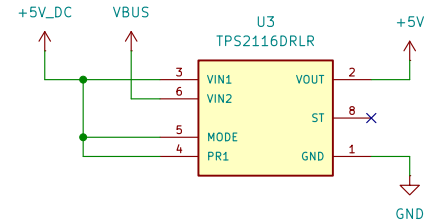

5v -> 3v3 Converter

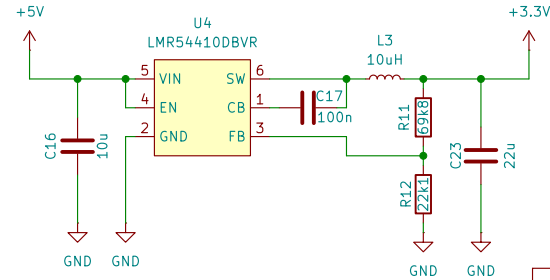

Nicholas Wiersma

Sheet: /Power/
File: Power.kicad_sch

Title: Sentinel

Size: A4 Date: 2026-08-02


KiCad E.D.A. 10.0.5

Rev: v0.1

Id: 3/4

LD2450 mmWave


I_{avg} = 120mA
I_{max} = >200mA

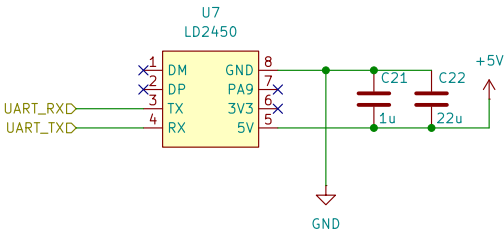

Temperature & Humidity Sensor

I_{avg} = 4.9μA
I_{max} = 900μA


I2C Address = 0x70



Ambient Light Sensor

I_{avg} = 120μA
I_{max} = 190μA

I2C Address = 0x23

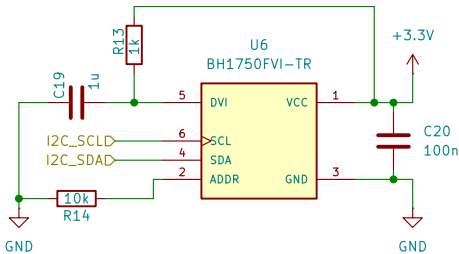

Nicholas Wiersma

Sheet: /Sensors/
File: Sensors.kicad_sch

Title: Sentinel

Size: A4
KiCad E.D.A. 10.0.5

Date:

Rev: v0.1

Id: 4/4