

US Patent No.: 1,210,1985 B1
Date of Patent: Oct. 26, 1985

FLUX CAPACITOR FOR TEMPORAL DISPLACEMENT

[75] Inventors: Emmett L. Brown, Hill Valley, CA (US)
[73] Assignee: Brown Industries, Hill Valley, CA (US)
[21] Appl. No.: 08/882,461
[22] Filed: Nov. 5, 1955
[51] Int. Cl.: G04F 5/00; H01G 4/00

ABSTRACT

An apparatus for the displacement of mass through the space-time continuum. The device comprises a vacuum-sealed housing containing three synchronized glass-encased glowing filaments arranged in a "Y" configuration. When energized by a power source of approximately 1.21 gigawatts, the flux capacitor generates a localized displacement field. Temporal transition is achieved when the vehicle or housing containing the device reaches a velocity of 88 miles per hour, facilitating the traversal of the fourth dimension via the manipulation of the flux dispersal.

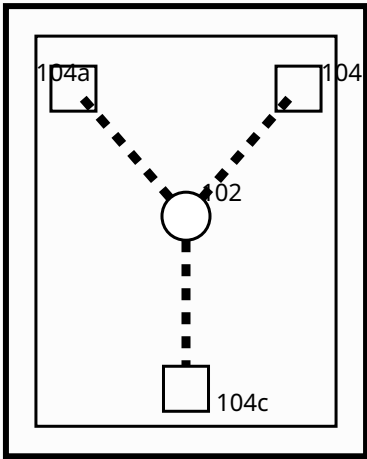


FIG. 1: Primary schematic of the flux-dispersal unit.

BACKGROUND OF THE INVENTION

This invention relates to chronometry and high-energy physics, specifically to the manipulation of the space-time continuum. For decades, the "Time Barrier" was

thought to be a physical impossibility. The present invention utilizes the discovery that time is not a linear progression but a malleable flux that can be bent given sufficient electrical energy and physical velocity.

SUMMARY OF THE INVENTION

The primary object of the invention is to provide a means for safe temporal displacement. The device utilizes three distinct glass-encased filaments arranged in a symmetrical "Y" pattern. This geometry is essential for the creation of a stable temporal rift. The invention requires a power input of 1.21 Gigawatts (GW) to initialize the flux field.

DETAILED DESCRIPTION

Referring to FIG. 1, the device 100 consists of a vacuum-shielded enclosure. The core 102 acts as the synchronization point for the three dispersal leads 104a, 104b, and 104c. Upon receiving 1.21 GW of energy, these leads begin to oscillate at a frequency

that allows the mass of the surrounding vessel to decouple from the current timeline.

Physical velocity is used as the catalyst for the jump. At exactly 88 miles per hour, the kinetic energy of the vessel interacts with the flux field, resulting in instantaneous displacement to a targeted chronological coordinate.

CLAIMS

The inventors claim:

1. An apparatus for temporal displacement comprising a housing and three filaments arranged in a Y-configuration.
2. The apparatus of claim 1, further comprising a means for supplying 1.21 gigawatts of power.
3. The apparatus of claim 1, wherein temporal displacement is triggered upon reaching a velocity of 88 miles per hour.