


DOT-MATRIX DISPLAY VAOM-C/A20571G-BW/40



Product:

2.0" DOT-MATRIX DISPLAY

Part Number:

VAOM-C20571G-BW/40 VAOM-A20571G-BW/40

Description

Chip Material-G: GaP/GaP.

Emitted Color: Yellow Green.

Black Face & White Dot.

VAOM-C20571G-BW/40 Column Cathode, Row Anode.

VAOM-A20571G-BW/40 Column Anode, Row Cathode.







Absolute Maximum Ratings at Ta=25℃

Parameter	Symbol	Yellow Green	Unit					
Power dissipation per dice	PAD	70	mW					
Derating Liner from 25 [°] C per dice	-	0.33	mA/°C					
Continuous forward current per dice	IAF	25	mA					
Peak current per dice (duty cycle 1/10, 1kHz)	IPF	90	mA					
Reverse voltage per dice	VR	5	V					
Operating temperature	Topr	-25 to +85	$^{\circ}\!\mathbb{C}$					
Storage temperature	Tstg	-25 to +85	$^{\circ}\!\mathbb{C}$					
Solder temperature 1/16 inch below seating plane for 5 seconds at 260 $^{\circ}\mathrm{C}$								

Electrical / Optical Characteristics and Curves at Ta=25°C

Parameter	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Forward Voltage per dot	VF	IF=20 mA		2.1	2.8	V
Luminous intensity per dot	IV	IF=20 mA		17		mcd.
Peak emission wavelength	λd	IF=20 mA		565		nm
Spectrum radiation bandwidth	Δλ	IF=20 mA		30		nm
Reverse Current	IR	VR=5 V			100	μ A

* Tolerance : $\pm 20\%$.










Package Dimension & Internal Circuit

- * 2.0 inch (50.72mm) Matrix height.
- * 5*7 array.
- * Description: VAOM-C20571. Column Cathode, Row Anode.
- * Description: VAOM-A20571. Column Anode, Row Cathode.

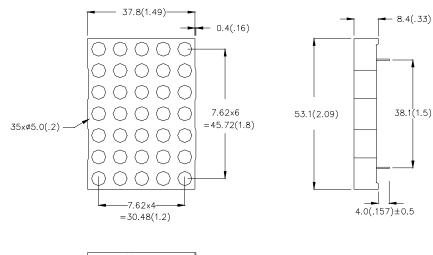






NOTE:

- 1. All pins are $\emptyset 0.51(.02)$
- Dimension in millimeter (inch), and tolerance is ±0.30 (.01) unless otherwise noted.


VER_D-09-12-P40








Internal Circuit

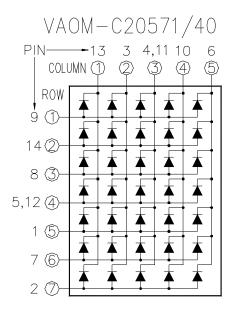

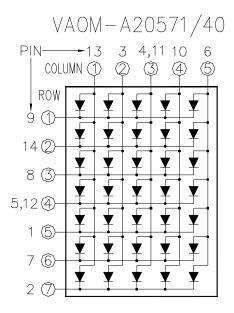

 $Cathode(-) \longrightarrow Anode(+)$

VER_D-09-12-P40







GREEN

Typical Electro-optical Characteristic Curves (25°C Free Air Temperature Unless Otherwise Specified)




Fig.1 SPECTRAL RESPONSE





Fig.2 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT





50

40

30

FORWARD CURRENT IF=mA





2.0 2,4

Fig.5 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE f=1KHz)



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

VAOM-A20571G-BW/40 VAOM-C20571G-BW/40