PROPRIETARY NOTICE
THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO VARIAN. IT MUST NOT BE REPRODUCE OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY VARIAN

QTY	PART NUMBER	REF DES	PART DESCRIPTION	NOTE
1	E51000008	J1	CONN HDR 8 POS	
1	E51000009	J2	CONN HDR 16 POS	
1	E51000010	J3	CONN HDR 5 POS	
2	E51000165	JP2, JP3	CONN HDR 2 PIN	
1	E60000001	VR1	VARISTOR 8ZA1 8V	
2	E60000002	VR2, VR3	VARSITOR 18ZA1 18V	
1	E60000005	X1	RESONATOR 12.0 MHZ	
2	E61000003	U6, U7	IC 75451	
1	~~E61000004~~	U8 E62111380	IC INTEL ~~E61000004~~ P8C251SB16	
1	6260003800	U5	IC LM556	
1	E61000015	U12	IC AD7549JN	
1	E61000016	U10	IC AD7582KN	
2	E61000017	U9, U11	IC AD584JH	
2	E61000363	U13, U15	IC OP213FP	
1	E61000020	U14	IC MC79L05ACP	
1	E61000036	U16	IC 75454	
2	E61000078	U2, U4	XMTR HFBR-1521	
2	E61000079	U1, U3	RCVR HFBR-2521	
2	3132016	U17, U18	IC HCPL-2731	
1	E63000001	Q1	XSTR 2N3906	
24	E64000001	D1-D8, D11-D26	DIODE 1N914B	
1	E64000002	D9	DIODE ICTE-5	
2	E64000004	D10, D27	DIODE ICTE-15	
1	4810018	D28	DIODE 1N270	
4	4865009	D32-D35	DIODE P6KE18	
1	5130001	S1	SWITCH DIP, 8 SPST	9
3	E66000001	L1-L3	INDUCTOR 10UH	
5	E67000001	C2, C8, C9, C22, C29	CAP .01UF, 100V, 10%	
13	E67000002	C1, C3, C20, C23-C25, C33, C38, C39, C43-C45 C49	CAP .1UF, 50V, 10%	
16	E67000003	C4, C7, C11-C14, C17, C19, C27, C34-C37, C51-C53	CAP 1UF, 50V, 10%	
3	E67000005	C15, C21, C46	CAP 100UF, 16V, 20%	
7	E67000006	C5, C6, C10, C18, C28, C30, C40	CAP 10UF, 20V, 10%	
1	E67000214	C26	CAP 3900PF, 50V, 1%	6
1	E67000216	C42	CAP 560PF, 50V, 1%	6
1	E67000215	C16	CAP 2200PF, 50V, 1%	6
6	E67000010	C31, C32, C41, C47, C48, C50	CAP 39PF, 200V, 10%	
1	4740039	RN1	RES NET 1K	
1	4740017	RN2	RES NET 10K	

QTY	PART NUMBER	REF DES	PART DESCRIPTION	NOTE
1	E68000001	R1	RES 10K, 1/4W, 5%	
4	E68000002	R17, R22, R29, R34	RES 100 , 1/4W, 5%	
1	E68000003	R2	RES 1M, 1/4W, 5%	
1	E68000004	R21	RES 2K, 1/4W, 5%	
1	E68000006	R12	POT 50K	
2	E68000007	R13, R19	RES 120 , 1/2W, 5%	
1	E68000009	R7	POT 5K	
1	E68000011	R15	POT 500	
1	E68000024	R20	RES 1K, 1/4W, 5%	
3	E68000031	R39, R40, R41	RES 220 , 1/4W, 5%	
2	E68000037	R36, R38	RES 470 , 1/4W, 5%	
1	E68000038	R3	RES 100K, 1/4W, 5%	

QTY	PART NUMBER	REF DES	PART DESCRIPTION	NOTE
1	E68000051	R14	POT 2K	
A3	E69000001	R23, R24, R28, ~~R45~~	RES 1K, 1/8W, 1%	
3 5	E69000002	R8, R9, R18, R26, R27, R30	RES 49.9K, 1/8W, 1%	
1	E69000003	R4	RES 56.2K, 1/8W, 1%	
1	E69000006	R16	RES 249, 1/8W, 1%	
1	E69000008	R25	RES 1M, 1/8W, 1%	
2	E69000048	R31, R32	RES 825, 1/8W, 1%	
1	4725026	R33	RES 47K, 1/8W, 1%	
3	4725252L	R49-R51	RES 2.49K, 1/8W, 1%	
2	2876259	TP1, TP2	TEST POINT	

1 9709972 R45 RES 9.71K 1/4W 5%

ZONE	REV	DESCRIPTION	APPROVAL / DATE
	1	GENERATED BY ENG INPUT MFB 3/21/95	CLF
	2	CHANGED PER ENG INPUT CLF 6-14-95	MFB
	3	RELEASED PER ECO 17175 MFB 10-15-95	
	A	CHG'D PER ECO 22798 CF 8-11-98 U13, U15 WAS LT1013; C16, C26, C42 WAS 33V, 2.5%	CLF 8-11-98

B ECO 27017 REPLACE E61000004

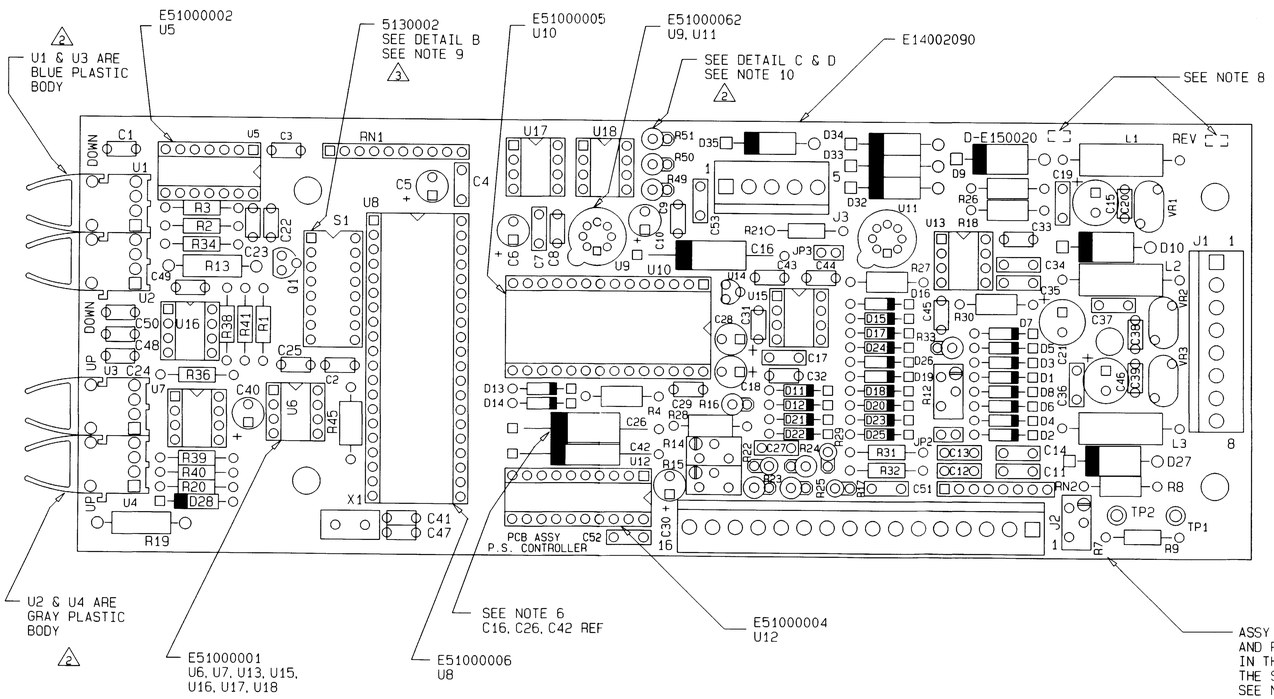

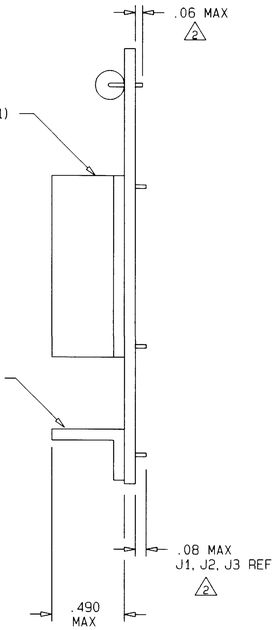

HIGHEST COMPONENTS

NOTES:

1. REFERENCE: SCHEMATIC DIAGRAM E-E13002090
2. MARK APPROPRIATE ~~VENDOR~~ Supplier ASSY NO., LATEST REVISION LEVEL, AND ~~VENDOR~~ Supplier ID. NUMBER ON SOLDER SOLDER.
3. PACKAGE FOR SHIPMENT IN ANTI-STATIC PACKAGING.
4. UNLESS OTHERWISE SPECIFIED:
   ALL RESISTANCE VALUES ARE IN OHMS
   ALL CAPACITANCE VALUES ARE IN MICROFARADS
5. SQUARE PADS FOR COMPONENTS DENOTE PIN 1 AND/OR COMPONENT POLARITY.
6.
7.
8. THE APPROPRIATE ASSY NO. AND LATEST REVISION LEVEL WILL BE COMPLETED AT NEXT ASSEMBLY.
9. REMOVE SWITCH COVER. MOVE SWITCH TO OPEN POSITION TO SELECT BIT. THEN REPLACE SWITCH COVER.
10. DENOTES ORIENTATION OF VERTICAL MOUNTED COMPONENTS







WARNING

STATIC SENSITIVE DEVICES
ASSEMBLY OPERATOR GROUNDING
IS MANDATORY

ECO # 27017

SEE SEPARATE PART LISTS

PN SUFFIX & QUANTITY	UI	DESCRIPTION VENDOR & PART NUMBER	PART NUMBER	DWG SIZE	FIND NO.	REV CHG

PARTS LIST

WORKMANSHIP PER VARIAN WORKMANSHIP STANDARDS	UNSPECIFIED TOL	APPROVALS	DATE
	.XXX ± .005"	DRAWN MFB	3-22-95
	.XX ± .020"	CHECKED CLF	3-22-95
	FRAC ± .032"	ELEC ENGR S.GREEN	3-22-95
	ANG ± 30'	MECH ENGR	
	DO NOT SCALE THIS DRAWING	PROJ ENGR	
	RADIUS OR CHAMFER ALL SHARP EDGES .015 MAX	MFG ENGR	
	ALL MACH. SURFACES 63 RMS	QUAL ENGR	
	CONCENTRICITY .005 TIR		
	PERPENDICULARITY WITHIN TOLERANCE ZONE		
NEXT ASSY / USED ON	FINISH		
APPLICATION			

varian
ION IMPLANT SYSTEMS, GLOUCESTER, MA

PCB ASSEMBLY
POWER SUPPLY
CONTROLLER

B

SIZE		REV
D	E15002090	A

SCALE 2/1 SHEET 1 OF 1

FILENAME 15002090/2090bd.pcb 1 PCAD