Features

- Low power consumption
- Low voltage drop
- Low temperature coefficient
- High input voltage (up to 24V)
- High output current : 100mA ($P_d \leq 250mW$)
- Output voltage accuracy: tolerance ±3%
- TO-92, SOT-89 and SOT-25 package

Applications

- Battery-powered equipment
- Communication equipment
- Audio/Video equipment

General Description

The HT75XX-1 series is a set of three-terminal high current low voltage regulator implemented in CMOS technology. They can deliver 100mA output current and allow an input voltage as high as 24V. They are available with several fixed output voltages ranging from 3.0V to 5.0V. CMOS technology ensures low voltage drop and low quiescent current.

Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain variable voltages and currents.

Selection Table

Part No.	Output Voltage	Tolerance	Package	Marking
HT7530-1	3.0V	±3%	TO-92 SOT-89 SOT-25	75XX-1 (for TO-92) 75XX-1 (for SOT-89) 5XX1 (for SOT-25)
HT7533-1	3.3V	±3%		
HT7536-1	3.6V	±3%		
HT7544-1	4.4V	±3%		
HT7550-1	5.0V	±3%		

Note: "XX" stands for output voltages.

Block Diagram

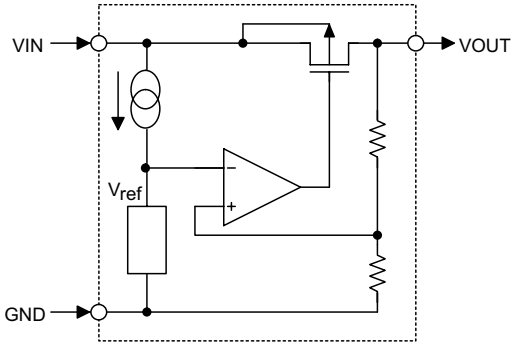

Pin Assignment

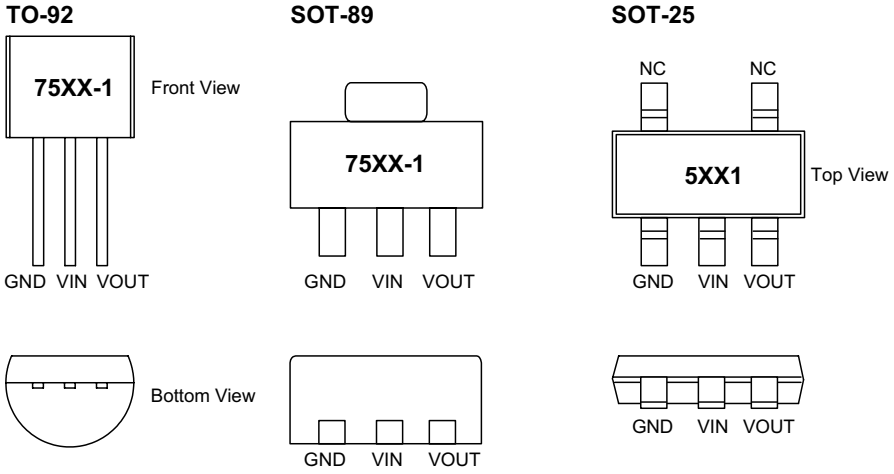

Pad Assignment

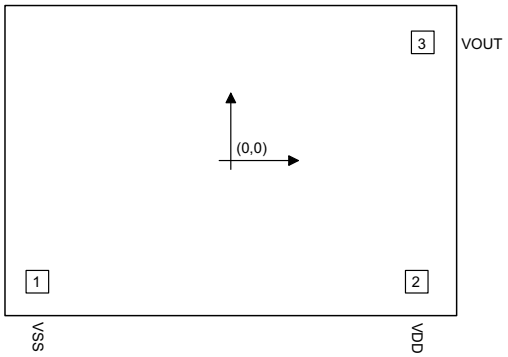

Chip size: 1540×1070 (μm)^2

*The IC substrate should be connected to VDD in the PCB layout artwork.

Pad Coordinates

Unit: μm

Pad No.	X	Y
1	–639.00	–406.00
2	618.50	–406.00
3	641.85	392.10

Absolute Maximum Ratings

Supply Voltage .....–0.3V to 26V

Power Consumption (*1) 250mW

Power Consumption (*2) 150mW

Storage Temperature .....–50°C to 125°C

Operating Temperature.....0°C to 70°C

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

*1: applied to SOT89 and TO-92

*2: applied to SOT-25

Electrical Characteristics

HT7530-1, +3.0V output type Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V_{IN}	Conditions				
V_{OUT}	Output Voltage Tolerance	5V	I_{OUT}=10mA	2.91	3.0	3.09	V
I_{OUT}	Output Current	5V	—	60	100	—	mA
ΔV_{OUT}	Load Regulation	5V	1mA≤I_{OUT}≤50mA		60	150	mV
V_{DIF}	Voltage Drop	—	I_{OUT}=1mA	—	100	—	mV
I_{SS}	Current Consumption	5V	No load	—	3.5	7	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation	—	4V≤V_{IN}≤24V I_{OUT}=1mA	—	0.2	—	%/V
V_{IN}	Input Voltage	—	—	—	—	24	V
$\frac{\Delta V_{OUT}}{\Delta T_a}$	Temperature Coefficient	5V	I_{OUT}=10mA 0°C<Ta<70°C	—	±0.45	—	mV/°C

HT7533-1, +3.3V output type Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V_{IN}	Conditions				
V_{OUT}	Output Voltage Tolerance	5.5V	I_{OUT}=10mA	3.201	3.3	3.399	V
I_{OUT}	Output Current	5.5V	—	60	100	—	mA
ΔV_{OUT}	Load Regulation	5.5V	1mA≤I_{OUT}≤50mA	—	60	150	mV
V_{DIF}	Voltage Drop	—	I_{OUT}=1mA	—	100	—	mV
I_{SS}	Current Consumption	5.5V	No load	—	3.5	7	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation	—	4.5V≤V_{IN}≤24V I_{OUT}=1mA	—	0.2	—	%/V
V_{IN}	Input Voltage	—	—	—	—	24	V
$\frac{\Delta V_{OUT}}{\Delta T_a}$	Temperature Coefficient	5.5V	I_{OUT}=10mA 0°C<Ta<70°C	—	±0.5	—	mV/°C

HT7536-1, +3.6V output type Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V_{IN}	Conditions				
V_{OUT}	Output Voltage Tolerance	5.6V	I_{OUT}=10mA	3.492	3.6	3.708	V
I_{OUT}	Output Current	5.6V	—	60	100	—	mA
ΔV_{OUT}	Load Regulation	5.6V	1mA≤I_{OUT}≤50mA	—	60	150	mV
V_{DIF}	Voltage Drop	—	I_{OUT}=1mA	—	100	—	mV
I_{SS}	Current Consumption	5.6V	No load	—	3.5	7	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation	—	4.6V≤V_{IN}≤24V I_{OUT}=1mA	—	0.2	—	%/V
V_{IN}	Input Voltage	—	—	—	—	24	V
$\frac{\Delta V_{OUT}}{\Delta T_a}$	Temperature Coefficient	5.6V	I_{OUT}=10mA 0°C<Ta<70°C	—	±0.6	—	mV/°C

HT7544-1, +4.4V output type Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V_{IN}	Conditions				
V_{OUT}	Output Voltage Tolerance	6.4V	I_{OUT}=10mA	4.268	4.4	4.532	V
I_{OUT}	Output Current	6.4V	—	60	100	—	mA
ΔV_{OUT}	Load Regulation	6.4V	1mA≤I_{OUT}≤50mA	—	60	150	mV
V_{DIF}	Voltage Drop	—	I_{OUT}=1mA	—	100	—	mV
I_{SS}	Current Consumption	6.4V	No load	—	3.5	7	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation	—	5.4V≤V_{IN}≤24V I_{OUT}=1mA	—	0.2	—	%/V
V_{IN}	Input Voltage	—	—	—	—	24	V
$\frac{\Delta V_{OUT}}{\Delta T_a}$	Temperature Coefficient	6.4V	I_{OUT}=10mA 0°C<Ta<70°C	—	±0.7	—	mV/°C

HT7550-1, +5.0V output type Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V_{IN}	Conditions				
V_{OUT}	Output Voltage Tolerance	7V	I_{OUT}=10mA	4.85	5.0	5.15	V
I_{OUT}	Output Current	7V	—	100	150	—	mA
ΔV_{OUT}	Load Regulation	7V	1mA≤I_{OUT}≤70mA	—	60	150	mV
V_{DIF}	Voltage Drop	—	I_{OUT}=1mA	—	100	—	mV
I_{SS}	Current Consumption	7V	No load	—	3.5	7	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation	—	6V≤V_{IN}≤24V I_{OUT}=1mA	—	0.2	—	%/V
V_{IN}	Input Voltage	—	—	—	—	24	V
$\frac{\Delta V_{OUT}}{\Delta T_a}$	Temperature Coefficient	7V	I_{OUT}=10mA 0°C<Ta<70°C	—	±0.75	—	mV/°C

Application Circuits

Basic circuit

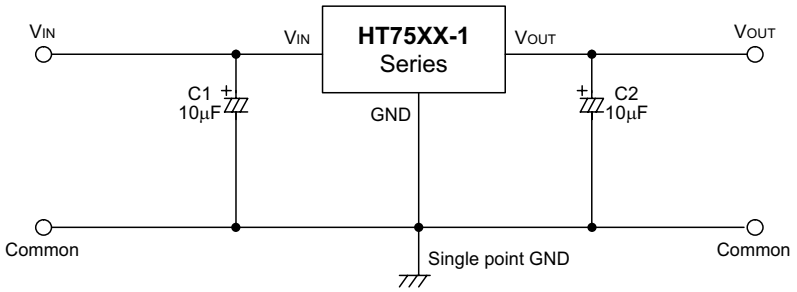

High output current positive voltage regulator

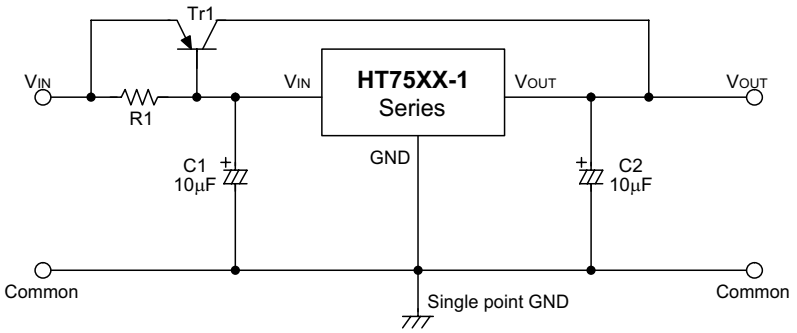

Short-Circuit protection for Tr1

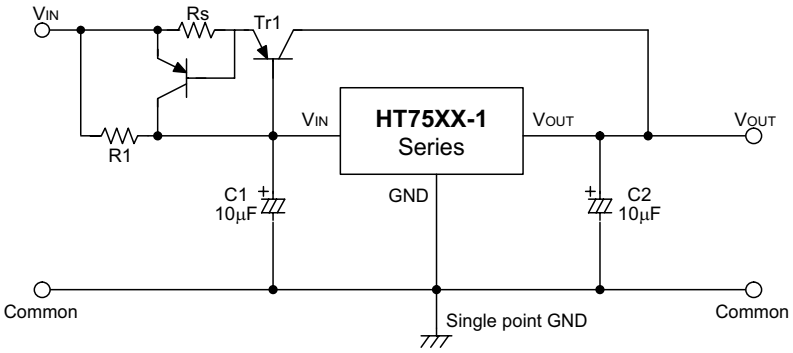

Circuit for increasing output voltage

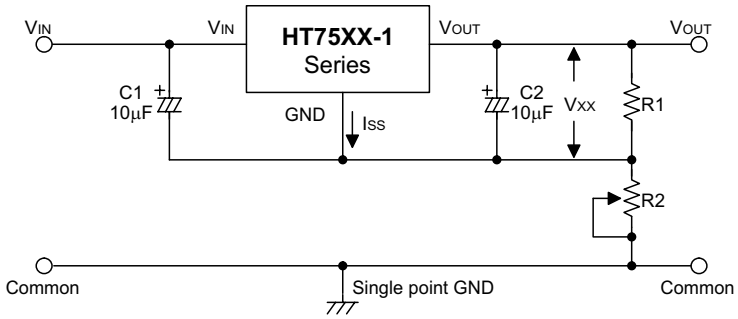

$$V_{OUT} = V_{XX} \left(1 + \frac{R2}{R1}\right) + I_{SS} R2$$

Circuit for increasing output voltage

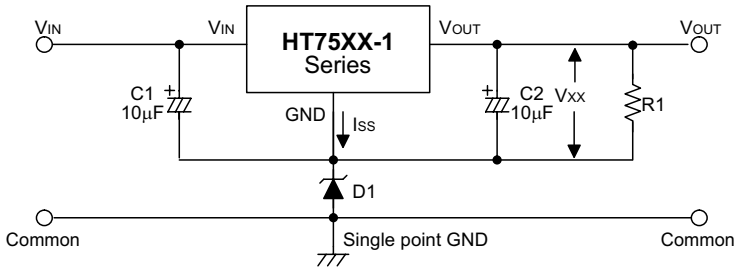

$$V_{OUT} = V_{XX} + V_{D1}$$

Constant current regulator

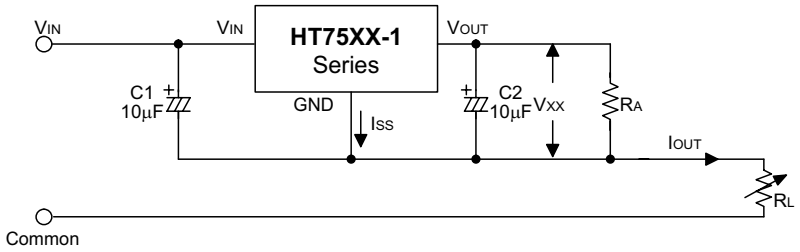

$$I_{OUT} = \frac{V_{XX}}{R_A} + I_{SS}$$

Dual supply

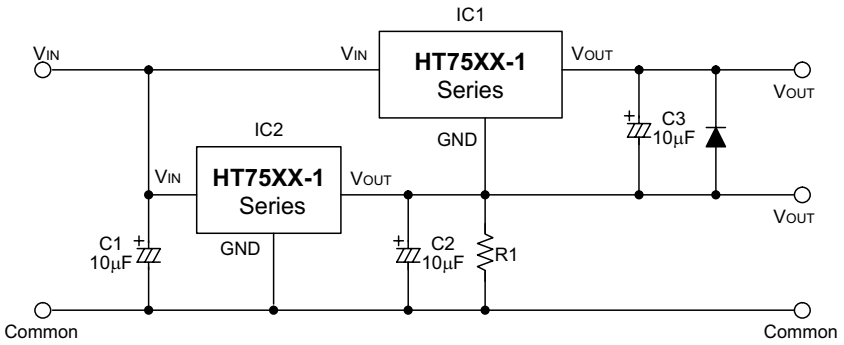

Package Information

3-pin TO-92 outline dimensions

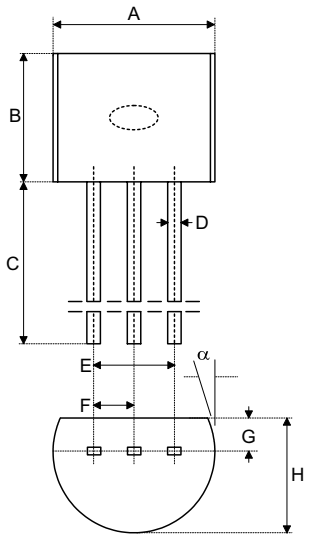

Symbol	Dimensions in mil		
	Min.	Nom.	Max.
A	170	—	200
B	170	—	200
C	500	—	—
D	11	—	20
E	90	—	110
F	45	—	55
G	45	—	65
H	130	—	160
I	8	—	18
α	4°	—	6°

3-pin SOT-89 outline dimensions

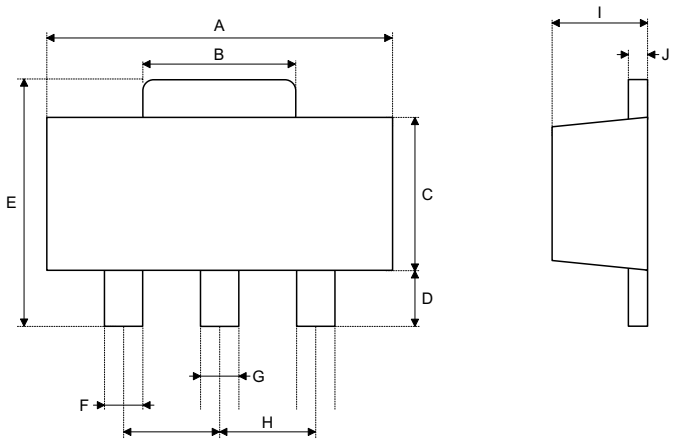

Symbol	Dimensions in mil		
	Min.	Nom.	Max.
A	173	—	181
B	64	—	72
C	90	—	102
D	35	—	47
E	155	—	167
F	14	—	19
G	17	—	22
H	—	59	—
I	55	—	63
J	14	—	17

5-pin SOT-25 outline dimensions

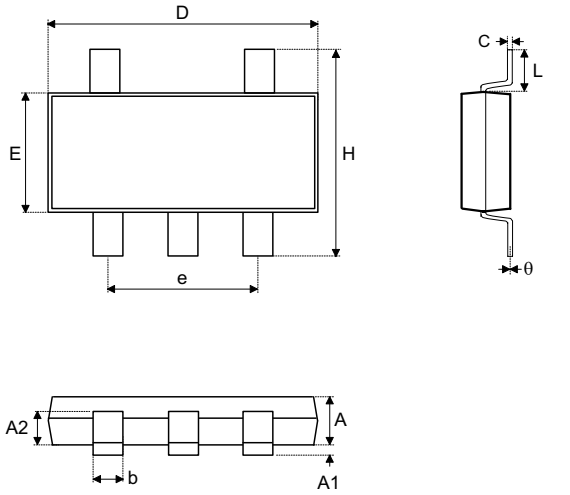

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A	1.00	—	1.30
A1	—	—	0.10
A2	0.70	—	0.90
b	0.35	—	0.50
C	0.10	—	0.25
D	2.70	—	3.10
E	1.40	—	1.80
e	—	1.90	—
H	2.60	—	3
L	0.37	—	—
θ	1°	—	9°

Product Tape and Reel Specifications

TO-92 reel dimensions (Unit: mm)

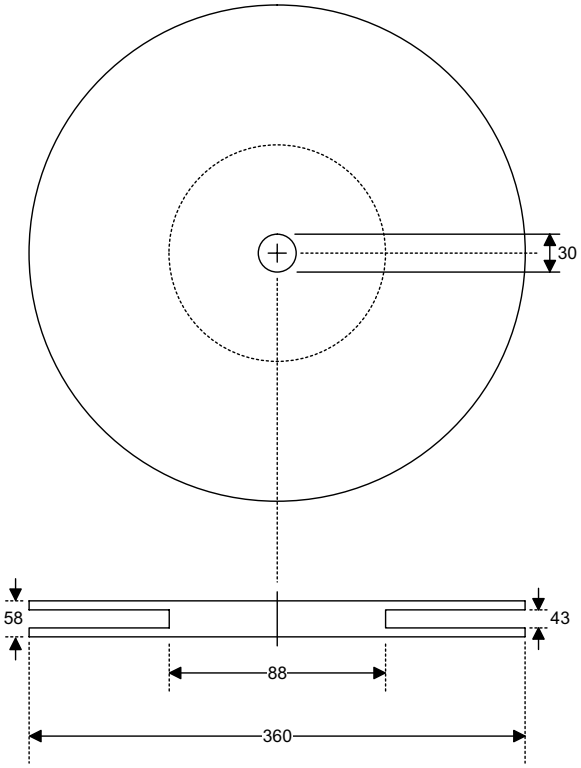

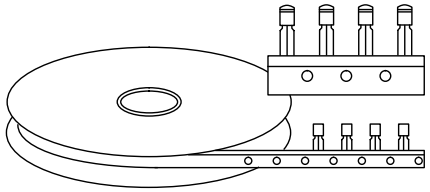

Package Up, Flat Side Up

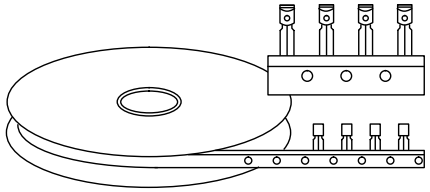

Package Up, Flat Side Down

SOT-89 & SOT-25 reel dimensions

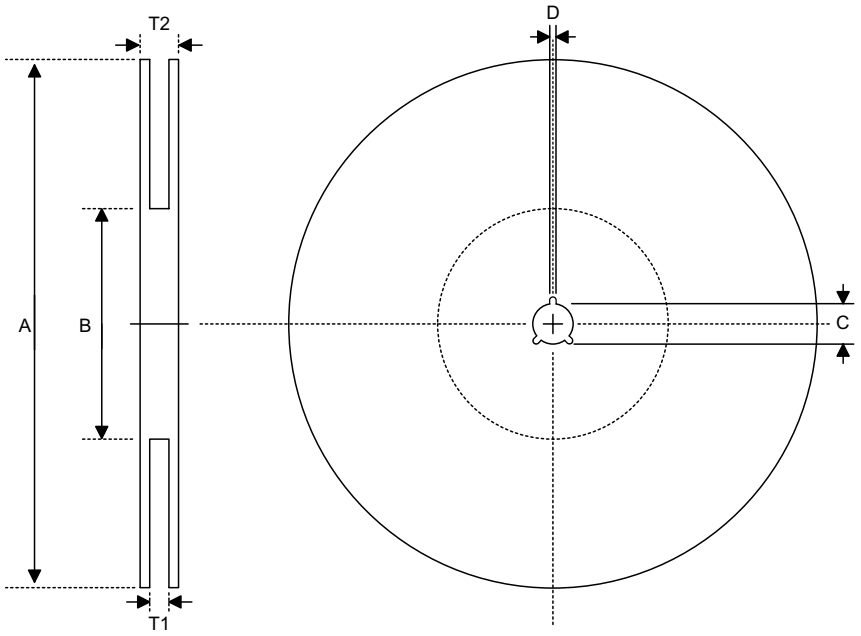

SOT-89

Symbol	Description	Dimensions in mm
A	Reel Outer Diameter	180±1.0
B	Reel Inner Diameter	62±1.5
C	Spindle Hole Diameter	12.75+0.15
D	Key Slit Width	1.9±0.15
T1	Space Between Flange	12.4+0.2
T2	Reel Thickness	17−0.4

SOT-25

Symbol	Description	Dimensions in mm
A	Reel Outer Diameter	178±1.0
B	Reel Inner Diameter	62±1.0
C	Spindle Hole Diameter	13.0±0.2
D	Key Slit Width	2.5±0.25
T1	Space Between Flange	8.4+1.5 −0.0
T2	Reel Thickness	11.4+1.5

TO-92 carrier tape dimensions

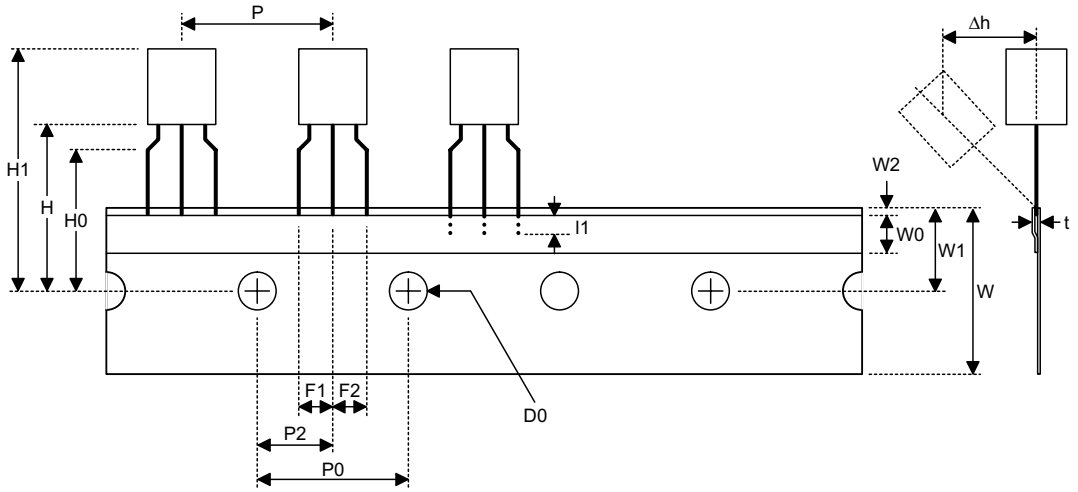

TO-92

Symbol	Description	Dimensions in mm
I1	Taped Lead Length	(2.5)
P	Component Pitch	12.7±1.0
P_0	Perforation Pitch	12.7±0.3
P_2	Component to Perforation (Length Direction)	6.35±0.4
F_1	Lead Spread	2.5+0.4 −0.1
F_2	Lead Spread	2.5+0.4 −0.1
Δh	Component Alignment	0±0.1
W	Carrier Tape Width	18.0+1.0 −0.5
W_0	Hold-down Tape Width	6.0±0.5
W_1	Perforation Position	9.0±0.5
W_2	Hold-down Tape Position	(0.5)
H_0	Lead Clinch Height	16.0±0.5
H_1	Component Height	Less than 24.7
D_0	Perforation Diameter	4.0±0.2
t	Taped Lead Thickness	0.7±0.2
H	Component Base Height	19.0±0.5

Note: Thickness less than 0.38±0.05mm~0.5mm

P0 Accumulated pitch tolerance: ±1mm/20pitches.

( ) Bracketed figures are for consultation only

SOT-89 & SOT-25 carrier tape dimensions

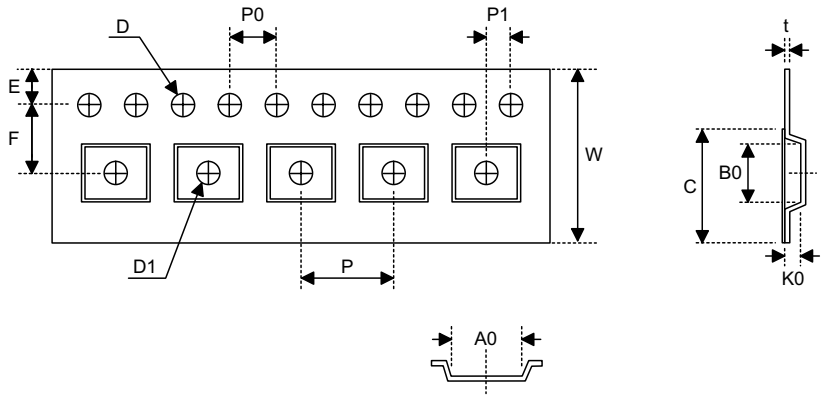

SOT-89

Symbol	Description	Dimensions in mm
W	Carrier Tape Width	12.0+0.3 −0.1
P	Cavity Pitch	8.0±0.1
E	Perforation Position	1.75±0.1
F	Cavity to Perforation (Width Direction)	5.5±0.05
D	Perforation Diameter	1.5+0.1
D1	Cavity Hole Diameter	1.5+0.1
P0	Perforation Pitch	4.0±0.1
P1	Cavity to Perforation (Length Direction)	2.0±0.10
A0	Cavity Length	4.8±0.1
B0	Cavity Width	4.5±0.1
K0	Cavity Depth	1.8±0.1
t	Carrier Tape Thickness	0.30±0.013
C	Cover Tape Width	9.3

SOT-25

Symbol	Description	Dimensions in mm
W	Carrier Tape Width	8.0±0.3
P	Cavity Pitch	4.0
E	Perforation Position	1.75
F	Cavity to Perforation (Width Direction)	3.5±0.05
D	Perforation Diameter	1.5+0.1
D1	Cavity Hole Diameter	1.5+0.1
P0	Perforation Pitch	4.0
P1	Cavity to Perforation (Length Direction)	2.0
A0	Cavity Length	3.15
B0	Cavity Width	3.2
K0	Cavity Depth	1.4
t	Carrier Tape Thickness	0.20±0.03
C	Cover Tape Width	5.3

Holtek Semiconductor Inc. (Headquarters)
No.3, Creation Rd. II, Science-based Industrial Park, Hsinchu, Taiwan
Tel: 886-3-563-1999
Fax: 886-3-563-1189
http://www.holtek.com.tw

Holtek Semiconductor Inc. (Sales Office)
11F, No.576, Sec.7 Chung Hsiao E. Rd., Taipei, Taiwan
Tel: 886-2-2782-9635
Fax: 886-2-2782-9636
Fax: 886-2-2782-7128 (International sales hotline)

Holtek Semiconductor (Shanghai) Inc.
7th Floor, Building 2, No.889, Yi Shan Rd., Shanghai, China
Tel: 021-6485-5560
Fax: 021-6485-0313
http://www.holtek.com.cn

Holtek Semiconductor (Hong Kong) Ltd.
Block A, 3/F, Tin On Industrial Building, 777-779 Cheung Sha Wan Rd., Kowloon, Hong Kong
Tel: 852-2-745-8288
Fax: 852-2-742-8657

Holmate Semiconductor, Inc.
46712 Fremont Blvd., Fremont, CA 94538
Tel: 510-252-9880
Fax: 510-252-9885
http://www.holmate.com

Copyright © 2002 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek's products are not authorized for use as critical components in life support devices or systems. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at http://www.holtek.com.tw.