



Master Equation Sheet

Version 1.3.3

This sheet contains equations typically used in engineering undergraduate classes from freshman through sophomore year.

Subjects include but are not limited to mathematics, physics, dynamics, mechanics of materials, and general engineering. A list of scientific constants and conversions are given at the end as well. Notes on each equation/principle added as necessary. Note that this sheet is not an exhaustive list; it is simply meant as an extra resource.

Created by Nick Tader. Last edited 2/3/24.

For FAQ, mistakes found, comments or suggestions, please read the “README” on the GitHub site: <https://github.com/ntader/MasterEquationSheet/tree/main>

Mathematics	15
Algebra	15
Exponent Laws	15
Quadratic Formula.....	15
Linear Slope Equations.....	15
Factoring.....	15
Logarithms.....	15
Vectors and Matrices	15
Radicals	15
Geometry	15
Circles	15
Cylinders.....	15
Spheres.....	15
Right Triangles	15
Equilateral Triangles.....	15
Trigonometry	16
Right Angle Ratios	16
Reciprocal Identities	16
Tan/Cotangent Identities.....	16
Trig Identities	16
Even/Odd Formulas.....	16
Double Angle Formulas.....	16
Degrees to Radians	16
Law of Sines.....	16
Law of Cosines	16
Small Angle Approx.....	16
Calculus	16
Derivative Properties	16

Derivative Power Rule	16
Derivative Product Rule.....	16
Derivative Quotient Rule.....	16
Derivative Chain Rule	16
Standard Derivatives.....	16
Chain Rule Variations	17
Integral Properties	17
Integral Power Rule.....	17
Standard Integrals	17
Integration Techniques.....	17
U-Substitution	17
Integration by Parts	18
Trigonometric Integrals	18
Trigonometric Substitution.....	18
Partial Fractions	19
The Laplace Transform.....	19
Laplace Transforms	19
Inverse Laplace Transforms	19
Physics.....	20
Classical Mechanics	20
Kinematic Relationships	20
Uniform Rectilinear Motion.....	20
Uniformly Accelerated Motion.....	20
Circular Motion	20
General Force Equations.....	20
Work and Energy.....	20
Universal Gravitation.....	20
Efficiency.....	20

Center of Mass	20
Impulse and Momentum	20
Angular Momentum	20
Collisions.....	20
Torque (Moments)	20
Density.....	20
Simple Harmonic Motion	20
Fluids (Basic Equations).....	21
Temperature	21
Thermal Expansion	21
Electricity and Magnetism.....	21
Electrostatic Equations.....	21
Coulomb's Law	21
Electric Field (Discrete Charges).....	21
Electric Field (Continuous Charges).....	21
Finite Line Charge - Parallel.....	21
Finite Line Charge - Perpendicular	21
Infinite Line.....	21
Infinite Sheet	21
Ring of Charge (radius R).....	21
Disk of Charge.....	21
Electric Flux.....	21
Gauss's Law.....	21
Electric Field Near a Conductor.....	21
Electric Potential.....	21
Coulomb Potential.....	21
Potential Energy	22
DC Circuit Equations	22

Capacitance	22
Dielectrics	22
Current	22
Power	22
Ohm's Law	22
Batteries	22
Resistor Networks	22
Capacitor Networks	22
Kirchhoff's Circuit Rules	22
RC Circuits	22
Magnetism Equations	22
Moving Point Charge	22
Biot-Savart Law	22
B for Various Configurations	22
Ampere's Law	22
Point Charge in B	23
Force on Current Carrying Wires	23
Torque on a Loop	23
Magnetic Flux	23
Faraday's Law	23
Inductance	23
LR Circuits (DC)	23
LC Circuits (DC)	23
AC Circuits and EM Waves Equations	23
Displacement Current	23
Maxwell's Equations	23
Lorentz Force	23
AC Circuits	23

EM Waves	23
Poynting Vector	23
Intensity	23
Light Equations	23
Light	23
Polarization	24
Snell's Law	24
Mirrors	24
Lenses	24
Thin Lens Equation	24
Interference	24
Phase	24
Double Slit	24
Single Slit	24
Grating	24
Resolution	24
Thin Film	24
Modern Physics/Quantum Mechanics	24
Heat	24
Gas laws	24
Entropy	24
Efficiency and Heat Engines	24
Wien's Law	24
Mean Free Path	24
Waves	24
Sound Intensity	25
Sound and Standing Waves	25
Photoelectric Effect	25

Schrödinger Equation.....	25
Penetration Distance.....	25
Uncertainty Equation.....	25
Normalization	25
Particle in a Box.....	25
Relativity	25
Relativistic Momentum.....	25
Relativistic Kinetic Energy	25
Relativistic Mass.....	25
Rest Energy	25
Total Energy	25
Disintegration Energy	25
Half Life	25
Decay Activity	25
Dynamics.....	26
Kinematic Relationships	26
Uniform Rectilinear Motion.....	26
Uniformly Accelerated Motion.....	26
3D Rectangular Motion	26
2D Motion - Tangential & Normal Components.....	26
2D Motion - Radial & Transverse Components.....	26
Newton's Second Law.....	26
Work & Energy.....	26
Mechanical Energy	26
Power	26
Efficiency.....	26
Linear Impulse & Momentum	26
Coefficient of Restitution	26

Rigid Body Kinematics.....	26
For a 2D slab:.....	26
Rotating Frames	26
Rotational Kinetic Energy	26
Moments of Inertia.....	26
Angular Momentum.....	26
Mechanics	27
Average normal/axial stress	27
Average Shear Stress	27
Average Normal/Axial Strain.....	27
Thermal Strain.....	27
Shear Strain	27
Poisson's Ratio.....	27
Shear Modulus	27
Factor of Safety.....	27
Hooke's Law (1D)	27
Hooke's Law (plane stress)	27
Elongation in Axial Members	27
Angle of Twist.....	27
Maximum Shear Stress	27
Polar Moment of Inertia	27
Equilibrium Beam Relationships.....	27
Flexure Stress in Bending Beams.....	27
Centroids.....	27
Moment of Inertia.....	27
Parallel Axis Theorem	27
Shear Stress in Bending Beams.....	28
Shear Flow	28

Stress Transformations.....	28
Principal (max/min) Stresses.....	28
Pressure Vessels	28
Differential Equations of the Deflection Curve	28
Materials Engineering.....	29
Lattice Paramaters	29
Points, Directions and Planes Notation	29
Density (metals).....	29
%Ionic Character	29
Linear Density	29
Planar Density	29
Atomic Packing Factor.....	29
Bragg's Law	29
Inter-Planar Spacing	29
(for cubic symmetries)	29
Vacancies/Unit Volume.....	29
Atomic Sites/Unit Volume.....	29
Composition (weight %)	29
Composition (atomic %)	29
Mean Intercept Length	29
Diffusion	29
Diffusion Flux	29
Fick's First Law	29
Fick's Second Law.....	29
Temperature Dependence of Diffusion Coefficient	29
Mechanical Properties.....	29
Engineering Stress.....	29
Engineering Strain	29

Hooke's Law	29
Poisson's Ratio.....	29
Ductility % Elongation	29
Ductility % Area Reduction.....	29
True Stress.....	30
True Strain.....	30
Plastic Region to the Point of Necking	30
Resolved Shear Stress	30
Critical Resolved Shear Stress	30
Hall-Petch Equation.....	30
Percent Cold Work.....	30
Average Grain Size.....	30
Failure/Fracture Mechanics	30
Elliptical Cracks.....	30
Fracture Toughness	30
Critical Stress	30
Maximum Flaw Size.....	30
Mean Stress (fatigue tests)	30
Stress Amplitude (fatigue tests)	30
Range of Stress (fatigue tests)	30
Max. Stress for Fatigue Rotating-Bending Tests	30
Thermal Stress.....	30
Steady-State Creep Rate.....	30
Larson-Miller Parameter	30
Phase Diagrams	30
Mass Fraction - Liquid Phase	30
Mass Fraction - Solid Phase.....	30
Phase Transformations	30

Critical Radius for Stable Solid Particle	30
Activation Free Energy for Formation of Stable Solid Particle	30
Interfacial Energies with Heterogenous Nucleation	31
Fraction of Transformation	31
Transformation Rate	31
Ceramic Properties	31
Density (Ceramics)	31
Flexural Strength	31
Porous Ceramics	31
Polymer Properties	31
Molecular Weight	31
Degree of Polymerization	31
% Crystallinity by Weight	31
Diffusion Flux	31
Relaxation Modulus	31
Polymer Tensile Strength	31
Composites	31
Rules of Mixtures	31
Critical Fiber Length	31
Longitudinal Tensile Strength	31
Corrosion and Degradation	32
Electrochemical Cell Potential	32
Corrosion Penetration Rate	32
Corrosion Rate	32
Overvoltage	32
Pilling-Bedworth Ratio	32
Metal Oxidation	32
Electrical Properties	32

Ohm's Law	32
Electrical Resistivity	32
Electrical Conductivity	32
Current Density	32
Electrical Field Intensity	32
(Metals) Conductivity for n-Type Extrinsic Semiconductor	32
(Metals) Matthiessen's Rule	32
Thermal Resistivity Contribution	32
Impurity Resistivity Contribution.....	32
Conductivity for Intrinsic Semiconductor	32
Conductivity for p-Type Extrinsic Semiconductor.....	32
Capacitance.....	32
Dielectric Constant	32
Dielectric Displacement.....	33
Polarization.....	33
Thermal Properties.....	33
Heat Capacity	33
Linear Coefficient of Thermal Expansion.....	33
Volume Coefficient of Thermal Expansion	33
Thermal Conductivity.....	33
Thermal Stress.....	33
Thermal Shock Resistance Parameter.....	33
Magnetic Properties.....	33
Magnetic Field Strength - Coil	33
Magnetic Flux Density.....	33
Relative Permeability	33
Magnetization	33
Magnetic Susceptibility.....	33

Saturation Magnetization	33
Optical Properties.....	33
Velocity of Light	33
Velocity of Electromagnetic Radiation.....	33
Index of Refraction	33
Reflectivity.....	33
Intensity of Transmitted Radiation.....	33
Intensity of Radiation Transmitted.....	33
Greek Characters.....	34
SI Base Units.....	34
SI Prefixes.....	34
Constants.....	34
Gravitational Constant	34
Earth Topics	34
Gravity on Earth	34
Atmospheric Pressure	34
Avogadro Constant	34
Gas Constant	34
Boltzmann Constant	34
Speed of Sound	34
Reference Sound Intensity.....	34
Elementary Charge	34
Coulomb Constant	34
Vacuum Permittivity	34
Permeability of Free Space.....	35
Mass of a Proton.....	35
Mass of an Electron	35
Speed of Light (vacuum).....	35

Planck's Constant	35
Bohr Radius	35
Unit Circle	35

Mathematics

Algebra

Exponent Laws

$$x^a \cdot x^b = x^{a+b}$$

$$(x^a)^b = x^{ab}$$

$$(xy)^a = (x^a y^a)$$

$$x^{-1} = \frac{1}{x}$$

$$\frac{a^m}{a^n} = a^{m-n}$$

Quadratic Formula

$$\rightarrow \text{Given } ax^2 + bx + c = 0$$

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

Linear Slope Equations

$$y = mx + b$$

$$y - y_1 = m(x - x_1)$$

$$m = \frac{y_2 - y_1}{x_2 - x_1}$$

Factoring

$$(a + b)^2 = a^2 + 2ab + b^2$$

$$a^2 - b^2 = (a + b)(a - b)$$

$$x^3 + y^3 = (x + y)(x^2 - xy + y^2)$$

$$x^3 - y^3 = (x - y)(x^2 + xy + y^2)$$

Logarithms

$$\ln A^x = x \ln A$$

$$\ln[A \cdot B] = \ln A + \ln B$$

$$\ln\left[\frac{A}{B}\right] = \ln A - \ln B$$

$$\ln\left(\frac{1}{x}\right) = -\ln(x)$$

$$\ln(1) = 0$$

$$\ln(e) = 1$$

$$\ln(e^x) = x$$

$$e^{\ln(x)} = x$$

Vectors and Matrices

$$\vec{u} \cdot \vec{v} = |\vec{u}| \cdot |\vec{v}| \cos(\theta)$$

$$\vec{u} \cdot \vec{v} = u_x v_x + u_y v_y + u_z v_z$$

$$\hat{u} \cdot \hat{v} = \cos(\theta)$$

$$|\vec{u}| = \sqrt{u_x^2 + u_y^2 + u_z^2}$$

$$\tan^{-1}\left(\frac{r_y}{r_x}\right) = \theta$$

\rightarrow Where r_x and r_y are vectors in the x-y plane

$$\hat{u} = \frac{\vec{u}}{|\vec{u}|}$$

$$\cos \theta = \frac{\vec{u} \cdot \vec{v}}{|\vec{u}| |\vec{v}|}$$

$$\det(A) = \begin{vmatrix} d & -b \\ -c & a \end{vmatrix}$$

$$A = \begin{vmatrix} a & b \\ c & d \end{vmatrix} = ad - bc$$

$$A^{-1} = \frac{1}{ad - bc} \begin{vmatrix} d & -b \\ -c & a \end{vmatrix}$$

$$\vec{u} \times \vec{v} = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ u_x & u_y & u_z \\ v_x & v_y & v_z \end{vmatrix}$$

$$\hat{i} \times \hat{j} = \hat{k} \quad \hat{j} \times \hat{i} = -\hat{k}$$

$$\hat{j} \times \hat{k} = \hat{i} \quad \hat{k} \times \hat{j} = -\hat{i}$$

$$\hat{k} \times \hat{i} = \hat{j} \quad \hat{i} \times \hat{k} = -\hat{j}$$

Radicals

$$\sqrt[n]{a^m} = a^{\frac{m}{n}}$$

$$\sqrt[n]{ab} = \sqrt[n]{a} \cdot \sqrt[n]{b}$$

$$\sqrt[m]{\sqrt[n]{a}} = \sqrt[nm]{a}$$

$$\sqrt[n]{\frac{a}{b}} = \frac{\sqrt[n]{a}}{\sqrt[n]{b}}$$

Geometry

Circles

$$A = \pi r^2$$

$$C = 2\pi r$$

$$r^2 = (x - a)^2 + (y - b)^2$$

$$s = r\theta$$

$$A_{Hoop} = \frac{\pi}{4}(d_o^2 - d_i^2)$$

$$A_{Hoop} = \pi(r_o^2 - r_i^2)$$

$\rightarrow (a, b)$ is the center of the circle.

$\rightarrow \theta$ must be in radians.

Cylinders

$$A = 2\pi rl + 2\pi r^2$$

$$V = \pi r^2 l$$

Spheres

$$A = 4\pi r^2$$

$$V = \frac{4}{3}\pi r^3$$

$$r^2 = (x - a)^2 + (y - b)^2 + (z - c)^2$$

$\rightarrow (a, b, c)$ is the center of the sphere and (x, y, z) are coordinates on the surface of the sphere.

Right Triangles

$$A = \frac{1}{2}bh$$

$$a^2 + b^2 = c^2$$

Equilateral Triangles

$$A = \frac{\sqrt{3}}{4}a^2$$

$$\theta = 60^\circ$$

Trigonometry

Right Angle Ratios

$$\sin \theta = \frac{\text{Opposite}}{\text{Hypotenuse}}$$

$$\cos \theta = \frac{\text{Adjacent}}{\text{Hypotenuse}}$$

$$\tan \theta = \frac{\text{Opposite}}{\text{Adjacent}}$$

→ Using reciprocal identities, the ratios for sec, csc, and cot can be found.

Reciprocal Identities

$$\sin \theta = \frac{1}{\csc \theta} \quad \cos \theta = \frac{1}{\sec \theta}$$

$$\tan \theta = \frac{1}{\cot \theta} \quad \csc \theta = \frac{1}{\sin \theta}$$

$$\sec \theta = \frac{1}{\cos \theta} \quad \cot \theta = \frac{1}{\tan \theta}$$

Tan/Cotangent Identities

$$\tan \theta = \frac{\sin \theta}{\cos \theta} \quad \cot \theta = \frac{\cos \theta}{\sin \theta}$$

Trig Identities

$$\sin^2 \theta + \cos^2 \theta = 1$$

$$\tan^2 \theta + 1 = \sec^2 \theta$$

$$\cot^2 \theta + 1 = \csc^2 \theta$$

$$\sin(2x) = 2 \sin(x) \cdot \cos(x)$$

$$\cos(2x) = \cos^2(x) - \sin^2(x)$$

$$\cos^2(x) = \frac{1}{2}(1 + \cos(2x))$$

$$\sin^2(x) = \frac{1}{2}(1 - \cos(2x))$$

$$*\cos^n \theta = [\cos \theta]^n$$

*Valid for all trigonometric functions (sin, cos, tan, cot, sec, csc).

Even/Odd Formulas

$$\sin(-\theta) = -\sin \theta$$

$$\cos(-\theta) = \cos \theta$$

$$\tan(-\theta) = -\tan \theta$$

$$\csc(-\theta) = -\csc \theta$$

$$\sec(-\theta) = \sec \theta$$

$$\cot(-\theta) = -\cot \theta$$

Double Angle Formulas

$$\sin 2\theta = 2 \sin \theta \cos \theta$$

$$\cos 2\theta = \cos^2 \theta - \sin^2 \theta$$

$$= 2 \cos^2 \theta - 1$$


$$= 1 - 2 \sin^2 \theta$$

Degrees to Radians

→ Where D is an angle in degrees and R is an angle in radians.

$$R = D \cdot \frac{\pi}{180} \quad D = R \cdot \frac{180}{\pi}$$

Law of Sines

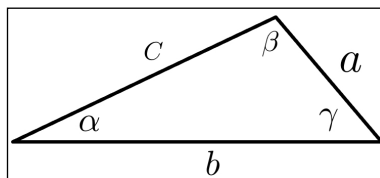

$$\frac{\sin \alpha}{a} = \frac{\sin \beta}{b} = \frac{\sin \gamma}{c}$$

Law of Cosines

$$a^2 = b^2 + c^2 - 2bc \cos \alpha$$

$$b^2 = a^2 + c^2 - 2ac \cos \beta$$

$$c^2 = a^2 + b^2 - 2ab \cos \gamma$$

Small Angle Approx.

$$\sin \theta \approx \theta$$

$$\cos \theta \approx 1 - \frac{\theta^2}{2} \approx 1$$

$$\tan \theta \approx \theta$$

Calculus

Derivative Properties

$$\frac{d}{dx}(c) = 0$$

$$(c \cdot f(x))' = c \cdot f'(x)$$

$$(f(x) \pm g(x))' = f'(x) \pm g'(x)$$

Derivative Power Rule

$$\frac{d}{dx}(x^n) = n \cdot x^{n-1}$$

Derivative Product Rule

$$\frac{d}{dx}(f(x) \cdot g(x)) = f'(x) \cdot g(x) + f(x) \cdot g'(x)$$

Derivative Quotient Rule

$$\frac{d}{dx}\left(\frac{f(x)}{g(x)}\right) = \frac{f'(x) \cdot g(x) - f(x) \cdot g'(x)}{(g(x))^2}$$

Derivative Chain Rule

$$\frac{d}{dx}(f(g(x))) = f'(g(x)) \cdot g'(x)$$

Standard Derivatives

$$\frac{d}{dx}(x) = 1$$

$$\frac{d}{dx}(\sin(x)) = \cos(x)$$

$$\frac{d}{dx}(\cos(x)) = -\sin(x)$$

$$\frac{d}{dx}(\tan(x)) = \sec^2(x)$$

$$\frac{d}{dx}(\sec(x)) = \sec(x) \cdot \tan(x)$$

$$\frac{d}{dx}(\csc(x)) = -\csc(x) \cdot \cot(x)$$

$$\frac{d}{dx}(\cot(x)) = -\csc^2(x)$$

$$\frac{d}{dx}(\sin^{-1}(x)) = \frac{1}{\sqrt{1-x^2}}$$

$$\frac{d}{dx}(\cos^{-1}(x)) = -\frac{1}{\sqrt{1-x^2}}$$

$$\frac{d}{dx}(\tan^{-1}(x)) = \frac{1}{1+x^2}$$

$$\frac{d}{dx}(n^x) = n^x \cdot \ln(n)$$

$$\frac{d}{dx}(e^{nx}) = n \cdot e^{nx}$$

$$\frac{d}{dx}(\ln(x)) = \frac{1}{x}, x > 0$$

$$\frac{d}{dx}(\ln x) = \frac{1}{x}, x \neq 0$$

Chain Rule Variations

$$\frac{d}{dx}([f(x)]^n) = n \cdot [f(x)]^{n-1} \cdot f'(x)$$

$$\frac{d}{dx}(e^{f(x)}) = f'(x) \cdot e^{f(x)}$$

$$\frac{d}{dx}(\ln[f(x)]) = \frac{f'(x)}{f(x)}$$

$$\frac{d}{dx}(\sin[f(x)]) = f'(x) \cdot \cos[f(x)]$$

$$\frac{d}{dx}(\cos[f(x)]) = -f'(x) \cdot \sin[f(x)]$$

$$\frac{d}{dx}(\tan[f(x)]) = f'(x) \cdot \sec^2[f(x)]$$

$$\frac{d}{dx}(\sec[f(x)]) = f'(x) \cdot \sec[f(x)] \cdot \tan[f(x)]$$

$$\frac{d}{dx}(\tan^{-1}[f(x)]) = \frac{f'(x)}{1+[f(x)]^2}$$

Integral Properties

$$\int f(x) \pm g(x) dx = \int f(x) dx \pm \int g(x) dx$$

$$\int_a^b f(x) dx = \int_a^c f(x) dx + \int_c^b f(x) dx$$

$$\int_a^a dx = 0$$

$$\int_a^b f(x) dx = - \int_b^a f(x) dx$$

$$\int_a^b C \cdot f(x) dx = C \cdot \int_a^b f(x) dx$$

$$\int_a^b C \cdot dx = C \cdot (b - a)$$

Integral Power Rule

$$\int x^n dx = \frac{x^{n+1}}{n+1} + C$$

Standard Integrals

$$\int k dx = k \cdot x + C$$

$$\int e^{nx} dx = \frac{1}{n} e^x + C$$

$$\int \cos(x) dx = \sin(x) + C$$

$$\int \sin(x) dx = -\cos(x) + C$$

$$\int \sec^2(x) dx = \tan(x) + C$$

$$\int \csc^2(x) dx = -\cot(x) + C$$

$$\int \frac{1}{ax+b} dx = \frac{1}{a} \ln |ax+b| + C$$

$$\int \sec(x) \cdot \tan(x) dx = \sec(x) + C$$

$$\int \csc(x) \cdot \cot(x) dx = -\csc(x) + C$$

$$\int \sec(x) dx = \ln |\sec(x) + \tan(x)| + C$$

$$\int \csc(x) dx = -\ln |\csc(x) + \cot(x)| + C$$

$$\int x^{-1} dx = \int \frac{1}{x} dx = \ln |x| + C$$

$$\int \ln(x) dx = x \cdot \ln(x) - x + C$$

$$\int \tan(x) dx = \ln |\sec(x)| + C$$

$$\int \tan(x) dx = -\ln |\cos(x)| + C$$

$$\int \frac{1}{a^2 + x^2} dx = \frac{1}{a} \arctan\left(\frac{x}{a}\right) + C$$

Integration Techniques

Topics include U-Sub, Integration by parts, trigonometric integrals, trig. sub, and PFD.

U-Substitution

Take an "X" term to be u , and then take du of that u term. Solve the integral in terms of u , and then re-substitute into the equation.

If needed, find new limits of integration using the substitution. Example:

$$\int_1^2 5x^2 \cos(x^3) dx$$

so

$$u = x^3 \therefore du = 3x^2 dx$$

or

$$\frac{1}{3} du = x^2 dx$$

resulting in

$$= 5 \int_{**}^* \frac{1}{3} \cos(u) du$$

Notice the substitution chosen allows for all x terms to be turned into u terms.

The integral can now easily be solved through standard methods. Once solved, replace u with the substitution above and replace the limits of integration as well. Solve as normal.

It is possible to complete u -sub without suppressing the limits of integration, you will just need to plug the given limits into the u term to find the new limits of integration.

For example, the lower would become $(1^3) = 1$ and the upper would become $(2^3) = 8$. Note that either method works and produces the same solution.

Integration by Parts

The standard formula for integration by parts is as follows:

$$\int u \, dv = uv - \int v \, du$$

Find u and dv in the original equation, then solve for du and v . Plug into the formula above and solve.

The u term can be found according to ILATE: inverse trigonometric, logarithmic, algebraic, trigonometric and exponential.

Example:

$$\int x e^{-x} \, dx$$

so

$$\begin{aligned} u &= x & dv &= e^{-x} \\ du &= dx & v &= -e^{-x} \end{aligned}$$

using the equation above:

$$= -x e^{-x} + \int e^{-x} \, dx$$

resulting in

$$= -x e^{-x} - e^{-x} + C$$

Trigonometric Integrals

When solving an integral with trigonometric functions (usually involving powers and multiple trig functions multiplied together), a u -sub may not be able to be applied.

Instead, the integral will need to be separated into multiples of the trig function, apply a trig identity, and then complete the u -sub.

Example:

$$\int \sin^6 x \cos^3 x \, dx$$

separating $\cos^3 x$ into $\cos^2 x \cdot \cos x$ and applying an identity:

$$= \int \sin^6 x (1 - \sin^2 x) \cos x \, dx$$

take $u = \sin x \therefore du = \cos x \, dx$ and perform the remaining u -sub:

$$= \int u^6 (1 - u^2) \, du$$

ending with:

$$= \frac{1}{7} \sin^7 x - \frac{1}{9} \sin^9 x + C$$

Note that while $\sin^2 x + \cos^2 x = 1$ is a common substitution, it is also common for other identities such as $\tan^2 x + 1 = \sec^2 x$ to be used as well.

Trigonometric Substitution

In certain cases, an integral may contain one of the following roots. In such situation, the following substitutions and formulas will be used to solve the integral.

Case I:

$$\sqrt{a^2 - b^2 x^2} \Rightarrow x = \frac{a}{b} \sin \theta$$

$$\text{uses } \cos^2(\theta) = 1 - \sin^2(\theta)$$

Case II:

$$\sqrt{b^2 x^2 - a^2} \Rightarrow x = \frac{a}{b} \sec(\theta)$$

$$\text{uses } \tan^2(\theta) = \sec^2(\theta) - 1$$

Case III:

$$\sqrt{a^2 + b^2 x^2} \Rightarrow x = \frac{a}{b} \tan(\theta)$$

$$\text{uses } \sec^2(\theta) = \tan^2(\theta) + 1$$

Example:

$$\int \frac{1}{(1 - x^2)^{3/2}} \, dx$$

Because this is a case I problem, use the substitution

$$x = \sin \theta \therefore dx = \cos \theta$$

Apply the substitution(s) back into the original equation:

$$\int \frac{1}{(1 - \sin^2(\theta))^{3/2}} \cdot \cos \theta \, d\theta$$

From here, the integral can be simplified and solved readily:

$$= \int \frac{1}{(\cos^2 \theta)^{3/2}} \cdot \cos \theta \, d\theta$$

$$= \int \frac{1}{\cos^3 \theta} \cdot \cos \theta \, d\theta$$

$$= \int \frac{1}{\cos^2 \theta} \, d\theta$$


$$= \int \sec^2 \theta \, d\theta$$

$$= \tan \theta + C$$

Although tempting to assume so, the problem is not solved. Because a substitution was applied near the beginning, the final answer must be in terms of x , not θ .

$$\sin \theta = \frac{x}{1} = \frac{\text{opposite}}{\text{hypotenuse}}$$

By creating a right triangle with this definition, the adjacent side a can be solved:



Recall that $a^2 + b^2 = c^2$ and as such $(x)^2 + (a)^2 = (1)^2$, resulting in

$$a = \sqrt{1-x^2}$$

The final result can finally be expressed in terms of x as

$$= \frac{x}{\sqrt{1-x^2}} + C$$

Partial Fractions

Occasionally an integral will involve a fraction which may be difficult to be solved by standard substitution methods.

Using PFD, the integral can be broken up into simpler fractions which can be easier solved.

Example:

$$\int \frac{3x+2}{x^2+x} dx$$

This integral is difficult by itself, due to the fact that an easy u -sub is not available.

To help with this, it can be broken down into simpler integrals. Begin by observing the fraction only and factoring the denominator:

$$\frac{3x+2}{x(x+1)}$$

This fraction can now re-written, with the factors of the denominator for each fraction:

$$\frac{3x+2}{x(x+1)} = \frac{A}{x} + \frac{B}{x+1}$$

Because the numerators are not known, variables A and B are put in place. Note the original factored fraction goes on the left.

From here the denominator of the left (in this case $x(x+1)$) is multiplied through the equation:

$$3x+2 = A(x+1) + B(x) \quad [1]$$

Make note that parts of the denominators of terms A and B

canceled, resulting in a much simpler expression than what was started with.

Multiplying terms:

$$3x+2 = Ax + A + Bx$$

Group terms based on their order (or "power"):

$$3x+2 = (A+B)x + A$$

From here, the coefficient matching game is played. Match the coefficients from the left (with respect to exponents/powers) to the coefficients of the right.

$$\begin{aligned} 3 &= A+B \\ 2 &= A \end{aligned}$$

Notice it is just the raw coefficients and A/B terms in the new set of equations. From here, it is seen that $A = 2$ and $B = 1$.

This conclusion could also be reached by revisiting equation [1]. Because the equation is true for any value of x , the equation can be solved by picking "0" as x and solving from there.

$$\begin{aligned} 3(0)+2 &= A(0+1) + B(0) \\ 2 &= A \end{aligned}$$

The same could be done for finding B (notice that A cancels this time):

$$\begin{aligned} 3(-1)+2 &= A(-1+1) + B(-1) \\ -1 &= -B \therefore B = 1 \end{aligned}$$

Once the numerators are realized, they can be plugged back into the first decomposition:

$$\frac{3x+2}{x(x+1)} = \frac{2}{x} + \frac{1}{x+1}$$

Because of this, the starting integral can now be replaced as well:

$$\int \frac{3x+2}{x(x+1)} dx = \int \frac{2}{x} + \frac{1}{x+1} dx$$

This is now a much easier integral, and can be readily solved using standard methods:

$$\int \frac{2}{x} dx + \int \frac{1}{x+1} dx$$

The Laplace Transform

$$\mathcal{L}\{f(t)\} = \int_0^\infty e^{-st} \cdot f(t) dt$$

Laplace Transforms

$$\mathcal{L}\{1\} = \frac{1}{s}$$

$$\mathcal{L}\{t^n\} = \frac{n!}{s^{n+1}}, n = 1, 2, 3, \dots$$

$$\mathcal{L}\{e^{at}\} = \frac{1}{s-a}$$

$$\mathcal{L}\{\sin kt\} = \frac{k}{s^2+k^2}$$

$$\mathcal{L}\{\cos kt\} = \frac{s}{s^2+k^2}$$

$$\mathcal{L}\{\sinh kt\} = \frac{k}{s^2-k^2}$$

$$\mathcal{L}\{\cosh kt\} = \frac{s}{s^2-k^2}$$

Inverse Laplace Transforms

$$\mathcal{L}^{-1}\left\{\frac{1}{s}\right\} = 1$$

$$\mathcal{L}^{-1}\left\{\frac{n!}{s^{n+1}}\right\} = t^n, n = 1, 2, 3, \dots$$

$$\mathcal{L}^{-1}\left\{\frac{1}{s-a}\right\} = e^{at}$$

$$\mathcal{L}^{-1}\left\{\frac{k}{s^2+k^2}\right\} = \sin kt$$

$$\mathcal{L}^{-1}\left\{\frac{s}{s^2+k^2}\right\} = \cos kt$$

$$\mathcal{L}^{-1}\left\{\frac{k}{s^2-k^2}\right\} = \sinh kt$$

$$\mathcal{L}^{-1}\left\{\frac{s}{s^2-k^2}\right\} = \cosh kt$$

Physics

Classical Mechanics

Kinematic Relationships

$$v = \frac{dx}{dt}$$

$$a = \frac{dv}{dt} = \frac{d^2x}{dt^2} = v \frac{dv}{dx}$$

→ These equations will also work for terms θ, ω, α if substituted.

Uniform Rectilinear Motion

$$x = x_0 + vt$$

$$\theta = \theta_0 + \omega t$$

→ Applies when $a = 0$

Uniformly Accelerated Motion

$$v = v_0 + at$$

$$x = x_0 + v_0 t + \frac{1}{2}at^2$$

$$v^2 = v_0^2 + 2a(x - x_0)$$

→ These equations will also work for terms θ, ω, α if substituted. Also “ x ” is subjective and could be any defined axis ($y, z, \text{etc.}$).

Circular Motion

$$\theta = \frac{s}{r}$$

$$v = \frac{2\pi r}{T} = r\omega$$

$$a_c = \frac{v^2}{r} = \omega^2 r$$

$$a_{tan} = r\alpha$$

$$\omega = 2\pi f$$

→ Where s is arc length, r is the radius of curvature, f is the frequency, and T is the period.

General Force Equations

$$\sum \vec{F} = m\vec{a}$$

$$\vec{F}_{ab} = -\vec{F}_{ba}$$

$$F_g = mg$$

$$F_{Spring} = -ks$$

$$\vec{F}_{static\ friction} = \mu_s \vec{F}_N$$

$$\vec{F}_{kinetic\ friction} = \mu_k \vec{F}_N$$

Work and Energy

$$W = \int_{x_0}^{x_f} F(x) dx = \int_{s_0}^{s_f} \vec{F} \cdot d\vec{s}$$

$$W = Fd \cos \theta = \vec{F} \cdot \vec{d}$$

→ Where F is force, d is distance traveled, and θ is the angle between the two \vec{F} and \vec{d} vectors

$$KE_1 + W_{1 \rightarrow 2} = KE_2$$

$$KE_1 + PE_1 = PE_2 + KE_2$$

$$KE = \frac{1}{2}mv^2$$

$$PE_{grav} = mgh$$

$$PE_{Elastic} = \frac{1}{2}kx^2$$

Universal Gravitation

$$F_G = G \frac{m_1 m_2}{r^2}$$

Efficiency

$$\eta = \frac{\text{input}}{\text{output}}$$

Center of Mass

$$x_{CM} = \frac{1}{M} \int x dm$$

$$y_{CM} = \frac{1}{M} \int y dm$$

$$x_{CM} = \frac{\sum_{i=1}^n m_i x_i}{m_T}$$

$$y_{CM} = \frac{\sum_{i=1}^n m_i y_i}{m_T}$$

Impulse and Momentum

$$p = mv$$

$$m\vec{v}_1 + \int \vec{F} dt = m\vec{v}_2$$

$$I = \int_{t_i}^{t_f} F(t) dt = \Delta p$$

$$I = \vec{F} \Delta t$$

$$\vec{F} \Delta t = \Delta p$$

Angular Momentum

$$\vec{L} = \vec{r} \times \vec{p} = m(\vec{r} \times \vec{v})$$

$$L = I\omega = mrv \sin \phi$$

$$L = mr^2 \omega \sin \phi$$

$$I_1 \omega_1 = I_2 \omega_2$$

Collisions

$$v'_{Bn} - v'_{An} = e(v_{An} - v_{Bn})$$

$$m_1 v_{1i} + m_2 v_{2i} = m_1 v_{1f} + m_2 v_{2f}$$

Torque (Moments)

$$\vec{\tau} = \vec{r} \times \vec{F}$$

$$\tau = F \cdot r \sin \theta$$

Density

$$\rho = \frac{m}{V}$$

$$\rho_{Theor} = \frac{nA}{V_c N_A}$$

Simple Harmonic Motion

$$T = 2\pi \sqrt{\frac{m}{k}} = \frac{1}{f} = 2\pi \sqrt{\frac{L}{g}}$$

$$f = \frac{1}{2\pi} \sqrt{\frac{k}{m}} \quad v = \frac{\lambda}{T}$$

→ Where T is the period, m is mass, g is gravitational acceleration, f is the frequency, L is the length of the string, and k is the spring constant.

Fluids (Basic Equations)

$$A_1 v_1 = A_2 v_2$$

$$F_2 A_1 = F_1 A_2$$

$$P = \frac{F}{A}$$

$$P_g = \rho g h$$

$$P_T = P_{atm} + \rho g h$$

$$F_{buoyant} = \rho g V_{fluid}$$

$$\frac{V}{t} = A v = Q$$

$$P_1 + \rho g y_1 + \frac{1}{2} \rho v_1^2 = P_2 + \rho g y_2 + \frac{1}{2} \rho v_2^2$$

$$\Delta P = \frac{1}{2} \rho v_1^2 - \frac{1}{2} \rho v_2^2$$

→ Where ρ is density, V is volume, v is velocity, g is gravitational acceleration, t is time, P is pressure, A is cross sectional area, Q is flow rate, h is height, and F is force.

Temperature

$$T_F = \frac{9}{5} T_C + 32$$

$$T_C = \frac{5}{9} (T_F - 32)$$

$$T_K = T_C + 273$$

Thermal Expansion

$$L_f = L_i (1 + \alpha \Delta T)$$

$$V_f = V_i (1 + \beta \Delta T)$$

Electricity and Magnetism

Electrostatic Equations

Coulomb's Law

$$\vec{F}_{1,2} = \frac{k}{r_{1,2}^2} q_1 q_2 \hat{r}$$

Electric Field (Discrete Charges)

$$\vec{E} = \frac{\vec{F}}{q_0}$$

$$\vec{E}_i = \frac{k q}{r_{(i,0)}^2} \hat{r}_{(r,0)}$$

$$E(x) = \Sigma E_i(x) = E_1(x) + E_2(x) + \dots$$

Electric Field (Continuous Charges)

$$\lambda = \frac{q}{L} \quad \sigma = \frac{q}{A} \quad \rho = \frac{q}{V}$$

$$\vec{E} = \int_{V,A,L} \frac{k dq}{r^2} \hat{r}$$

$$\text{Line: } dq = \lambda dx$$

$$\text{Surface: } dq = \sigma dA$$

$$\text{Volume: } dq = \rho dV$$

Finite Line Charge - Parallel

$$E_x = \frac{kQ}{a(a+L)}$$

→ Where L is length, and a is the distance from the end

Finite Line Charge - Perpendicular

$$E_y = \frac{kQ}{y \sqrt{y^2 + \left(\frac{L}{2}\right)^2}}$$

Infinite Line

$$E = \frac{2k\lambda}{y}$$

Infinite Sheet

$$E = \frac{\sigma}{2\epsilon_0}$$

Ring of Charge (radius R)

$$E_z = \frac{kzQ}{(z^2 + R^2)^{3/2}}$$

Disk of Charge

$$E_z = 2\pi k \sigma \left(1 - \frac{z}{\sqrt{z^2 + R^2}} \right)$$

Electric Flux

$$E_n = E \cdot \hat{n} = E \cos \theta$$

$$\phi = E_n A$$

$$\phi_{net} = \int_S E_n dA$$

Gauss's Law

$$\phi_{net} = E_n A = \frac{Q_{in}}{\epsilon_0}$$

Electric Field Near a Conductor

$$\vec{E} = \frac{\sigma}{\epsilon_0} (\hat{r})$$

$$\sigma_{total} = \sigma_{charge} + \sigma_{induced}$$

$$E_{total} = \frac{\sigma_{total}}{\epsilon_0} = E_{external} + E_{charge}$$

Electric Potential

$$\Delta V = V_b - V_a = - \int_a^b \vec{E} \cdot d\vec{x}$$

$$E = - \frac{dV}{dx}$$

Coulomb Potential

$$V = \frac{kq}{r}$$

$$V = \Sigma_i \frac{kq_i}{r_i}$$

$$V = \int \frac{k dq}{r}$$

Line charge:

$$dq = \lambda dx$$

Plane charge:

$$dq = \sigma dx dy$$

Disk charge:

$$dq = \sigma \rho d\theta d\rho = 2\pi \sigma \rho d\rho$$

Potential Energy

$$U = q_0 V = \frac{k q_0 q}{r}$$

DC Circuit Equations

Capacitance

$$C = \frac{Q}{V}$$

$$C_{\text{Parallel Plates}} = \frac{\epsilon_0 A}{d}$$

$$C_{\text{Cylindrical}} = \frac{2\pi \epsilon_0 L}{\ln(r_2/r_1)}$$

$$U = \frac{1}{2} \frac{Q^2}{C} = \frac{1}{2} QV = \frac{1}{2} CV^2$$

→ Where C is capacitance, Q is charge, U is energy in a capacitor, and V is electric potential.

Dielectrics

$$\kappa = \frac{\epsilon}{\epsilon_0}$$

$$C = \kappa C_0$$

$$E = \frac{E_0}{\kappa}$$

→ Where E is the field with the dielectric, E₀ is the field without the dielectric, and κ is the dielectric constant.

Current

$$I_{\text{Avg}} = \frac{\Delta Q}{\Delta t}$$

$$J = \frac{I}{A}$$

$$J = qn v_D$$

→ Where J is current density, I is current, A is cross-sectional area, q is charge per particle, n is particle density, v_D is drift velocity, and Q is overall charge.

Power

$$P = IV = I^2 R = \frac{V^2}{R}$$

→ Where V is voltage, R is resistance, and I is current.

Ohm's Law

$$\vec{J} = \sigma \vec{E}$$

$$\sigma = \frac{1}{\rho}$$

$$V = IR$$

$$R = \rho \frac{L}{A}$$

→ Where \vec{J} is the electric current density (at a point), \vec{E} is the applied electric field, σ is the conductivity of a material, and ρ is the material resistivity.

Batteries

$$V_{\text{terminal}} = V_{\text{EMF}} - IR_{\text{internal}}$$

Resistor Networks

$$R_{\text{Series}} = \sum_i R_i = R_1 + R_2 + \dots$$

$$\frac{1}{R_{\text{Parallel}}} = \sum_i \frac{1}{R_i} = \frac{1}{R_1} + \frac{1}{R_2} + \dots$$

Capacitor Networks

$$\frac{1}{C_{\text{Series}}} = \sum_i \frac{1}{C_i} = \frac{1}{C_1} + \frac{1}{C_2} + \dots$$

$$C_{\text{Parallel}} = \sum_i C_i = C_1 + C_2 + \dots$$

Kirchhoff's Circuit Rules

Loop Rule: $\sum V = 0$

Junction Rule: $\sum I_{\text{in}} = \sum I_{\text{out}}$

RC Circuits

$$\tau = RC$$

Discharging:

$$Q(t) = Q_0 e^{-t/RC} = Q_0 e^{-t/\tau}$$

Charging:

$$Q(t) = C V_{\text{EMF}} (1 - e^{-t/RC}) = Q_{\text{max}} (1 - e^{-t/\tau})$$

$$I(t) = \frac{V_0}{R} e^{-t/RC} = I_0 e^{-t/RC}$$

Magnetism Equations

Moving Point Charge

$$\vec{B} = \frac{\mu_0}{4\pi} \frac{q \vec{v} \times \hat{r}}{r^2}$$

Biot-Savart Law

$$d\vec{B} = \frac{\mu_0}{4\pi} \frac{Idl \times \hat{r}}{4\pi r^2}$$

B for Various Configurations

$$B_{\text{solenoid}} = \mu_0 \frac{N}{l} I$$

$$B_{\text{loop}} = \frac{\mu_0 I R^2}{2(R^2 + x^2)^{3/2}}$$

$$B_{\text{loop,center}} = \frac{\mu_0 I}{2R}$$

$$B_{\text{wire}} = \frac{\mu_0 I}{2\pi R}$$

Ampere's Law

$$\oint_C \vec{B} \cdot d\vec{l} = \mu_0 I$$

Point Charge in B

$$\vec{F} = q\vec{v} \times \vec{B}$$

$$r = \frac{mv}{qB}$$

$$f_{cyclotron} = \frac{1}{T} = \frac{qB}{2\pi m}$$

$$v = \frac{E}{B} \text{ (velocity selector)}$$

Force on Current Carrying Wires

$$\vec{F} = I\vec{dl} \times \vec{B}$$

$$\frac{\vec{F}}{L} = \frac{\mu_0 I_1 I_2}{2\pi R}$$

Torque on a Loop

$$\vec{\mu} = NIA\hat{n}$$

$$\tau = \vec{u} \times \vec{B}$$

$$U = -\mu B \cos \theta = -\mu \cdot \vec{B}$$

Magnetic Flux

$$\phi_B = \int_{\text{Surface}} \vec{B} \cdot \hat{n} dA$$

$$\phi_B = NBA \cos \theta$$

Faraday's Law

$$EMF = -\frac{d\phi_B}{dt}$$

Inductance

$$L = \frac{\phi_B}{I}$$

$$L_{\text{solenoid}} = \frac{\mu_0 N^2 A}{l}$$

$$EMF_i = -L \frac{dl}{dt}$$

$$U = \frac{1}{2} LI^2$$

LR Circuits (DC)

$$\tau = \frac{L}{R}$$

$$I(t) = I_{\max}(1 - e^{-t/\tau}) \text{ (closes)}$$

$$I(t) = I_{\max} e^{-t/\tau} \text{ ("opens")}$$

LC Circuits (DC)

$$\omega = \frac{1}{\sqrt{LC}}$$

$$\omega = 2\pi f$$

$$I(t) = -\omega Q_{\max} \sin(\omega t)$$

AC Circuits and EM

Waves Equations

Displacement Current

$$I_d = \epsilon_0 \frac{d\phi_e}{dt}$$

Maxwell's Equations

$$\oint_s \vec{E} \cdot d\vec{A} = \frac{Q}{\epsilon}$$

$$\oint_s \vec{B} \cdot d\vec{A} = 0$$

$$\oint_c \vec{E} \cdot d\vec{l} = -\frac{d\phi_B}{dt}$$

$$\oint_c \vec{B} \cdot d\vec{l} = \mu \left(I + \epsilon \frac{d\phi_E}{dt} \right)$$

Lorentz Force

$$\vec{F} = q\vec{E} + q(\vec{v} \times \vec{B})$$

AC Circuits

$$\Delta V = NBA\omega \sin(\omega t)$$

$$\omega = 2\pi f$$

$$V_{\text{rms}} = \frac{V_{\max}}{\sqrt{2}}$$

$$X_L = \omega L$$

$$X_C = \frac{1}{\omega C}$$

$$\omega_0 = \frac{1}{\sqrt{LC}}$$

$$Z = \sqrt{R^2 + (X_L - X_C)^2}$$

$$EMF = \Delta V_{EMF} = IZ$$

$$\phi_{\text{phase angle}} = \tan^{-1} \left(\frac{X_L - X_C}{R} \right)$$

$$P_{\text{ave}} = I_{\text{RMS}}^2 R$$

$$P_{\text{ave}} = I_{\text{RMS}} V_{\text{RMS}} \cos \phi$$

EM Waves

$$E_x(z, t) = E_0 \sin(kz - \omega t)$$

$$B_y(z, t) = \frac{k}{\omega} E_0 \sin(kz - \omega t)$$

$$k = \frac{2\pi}{\lambda}$$

$$c = \lambda f = \frac{E}{B} = \frac{1}{\sqrt{\epsilon_0 \mu_0}}$$

Poynting Vector

$$\vec{S} \equiv \frac{1}{\mu_0} \vec{E} \times \vec{B}$$

$$S = \frac{EB}{\mu_0} = \frac{E^2}{c\mu_0}$$

Intensity

$$I = \frac{\text{Power}}{\text{Area}} = \frac{EB}{2\mu_0} = \frac{E^2}{2c\mu_0}$$

Light Equations

Light

$$c = \lambda f = \frac{E}{B} = \frac{1}{\sqrt{\epsilon_0 \mu_0}}$$

$$E = hf = \frac{hc}{\lambda}$$

$$\text{Intensity} = \frac{E_{\max} B_{\max}}{2\mu_0}$$

$$n_{medium} = \frac{c}{v_{medium}}$$

Polarization

$$I_{transmitted} = I_{incident} \cos^2 \theta$$

$$\tan \theta_{brewster} = \frac{n_2}{n_1}$$

Snell's Law

$$n_1 \sin \theta_1 = n_2 \sin \theta_2$$

$$\sin \theta_{crit} = \frac{n_2}{n_1}$$

Mirrors

$$f = \frac{1}{2}R$$

$$\frac{1}{s} + \frac{1}{s'} = \frac{1}{f}$$

$$m = \frac{h_{img}}{h_{obj}} = -\frac{s'}{s}$$

Lenses

$$\frac{n_1}{s} + \frac{n_2}{s'} = \frac{n_2 - n_1}{R}$$

$$m = -\frac{n_1 s'}{n_2 s}$$

$$s' = -\frac{n_2}{n_1} s$$

$$\frac{1}{f} = (n - 1) \left(\frac{1}{R_1} + \frac{1}{R_2} \right)$$

Thin Lens Equation

$$\frac{1}{f_1} + \frac{1}{f_2} = \frac{1}{f}$$

Interference

Constructive:

$$\Delta L = 0, \lambda, 2\lambda \dots = m\lambda$$

Destructive:

$$\Delta L = \frac{1}{2}\lambda, \frac{3}{2}\lambda, \frac{5}{2}\lambda \dots = (m + \frac{1}{2})\lambda$$

Phase

$$\Delta\phi = 2\pi \frac{\Delta L}{\lambda}$$

$$= 0, 2\pi, 4\pi \dots \text{const.}$$

$$= \pi, 3\pi, 5\pi \dots \text{dest.}$$

Double Slit

$$\text{Max: } d \sin \theta = m\lambda$$

$$\text{Min: } d \sin \theta = (m + \frac{1}{2})\lambda$$

Single Slit

$$\text{Min: } a \sin \theta = m\lambda$$

Grating

$$\text{Max: } d \sin \theta = m\lambda$$

Resolution

$$\alpha_{Rayleigh} = \frac{\lambda}{D} \text{ (rads)}$$

Thin Film

$$\Delta\phi = 2\pi \frac{2t}{\lambda'}$$

$$\Delta\phi = \pi \text{ at } n_2 > n_1$$

Modern Physics/ Quantum Mechanics

Heat

$$W = - \int_{V_i}^{V_f} P dV$$

$$Q = mc\Delta T$$

$$Q = \pm mL_f \text{ or } Q = \pm mL_v$$

$$Q_{gained} = -Q_{lost}$$

$$\Delta E_{int} = nC_V \Delta T = Q_{in} + W$$

→ Work done on a system is (+),
work done by a system is (-).

Gas laws

$$n = \frac{N}{N_A} = \frac{m \text{ (in g)}}{m_{mol}}$$

$$PV = nRT = Nk_B T$$

$$P_i V_i^\gamma = P_f V_f^\gamma$$

$$T_i V_i^{\gamma-1} = T_f V_f^{\gamma-1}$$

$$\gamma = \frac{C_p}{C_v}$$

$$K_{avg} = \frac{1}{2} m v_{rms}^2 = \frac{3}{2} k_B T$$

$$v_{rms} = \sqrt{\frac{3k_B T}{m}}$$

Entropy

$$S = k_B \ln \Omega$$

$$\Delta S = \int_i^f \frac{dQ_r}{T}$$

Efficiency and Heat Engines

$$\epsilon = \frac{W}{Q_H} = 1 - \frac{Q_C}{Q_H} \leq 1 - \frac{T_C}{T_H}$$

$$COP = \frac{Q_C}{W_{in}} \leq \frac{T_C}{T_H - T_C}$$

Wien's Law

$$\lambda_{peak} = \frac{2.90 \cdot 10^6 \text{ nm} \cdot \text{K}}{T}$$

Mean Free Path

$$\lambda = \frac{1}{4\sqrt{2}\pi(N/V)r^2}$$

Waves

$$v = \lambda f$$

$$f = \frac{1}{T} = \frac{\omega}{2\pi}$$

$$k = \frac{2\pi}{\lambda}$$

$$y(x, t) = A \sin(kx \pm \omega t)$$

$$v_s = \sqrt{\frac{F_T}{\mu}}$$

$$v_s = 331 \text{ m/s} \sqrt{1 + \frac{T_C}{273 \text{ C}}}$$

$$v = \sqrt{\frac{B}{\rho}}$$

Sound Intensity

$$I = \frac{P}{\text{area}}$$

$$\frac{I_1}{I_2} = \frac{r_2^2}{r_1^2}$$

$$\beta = 10 \log\left(\frac{I}{I_0}\right)$$

Sound and Standing Waves

$$f' = f \left(\frac{v_{\text{sound}} \pm v_{\text{obs}}}{v_{\text{sound}} \pm v_{\text{source}}} \right)$$

$$f_n = n \frac{v}{2L}; n = 1, 2, 3, \dots$$

$$f_n = n \frac{v}{4L}; n = 1, 3, 5, \dots$$

$$f_{\text{heard}} = \frac{1}{2}(f_1 + f_2)$$

$$f_{\text{beat}} = f_1 - f_2$$

Photoelectric Effect

$$E = hf = \frac{hc}{\lambda}$$

$$K_{\text{max}} = eV_{\text{stop}} = hf - \phi$$

$$E_H - E_L = hf$$

Schrödinger Equation

$$\frac{d^2\psi(x)}{dx^2} = -\frac{2m}{(\hbar/2\pi)^2}[E - U(x)]\psi(x)$$

Penetration Distance

$$\eta = \frac{(\hbar/2\pi)}{\sqrt{2m(U_0 - E)}}$$

Uncertainty Equation

$$\Delta x \Delta p_x \geq \frac{\hbar/2\pi}{2}$$

Normalization

$$(\text{Prob. } x_L \text{ to } x_R) = \int_{x_L}^{x_R} P(x) dx$$

$$\int_{x_L}^{x_R} P(x) dx = \int_{x_L}^{x_R} \psi(x)^2 dx = 1$$

Particle in a Box

$$E_n = n^2 \frac{h^2}{8mL^2}$$

Relativity

$$\gamma = \frac{1}{\sqrt{1 - \frac{v^2}{c^2}}}$$

$$\Delta t = \gamma \Delta t_p$$

$$L = \frac{L_p}{\gamma}$$

$$u = \frac{u' \pm v}{1 \pm u' \cdot \frac{v}{c^2}}$$

Relativistic Momentum

$$p = \gamma m_0 v$$

Relativistic Kinetic Energy

$$K = (\gamma - 1)E_0$$

Relativistic Mass

$$E^2 = (pc)^2 = E_0^2$$

Rest Energy

$$E_0 = m_0 c^2$$

Total Energy

$$E = \gamma m_0 c^2$$

Disintegration Energy

$$B = (Zm_H + Nm_n - m_{\text{atom}})^2$$

Half Life

$$t_{1/2} = \tau \ln 2$$

$$N(t) = N_0 e^{-t/\tau}$$

Decay Activity

$$R = R_0 e^{-t/\tau}$$

$$R_0 = \frac{N_0}{\tau}$$

Dynamics

Kinematic Relationships

$$v = \frac{dx}{dt}$$

$$a = \frac{dv}{dt} = \frac{d^2x}{dt^2} = v \frac{dv}{dx}$$

→ These equations will also work for terms θ, ω, α if substituted.

Uniform Rectilinear Motion

$$x = x_0 + vt$$

$$\theta = \theta_0 + \omega t$$

→ Applies when $a = 0$

Uniformly Accelerated Motion

$$v = v_0 + at$$

$$x = x_0 + v_0 t + \frac{1}{2}at^2$$

$$v^2 = v_0^2 + 2a(x - x_0)$$

→ These equations will also work for terms θ, ω, α if substituted. Also “x” is subjective and could be any defined axis (y, z, etc).

3D Rectangular Motion

$$\vec{r} = x\hat{i} + y\hat{j} + z\hat{k}$$

$$\vec{v} = \dot{x}\hat{i} + \dot{y}\hat{j} + \dot{z}\hat{k}$$

$$\vec{a} = \ddot{x}\hat{i} + \ddot{y}\hat{j} + \ddot{z}\hat{k}$$

2D Motion - Tangential & Normal Components

$$\vec{v} = v\hat{e}_t$$

$$\vec{a} = a_t\hat{e}_t + a_n\hat{e}_n$$

→ Where $a_t = \frac{dv}{dt}$ and $a_n = \frac{v^2}{\rho}$

2D Motion - Radial & Transverse Components

$$\vec{r} = r\hat{e}_r$$

$$\vec{v} = \dot{r}\hat{e}_r + r\dot{\theta}\hat{e}_\theta$$

$$\vec{a} = (\ddot{r} - r\dot{\theta}^2)\hat{e}_r + (r\ddot{\theta} + 2\dot{r}\dot{\theta})\hat{e}_\theta$$

Newton's Second Law

$$\sum \vec{F} = m\vec{a}$$

$$\sum \vec{M} = I\vec{\alpha}$$

Work & Energy

$$T_1 + U_{1 \rightarrow 2} = T_2$$

$$\rightarrow \text{Where } U_{1 \rightarrow 2} = \int_{A_1}^{A_2} \vec{F} \cdot d\vec{r}$$

Mechanical Energy

$$T_1 + V_1 = T_2 + V_2$$

$$V_g = Wy \quad V_e = \frac{1}{2}kx^2$$

$$T_1 + V_1 + U_{NC1 \rightarrow 2} = T_2 + V_2$$

Power

$$P = \frac{dU}{dt}$$

$$P = \vec{F} \cdot \vec{v}$$

Efficiency

$$\eta = \frac{U_{out}}{U_{in}}$$

Linear Impulse & Momentum

$$m\vec{v}_1 + \int \vec{F} dt = m\vec{v}_2$$

Coefficient of Restitution

$$v'_{Bn} - v'_{An} = e(v_{An} - v_{Bn})$$

Rigid Body Kinematics

$$\vec{v}_B = \vec{v}_A + \vec{v}_{B/A}$$

$$\vec{v}_B = \vec{v}_A + \vec{\omega} \times \vec{r}_{B/A}$$

$$\vec{a}_B = \vec{a}_A + \vec{a}_{B/A}$$

$$\vec{a}_B = \vec{a}_A + \vec{\alpha} \times \vec{r}_{B/A} + \vec{\omega} \times (\vec{\omega} \times \vec{r}_{B/A})$$

For a 2D slab:

$$\vec{a}_B = \vec{a}_A + \vec{\alpha} \times \vec{r}_{B/A} - \omega^2 \vec{r}_{B/A}$$

Rotating Frames

$$\vec{v}_P = \vec{v}_{P'} + \vec{v}_{P/F}$$

$$\vec{a}_P = \vec{a}_{P'} + \vec{a}_{P/F} + \vec{a}_{cor}$$

→ Where $\vec{a}_{cor} = 2\vec{\Omega} \times \vec{v}_{P/F}$

Rotational Kinetic Energy

$$T_{rot} = \frac{1}{2}I\omega^2$$

Moments of Inertia

$$\bar{I}_{disk} = \frac{1}{2}mr^2 \quad \bar{I}_{rod} = \frac{1}{12}ml^2$$

$$\bar{I}_{hoop, symmetry axis} = mr^2$$

$$\bar{I}_{sphere} = \frac{2}{5}mr^2$$

Angular Momentum

$$\vec{H}_G = I\vec{\omega}$$

Mechanics

Average normal/axial stress

$$\sigma_{avg} = \frac{F}{A}$$

Average Shear Stress

$$\tau_{avg} = \frac{V}{A_s}$$

Average Normal/Axial Strain

$$\epsilon_{avg} = \frac{\Delta L}{L_0}$$

Thermal Strain

$$\epsilon_T = \alpha \Delta T$$

Shear Strain

$$\gamma = \frac{\pi}{2} - \theta$$

$$\gamma = \tan^{-1}\left(\frac{\delta}{L}\right)$$

Poisson's Ratio

$$\nu = -\frac{\epsilon_L}{\epsilon_{Ax}} = -\frac{\epsilon_{trans}}{\epsilon_{long}}$$

Shear Modulus

$$G = \frac{E}{2(1 + \nu)}$$

Factor of Safety

$$F_s = \frac{\sigma_{failure}}{\sigma_{allow}}$$

Hooke's Law (1D)

$$\sigma_x = E\epsilon_x$$

Hooke's Law (plane stress)

$$\epsilon_x = \frac{1}{E}(\sigma_x - \nu\sigma_y) + \alpha\Delta T$$

$$\epsilon_y = \frac{1}{E}(\sigma_y - \nu\sigma_x) + \alpha\Delta T$$

$$\epsilon_z = \frac{1}{E}(-\nu\sigma_x - \nu\sigma_y) + \alpha\Delta T$$

$$\gamma_{xy} = \frac{1}{G}\tau_{xy}$$

Elongation in Axial Members

$$e = \int_0^L \frac{F(x) \cdot dx}{A(x) \cdot E(x)}$$

$$e = \frac{FL}{EA}$$

$$e = \frac{FL}{EA} + \alpha\Delta TL$$

Angle of Twist

$$\phi = \int_0^L \frac{T(x) dx}{I_p(x) G(x)}$$

$$\phi = \frac{TL}{I_p G}$$

Maximum Shear Stress

$$\tau_{max} = \frac{Tr}{I_p}$$

Polar Moment of Inertia

$$I_p = \int_A \rho^2 dA \text{ (General)}$$

$$I_p = \frac{\pi d^4}{32} \text{ (Circular Shaft)}$$

$$I_p = \frac{\pi}{32}(d_o^4 - d_i^4) \text{ (Tubular Shaft)}$$

Equilibrium Beam Relationships

$$\Delta V = P$$

$$\Delta V = V_2 - V_1 = \int_{x_1}^{x_2} p(x) dx$$

$$\frac{dV}{dx} = p(x)$$

$$\Delta M = -M$$

$$\Delta M = M_2 - M_1 = \int_{x_1}^{x_2} V(x) dx$$

$$\frac{dM}{dx} = V(x)$$

Flexure Stress in Bending Beams

$$\sigma_x = \frac{-My}{I_z}$$

$$S = \frac{I_z}{c}$$

$$S_{design} \geq \frac{M_{max}}{\sigma_{allow}}$$

Centroids

$$\bar{y} = \frac{\sum_i \bar{y}_i A_i}{\sum_i A_i}$$

Moment of Inertia

$$I_z = \int_A y^2 dA$$

Rectangle:

$$I_z = \frac{bh^3}{12}$$

Solid Circular Section:

$$I_z = \frac{\pi d^4}{64}$$

Hollow Circular Section:

$$I_z = \frac{\pi}{64}(d_o^4 - d_i^4)$$

Parallel Axis Theorem

$$I_{axis, any} = I_c + d^2 A$$

$$I = \sum_i (I_{c,i} + d_i^2 A_i)$$

Shear Stress in Bending Beams

$$\tau = \frac{VQ}{It}$$

$$Q = \sum_i \bar{y}_i' A_i'$$

Solid Circular Section:

$$Q_{max} = \frac{1}{12} d^3$$

Hollow Circular Section:

$$Q_{max} = \frac{1}{12} [d_o^3 - d_i^3]$$

Shear Flow

$$q = \frac{VQ}{I}$$

$$n_f \tau_f A_f \geq q \Delta s$$

Stress Transformations

$$\sigma_n = \left(\frac{\sigma_x + \sigma_y}{2} \right) + \left(\frac{\sigma_x - \sigma_y}{2} \right) \cos(2\theta) + \tau_{xy} \sin(2\theta)$$

$$\sigma_n = \left(\frac{\sigma_x + \sigma_y}{2} \right) - \left(\frac{\sigma_x - \sigma_y}{2} \right) \cos(2\theta) - \tau_{xy} \sin(2\theta)$$

$$\sigma_x + \sigma_y = \sigma_n + \sigma_t$$

$$\tau_{nt} = - \left(\frac{\sigma_x - \sigma_y}{2} \right) \sin(2\theta) + \tau_{xy} \cos(2\theta)$$

Principal (max/min) Stresses

$$\sigma_{avg} = \left(\frac{\sigma_x + \sigma_y}{2} \right)$$

$$R = \sqrt{\left(\frac{\sigma_x - \sigma_y}{2} \right)^2 + \tau_{xy}^2}$$

$$\sigma_1 = \sigma_{avg} + R$$

$$\sigma_2 = \sigma_{avg} - R$$

$$\tau_{max} = \pm R$$

$$\tan(2\theta_p) = \frac{2\tau_{xy}}{\sigma_x - \sigma_y}$$

$$\text{If } (\sigma_x - \sigma_y) > 0, \theta_p = \theta_{p,1}$$

$$\text{If } (\sigma_x - \sigma_y) < 0, \theta_p = \theta_{p,2}$$

$$\tan(2\theta_s) = - \frac{(\sigma_x - \sigma_y)}{2\tau_{xy}}$$

$$\theta_s = \theta_p \pm 45$$

$$\text{If } \theta_p > 0, \theta_s = \theta_p - 45$$

$$\text{If } \theta_p < 0, \theta_s = \theta_p + 45$$

Pressure Vessels

$$\sigma_{sphere} = \frac{pr}{2t}$$

$$\sigma_{axial} = \frac{pr}{2t}$$

$$\sigma_{hoop} = \frac{pr}{t}$$

$$\tau_{abs,max} = \frac{\sigma_{max} - \sigma_{min}}{2}$$

Differential Equations of the

Deflection Curve

$$\text{Deflection} = v(x)$$

$$\text{Slope} = \frac{dv}{dx} = \theta(x)$$

$$\text{Moment, } M(x) = EI \frac{d^2v}{dx^2}$$

$$\text{Shear, } V(x) = \frac{dM}{dx} = EI \frac{d^3v}{dx^3}$$

$$\text{Load, } w(x) = \frac{dV}{dx} = EI \frac{d^4v}{dx^4}$$

Materials Engineering

Lattice Parameters

$$\text{SC} : a = 2R$$

$$\text{BCC} : a\sqrt{3} = 4R$$

$$\text{FCC} : a\sqrt{2} = 4R$$

$$\text{DC} : a = \frac{8R}{\sqrt{3}}$$

Points, Directions and Planes Notation

Points : x, y, z

Direction (singular) : $[h \ k \ l]$

Direction (family) : $\langle h \ k \ l \rangle$

Planes (singular) : $(h \ k \ l)$

Planes (family) : $\{h \ k \ l\}$

Density (metals)

$$\rho = \frac{nA}{V_c N_A}$$

%Ionic Character

$$\% \text{IC} = [1 - \exp\{-(0.25)(X_A - X_B)^2\}] \times 100$$

Linear Density

$$LD = \frac{L_{\text{occupied}}}{L_{\text{total}}}$$

Planar Density

$$PD = \frac{A_{\text{occupied}}}{A_{\text{total}}}$$

Atomic Packing Factor

$$APF = \frac{V_{\text{occupied}}}{V_{\text{total}}}$$

Bragg's Law

$$n\lambda = 2d_{hkl} \sin \theta$$

Inter-Planar Spacing (for cubic symmetries)

$$d_{hkl} = \frac{a}{\sqrt{h^2 + k^2 + l^2}}$$

Vacancies/Unit Volume

$$N_v = N \exp\left(-\frac{Q_v}{kT}\right)$$

Atomic Sites/Unit Volume

$$N = \frac{N_A \rho}{A}$$

Composition (weight %)

$$C_w = \frac{m_1}{m_1 + m_2} \times 100$$

Composition (atomic %)

$$C_a = \frac{n_{m1}}{n_{m1} + n_{m2}} \times 100$$

Mean Intercept Length

$$\bar{l} = \frac{L_T}{PM}$$

Diffusion

Diffusion Flux

$$J = \frac{M}{At}$$

Fick's First Law

$$J = -D \frac{dC}{dx}$$

Fick's Second Law

$$\frac{\partial C}{\partial t} = D \frac{\partial^2 C}{\partial x^2}$$

$$\frac{C_x - C_0}{C_s - C_0} = 1 - \text{erf}\left(\frac{x}{2\sqrt{Dt}}\right)$$

Temperature Dependence of Diffusion Coefficient

$$D = D_0 \exp\left(-\frac{Q_d}{RT}\right)$$

Mechanical Properties

Engineering Stress

$$\sigma = \frac{F}{A_0}$$

Engineering Strain

$$\epsilon = \frac{l_i - l_0}{l_0} = \frac{\Delta l}{l_0}$$

Hooke's Law

$$\sigma = E\epsilon$$

Poisson's Ratio

$$\nu = -\frac{\epsilon_x}{\epsilon_z} = -\frac{\epsilon_y}{\epsilon_z}$$

Ductility % Elongation

$$\%EL = \left(\frac{l_f - l_0}{l_0}\right) \times 100$$

Ductility % Area Reduction

$$\%RA = \left(\frac{A_0 - A_f}{A_0}\right) \times 100$$

True Stress

$$\sigma_T = \frac{F}{A_i}$$

True Strain

$$\epsilon_T = \ln \frac{l_i}{l_0}$$

Plastic Region to the Point of Necking

$$\sigma_T = K \epsilon_T^n$$

Resolved Shear Stress

$$\tau_R = \sigma \cos \phi \cos \lambda$$

Critical Resolved Shear Stress

$$\tau_{crss} = \sigma_y (\cos \phi \cos \lambda)_{max}$$

Hall-Petch Equation

$$\sigma_y = \sigma_0 + k_y d^{-1/2}$$

Percent Cold Work

$$\% CW = \left(\frac{A_0 - A_d}{A_0} \right) \times 100$$

Average Grain Size

$$d^n - d_0^n = Kt$$

→ During grain growth

Failure/Fracture Mechanics

Elliptical Cracks

$$\sigma_m = 2\sigma_0 \left(\frac{a}{p_t} \right)^{1/2}$$

→ Where 'a' is the length of an edge external crack, and '2a' is the length of an internal crack.

Fracture Toughness

$$K_c = Y\sigma_c \sqrt{\pi a}$$

Critical Stress

$$\sigma_c = \frac{K_{Ic}}{Y\sqrt{\pi a}}$$

Maximum Flaw Size

$$a_c = \frac{1}{\pi} \left(\frac{K_{Ic}}{\sigma Y} \right)^2$$

Mean Stress (fatigue tests)

$$\sigma_m = \frac{\sigma_{max} + \sigma_{min}}{2}$$

Stress Amplitude (fatigue tests)

$$\sigma_a = \frac{\sigma_{max} - \sigma_{min}}{2}$$

Range of Stress (fatigue tests)

$$\sigma_r = \sigma_{max} - \sigma_{min}$$

Max. Stress for Fatigue

Rotating-Bending Tests

$$\sigma = \frac{16FL}{\pi d_0^3}$$

Thermal Stress

$$\sigma = \alpha_l E \Delta T$$

Steady-State Creep Rate

$$\dot{\epsilon}_s = K_1 \sigma^n \text{ (constant T)}$$

$$\dot{\epsilon}_s = K_2 \sigma^n \exp \left(-\frac{Q_c}{RT} \right)$$

Larson-Miller Parameter

$$m = T(C + \log t_r)$$

Phase Diagrams

Mass Fraction - Liquid Phase

$$W_L = \frac{C_\alpha - C_0}{C_\alpha - C_L}$$

→ For binary isomorphous

Mass Fraction - Solid Phase

$$W_\alpha = \frac{C_0 - C_L}{C_\alpha - C_L}$$

→ For binary isomorphous

Phase Transformations

Critical Radius for Stable Solid Particle

$$r^* = \left(-\frac{2\gamma T_m}{\Delta H_f} \right) \left(\frac{1}{T_m - T} \right)$$

Homogenous nucleation:

$$r^* = -\frac{2\gamma}{\Delta G_v}$$

Heterogenous nucleation:

$$r^* = -\frac{2\gamma_{SL}}{\Delta G_v}$$

Activation Free Energy for Formation of Stable Solid Particle

$$\Delta G^* = \left(\frac{16\pi\gamma^3 T_m^2}{3\Delta H_f^2} \right) \frac{1}{(T_m - T)^2}$$

Homogenous nucleation:

$$\Delta G^* = \frac{16\pi\gamma^3}{3(\Delta G_v)^2}$$

Heterogenous nucleation:

$$\Delta G^* = \left(\frac{16\pi\gamma_{SL}^3}{3(\Delta G_v)^2} \right) S(\theta)$$

Interfacial Energies with Heterogenous Nucleation

$$\gamma_{IL} = \gamma_{SI} + \gamma_{SL} \cos \theta$$

Fraction of Transformation

$$y = 1 - \exp(-kt^n)$$

Transformation Rate

$$\text{rate} = \frac{1}{t_{0.5}}$$

Ceramic Properties

Density (Ceramics)

$$\rho = \frac{n'(\sum A_C + \sum A_A)}{V_C N_A}$$

Flexural Strength

Rectangular cross section:

$$\sigma_{fs} = \frac{3F_f L}{2bd^2}$$

$$\epsilon = \frac{6 \cdot d \cdot \Delta y}{L^2}$$

Circular cross section:

$$\sigma_{fs} = \frac{F_f L}{\pi R^3}$$

$$\epsilon = \frac{12 \cdot R \cdot \Delta y}{L^2}$$

Porous Ceramics

Elastic modulus:

$$E = E_0(1 - 1.9P + 0.9P^2)$$

Flexural strength:

$$\sigma_{fs} = \sigma_0 \exp(-nP)$$

Polymer Properties

Molecular Weight

Number-Average:

$$\bar{M}_n = \sum x_i M_i$$

Weight-Average:

$$\bar{M}_w = \sum w_i M_i$$

For copolymers, average repeat unit molecular weight:

$$\bar{m} = \sum f_i m_i$$

Degree of Polymerization

$$n = \frac{\bar{M}_n}{m}$$

% Crystallinity by Weight

$$\% C = \frac{\rho_c(\rho_s - \rho_a)}{\rho_s(\rho_c - \rho_a)} \times 100$$

Diffusion Flux

$$J = -P_M \frac{\Delta P}{\Delta x}$$

→ For steady state diffusion through a polymer membrane

Relaxation Modulus

$$E_r(t) = \frac{\sigma(t)}{\epsilon_0}$$

Polymer Tensile Strength

$$TS = TS_\infty - \frac{A}{\bar{M}_n}$$

Composites

Rules of Mixtures

Transverse properties:

$$E_c^{trans} = \frac{E_m E_f}{E_m V_f + E_f V_m}$$

Axial/longitudinal properties:

$$E_c^{long} = E_m V_m + E_p V_p$$

Critical Fiber Length

$$l_c = \frac{\sigma_f^* d}{2\tau_c}$$

Longitudinal Tensile Strength

For continuous and aligned fibrous composite:

$$\sigma_{cl}^* = \sigma_m'(1 - V_f) + \sigma_f^* V_f$$

For discontinuous and aligned fibrous composite and $l > l_c$:

$$\sigma_{cd}^* = \sigma_f^* V_f \left(1 - \frac{l_c}{2l}\right) + \sigma_m'(1 - V_f)$$

For discontinuous and aligned fibrous composite and $l < l_c$:

$$\sigma_{cd'}^* = \frac{l\tau_c}{d} V_f + \sigma_m'(1 - V_f)$$

Corrosion and Degradation

Electrochemical Cell Potential

For two standard half-cells:

$$\Delta V^0 = V_2^0 - V_1^0$$

For two nonstandard half-cells:

$$\Delta V = (V_2^0 - V_1^0) - \frac{RT}{n\mathcal{F}} \ln \frac{[M_1^{n+}]}{[M_2^{n+}]}$$

For two nonstandard half-cells, room temperature:

$$\Delta V = (V_2^0 - V_1^0) - \frac{0.0592}{n} \log \frac{[M_1^{n+}]}{[M_2^{n+}]}$$

Corrosion Penetration Rate

$$\text{CPR} = \frac{KW}{\rho A t}$$

Corrosion Rate

$$r = \frac{i}{n\mathcal{F}}$$

Overvoltage

For activation polarization:

$$\eta_a = \pm \beta \log \frac{i}{i_0}$$

For concentration polarization:

$$\eta_c = \frac{2.3RT}{n\mathcal{F}} \log \left(1 - \frac{i}{i_L} \right)$$

Pilling-Bedworth Ratio

For divalent metals:

$$\text{P-B ratio} = \frac{A_o \rho_M}{A_M \rho_o}$$

For other than divalent metals:

$$\text{P-B ratio} = \frac{A_o \rho_M}{a A_M \rho_o}$$

Metal Oxidation

Parabolic rate expression:

$$W^2 = K_1 t + K_2$$

Linear rate expression:

$$W + K_3 t$$

Logarithmic rate expression:

$$W = K_4 \log(K_5 t + K_6)$$

Electrical Properties

Ohm's Law

$$V = IR$$

Electrical Resistivity

$$\rho = \frac{RA}{l}$$

Electrical Conductivity

$$\sigma = \frac{1}{\rho}$$

Current Density

$$J = \sigma \mathcal{E}$$

Electrical Field Intensity

$$\mathcal{E} = \frac{V}{l}$$

(Metals) Conductivity for n -Type Extrinsic Semiconductor

$$\sigma = n e \mu_e$$

(Metals) Matthiessen's Rule

$$\rho_{total} = \rho_t + \rho_i + \rho_d$$

Thermal Resistivity

Contribution

$$\rho_t = \rho_0 + aT$$

Impurity Resistivity

Contribution

Impurity resistivity contribution, single-phase alloy:

$$\rho_i = A c_i (1 - c_i)$$

Impurity resistivity contribution, two-phase alloy:

$$\rho_i = \rho_\alpha V_\alpha + \rho_\beta V_\beta$$

Conductivity for Intrinsic Semiconductor

$$\begin{aligned} \sigma &= n e \mu_e + p e \mu_h \\ &= n_i e (\mu_e + \mu_h) \end{aligned}$$

Conductivity for p -Type Extrinsic Semiconductor

$$\sigma \cong p e \mu_h$$

Capacitance

$$C = \frac{Q}{V}$$

Parallel-plate capacitor (vacuum):

$$C = \epsilon_0 \frac{A}{l}$$

Parallel-plate capacitor (dielectric medium between plates):

$$C = \epsilon \frac{A}{l}$$

Dielectric Constant

$$\epsilon_r = \frac{\epsilon}{\epsilon_0}$$

Dielectric Displacement

$$D = \epsilon_0 \mathcal{E} + P$$

In a vacuum:

$$D_0 = \epsilon_0 \mathcal{E}$$

In a dielectric material:

$$D = \epsilon \mathcal{E}$$

Polarization

$$P = \epsilon_0(\epsilon_r - 1)\mathcal{E}$$

Thermal Properties

Heat Capacity

$$C = \frac{dQ}{dT}$$

Linear Coefficient of

Thermal Expansion

$$\frac{l_f - l_0}{l_0} = \alpha_l(T_f - T_0)$$

$$\frac{\Delta l}{l_0} = \alpha_l \Delta T$$

Volume Coefficient of

Thermal Expansion

$$\frac{\Delta V}{V_0} = \alpha_v \Delta T$$

Thermal Conductivity

$$q = -k \frac{dT}{dx}$$

Thermal Stress

$$\sigma = E\alpha_l(T_0 - T_f)$$

$$= E\alpha_l \Delta T$$

Thermal Shock Resistance

Parameter

$$\text{TSR} \cong \frac{\sigma_f k}{E\alpha_l}$$

Magnetic Properties

Magnetic Field Strength - Coil

$$H = \frac{NI}{l}$$

Magnetic Flux Density

$$B = \mu_0 H + \mu_0 M$$

In a material:

$$B = \mu H$$

In a vacuum:

$$B_0 = \mu_0 H$$

For a ferromagnetic material:

$$B \cong \mu_0 M$$

Relative Permeability

$$\mu_r = \frac{\mu}{\mu_0}$$

Magnetization

$$M = X_m H$$

Magnetic Susceptibility

$$X_m = \mu_r - 1$$

Saturation Magnetization

For Ni:

$$M_s = 0.60\mu_B N$$

For a ferrimagnetic material:

$$M_s = N' \mu_B$$

Optical Properties

Velocity of Light

In a vacuum:

$$c = \frac{1}{\sqrt{\epsilon_0 \mu_0}}$$

In a medium:

$$v = \frac{1}{\sqrt{\epsilon \mu}}$$

Velocity of

Electromagnetic Radiation

$$c = \lambda \nu$$

Index of Refraction

$$n = \frac{c}{v} = \sqrt{\epsilon_r \mu_r}$$

Reflectivity

$$R = \left(\frac{n_2 - n_1}{n_2 + n_1} \right)^2$$

Intensity of Transmitted Radiation

$$I'_T = I'_0 e^{-\beta x}$$

→ (Reflection losses not taken into account)

Intensity of Radiation

Transmitted

$$I_T = I_0(1 - R)^2 e^{-\beta l}$$

→ (Reflection losses taken into account)

Many equations were referenced from Callister, W. D. (2012).

Materials science and engineering: An introduction 8E. John Wiley & Sons.

Appendix

Greek Characters

Symbol	Name
α	Alpha
β	Beta
χ	Chi
$\Gamma \gamma$	Gamma
$\Delta \delta$	Delta
ϵ	Epsilon
ϵ_0	Epsilon Nought
ζ	Zeta
η	Eta
$\Theta \theta$	Theta
κ	Kappa
$\Lambda \lambda$	Lambda
μ	Mu
μ_0	Mu Nought
ν	Nu
$\Xi \xi$	Xi
$\Pi \pi$	Pi
ρ	Rho
$\Sigma \sigma$	Sigma
τ	Tau
$\Phi \varphi \phi$	Phi
$\Psi \psi$	Psi
$\Omega \omega$	Omega

SI Base Units

Name	Symbol	Measure	Dim. Analysis Symbol
Second	s	Time	T
Meter	m	Length	L
Kilogram	kg	Mass	M
Ampere	A	Electric Current	I
Kelvin	K	Temp	Θ
Mole	mol	Amount of substance	N
Candela	cd	Luminous Intensity	J

SI Prefixes

Prefix	Symbol	Factor	Meaning
Pico	p	10^{-12}	Trillionth
Nano	n	10^{-9}	Billionth
Micro	μ	10^{-6}	Millionth
Milli	m	10^{-3}	Thousandth
Centi	c	10^{-2}	Hundredth
Deci	d	10^{-1}	Tenth
Kilo	K	10^3	Thousand
Mega	M	10^6	Million
Giga	G	10^9	Billion
Tera	T	10^{12}	Trillion

Constants

Gravitational Constant

$$G = 6.67430 \times 10^{-11} \text{ m}^3 \cdot \text{kg}^{-1} \cdot \text{s}^{-2}$$

Earth Topics

$$m_{\text{Earth}} = 5.97 \times 10^{24} \text{ kg}$$

$$r_{\text{Earth}} = 6.38 \times 10^6 \text{ m}$$

Gravity on Earth

$$g = 9.81 \text{ m/s}^2 \text{ or } 32.17 \text{ ft/s}^2$$

Atmospheric Pressure

$$1 \text{ atm} = 101325 \text{ pa} = 760.00 \text{ mmHg}$$

Avogadro Constant

$$N_A = 6.022 \times 10^{23} \text{ mol}^{-1}$$

Gas Constant

$$R = 8.31 \text{ J/(mol} \cdot \text{K)}$$

Boltzmann Constant

$$k_b = 1.38 \times 10^{-23} \text{ J/K}$$

Speed of Sound

$$v_s = 343 \text{ m/s}$$

→ When on earth at 20° C or 68° F

Reference Sound Intensity

$$I_0 = 10^{-12} \text{ W/m}^2$$

→ Where I_0 is the lowest sound intensity able to be heard by an undamaged human ear (in room conditions)

Elementary Charge

$$e = 1.602 \times 10^{-19} \text{ C}$$

→ This could be the charge of a single proton, or the magnitude of a single electron

Coulomb Constant

$$k_e = 8.988 \times 10^9 \text{ N} \cdot \text{m}^2 \cdot \text{C}^{-2} = \frac{1}{4\pi\epsilon_0}$$

Vacuum Permittivity

$$\epsilon_0 = 8.854 \times 10^{-12} \text{ F} \cdot \text{m}^{-1}$$

Permeability of Free Space

$$4\pi \cdot 10^{-7} \frac{Tm}{A}$$

Mass of a Proton

$$m_{proton} = 1.672 \times 10^{-27} \text{ kg} = 938.27 \text{ MeV}/c^2$$

Mass of an Electron

$$m_{electron} = 9.11 \times 10^{-31} \text{ kg} = 0.511 \text{ MeV}/c^2$$

Speed of Light (vacuum)

$$c = 2.998 \times 10^8 \text{ m/s}$$

Planck's Constant


$$h = 6.626 \times 10^{-34} \text{ J} \cdot \text{s}$$

$$h = 4.14 \times 10^{-15} \text{ eV} \cdot \text{s}$$

$$\hbar = \frac{h}{2\pi}$$

Bohr Radius

$$a_b = 0.0529 \text{ nm}$$

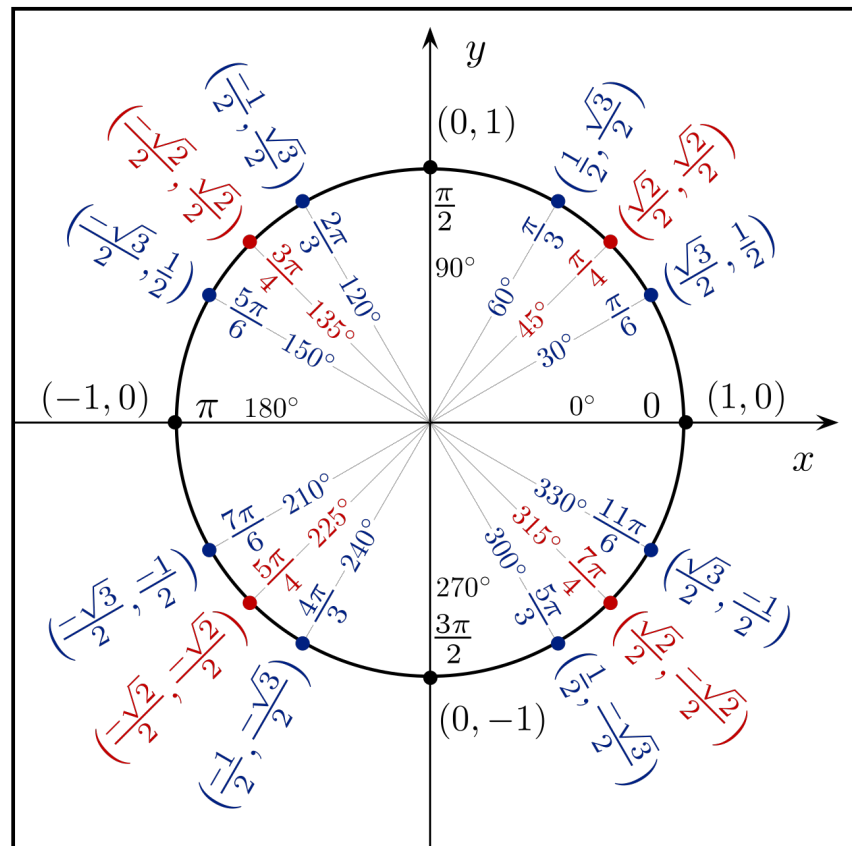Unit Circle

https://en.wikipedia.org/wiki/Unit_circle