



LOCAL FABRICATION - OD20 PARTS ARE BELOW SENDCUTSEND MINIMUM LENGTH

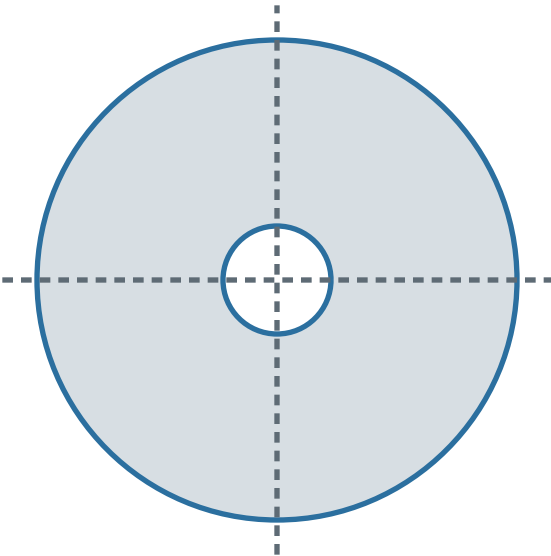

304 BACKING DISC
FRONT VIEW - 5:1

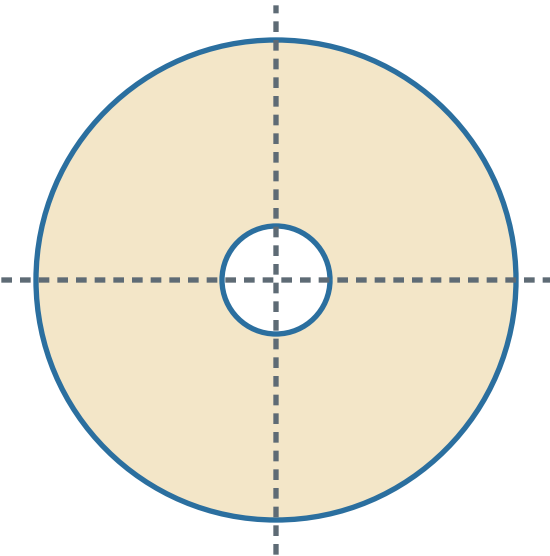

F5 WOOL FELT PAD
FRONT VIEW - 5:1

FEATURE	REQUIREMENT
OD	20.00 +/-0.10
Bore	4.50 +/-0.10
Backing	304 SS, 1.00 +/-0.05
Pad stock	McMaster 8341K31
Pad grade	F5 plain, 95% wool
Pad thickness	3.00 +/-0.30
Quantity	2 each

CUTTING AND USE NOTES

- 1. DXFs are 1:1 local-cut templates with two closed circular CUT entities.
- 2. Backing discs: local laser, waterjet, punch, or lathe; deburr both faces completely.
- 3. Pads: punch or knife-cut from plain-back F5 felt; no adhesive, oil, grit, or loose fibres.
- 4. Twenty millimetres is 0.787 inch, below the published 1.5 inch SendCutSend minimum length.
- 5. Set drag with the spring/wingnut after assembly; the drawing does not certify enamel wear.