


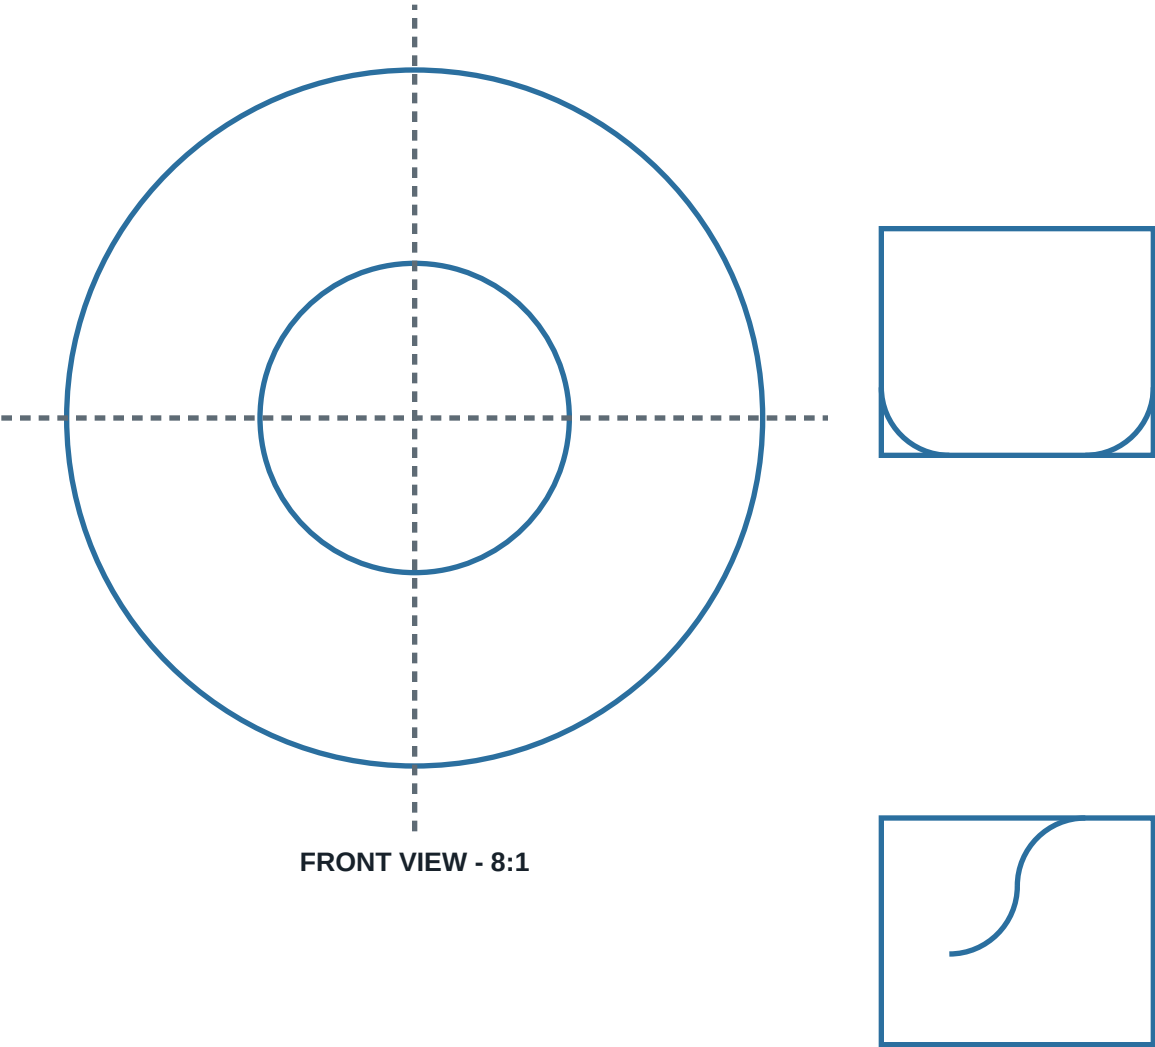

FRONT VIEW - 8:1

AXIAL SECTION - 12:1; BOTH BORE RIMS R0.75

| FEATURE          | REQUIREMENT    |
|------------------|----------------|
| Outside diameter | 9.00 +0/-0.03  |
| Clear bore waist | 4.00 +0.05/0   |
| Axial thickness  | 3.00 +/-0.05   |
| Both bore rims   | R0.75 +/-0.05  |
| Material         | 99.8% Al2O3    |
| Wire surfaces    | Ra <=0.2 um    |
| OD concentricity | <=0.03 to bore |

RFQ AND INSPECTION NOTES

- 1. Diamond-polish the full bore and both R0.75 blends; no molding seam or glaze ridge may cross a wire-contact surface.
- 2. No chips, cracks, pits, sharp defects, abrasive residue, or polishing compound; ultrasonically clean before packing.
- 3. OD is the bonded light-interference seat in a nominal ID8.90 PETG cradle; do not increase OD above 9.00.
- 4. Quote quantity 2: one production entry guide plus one fragile-part spare; provide dimensional inspection with shipment.