
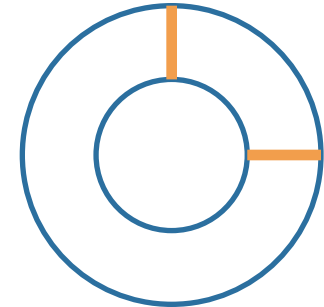


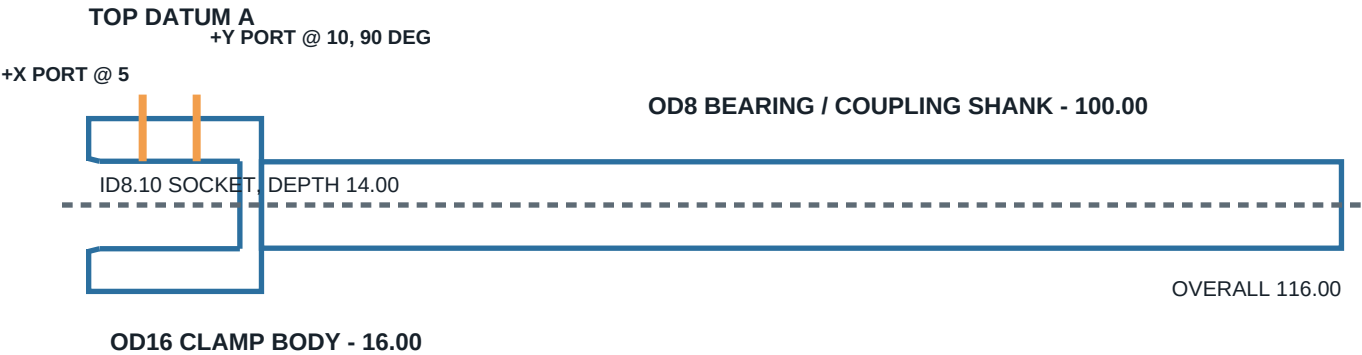

TOP VIEW AT DATUM A
PORTS CLOCKED 90 DEG +/-1 DEG

FEATURE	NOMINAL	TOLERANCE	CONTROL
Overall length	116.00	+/-0.10	datum A to shank end
Clamp body	OD16 x 16	OD +0/-0.03; L +/-0.05	break OD edges C0.2
Shared shank	OD8 x 100	-0.005/-0.015; L +/-0.05	Ra <=0.8; straight <=0.05
Shaft socket	ID8.10 x 14	+0.03/0; depth +0/-0.05	Ra <=1.6; bottom flat
Mouth lead-in	ID8.60 x 1	reference	smooth blend; no sharp lip
Clamp ports	2x M4x0.7-6H	stations +/-0.05	5 and 10 from datum A
Port clocking	+X / +Y	90 deg +/-1 deg	tap through wall to socket
Material	4140 prehard	28-32 HRC	machine from one piece

MACHINING AND USE NOTES

1. Custom part; no supplier SKU. Quote the paired STEP and drawing.
2. Use two M4x5 cup-point screws; matching shaft flats are recommended.
3. Deburr both tap breakthroughs and polish the socket mouth.
4. Socket-to-shank total indicated runout <=0.03 after final finish.
5. Qualify screw torque and shaft marking on scrap before production.