Subsea Integrity Copilot - Customer Brief

Subsea pipelines carry oil and gas from offshore fields. Operators monitor pressure along these pipelines to spot possible problems and decide when to intervene. A missed leak can harm the marine environment, stop production and put operating permissions at risk. But sending a vessel or underwater inspection team to investigate faulty measurements can also be costly. The integrity engineer must therefore distinguish a real pipeline problem from a measurement problem before directing a response.

Making that distinction is difficult because different causes can produce similar alerts. A pressure drop may indicate a leak, an operating change or a faulty sensor; missing readings can obscure the picture. A leak and sensor faults may also occur together. Before directing a response, the engineer must establish what is happening, where attention is needed and whether the evidence is reliable enough to act on. This turns each investigation into three practical questions:

1. Is this a leak, a change in operating or measurement conditions, or an instrument problem?

2. If a leak is suspected, which branch and section should be inspected?

3. What evidence supports that conclusion, and what still needs checking before a team is sent?

The illustration below shows this challenge on a simulated 11.2 km network with seven connected sections (P1-P7) and 112 pressure instruments. A leak on P5 occurs alongside sensor faults, missing data and a shared data-connection problem on P7. Both maps summarize the same 60-second slice of simulated readings of scenario S7 (see the live tab of the dashboard), from 50 to 110 seconds into the replay, with 69 instruments flagged.

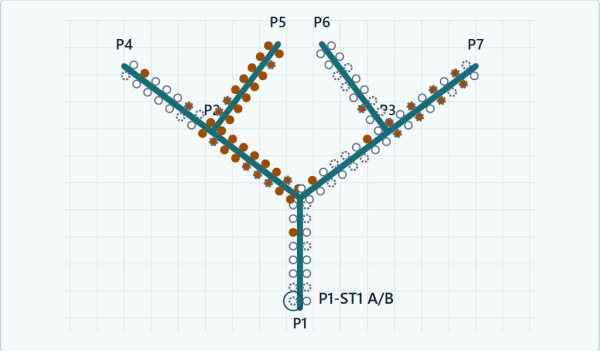


Figure 1. Sensor alerts only. Orange dots show unusual pressure; dashed dots show missing or invalid readings. Question 1 requires comparing histories and records to separate the P5 leak from P7's connection problem and sensor faults. Question 2 requires tracing related pressure changes across branches to narrow the inspection area. Question 3 requires checking sensor reliability and documenting the supporting evidence. The map alone answers none of these: repeated cross-checks take time and require knowledge of pipeline behavior.

Subsea Integrity Copilot helps answer these same questions as monitoring continues. Its AI agents compare measurements and records, assess causes, prioritize inspection and link findings to evidence. The engineer reviews an organized investigation rather than assembling one from individual alerts.

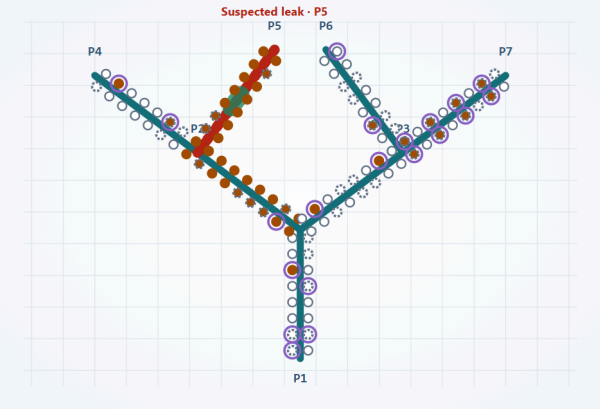


Figure 2. Agent-assisted investigation. For question 1, the report separates a suspected P5 leak (red) from sensor or data concerns (purple rings, not confirmed hardware failures). For question 2, it prioritizes inspection at 700-900 m from P5's start (green). For question 3, it provides supporting readings and records, uncertainties and further checks. The engineer reviews these findings before acting; they neither confirm an exact leak location nor authorize deployment.

This handoff also needs to be timely. In two controlled tests of this simulated scenario, reviewed reports were ready in about 2.5-2.8 minutes of elapsed time.

We evaluated **3 simulated recordings at 3 times each (60, 150 and 360 seconds): 9 snapshots**, with known answers hidden from agents. Six snapshots triggered reports; three clean snapshots required none. Results: leak precision/recall **100%**; correct branch **4/4**; leak-source coverage **4/4** in 400 m inspection sections; false leak locations **0/5** non-leak snapshots; sensor-concern and issue-type precision/recall **100%**; report evidence and explanation passes **6/6**. These results assess diagnosis, not detection speed or field performance.

Run the demo. Dashboard evidence. Evaluation and timing results.