

Features and Benefits

Mortise Lockcase
AA8700 Series

Key Feature

- Made of 304 stainless steel
- 1,000,000 cycles tested
- 19 latching functions
- Fire rated UL 10C
- Non-handed - latch reversible
- ANSI/BHMA A156.13 Grade 1
- Door thickness: range 45-55 mm with the standard screw fixing pack provided
- 70mm backset

Benefits:

- High corrosion resistance
- High durability
- Versatile usage
- Can be used for fire doors
- Provide maximum security performance
- Application in commercial buildings, schools and other institutions

Standard &
Certification

ANSI/BHMA 156.13
Operational Grade1

UL10C

BHMA Listed

Technical details

- Center to center - 92mm
- Bevel front - free-floating to adjust from flat to the standard bevel of 3mm in 51mm
- 25mm (1") deadbolt projection
- Latchbolt - 19mm, stainless steel two-piece anti-friction reversible latchbolt camming action
- Case - Heavy Gauge wrought steel, Zinc dichromated
- Handing - Reversible at site
- Trim Alignment - Expansion anchor spindle fixing method ensures top security and tightening
- Suitable for hinged timber, metal and fire doors
- All mortise lock contain ANSI strike plate and screws

Finishes

- 630 Satin Stainless Steel
- 724 PVD Bright Brass

**Consult local ASSA ABLOY sales representative when other finish is required*

Application

- Suitable for hinged timber, metal and fire doors where applicable
- Favorable for various application in commercial building, industrial plant, school, hospital, airport, gymnasium, shopping mall and most public building



Section



- | | |
|------------------------------|-------------|
| ① Wrought strike box | ④&⑥ Trim |
| ② ANSI Template Strike Plate | ⑤ Lock Body |
| ③ Armor Front | ⑦ Cylinder |

Structure


1.5mm thick stainless steel outside front plate. Adjustable for door bevels from flat to 3mm in 51mm.

25.5mm throw, slim oval shape stainless steel 304 made dead bolt.

19mm projection stainless steel two-piece latch, reversible at site. Anti-friction piece for quiet operation and prevents scratching of strike plate.


Non-handed stainless steel deadlatch.






Inside front 3mm steel (full length). One-piece design to hold lock securely in door.




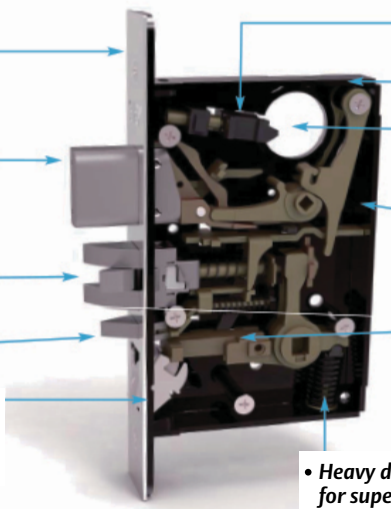






- Cylinder retainer two prong grip Security Grade 1
- Extra strong 3mm steel case for improved impact resistance.
- 6-pin solid brass cylinder standard; master keying systems available.
- Heavy gauge corrosion resistant parts provide security, reliability, durability and longevity.
- Heavy gauge corrosion resistant parts provide security, reliability, durability and longevity.
- Heavy duty hubs and spring cartridge for superior strength and cycle life.

Lock Dimension

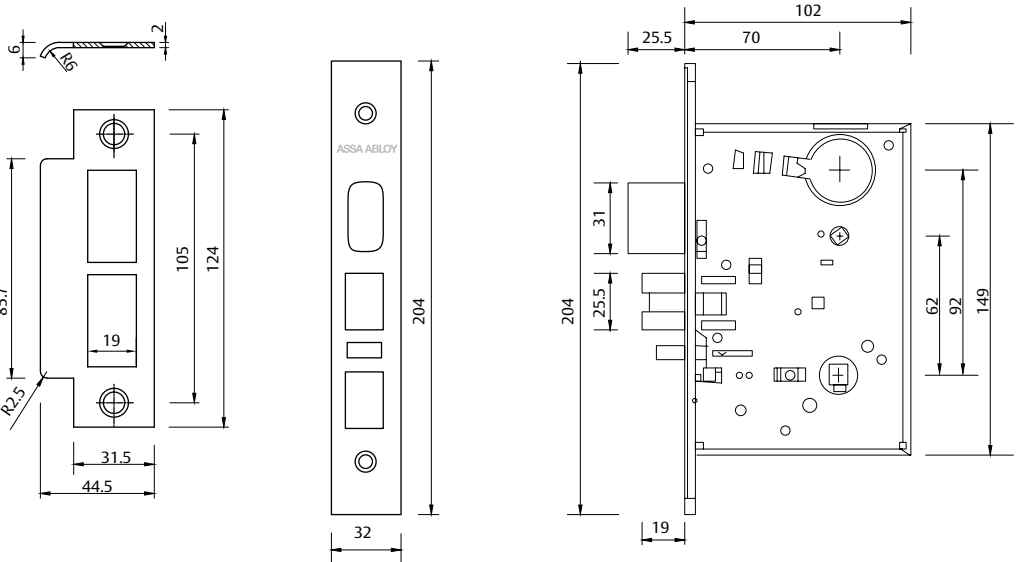

Function No.	Model No.	
F01 Passage or Closet	AA8701	• Latchbolt retracted by lever either side at all times • Both levers always free 
F05 Classroom	AA8705	• Latchbolt retracted by lever either side, unless outside lever is locked by key outside • Auxiliary latch deadlocks latchbolt • Inside lever always free 
F07 Storeroom or Closet	AA8707	• For use on storeroom, utility, exit doors. • Latchbolt retracted by key outside, knob/lever inside. • Outside lever rigid at all times. • Inside lever always active. • Deadlocking latchbolt. 
F09 Entrance or Public Restroom	AA8709	• Latchbolt retracted by lever either side, unless outside lever by key inside • When outside lever is locked, latchbolt is operated by key outside and lever inside • Auxiliary latch deadlocks latchbolt • Inside lever always free 
F10 Apartment Corridor Door Lock	AA8710	• Key and thumbturn both retract & project deadbolt • Trim outside is locked by toggle or projecting deadbolt • Key retracts both latchbolt and deadbolt, trim outside remains locked • Trim outside retracts latchbolt only, deadbolt is retracted manually & trim outside remains locked 

Function No.	Model No.	Description	Outside	Inside
F13 Dormitory Entrance or Storeroom	AA8013	• Latchbolt retracted by lever either side • Deadbolt operated by key outside, or by thumbturn inside • When the deadbolt is projected, outside lever is automatically locked • Inside levers imultaneously retracts latchbolt and deadbolt, automatically unlock outside lever 		
F14 Storeroom or Closet	AA8714	• Latchbolt retracted by lever either side • Deadbolt operated by key both sides 		
F16 Dead lock Double cylinders	AA8716	•Deadbolt operated by key either side •Not UL Listed Note: Use only on rooms with more than one exit 		
F17 Deadlock Cylinder and turn	AA8717	•Deadbolt by key outside or by thumbturn inside •Not UL Listed 		
F18 Deadlock Single side cylinder	AA8718	•Deadbolt operated by key outside only • No inside operation • Not UL Listed 		

Function No.	Model No.	Description	Outside	Inside
F19 Privacy, Bedroom or Bathroom	AA8719	- Latchbolt retracted by lever either side - Deadbolt operated by thumbturn outside, or by emergency release tool outside - When the deadbolt is projected, outside lever is automatically locked - Inside lever simultaneously retracts latchbolt and deadbolt, automatically unlock outside lever		
F20 Apartment or Dormitory	AA8720	- Latchbolt retracted by lever either side, unless outside lever is locked by toggle-action stop or by projection of deadbolt - Deadbolt operated by key outside or by thumbturn inside - When outside lever is locked, latchbolt and deadbolt are operated by key outside - When the deadbolt is projected, outside lever is automatically locked - Inside lever simultaneously retracts latchbolt and deadbolt with outside lever remains locked - Auxiliary latch deadlocks latchbolt		
F21 Storeroom or Closet	AA8721	- Latchbolt retracted by knob/lever either side - Deadbolt operated by key outside, or by thumbturn inside		
F29 Classroom Deadlock	AA8729	- Deadbolt operated by key outside, thumbturn inside - Thumbturn inside will retract the deadbolt but will not project it - Not UL Listed		

Electric option

- LBM – Latch Bolt Monitor
- DBM – Dead Bolt Monitor
- REM – Request for Exit
- DPS – Auxiliary Latch Monitor
- CYS – Cylinder Monitor

How to order : AA8700 Series

Model. No.	Lever Design	Cylinder Length	Finish
Example: AA8701	H01	CY32 E6	30
AA8701			
AA8705	H01		
AA8707	H01		
AA8709**	H02		
AA8710	H02		
AA8713	H03		
AA8714	H03		
AA8716	H04		
AA8717	H04		
AA8718	H05		
AA8719	H05		
AA8720	K01		
AA8721			
AA8729			
		CY32E1 -1/4" (32mm)*	630 Satin Stainless Steel
		CY32EC1 -1/4" (32mm)**	724 PVD Bright Brass

* Cylinder CY32E of length 32mm for door thickness 40-54mm, consult factory for suitable cylinder length to specific door thickness

** CY32EC are double cylinders for AA8709 only

Electrified mortise
AA8700 Series

Key Features

- Mechanical key override
- Available in 12 volts DC (option 24 volts DC)
- External rectifier for AC operation
- Available Fail Safe or Fail Secure
- LBM, DBM and REX available
- Continuous duty solenoid
- 480mA@12VAC/DC (standard)
- 240mA@24VAC/DC (option)

Benefits

- Provide the ability to electrically lock or unlock the outside trim from a remote location
- Fail Safe locks - commonly used in stair towers to release upon fire alarm activation
- Fail Secure locks - used on perimeter doors or security doors to allow ingress using access control technologies

Standard &
Certification

ANSI/BHMA 156.13
Operational Grade 1

UL10C

Technical details

- Fail Safe
 - Power on locks outside/inside lever
 - Deadlocking latchbolt
 - Latchbolt retracted by mechanical key when locked electrically
- Fail Secure
 - Power on locks outside/inside lever
 - Deadlocking latchbolt
 - Latchbolt retracted by mechanical key when power is off

Monitoring

Option

- REX(Request to Exit)- An SPDT switch that monitors activation of the free lever (not available with knob trim). REX is available for all mechanical and electrified functions and can be supplied alone or with either LBM or DBM.
- LBM (Latchbolt Monitor) - An SPDT switch that monitors full retraction of the main latch. LBM is available for all mechanical and electrified functions without a deadboltand can be supplied alone or with REX.
- DBM (Deadbolt Monitor)- An SPDT switch that monitors full extension orretraction of the deadbolt. DBM is available for all mechanical and electrified functions with a deadbolt and can be supplied alone with REX. DBX cannot be used with LBM together.
- CYS (Cylinder Monitor) - An SPDT switch that monitor the movement of cylinder cam.



AA8790 (Fail Safe)
AA8791 (Fail Secure)

AA8792 (Fail Safe)
AA8793 (Fail Secure)

Function No.

90
Latch


Model No.

AA8790

Description

- Power off - outside lever active
- Power on - outside lever locked
- Auxiliary latch deadlocks latchbolt
- Inside lever always free
- Mechanical key override by outside when locked


Outside Inside



91
Latch

AA8791


- Power off - outside lever locked
- Power on - outside lever active
- Auxiliary latch deadlocks latchbolt
- Inside lever always free
- Mechanical key override by outside when locked



92
Latch & Deadbolt

AA8792


- Power off - outside lever active
- Power on - outside lever locked
- Auxiliary latch deadlocks latchbolt
- Inside lever always free
- Mechanical key override by outside when locked



93
Latch & Deadbolt

AA8793


- Power off - outside lever locked
- Power on - outside lever active
- Auxiliary latch deadlocks latchbolt
- Inside lever always free
- Mechanical key override by outside when locked



90-D
Dual Solenoid

AA8790-D


- Outside: Fail Lock
 - Power on – Unlock
 - Power off – Lock
- Inside: Fail safe
 - Power on – lock
 - Power off – unlock
- Mechanical Key retract latch
- CYS, cylinder monitor shows key is being used to open the lock
- Card Control at either side can be changed at field



* DBM is only for AA8792 and AA8793 Model No. Description Outside Inside
** Cylinder CY32E of length 32mm for door thickness 40-54mm, consult factory for suitable cylinder length to specific door thickness


H01

Model No.: H01
Material: 304 Stainless Steel
Construction: Hollow
Finish: 630 Stain Stainless Steel

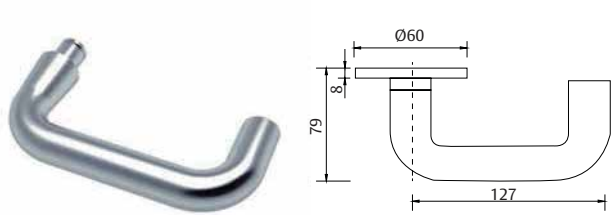


H02

Model No.: H02
Material: 304 Stainless Steel
Construction: Solid
Finish: 630 Stain Stainless Steel

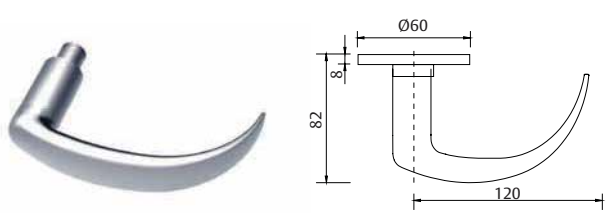


H03

Model No.: H03
Material: 304 Stainless Steel
Construction: Solid
Finish: 630 Stain Stainless Steel

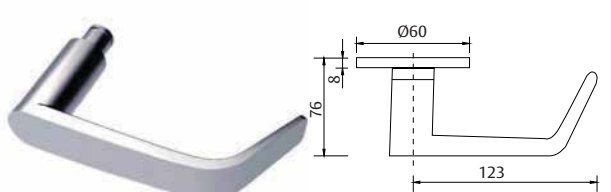


H04

Model No.: H04
Material: 304 Stainless Steel
Construction: Hollow
Finish: 630 Stain Stainless Steel

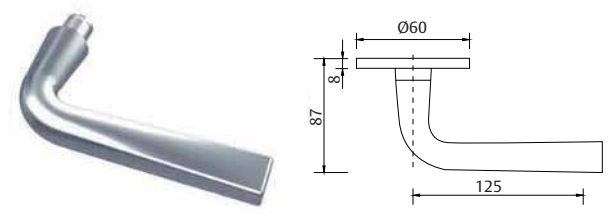


H05

Model No.: H05
Material: 304 Stainless Steel
Construction: Hollow
Finish: 630 Stain Stainless Steel

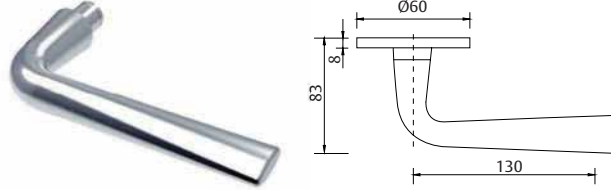

Strike and Strike Box


- 6mm curved lip
- 32mm lip length as standard for 40-54mm door thickness, please consult factory for suitable strike length to specific door thickness
- strike materials 304 stainless steel
- strike box materials galvanized steel

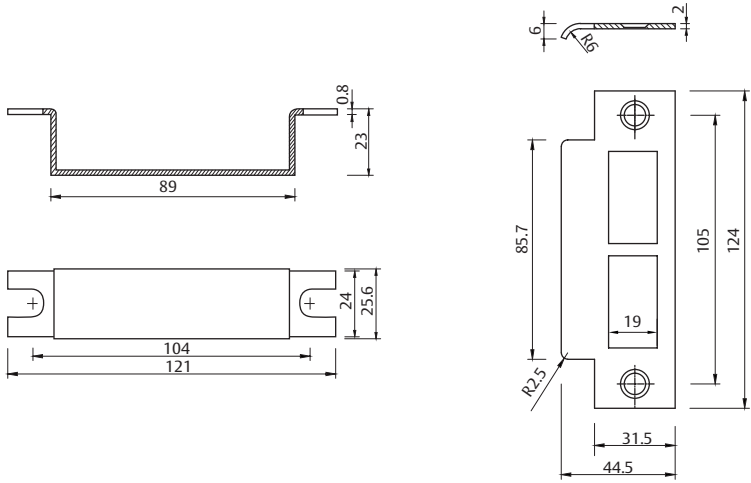

All dimensions are in mm

Cylinder


- 6-pin high security ANSI cylinder with nickel silver brass key
- Option master key system up to GG MK
- 32mm (1-1/4") length as standard for 40-54mm door thickness
- Option cylinder length are 30mm (1-1/8"), 35mm (1-3/8"), 38mm (1-1/2"), 45mm (1-3/4"), 51mm (2"), 57mm (2-1/4") for difference door thickness
- Consult factory for suitable cylinder length to specific door thickness

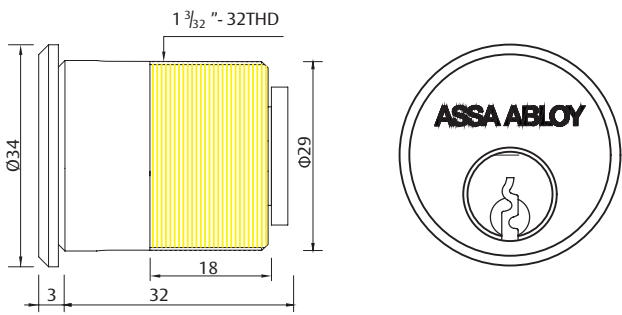

Knob Designs


D Knob

- Machined from Stainless Steel
- Only available with BH or SL Rose
- Finish: 32D
- Options not available: 75, 76, 77, 85, 86 & 87

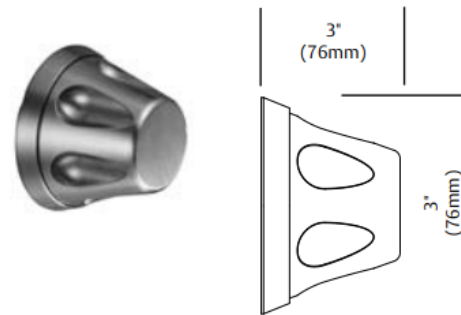


B Knob Design

- Knob: B-Wrought

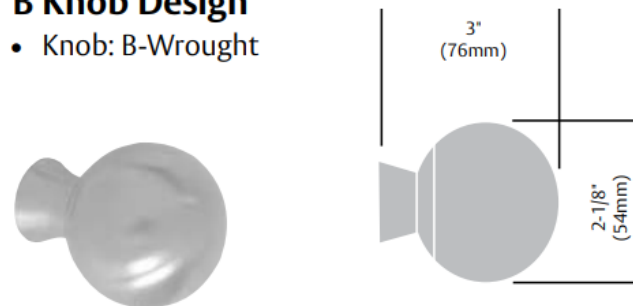

K Knob Design

- Knob: K-Cast (prior designation 1485)
Only with KS escutcheon

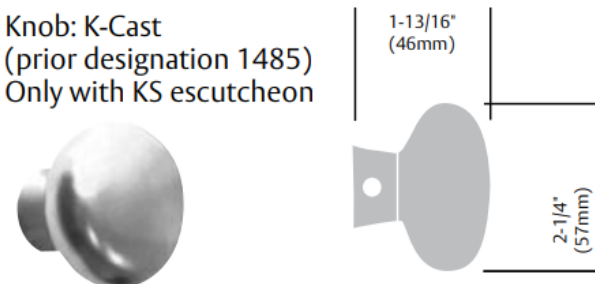

SARGENT ASSA ABLOY



(Paddle shown horizontally)

8200 Push/Pull Trim (ALP)

The 8200 mortise lock with push/pull trim provides an aesthetically-pleasing alternative to standard push/pull products. Ease of operation, along with the strength, versatility and integrity of the 8200 mortise lock, allows its use in many types of environments. Perfect for health care facilities, including behavioral health units, patient room doors and operating rooms.

Features

- Paddles can be mounted in vertically (up or down) and horizontally (towards hinge)
 - with Cylinder - paddle mounts vertically down or horizontally
 - Easy installation
 - Trim is non-handed; lockbody is easily field reversible
 - Through-bolted trim for stability
 - Torx® and spanner screws optional with ALP
 - Lead lining is optional (Lockbody only), specify 74-option
 - Covers are cast stainless steel
 - Paddles are cast stainless steel
 - Finish: 32D
 - Patent pending and/or patent www.assaabloydss.com/patents
- See Specialty Hardware Catalog 90712 for more details

8200 Series with BHW* Trim

Part of the Behavioral Health Series™ of products, the 8200 mortise lock with BHW trim provides an innovative solution for behavioral health environments. The unique integrated lever and escutcheon combines aesthetics with safety. Ease of operation, along with the strength and versatility of the 8200 mortise lock allows its use in many applications.

Features

- Available in 37 functions
 - Uses standard mortise prep
 - ANSI/BHMA Grade 1
 - Tapered surfaces on all components
 - Handed
 - Available with MicroShield® antimicrobial coating
 - Trim only option available with existing sectional and escutcheon trim only
 - Trim only kits
 - 694-1 Trim only, non-keyed functions
 - 694-2 Trim only, single cylinder functions
 - 694-3 Trim only, double cylinder functions
 - ADA Compliant
 - Matching thumbturn available
 - Finish: 32D
 - 6 Lobe head security screws (Torx® type)
 - Patent pending and/or patent www.assaabloydss.com/patents
- See Specialty Hardware Catalog 90712 for more details



8200 with BHL* Trim

The SARGENT BHL trim is part of the Behavioral Health Series™ of products. With an array of functions, this trim can be used on virtually any opening in healthcare applications. Sloping surfaces and overlapping rose and lever address safety concerns common in behavioral health. Optimal for tough environments, the SARGENT 8200 mortise lock provides impressive strength and reliability.

Features

- Available in 21 functions
 - UL Fire Rated
 - ANSI/BHMA Grade 1
 - Outside lever freely rotates up to 45°
 - Sloped surfaces
 - Non-Handed
 - Concealed hardware
 - Overlapping lever and rose construction
 - ADA compliant
 - Finish: 32D
 - Available with MicroShield® antimicrobial coating
- See Specialty Hardware Catalog 90712 for more details



* Although these products are better designed for behavioral health applications than traditional trim, they do not eliminate the risk that an object can be affixed to, or around them



(Paddle shown horizontally)

7800 Push/Pull Trim (PT)

Typically used in the healthcare environment, push/pull trim is known for its ease of operation. Because the mortise lock with trim is more durable and secure than a cylindrical lock, conference rooms, handicapped restrooms, laboratories and pharmacies are appropriate applications.

Features


- Paddles can be mounted in vertically (up or down) and horizontally (towards hinge)
 - with Cylinder — paddle mounts vertically down or horizontally
 - with thumb turn — paddle mounts horizontally only
 - Handing is easily field reversible
 - Through-bolted trim for stability
 - Functions available: 04, 15, 16, 17, 24, 26, 37, 43, 45, 50, 65
 - Paddles & Covers are cast stainless steel, brass or bronze
- See Specialty Hardware Catalog 90712 for more details

7800/8200 Anti-Vandal Trim (AV)

Designed for exterior doors that require extra security or resistance to vandalism. AV anti-vandal trim plates have an extended lip on the active side of the door to provide extra protection for the latchbolt, deadbolt and deadlatch. A matte plastic coated grip edge provides a comfortable pull that feels good over wide temperature ranges. Fully through-bolted without exposed exterior fasteners for a clean look and increased security.

Features

- Heavy duty 12 gauge stainless steel in 32D finish only
- Through-bolted through mortise lockbody and door for added strength
- Handed: specify RHRB or LHRB
- ADA Compliant
- Patent Pending
- Available with all inside trim except LS/KS, FE and PT
- Options not available with AV trim: 1-, 31-, 49-, 50-, 68-, 69, 76, 77-, 85, 86, 87, DX- & SG-
- See chart to right for available functions
- For inactive door, available without protective lip
- Anti-Vandal Trim is available as a retrofit (667-__ Kit) or with the lock, as an “AV” option

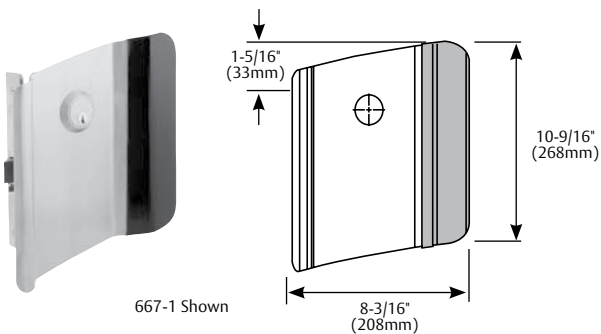

667-1 Shown

667 AV Retrofit Kit

- Retrofit kits for 7800, 7900, 8200 & 9200 mortise locks 667 Kit includes:
- AV Pull
 - 1SB Rosette
 - (4) 1/4-20 screws
 - Instructions & Templates
 - (4) Cup washers

RHRB	LHRB	Functions
667-1 82-4034	667-2 82-4035	04, 06, 17, 28, 29, 30, 50, 51, 52, 91 & 92 -1 & -2 Trim has an extended lip, cylinder hole and through-bolt post for mounting Inside trim
667-3* 82-4036	667-4* 82-4037	03, 20, 21, 23, & 31 -3 & -4 Trim has an extended lip & cylinder hole for deadbolt functions only
667-5* 82-4044	667-6* 82-4045	-5 & -6 Trim is designed as a Pull does not have an extended lip or cylinder hole


* For Deadbolt Functions only without lever trim



Single Cylinder without Deadbolt


*†04 Storeroom or Closet

- 8200, R8200 & 7800
- Key outside retracts latchbolt
 - Trim outside locked at all times
 - Trim inside always retracts latchbolt
 - Auxiliary deadlatch
 - A Multi-Function 8200/R8200/7800 Lockbody
 - ANSI F07




*♦36 Closet

- 8200, R8200 & 7800
- Key locks and unlocks trim
 - No inside trim or cylinder
 - A Multi-Function 8200/R8200/7800 Lockbody
 - Auxiliary dead latch



*05 Office or Entry

- 8200, R8200 & 7800
- Key outside retracts latchbolt, also locks & unlocks outside trim
 - Trim inside always retracts latchbolt, trim outside remains locked
 - Thumbturn inside locks & unlocks outside trim
 - Auxiliary deadlatch
 - A Multi-Function 8200/R8200/7800 Lockbody
 - ANSI F04




The Multi-Function Advantage with rose trim:

1. Lock will accommodate 04, 05, 15 & 37 functions without additional parts.
2. By adding an additional cylinder, lock will accommodate 38 function.
3. By adding a Trim One Side Kit, lock will accommodate 06, 13, 31 & 36 functions.

NOTE: Office/Entry Function with toggle is a 55 function.


*†37 Classroom

- 8200, R8200 & 7800
- Key outside retracts latchbolt, also locks & unlocks outside trim
 - Trim inside always retracts latchbolt
 - Auxiliary deadlatch
 - A Multi-Function 8200/R8200/7800 Lockbody
 - ANSI F05




55 Office or Entry

- 8200, R8200 & 7800
- Key outside retracts latchbolt
 - Trim inside always retracts latchbolt, outside trim remains locked
 - Trim outside is locked & unlocked by the toggle only
 - Auxiliary deadlatch




06 Storeroom or Service

- 8200, R8200 & 7800
- No trim outside, cylinder only
 - Key outside retracts latchbolt
 - Trim inside always retracts latchbolt
 - Auxiliary deadlatch
 - A Multi-Function 8200/R8200/7800 Lockbody
 - Same as 04 Function without trim outside



*31 Utility

- 8200, R8200 & 7800
- Key outside retracts latchbolt
 - Trim outside is always locked
 - No inside trim or cylinder
 - A Multi-Function 8200/R8200/7800 Lockbody
 - Auxiliary deadlatch



*8200 Available with Freewheeling Trim


† 7800 Available with Push/Pull Trim

♦ CAUTION: Not recommended for use on any door used for Life Safety egress

 If shaded, knob or lever rigid at all times

SARGENT
 ASSA ABLOY
56 Office & Inner Entry Lock


8200, R8200 & 7800



- Key outside retracts latchbolt
- Trim inside always retracts latchbolt and unlocks outside trim
- Trim outside is locked by thumbturn or key
- Auxiliary deadlatch

67 Institutional Privacy

8200, R8200 & 7800




- Key outside retracts latchbolt, overriding thumbturn when held in locked position
- Thumbturn inside locks & unlocks outside trim
- Trim outside unlocks when the door closes or by operating trim inside
- Trim inside always retracts latchbolt
- Auxiliary deadlatch
- ANSI F26

Note: Key does not lock trim outside, only unlocks it

57 Institutional Privacy

8200, R8200 & 7800




- Key outside retracts latchbolt, overriding thumbturn when held in locked position
- Thumbturn inside locks and unlocks outside trim
- Trim outside unlocks when the door closes or operating trim inside
- Trim inside always retracts latchbolt
- Auxiliary deadlatch

Note: Key does not lock trim outside

58 Institutional Privacy

8200, R8200 & 7800



- Key outside retracts latchbolt, overriding thumbturn when held in locked position
- Thumbturn inside locks and unlocks outside trim
- Trim outside does not unlock when the door closes
- Trim outside unlocks when the door closes or operating trim inside
- Trim inside always retracts latchbolt
- Auxiliary deadlatch

Note: Key does not lock trim outside, only unlocks it

SARGENT
 ASSA ABLOY

SARGENT 8200 Electromechanical Mortise locks are designed to handle single opening, stand alone applications, or can be readily integrated into sophisticated access control systems. They meet ANSI/BHMA A156.13 Grade 1 requirements, are UL listed on fire doors, and satisfy industry standards for operating temperature, shock and fire hazard.

Featuring EcoFlex® Technology*

- **Reduces energy consumption up to 96%, as certified by GreenCircle**
 - Lower operating costs
 - Assists with load reduction in optimizing energy performance credit in LEED
 - Reduces number of power supplies required
- **Field configurable to fail-safe or fail-secure**
- **Operates from 12-24VDC, offering greater flexibility in system design**

- **Innovative actuator design provides superior reliability**
 - Reduces risk of voltage drops and eliminates inductive kickback
 - Lower total cost of ownership

*Patent pending

- Lower total cost of ownership

Electrical Requirements for electromechanical functions:

Voltage: Operates from 12-24VDC Regulated. Full wave rectification installed inside the lockbody.

Current:

- Actuator draw = .015 Amp continuous
- Maximum (2) locks per 1 Amp power supply (1/2 Amp peak current draw)


Operating Temp.: Max. 151°F (66°C), Min -31°F (-35°C)

UL and CUL listed for use on Fire Doors

Note: Repeated operation at voltage exceeding +/- 10% is not recommended

Electromechanical Functions**70 Electrical (Fail Safe)****71 Electrical (Fail Secure)**


8200 & R8200



- 70 function — Power ON, locks outside lever
- 71 function — Power ON, unlocks outside lever
- Specify voltage: 12VDC or 24VDC (operates from 12-24VDC)
- Key outside retracts latchbolt
- Lever outside retracts latchbolt, except when locked
- Lever outside can only be locked electronically
- Lever inside always retracts latchbolt
- Auxiliary deadlatch

72 Electrical (Fail Safe)**73 Electrical (Fail Secure)**

8200 & R8200



- 72 function — Power ON, locks both levers
- 73 function — Power ON, unlocks both levers
- Specify voltage: 12VDC or 24VDC (operates from 12-24VDC)
- Key on either side retracts latchbolt
- Lever from either side retracts latchbolt, except when levers are locked
- Both Levers can only be locked & unlocked electronically
- Levers can not be locked separately, only together
- Auxiliary deadlatch

Electrified Mortise Locks with Standard Monitoring Options

- Single Pole Double Throw (SPDT) type C switches
- **RX- option — Request-to-Exit or Enter Signaling Switch**
 - Two switches mounted internally in lockbody that provide independent monitoring of inside and outside lever rotation
 - Available in all functions with non rigid levers
 - Not available for the following options: 1-, 3P, 74
 - Not available for the following trims: LS or FE
- **LX- option — Latchbolt Monitor**
 - Single switch mounted within lockbody signaling latchbolt position
 - Available for all non deadbolt functions
 - Not available with DX
- **DX- option — Deadbolt Monitor**
 - Switch mounted internally in lockbody that indicates deadbolt position
 - Not available for the following options: 3P-, 74 or LX
 - Available in all deadbolt functions

♦**CAUTION:** Not recommended for use on any door used for Life Safety egress

