


OPTIONAL RELAY EXPANSION / SEPARATE BOARD

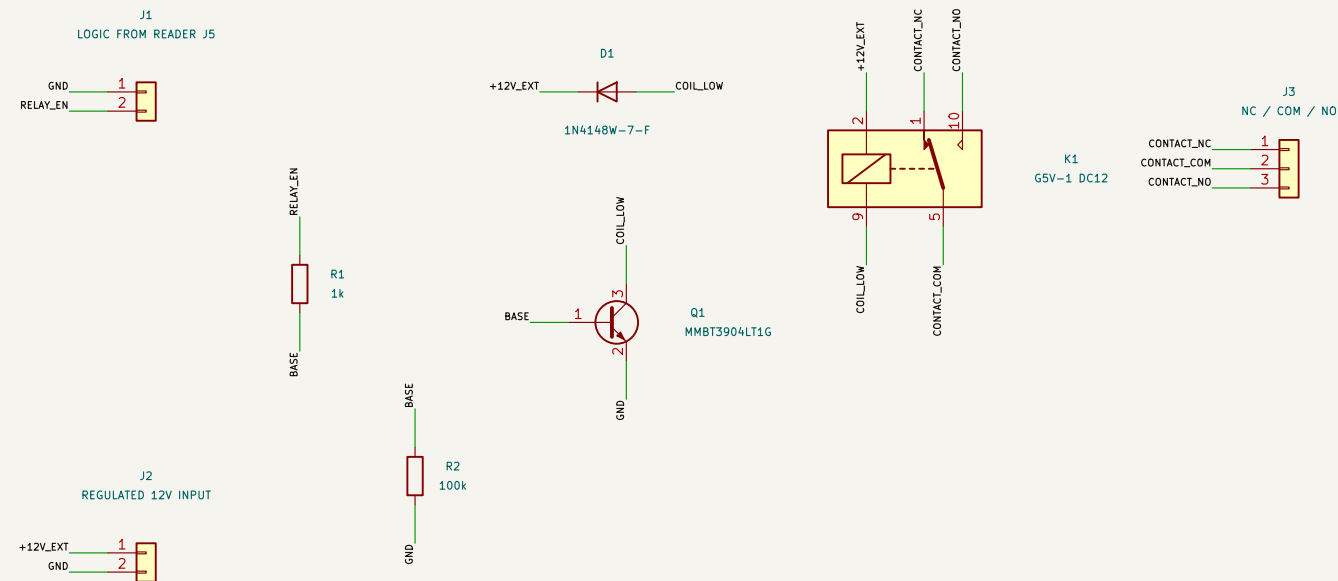

J1.1 GND -> reader J5.1; J1.2 RELAY_EN -> reader J5.2. Leave reader J5.3 unused.

J2.1: separate regulated +12V +/-5%; J2.2: GND, common with reader. Current limit100mA.

J3: 1 NC, 2 COM, 3 NO. Demonstration limit24VDC /0.5A RESISTIVE. No mains.

Driver active high. Coil current approximately12.5mA. Flyback diode slows release.

Relay coil pins2/9; common5/6; NC1; NO10. No reader rail supplies coil or load.

Bench prototype: verify pickup/dropout, diode polarity and actual contact mapping before use.

Sheet: /		
File: OpenDual-Relay-Demo.kicad_sch		
Title: OpenDual optional relay demonstration		
Size: A4	Date:	Rev: A0 BENCH
KiCad E.D.A. 10.0.6		Id: 1/1