50.012 Networks

Lecture 8: Congestion Control

2021 Term 6

Assoc. Prof. CHEN Binbin

SINGAPORE UNIVERSITY OF TECHNOLOGY AND DESIGN

Outline

- principles of congestion control
- TCP congestion control

Read textbook Section 3.6, 3.7

Principles of congestion control

congestion:

- informally: "too many sources sending too much data too fast for *network* to handle"
- different from flow control!
- manifestations:
  – lost packets (buffer overflow at routers)
  – long delays (queueing in router buffers)
- a top-10 problem!

Causes/costs of congestion: scenario 1

- two senders, two receivers
- one router, infinite buffers
- output link capacity: R
- no retransmission

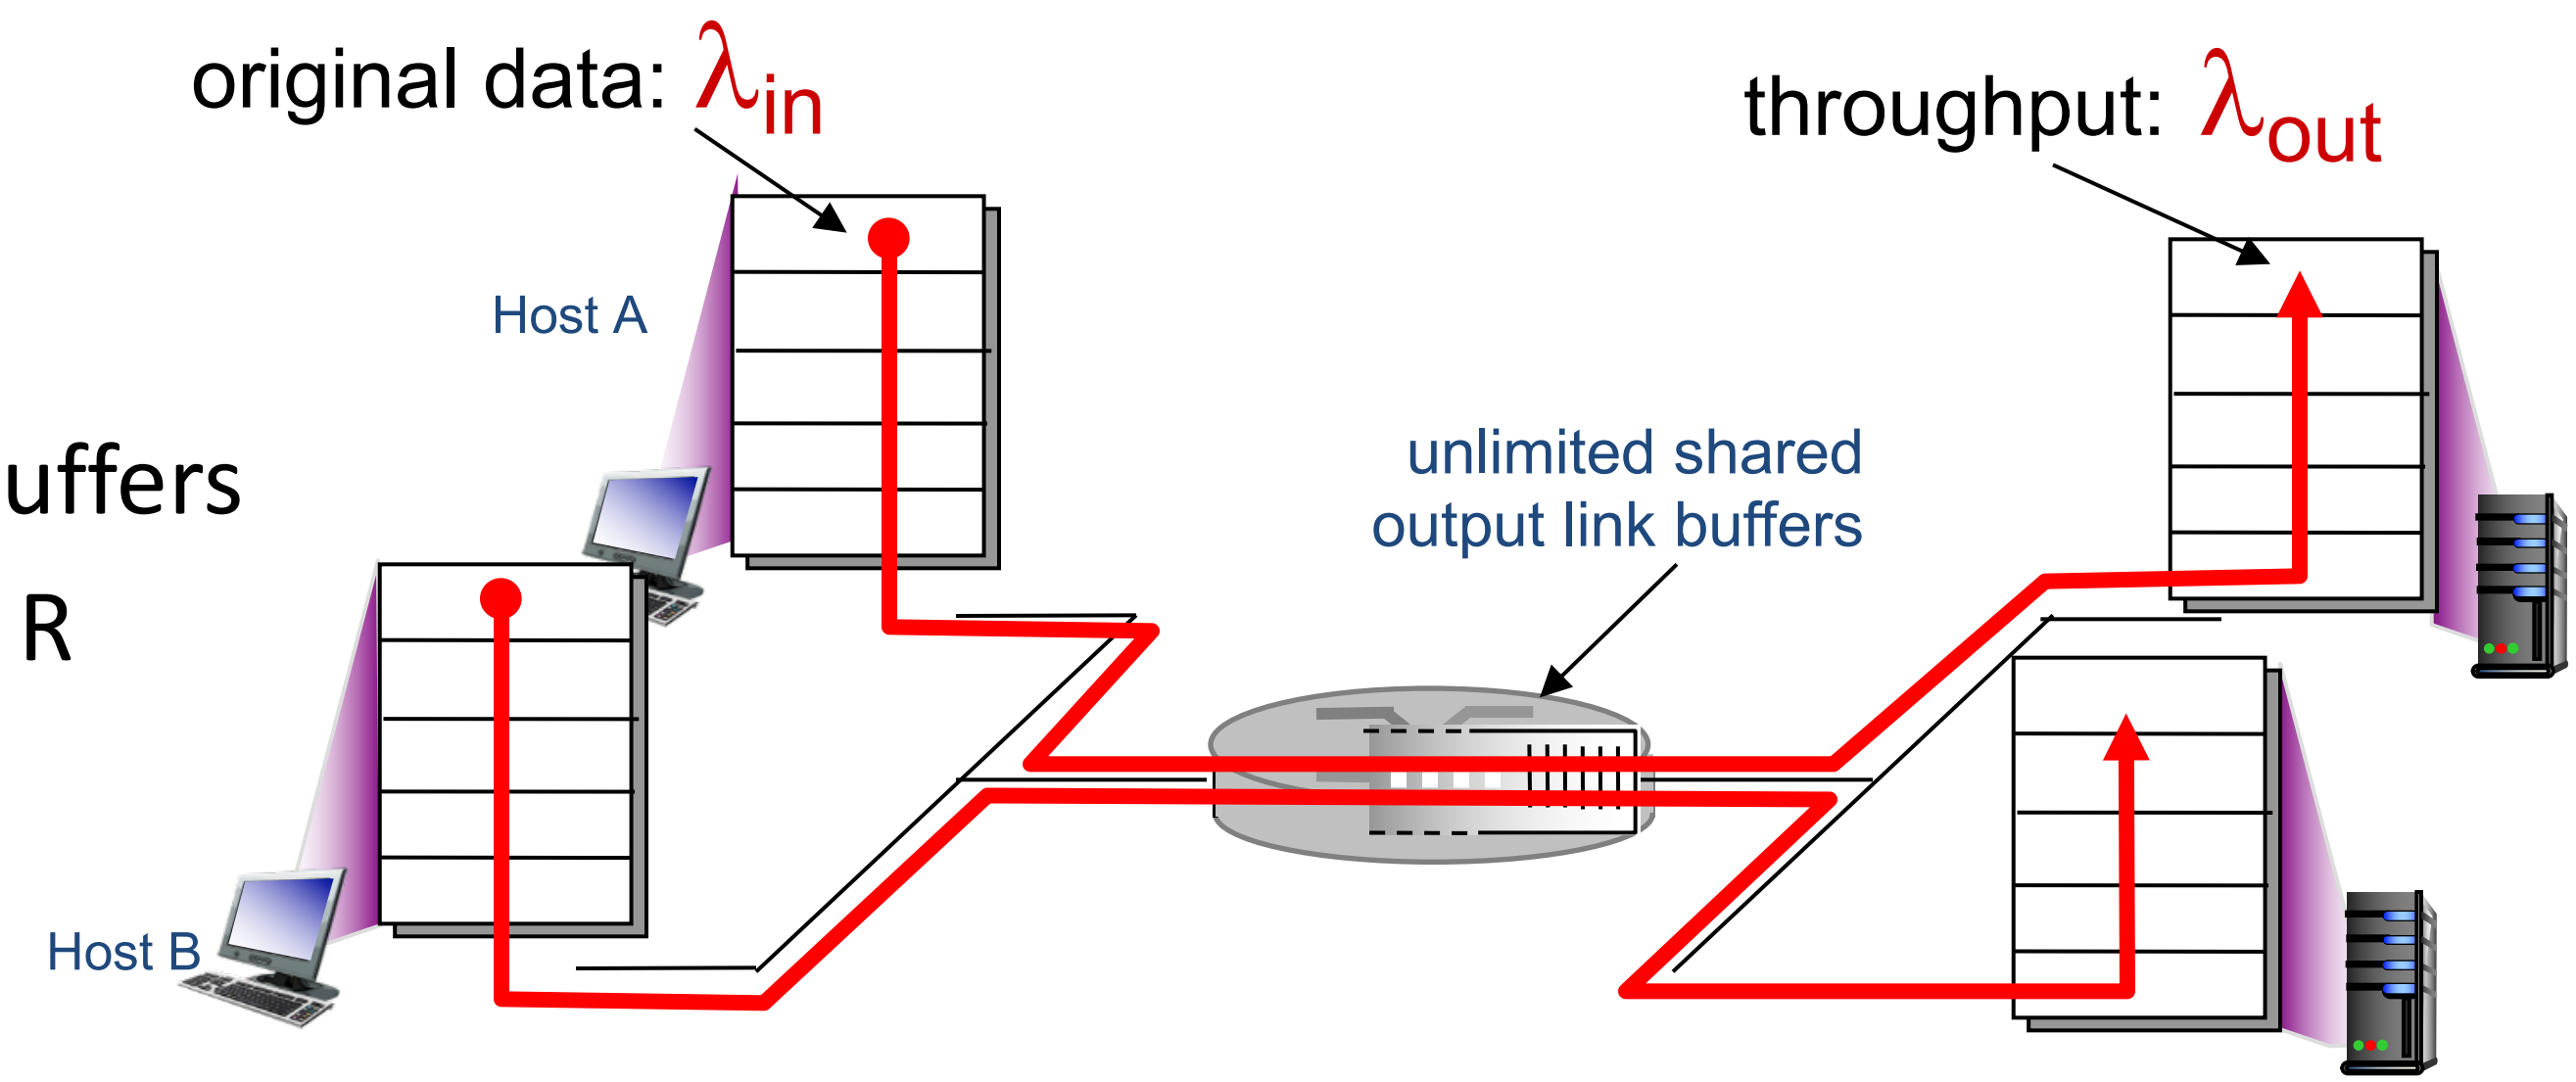

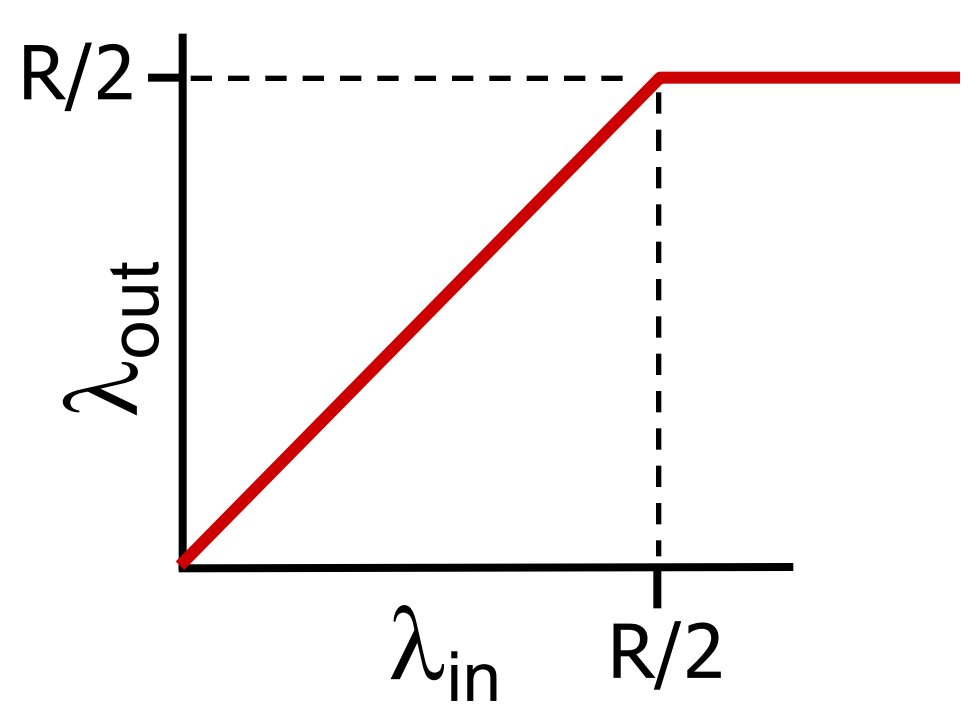

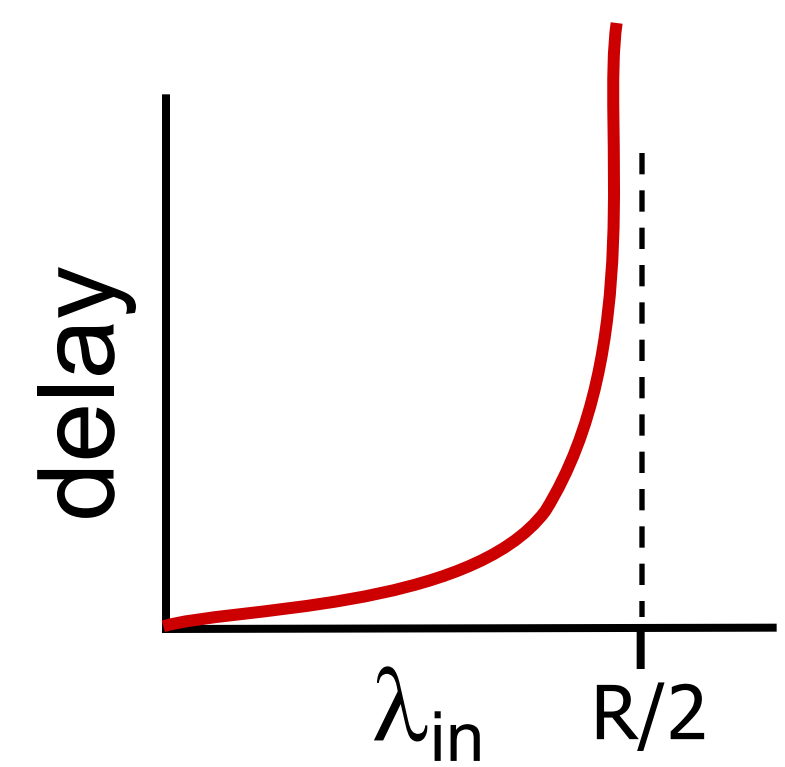

- maximum per-connection throughput: R/2

- large delays as arrival rate, λ_{in}, approaches capacity

Causes/costs of congestion: scenario 2

- one router, *finite* buffers
- sender retransmission of timed-out packet
  - application-layer input = application-layer output: $\lambda_{in} = \lambda_{out}$
  - transport-layer input includes *retransmissions* : $\lambda'_{in} \geq \lambda_{in}$

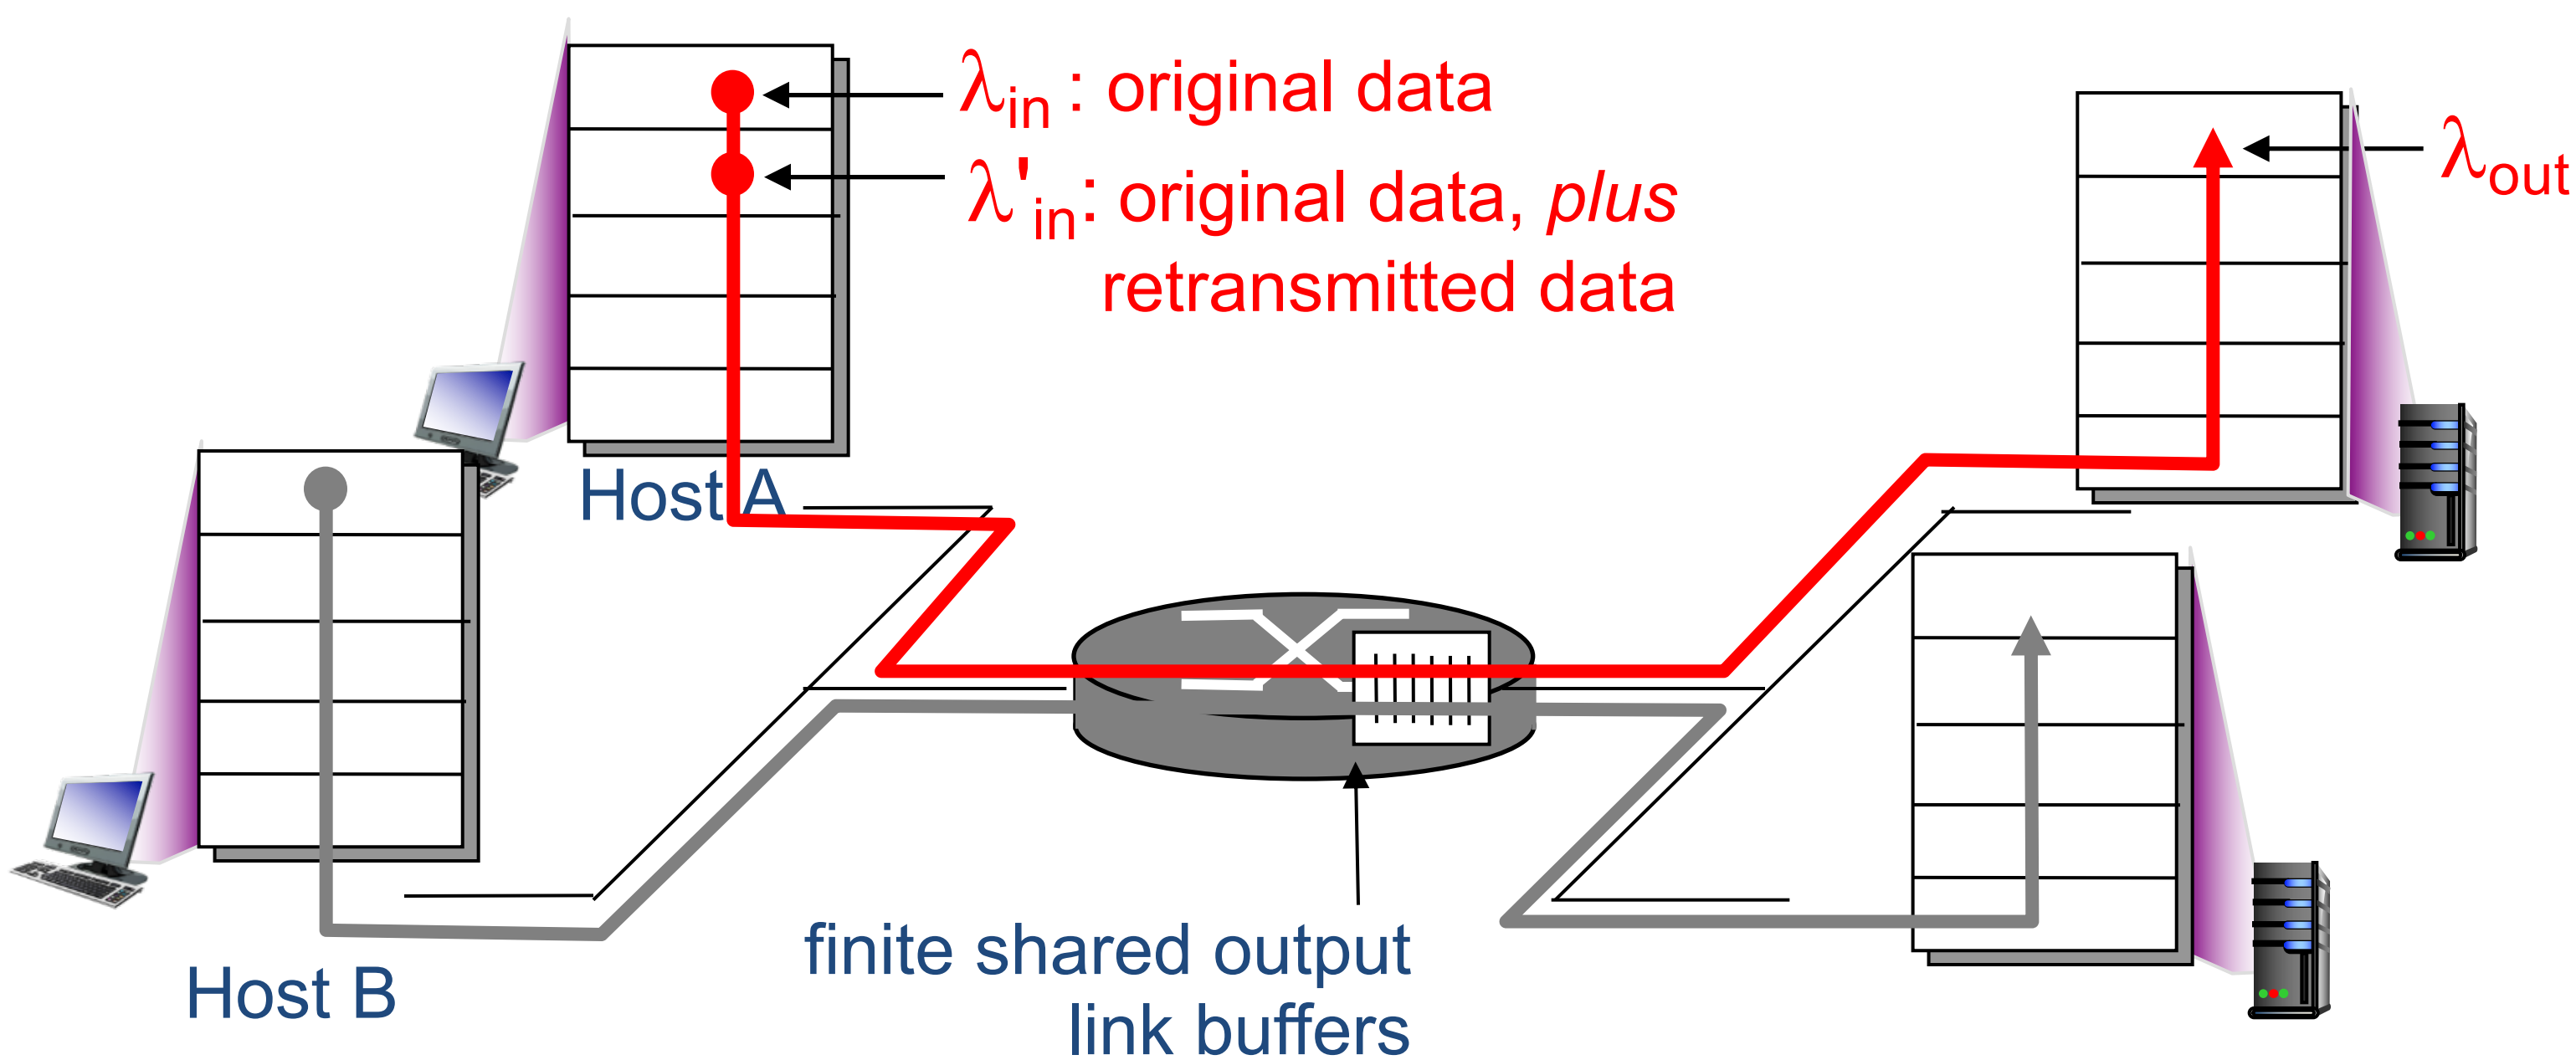

Causes/costs of congestion: scenario 2

idealization: perfect knowledge

- sender sends only when router buffers available

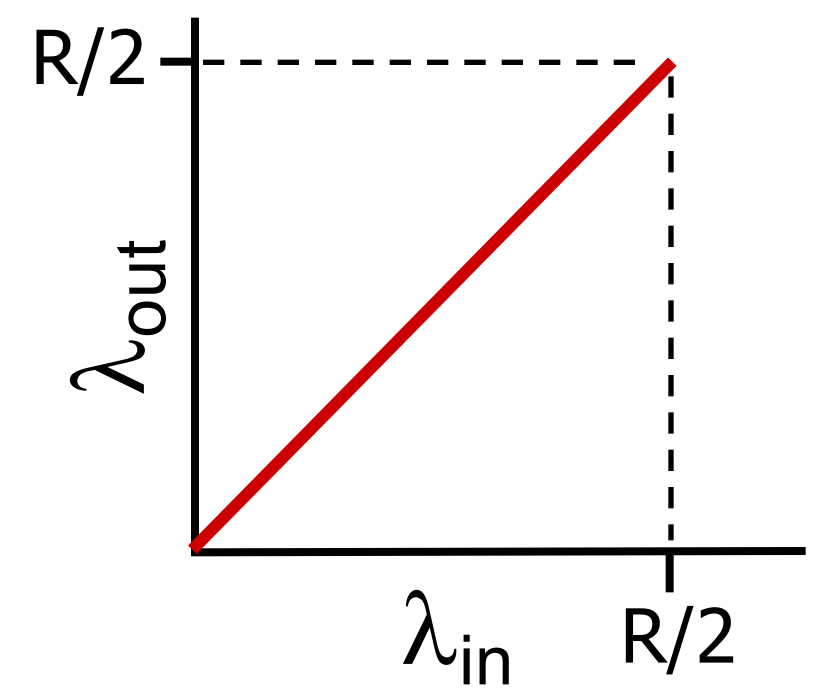

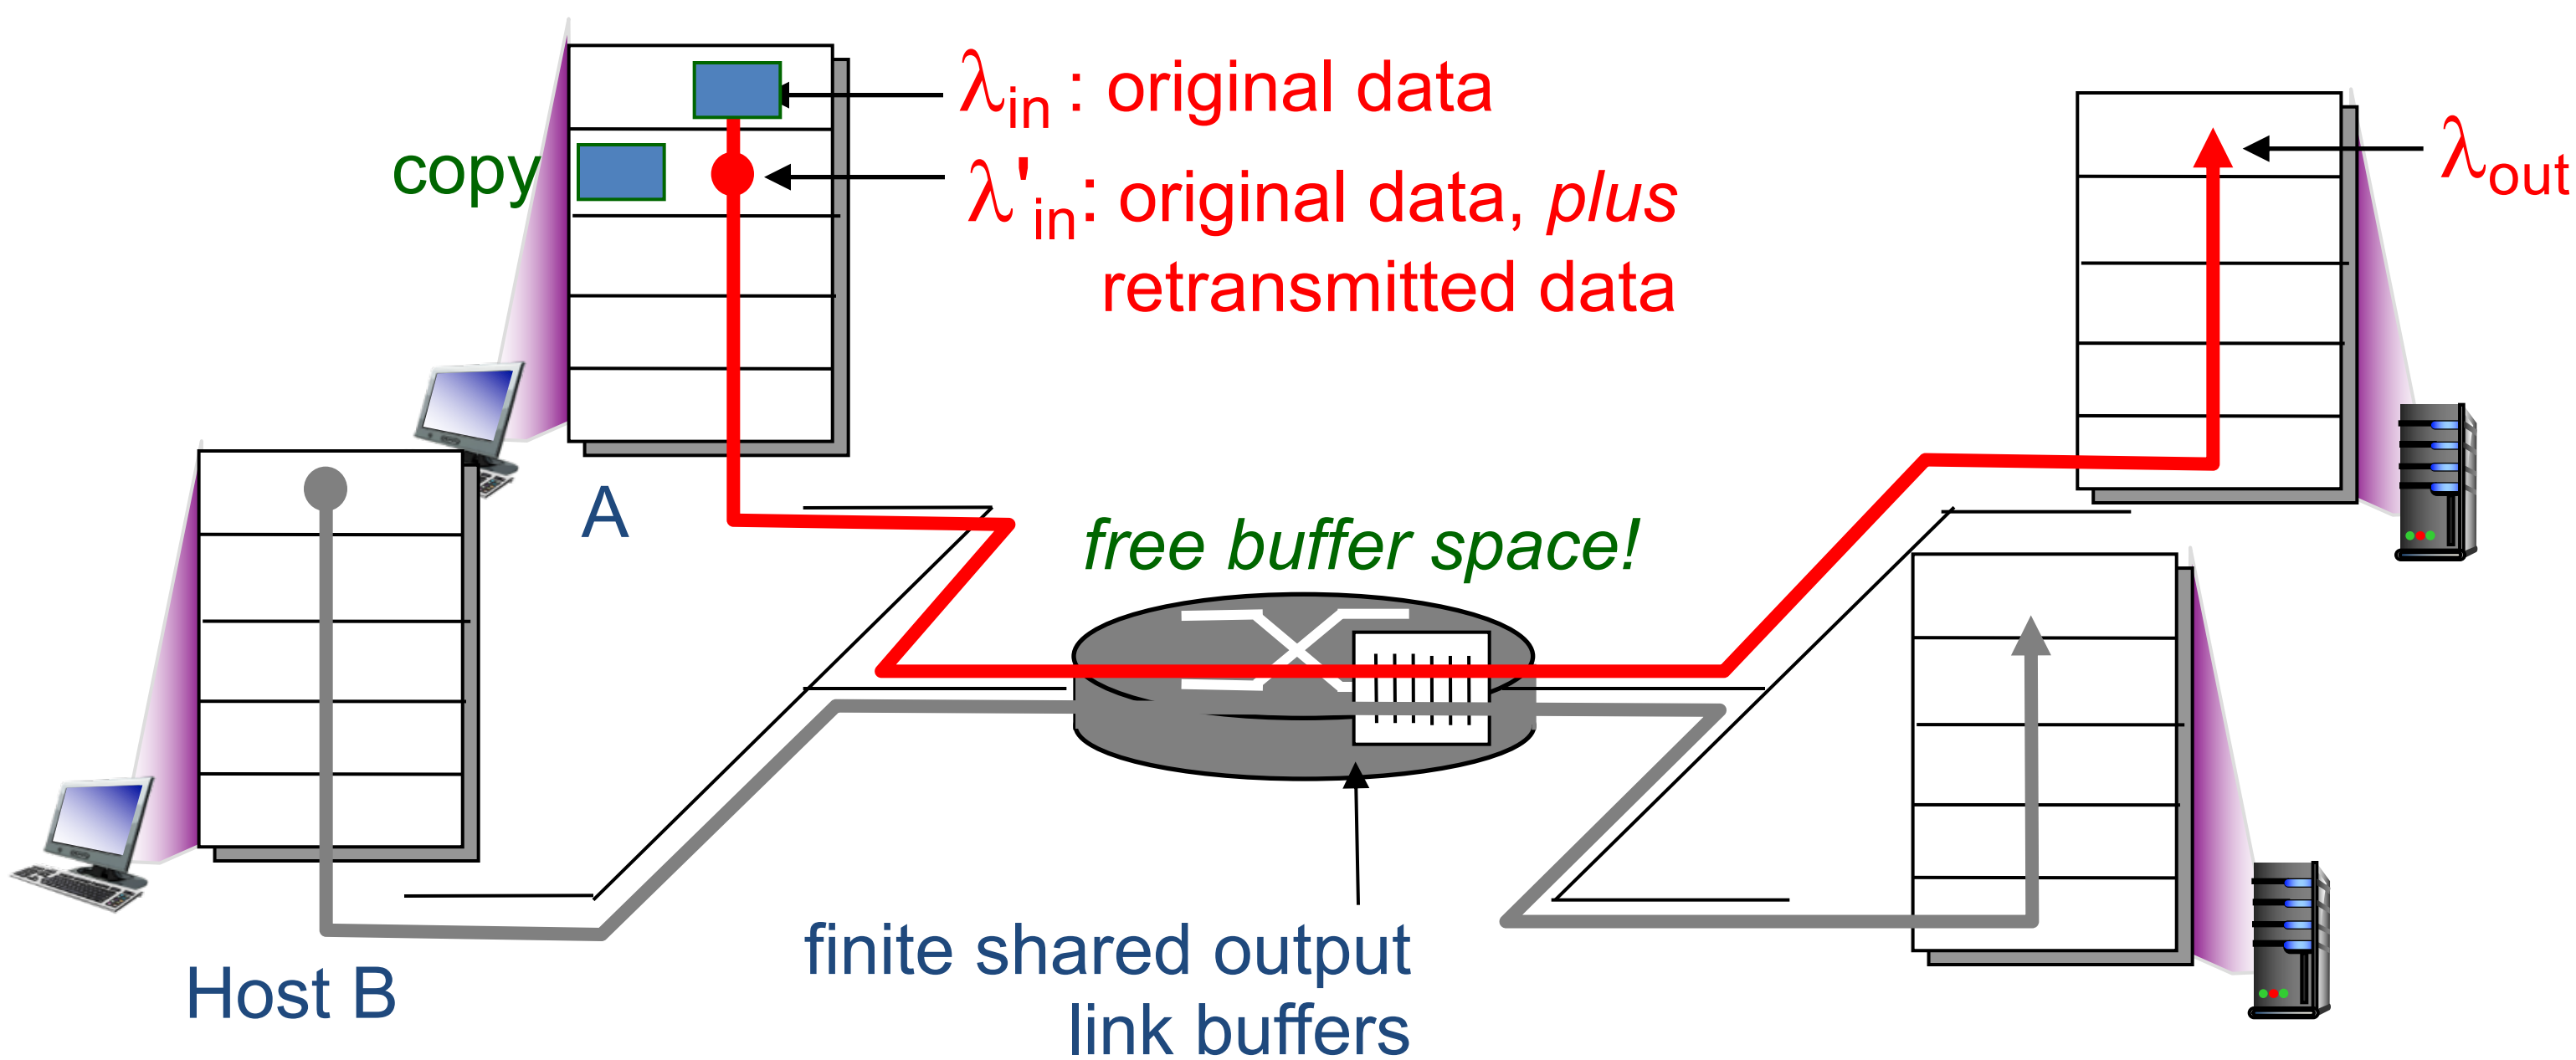

Causes/costs of congestion: scenario 2

Idealization: known loss
packets can be lost, dropped at router due to full buffers

- sender only resends if packet *known* to be lost

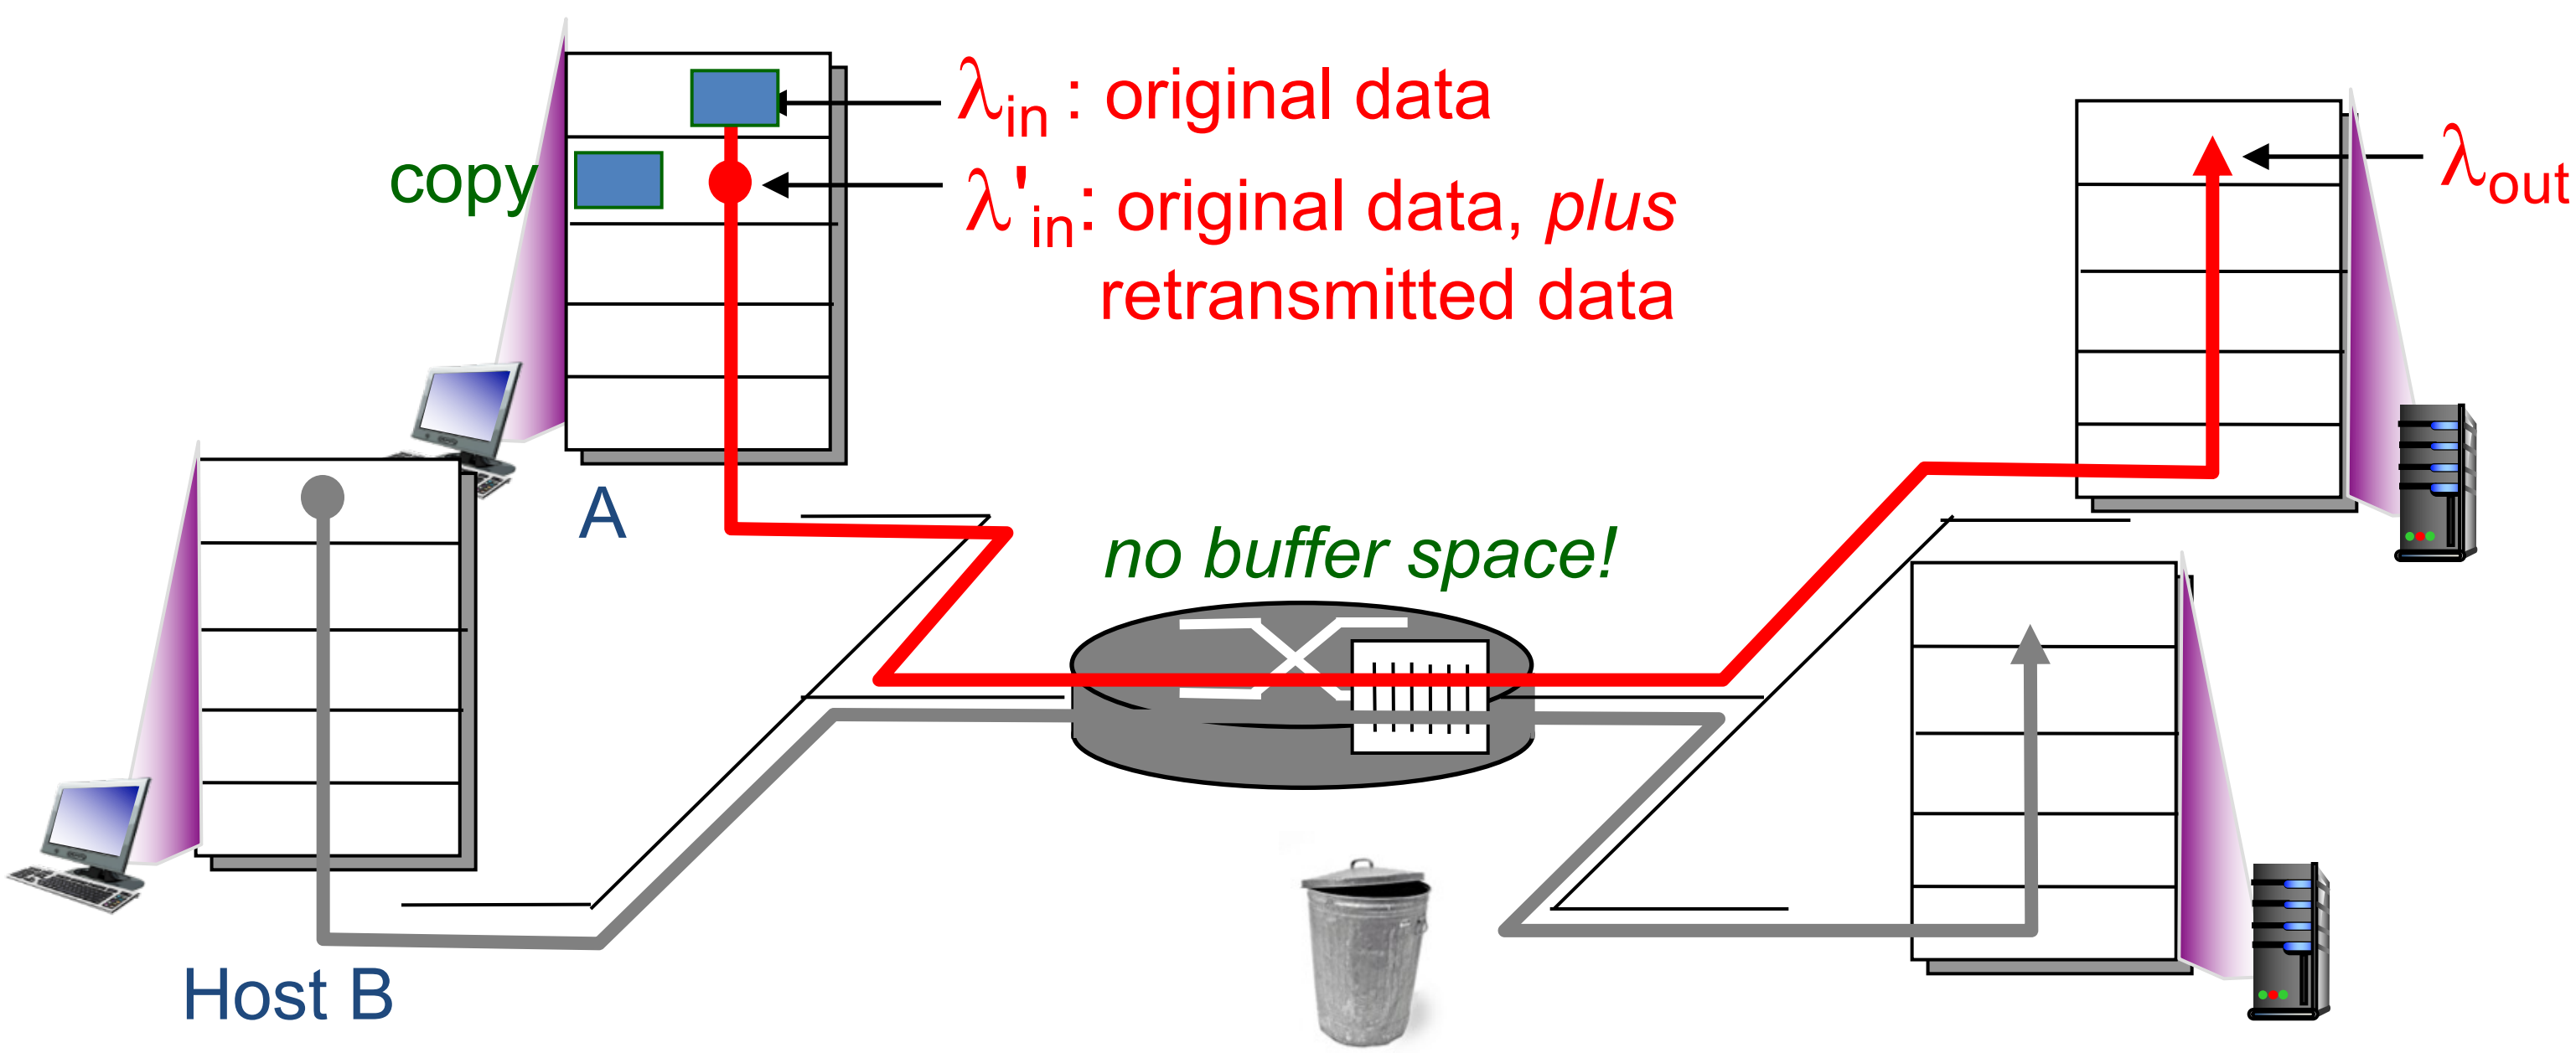

Causes/costs of congestion: scenario 2

Idealization: known loss
packets can be lost, dropped at router due to full buffers

- sender only resends if packet *known* to be lost

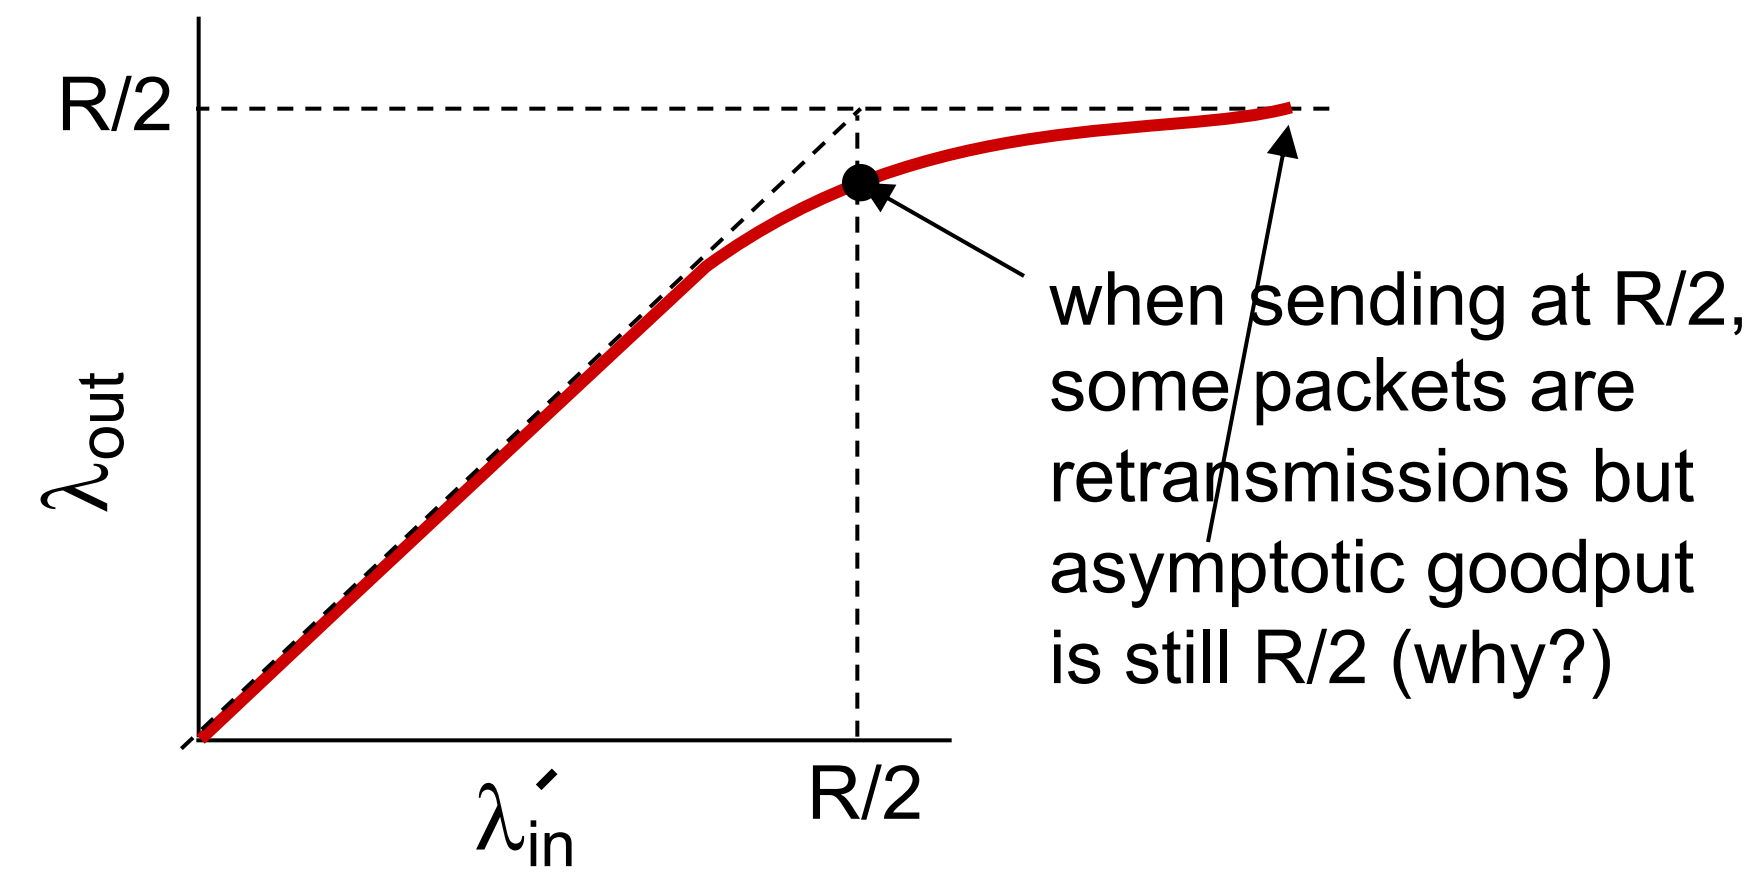

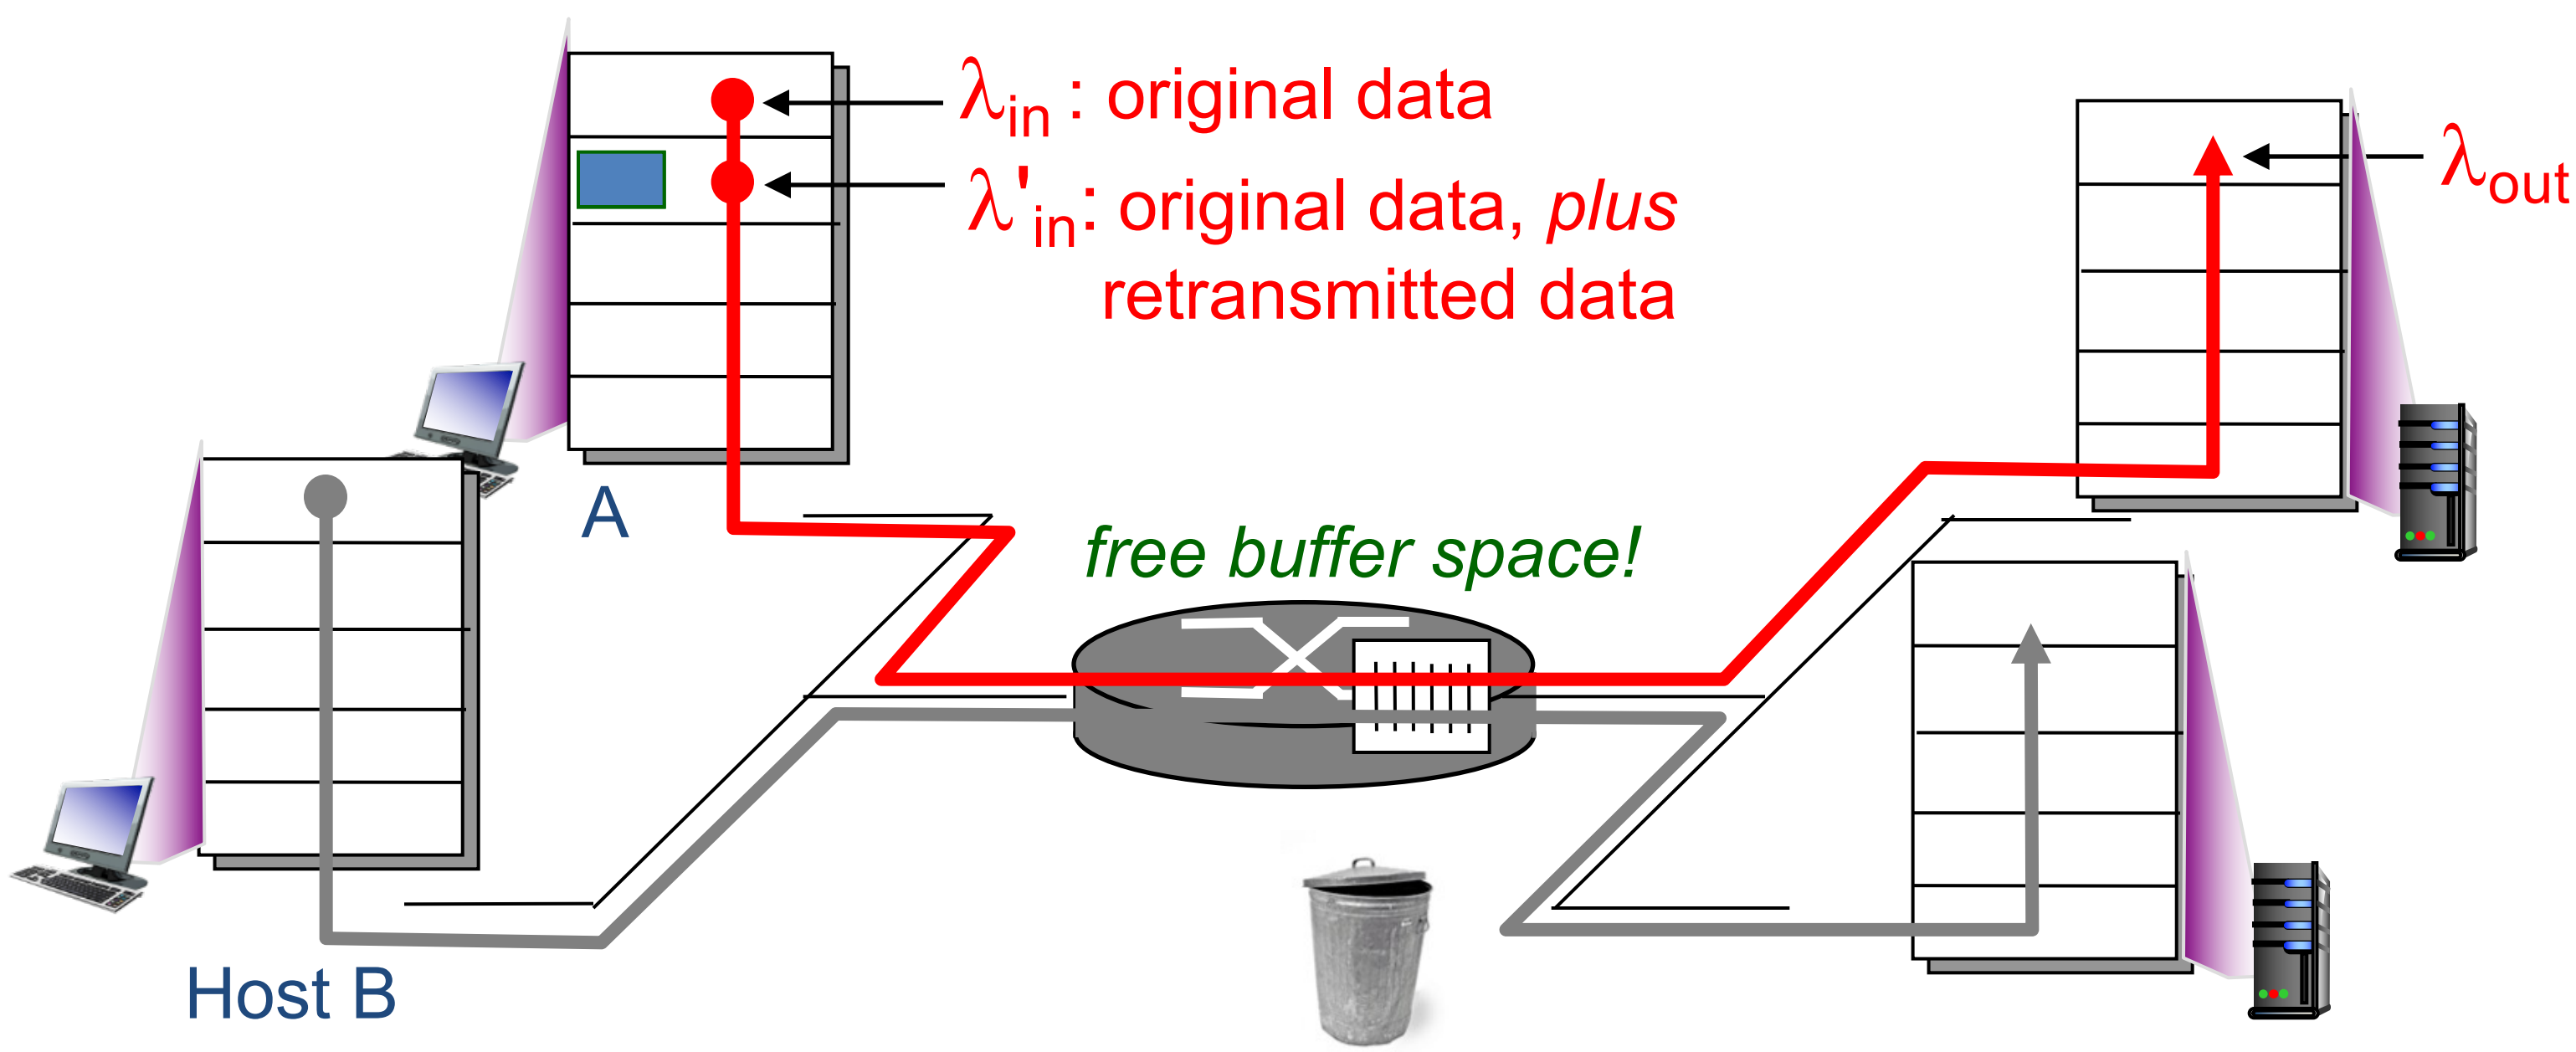

Causes/costs of congestion: scenario 2

Realistic:* *duplicates

- packets can be lost, dropped at router due to full buffers
- sender times out prematurely, sending *two* copies, both of which are delivered

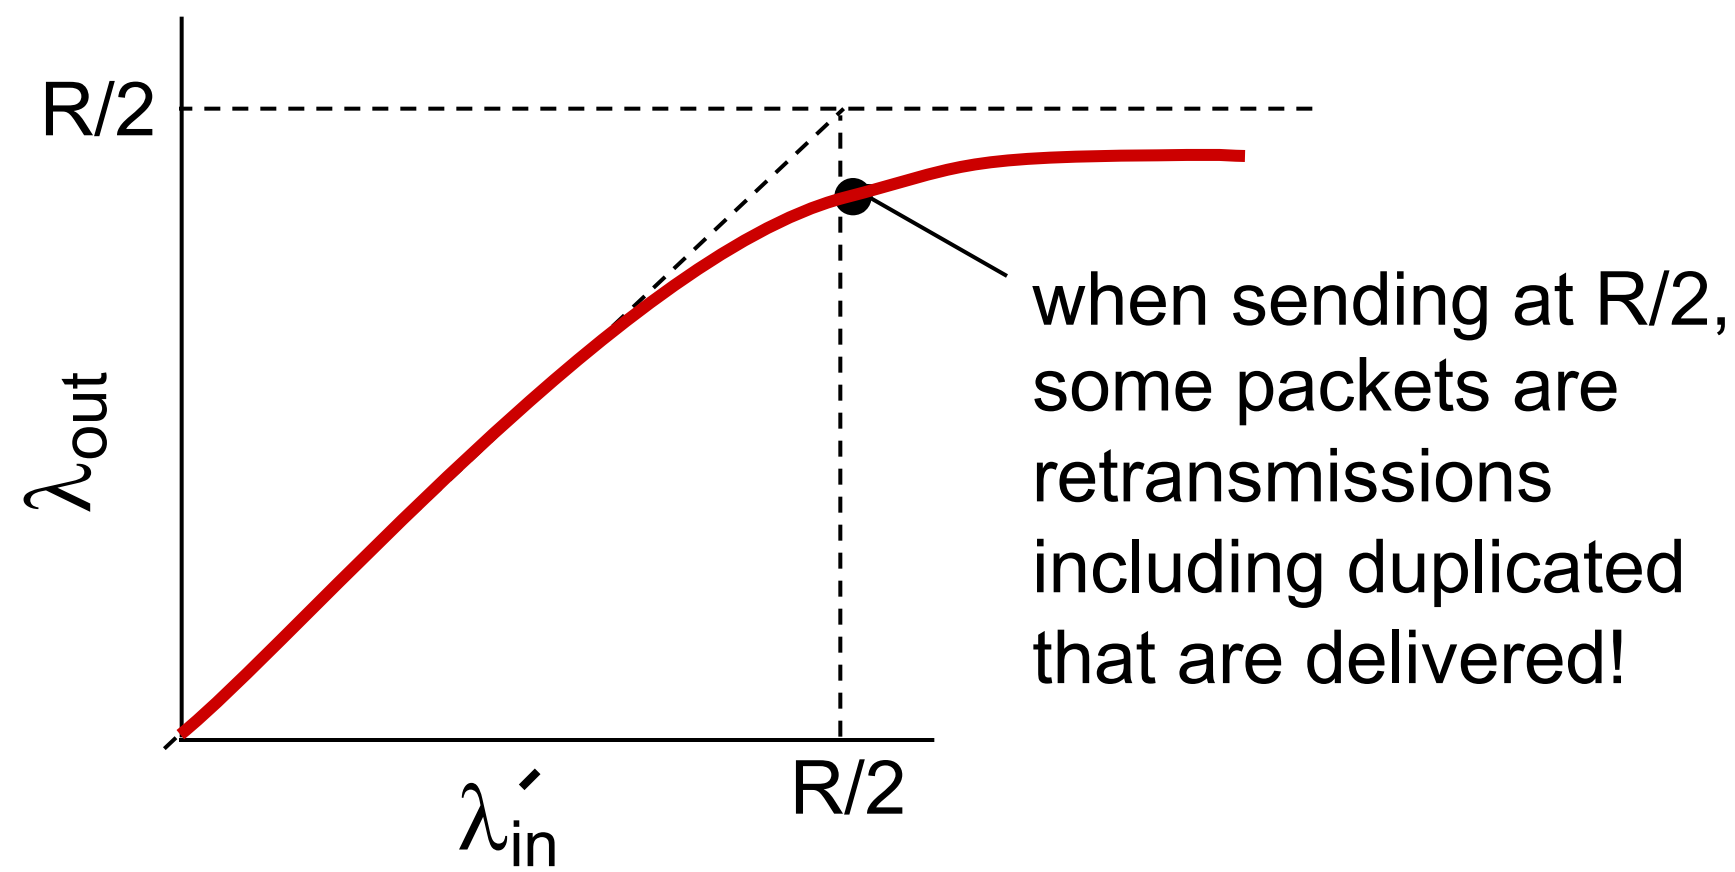

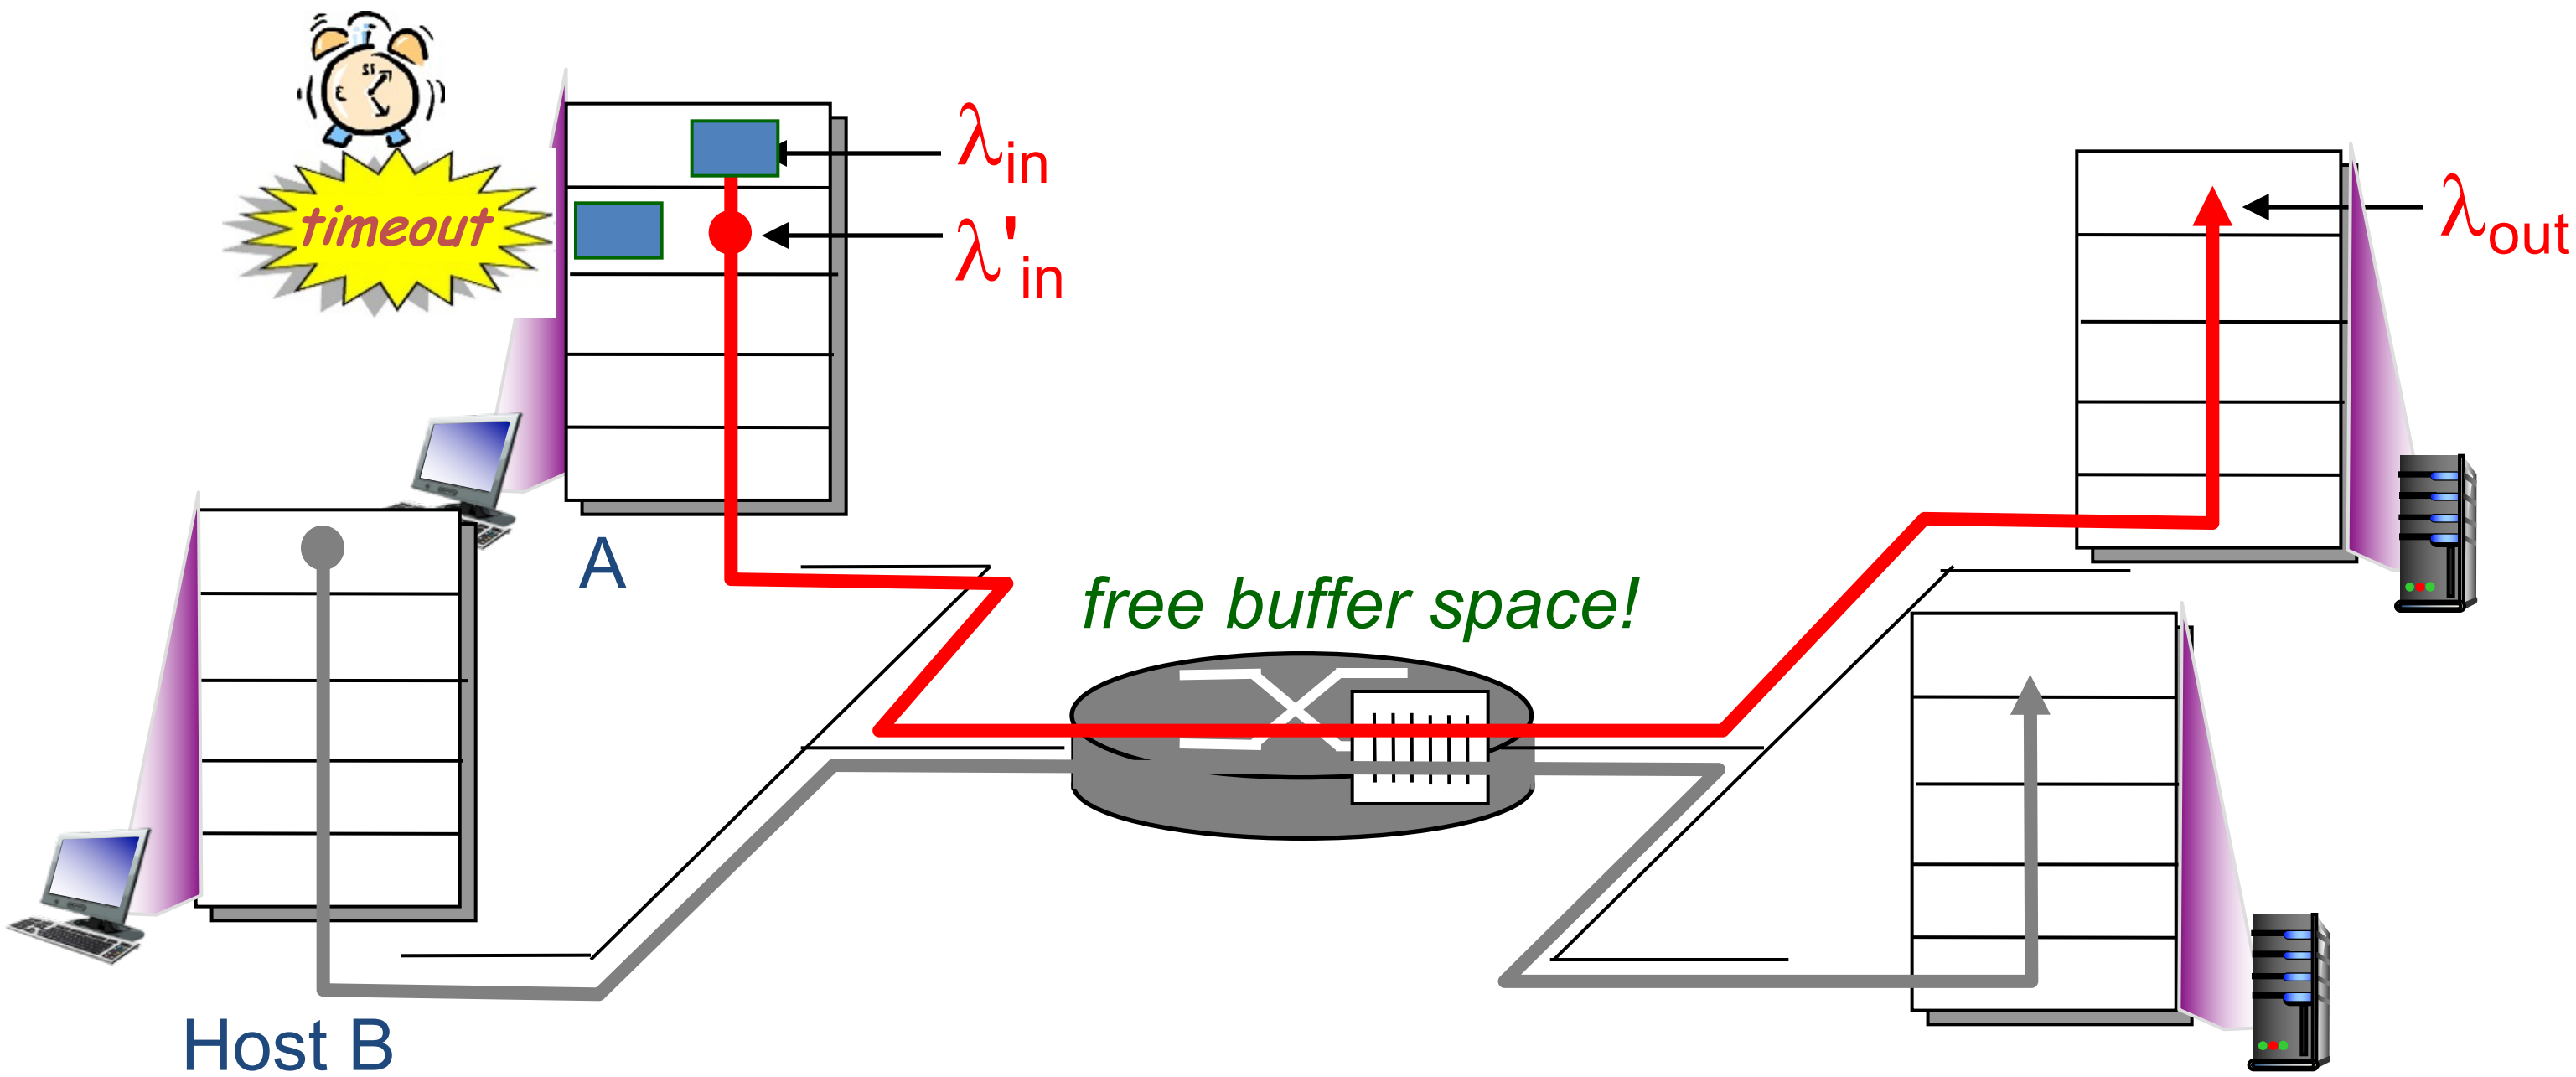

Causes/costs of congestion: scenario 2

Realistic: duplicates

- packets can be lost, dropped at router due to full buffers
- sender times out prematurely, sending *two* copies, both of which are delivered

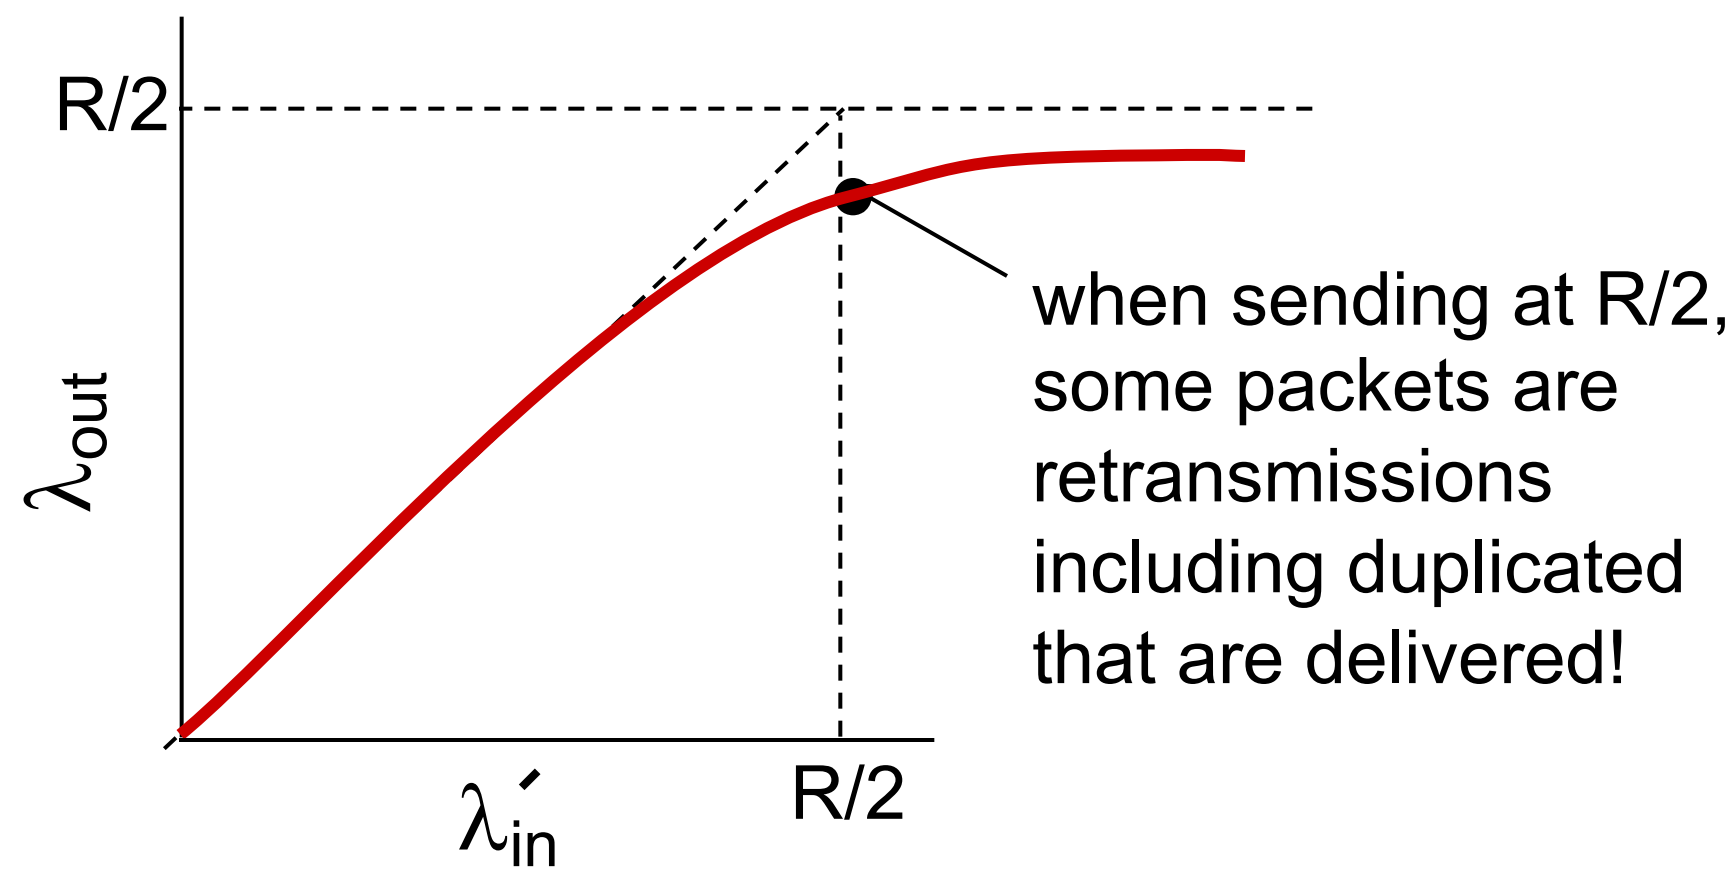

"costs" of congestion:

- more work (retrans) for given "goodput"
- unneeded retransmissions: link carries multiple copies of pkt
  - decreasing goodput

Causes/costs of congestion: scenario 3

- four senders
- multihop paths
- timeout/retransmit

<u>Q:</u> what happens as λ_{in} and λ_{in}' increase ?

<u>A:</u> as red λ_{in}' increases, all arriving blue pkts at upper queue are dropped, blue throughput → 0

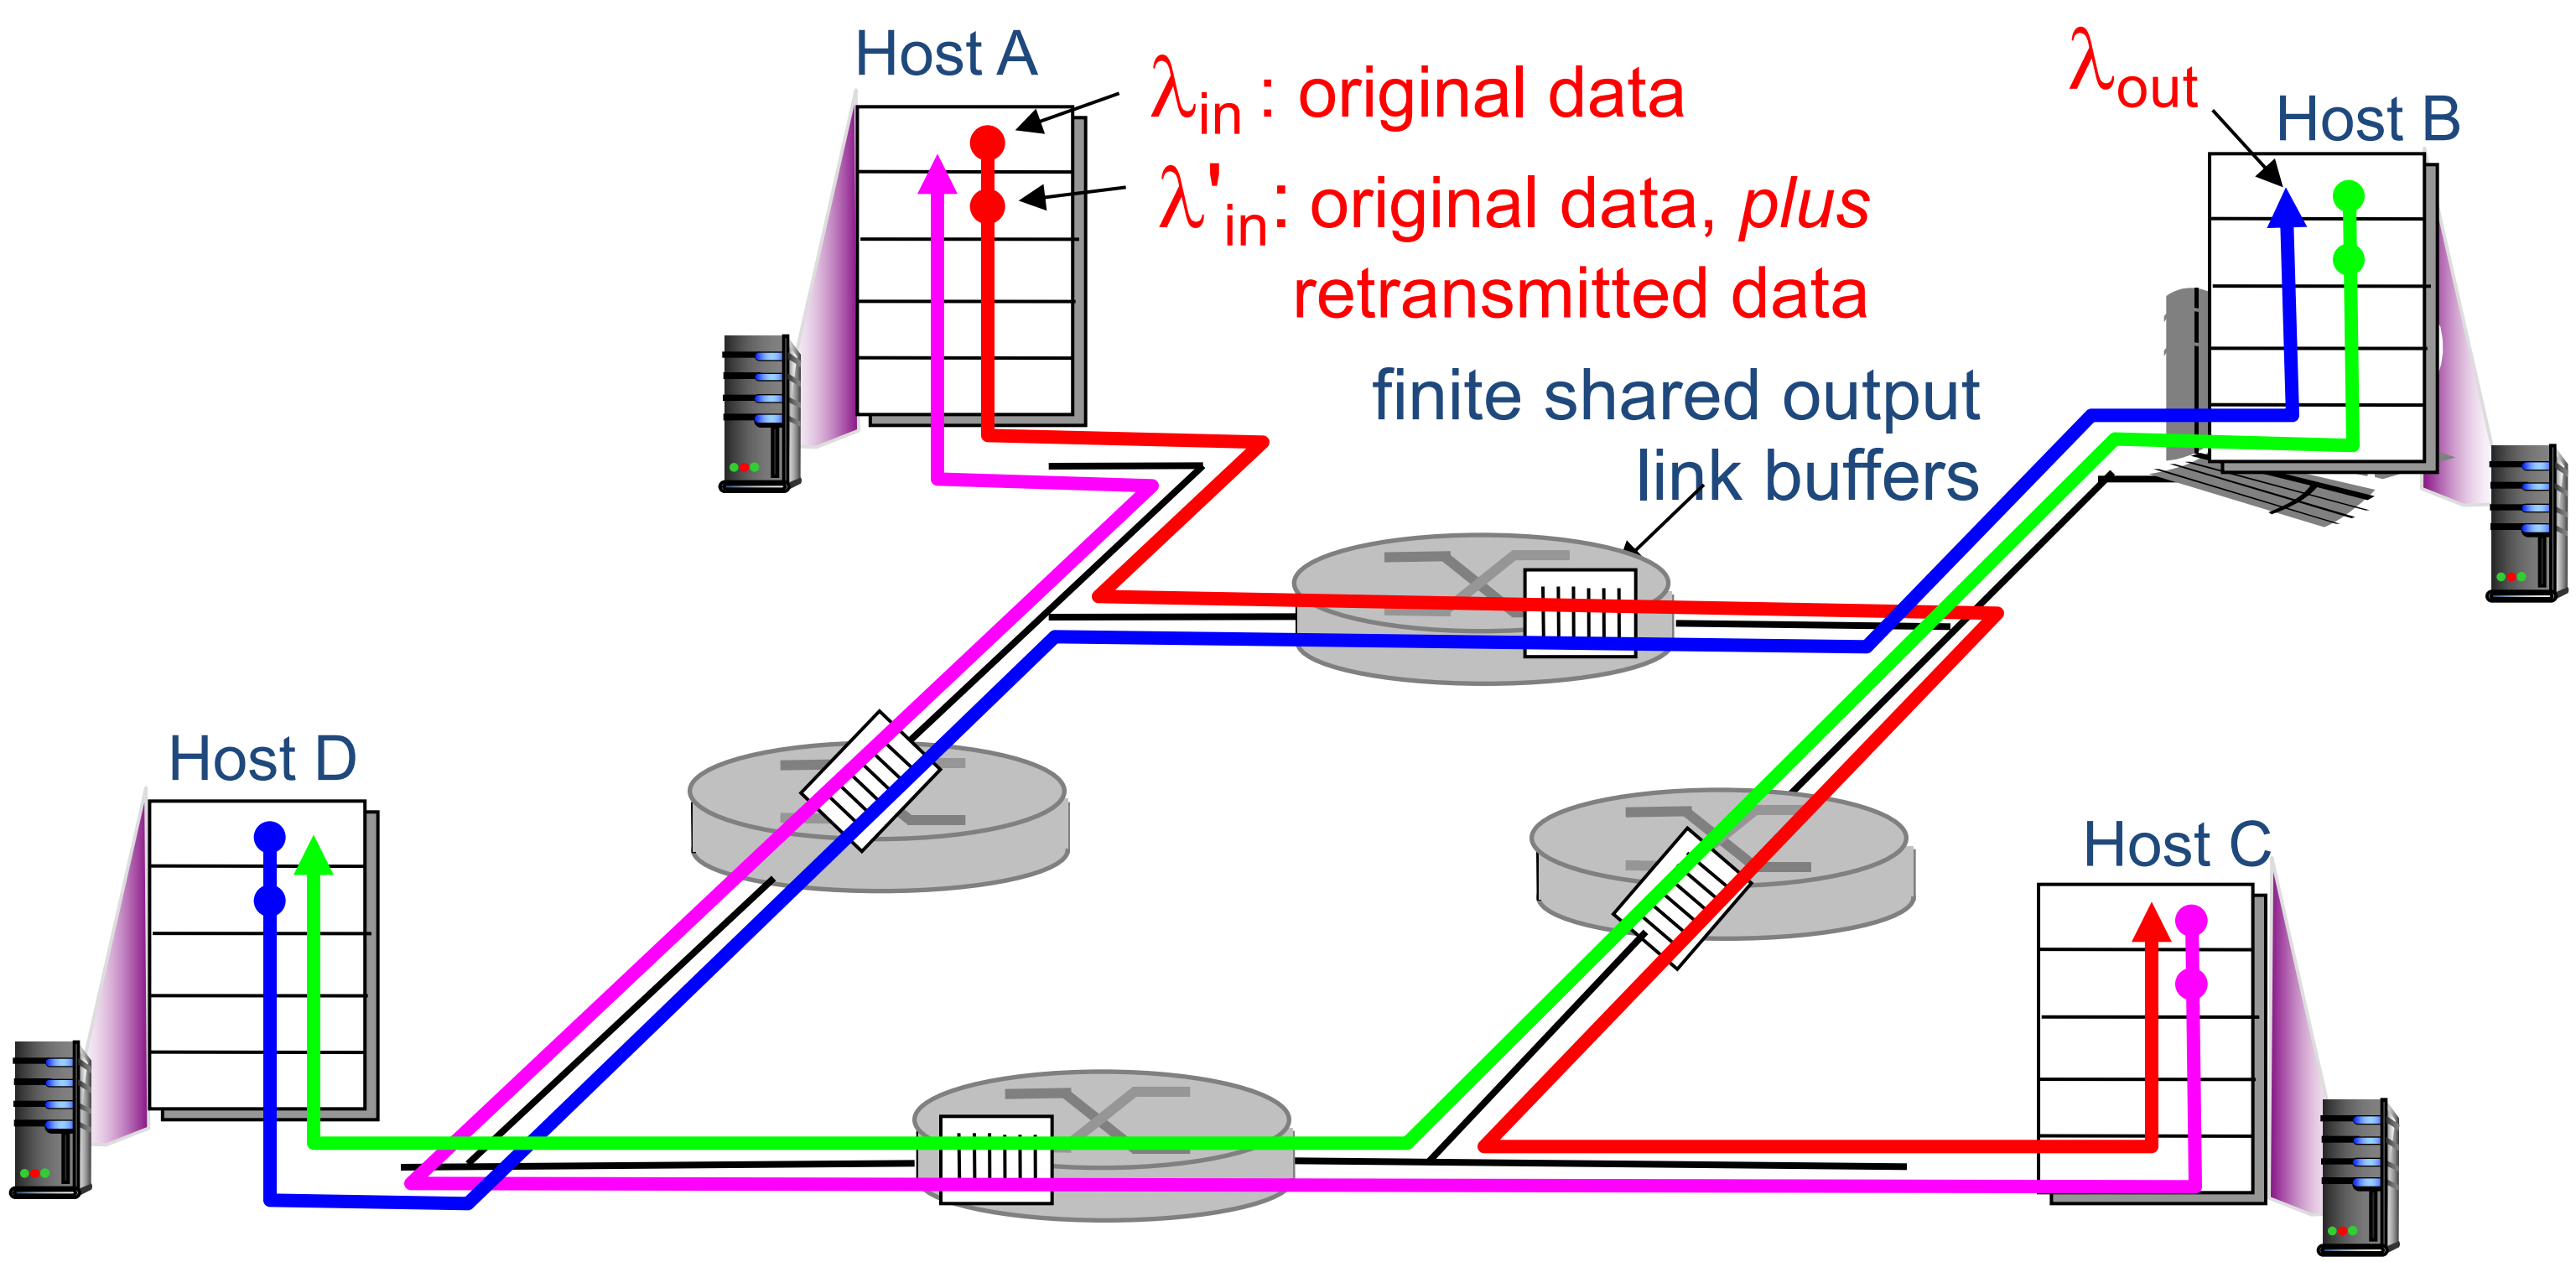

Causes/costs of congestion: scenario 3

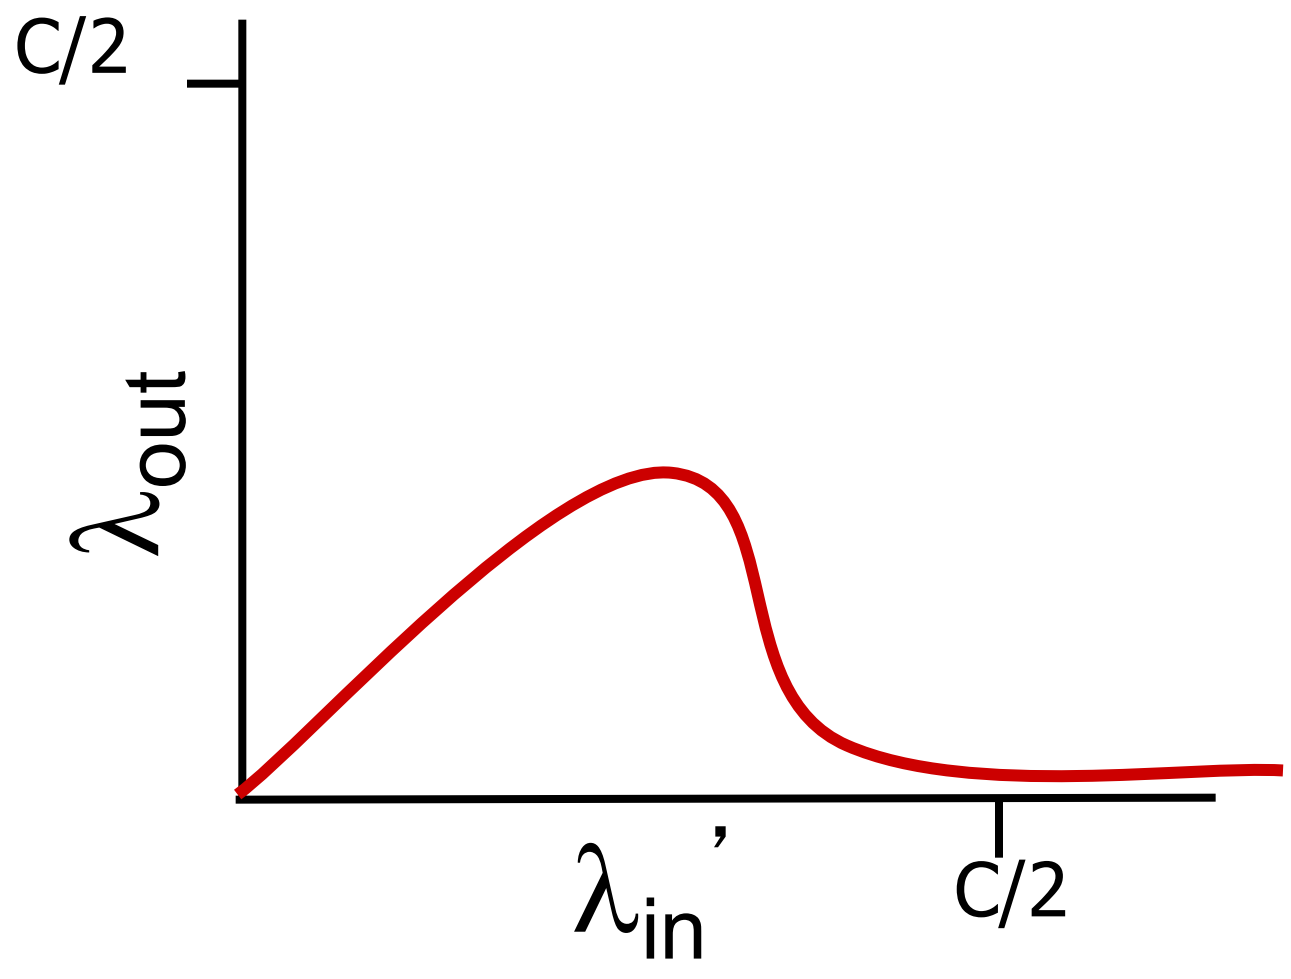

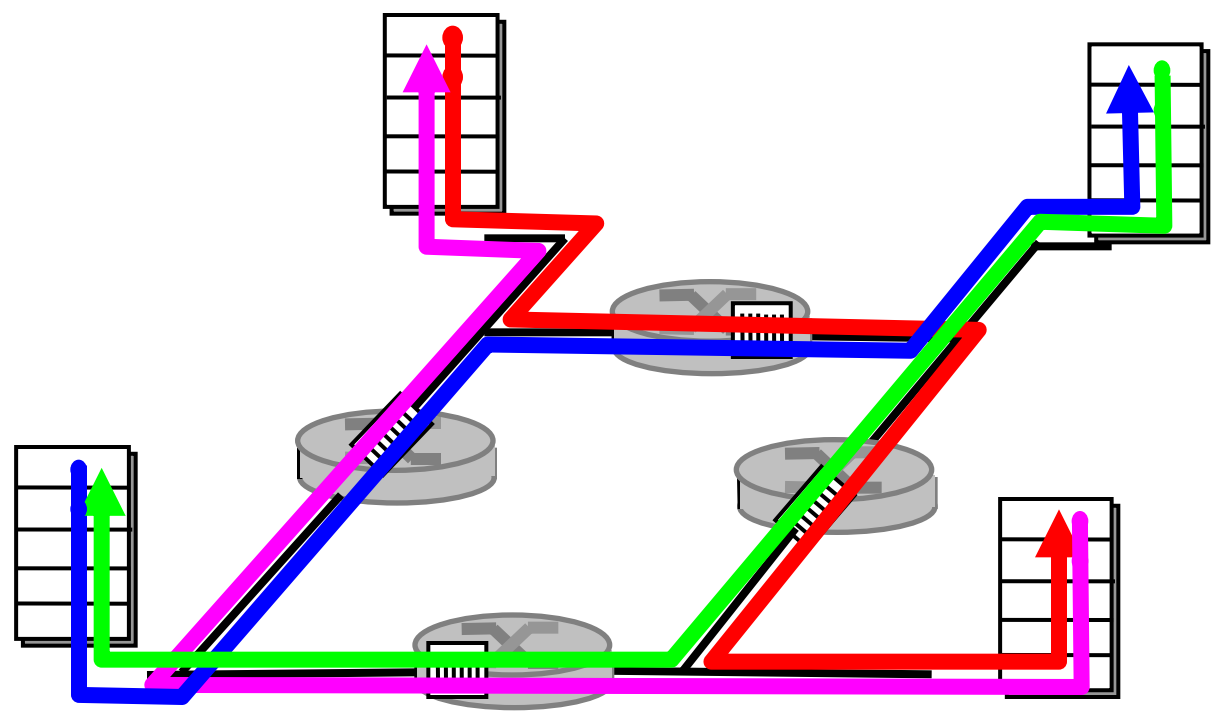

another "cost" of congestion:

- when packet dropped, any "upstream" transmission capacity used for that packet was wasted!

Outline

- principles of congestion control
- TCP congestion control

TCP congestion control: additive increase multiplicative decrease

- *approach:* sender increases transmission rate (window size), probing for usable bandwidth, until loss occurs
  - *additive increase:* increase **`cwnd`** by 1 MSS every RTT until loss detected
  - *multiplicative decrease:* cut **`cwnd`** in half after loss

AIMD saw tooth behavior: probing for bandwidth

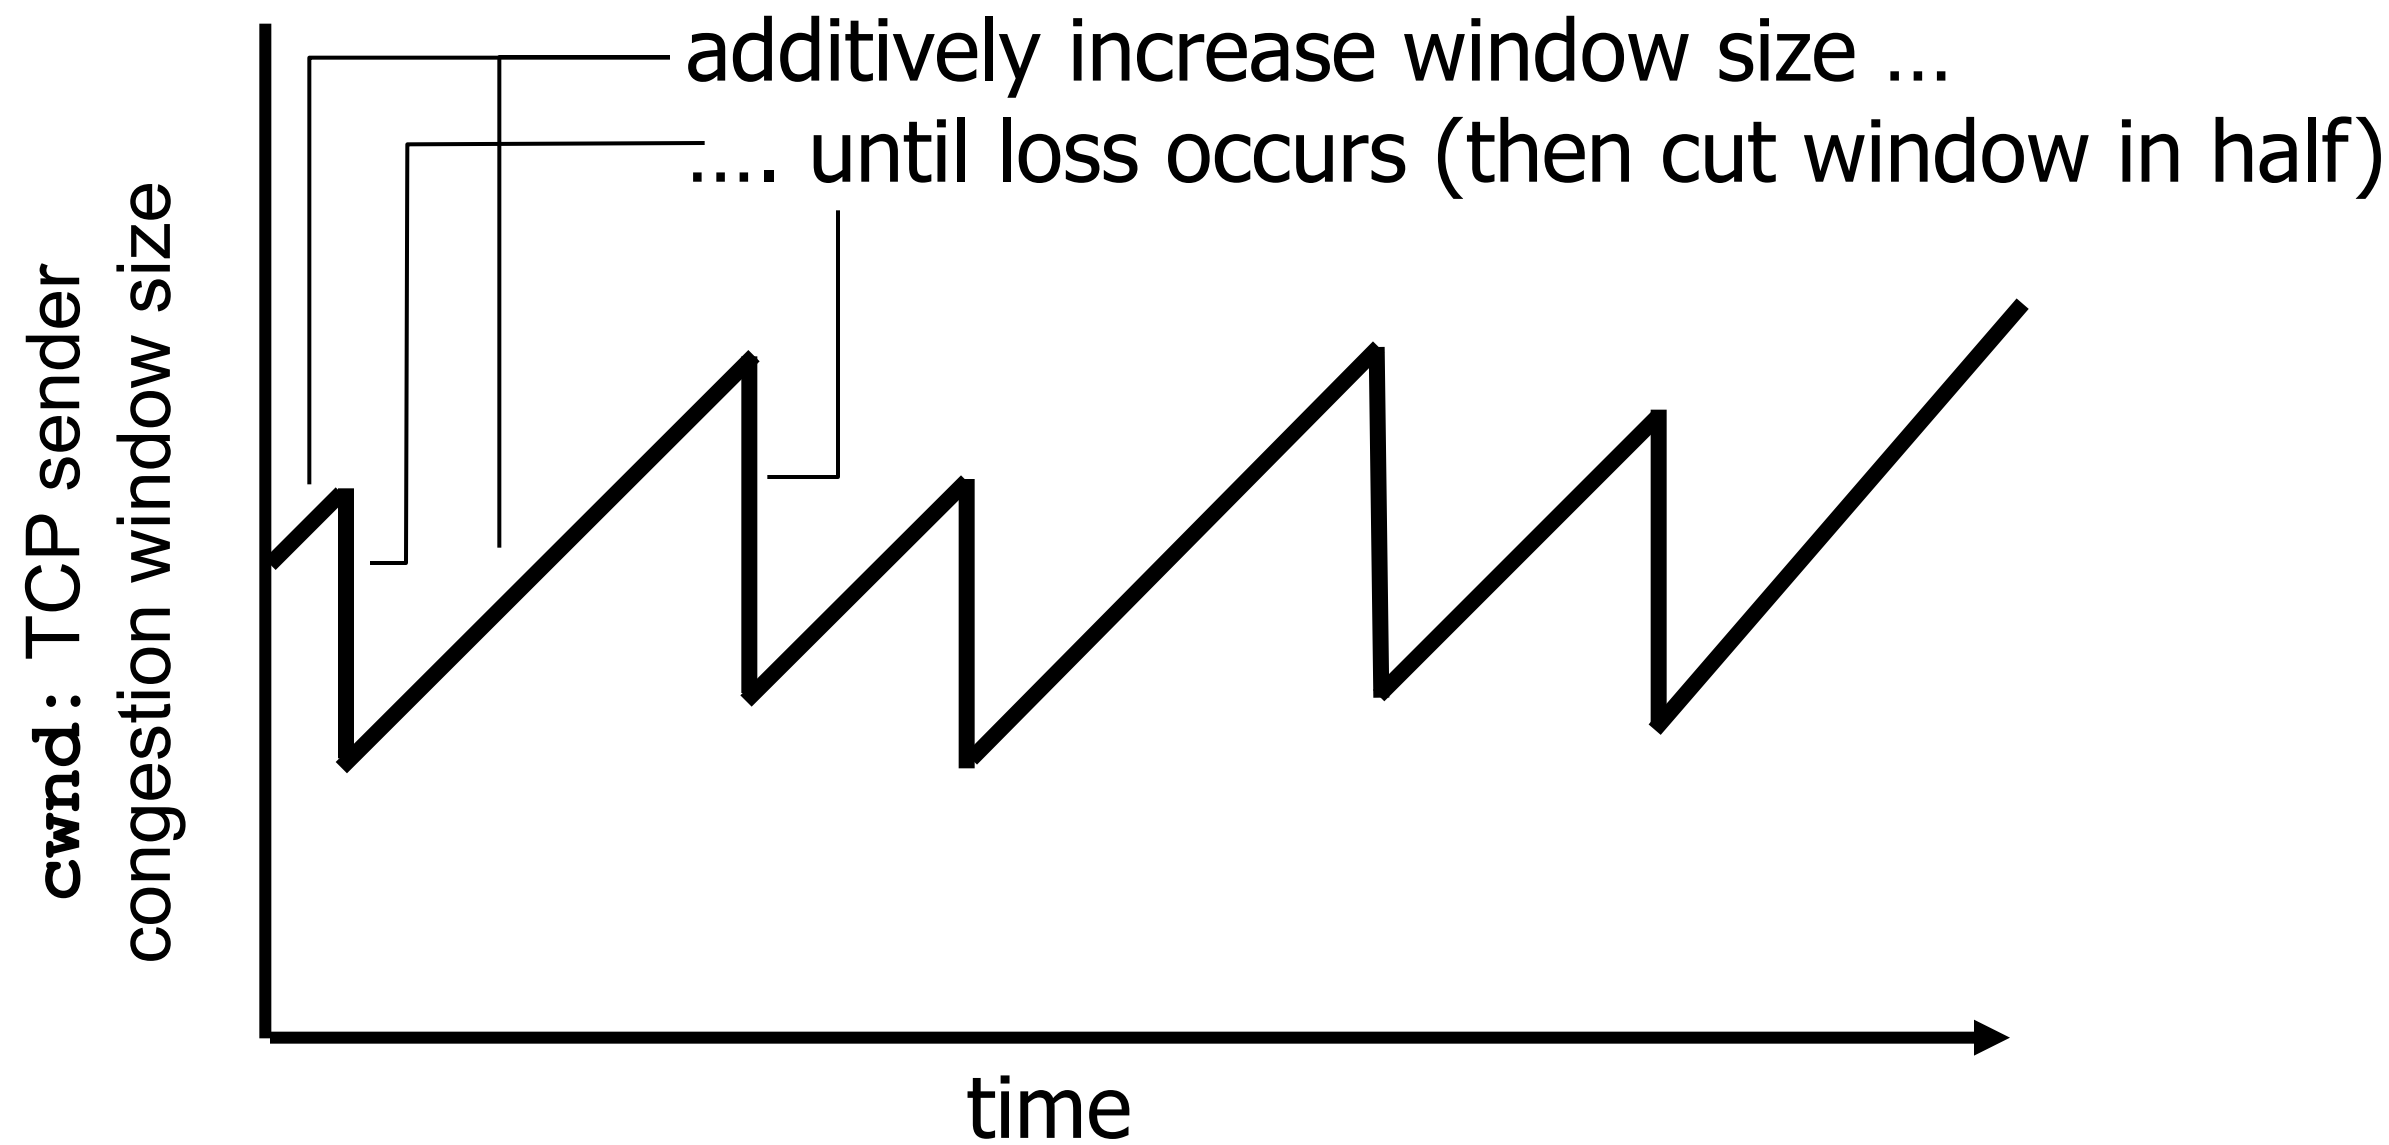

TCP Congestion Control: details

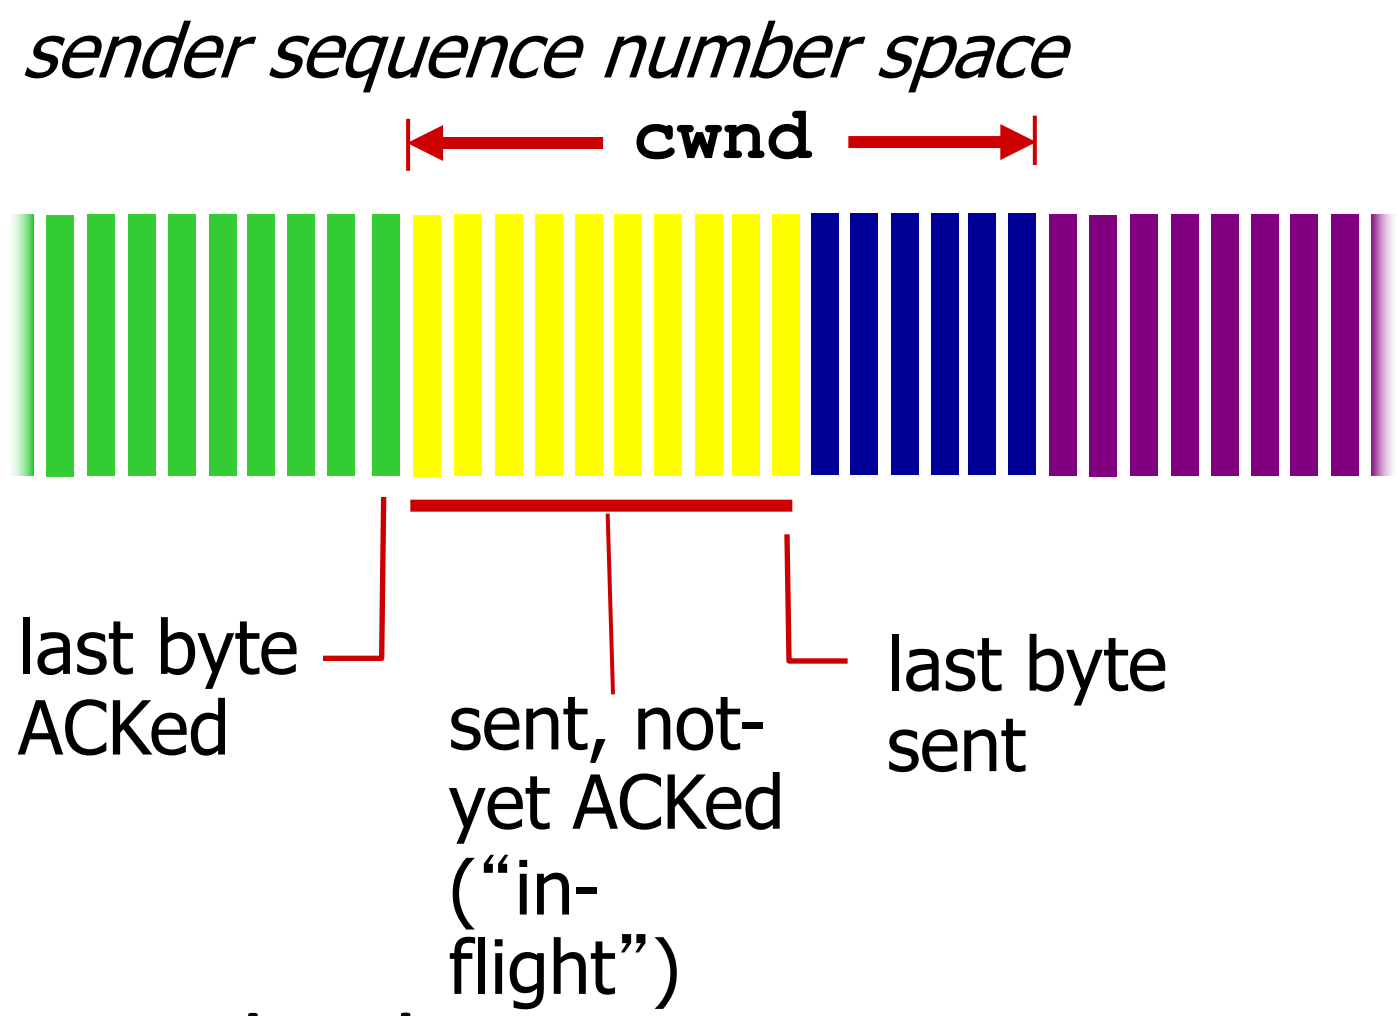

- sender limits transmission:

$$\texttt{LastByteSent-LastByteAcked} \le \texttt{cwnd}$$

- **cwnd** is dynamic, function of perceived network congestion

TCP sending rate:

- *roughly:* send cwnd bytes, wait RTT for ACKS, then send more bytes

$$\text{rate} \approx \frac{\text{cwnd}}{\text{RTT}} \text{ bytes/sec}$$

TCP Slow Start

- when connection begins, increase rate exponentially until first loss event:
  - initially **cwnd** = 1 MSS
  - double **cwnd** every RTT
  - done by incrementing **cwnd** for every ACK received
    - **Cwnd=cwnd+MSS** upon receiving new ACK
- <u>*summary:*</u> initial rate is slow but ramps up exponentially fast

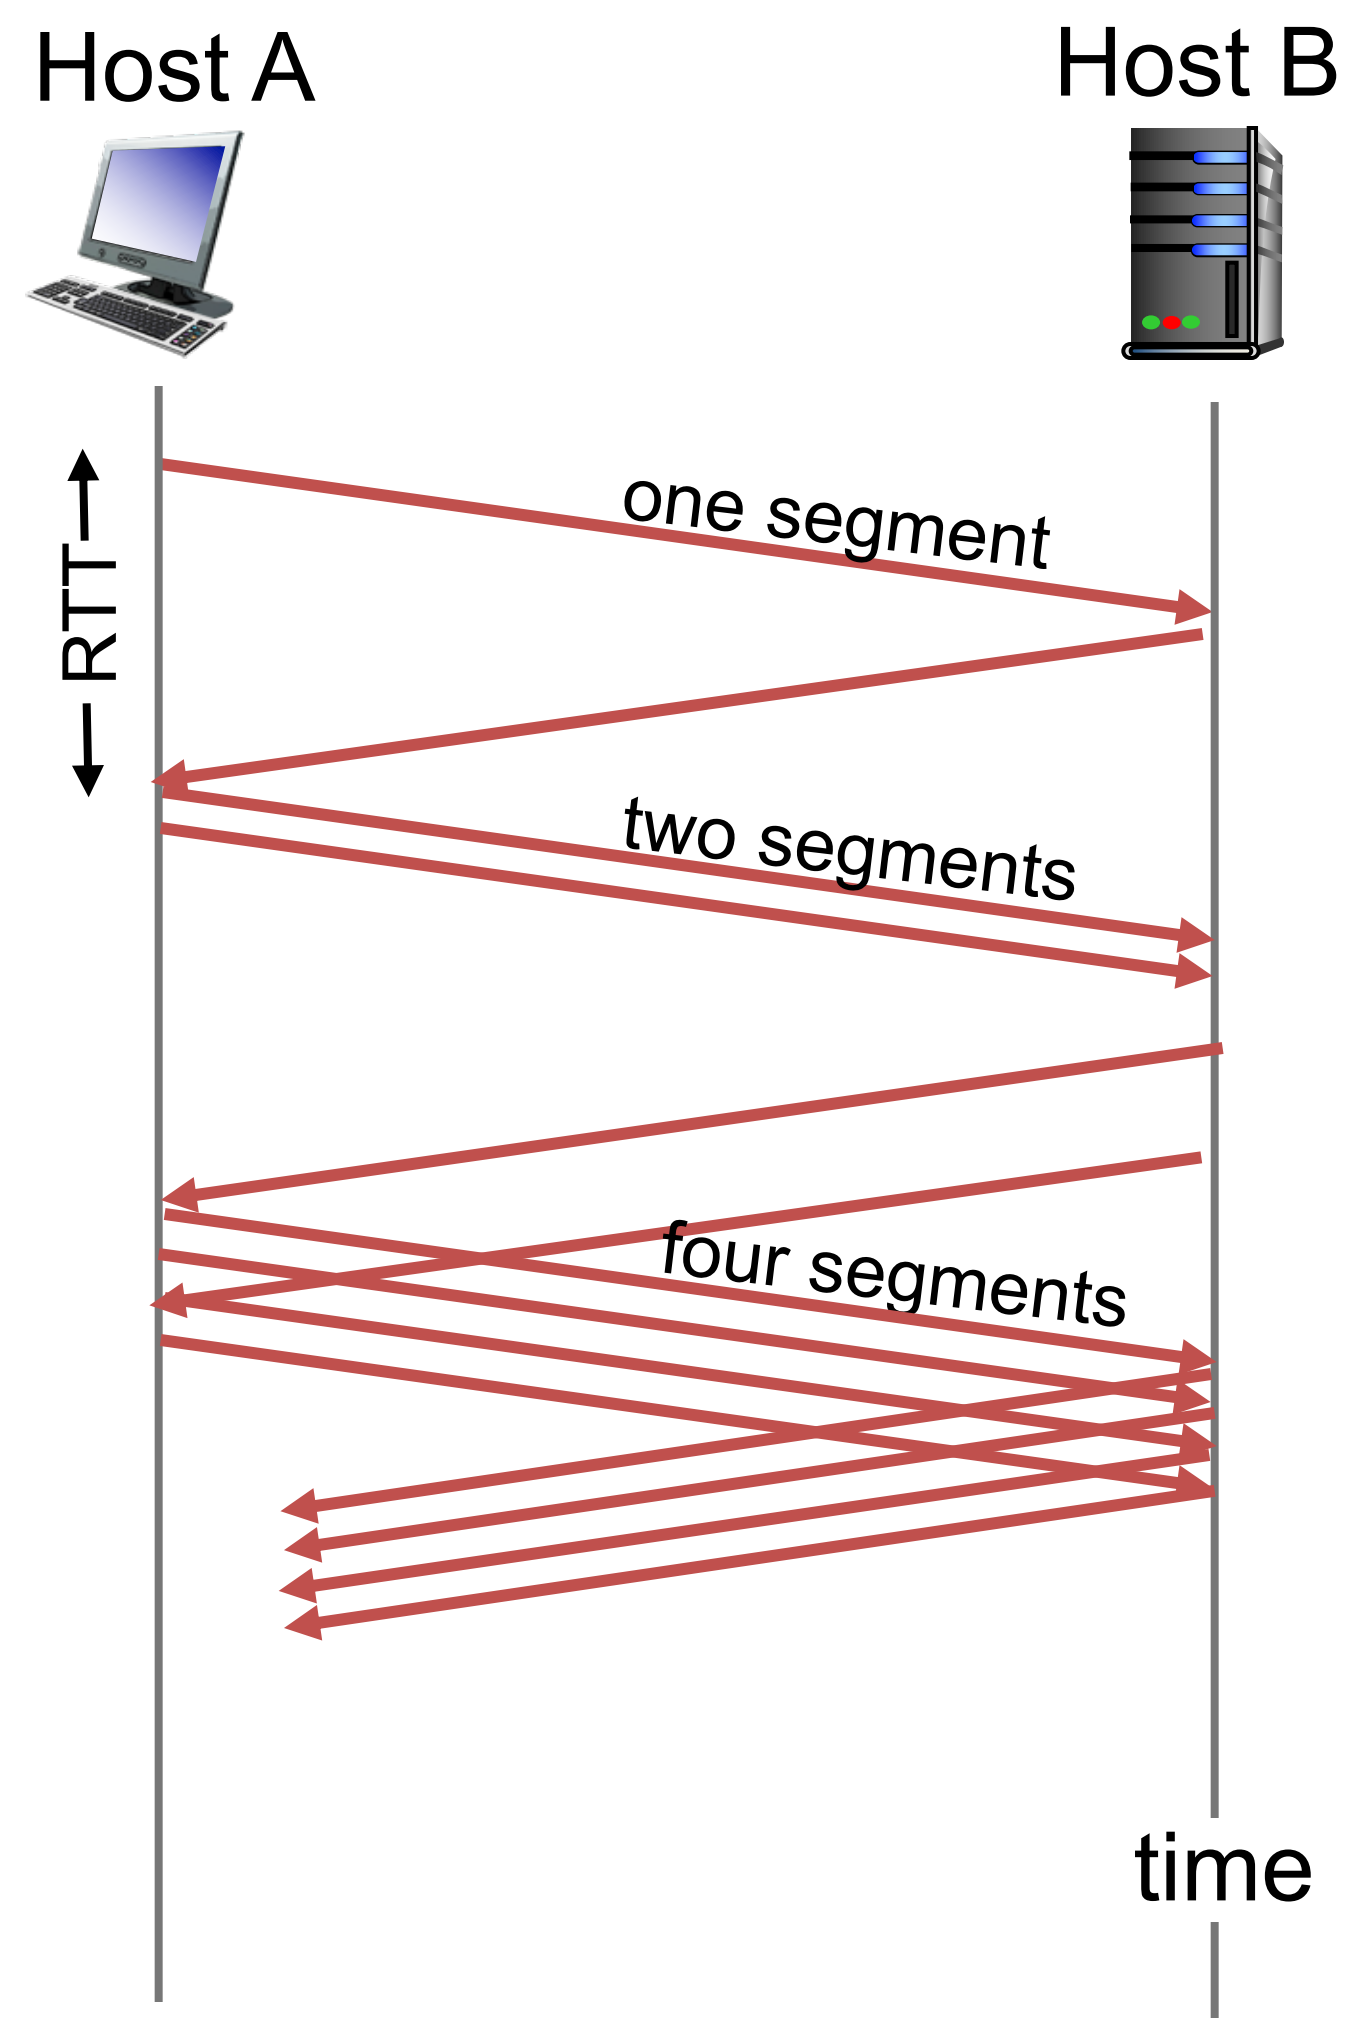

TCP: detecting, reacting to loss

- loss indicated by timeout:
  - **`cwnd`** set to 1 MSS;
  - window then grows exponentially (as in **slow start**) to ***threshold***, then grows linearly (**congestion-avoidance**)
- The congestion-avoidance state
  - cwnd=cwnd+MSS •(MSS/cwnd)
- loss indicated by 3 duplicate ACKs: TCP RENO
  - dup ACKs indicate network capable of delivering some segments
  - **`cwnd`** is cut in half window then grows linearly
- The old TCP Tahoe always sets **`cwnd`** to 1 (timeout or 3 duplicate acks)

TCP: switching from slow start to CA

Q: when should the exponential increase switch to linear?

A: when **cwnd** gets to 1/2 of its value before timeout.

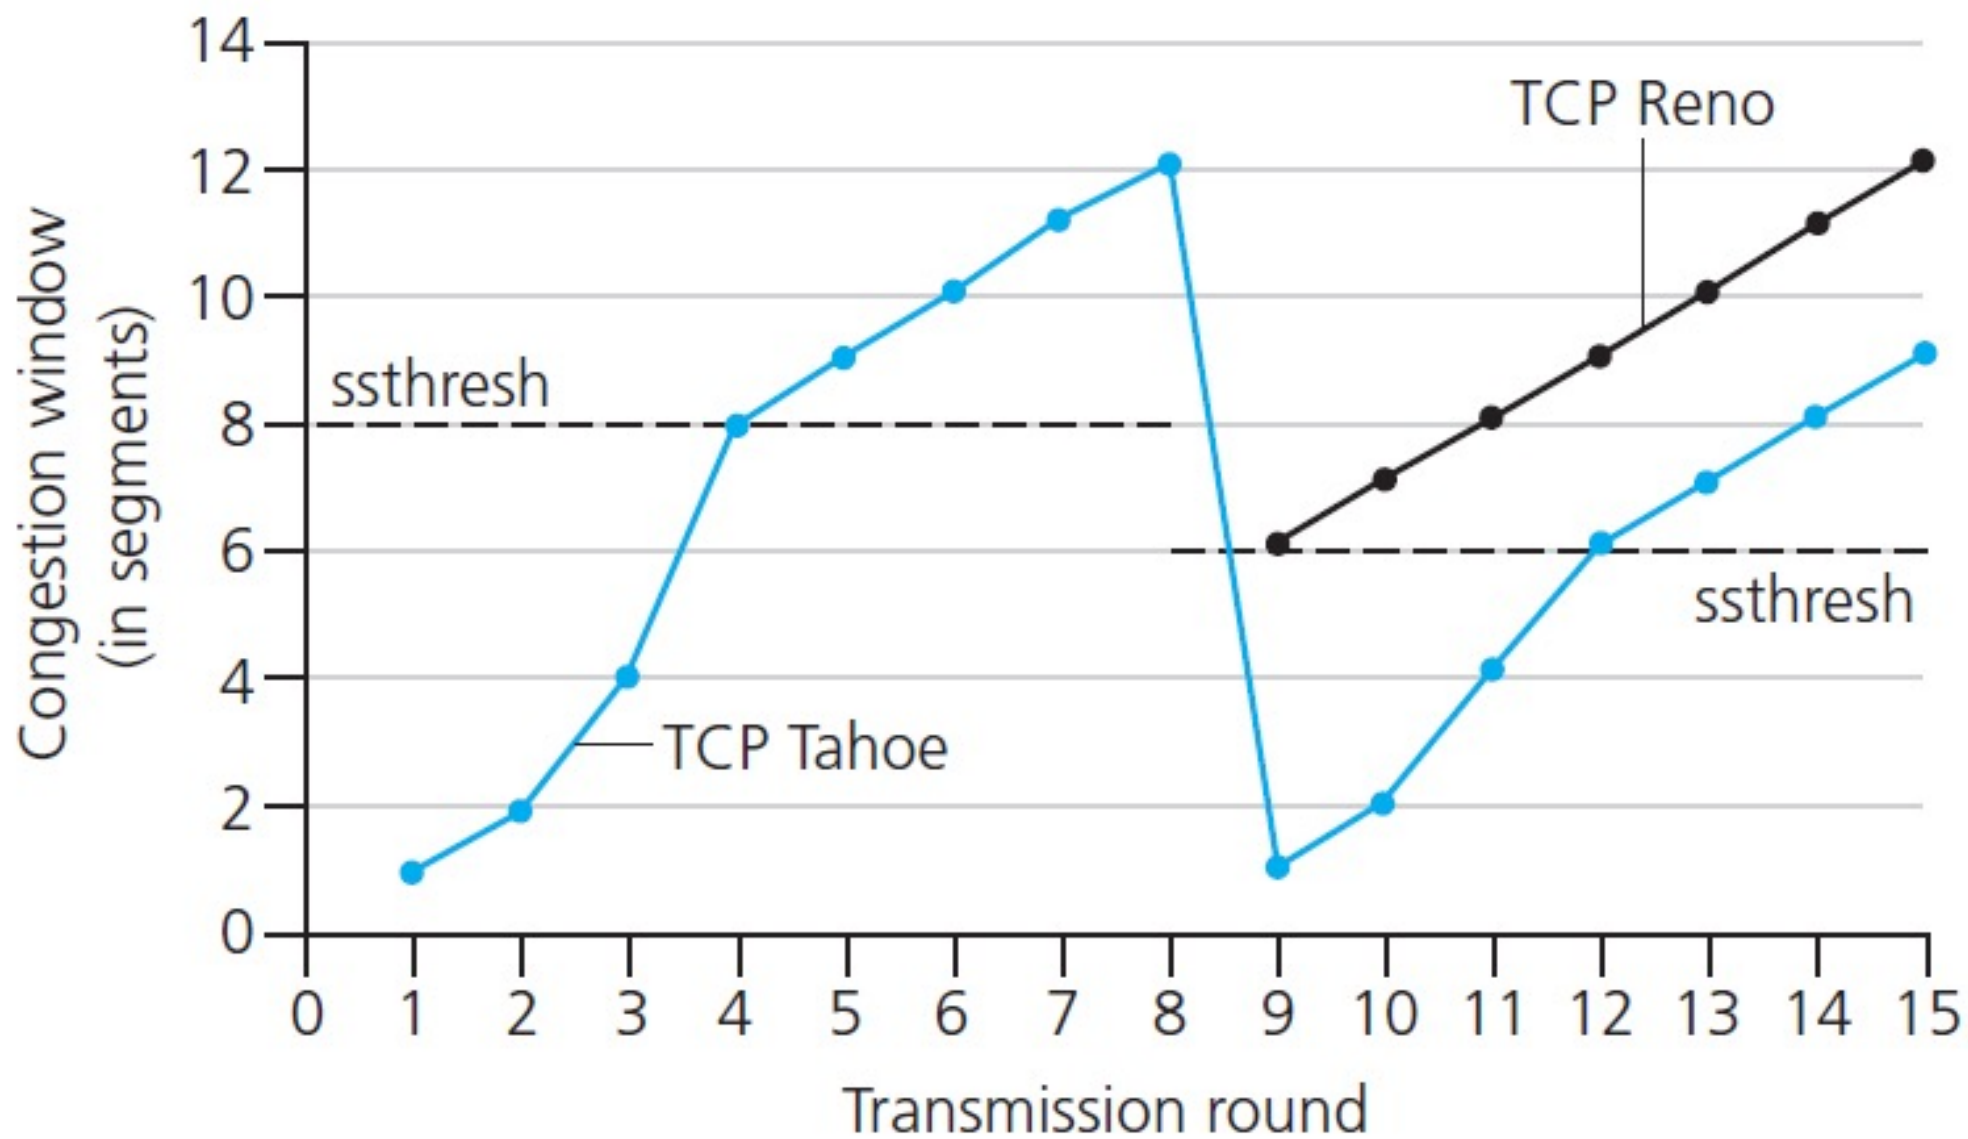

Implementation:

- variable **ssthresh**
- on loss event, **ssthresh** is set to 1/2 of **cwnd** just before loss event

  - Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/interactive/tcp_evolution.php

Summary: TCP Congestion Control

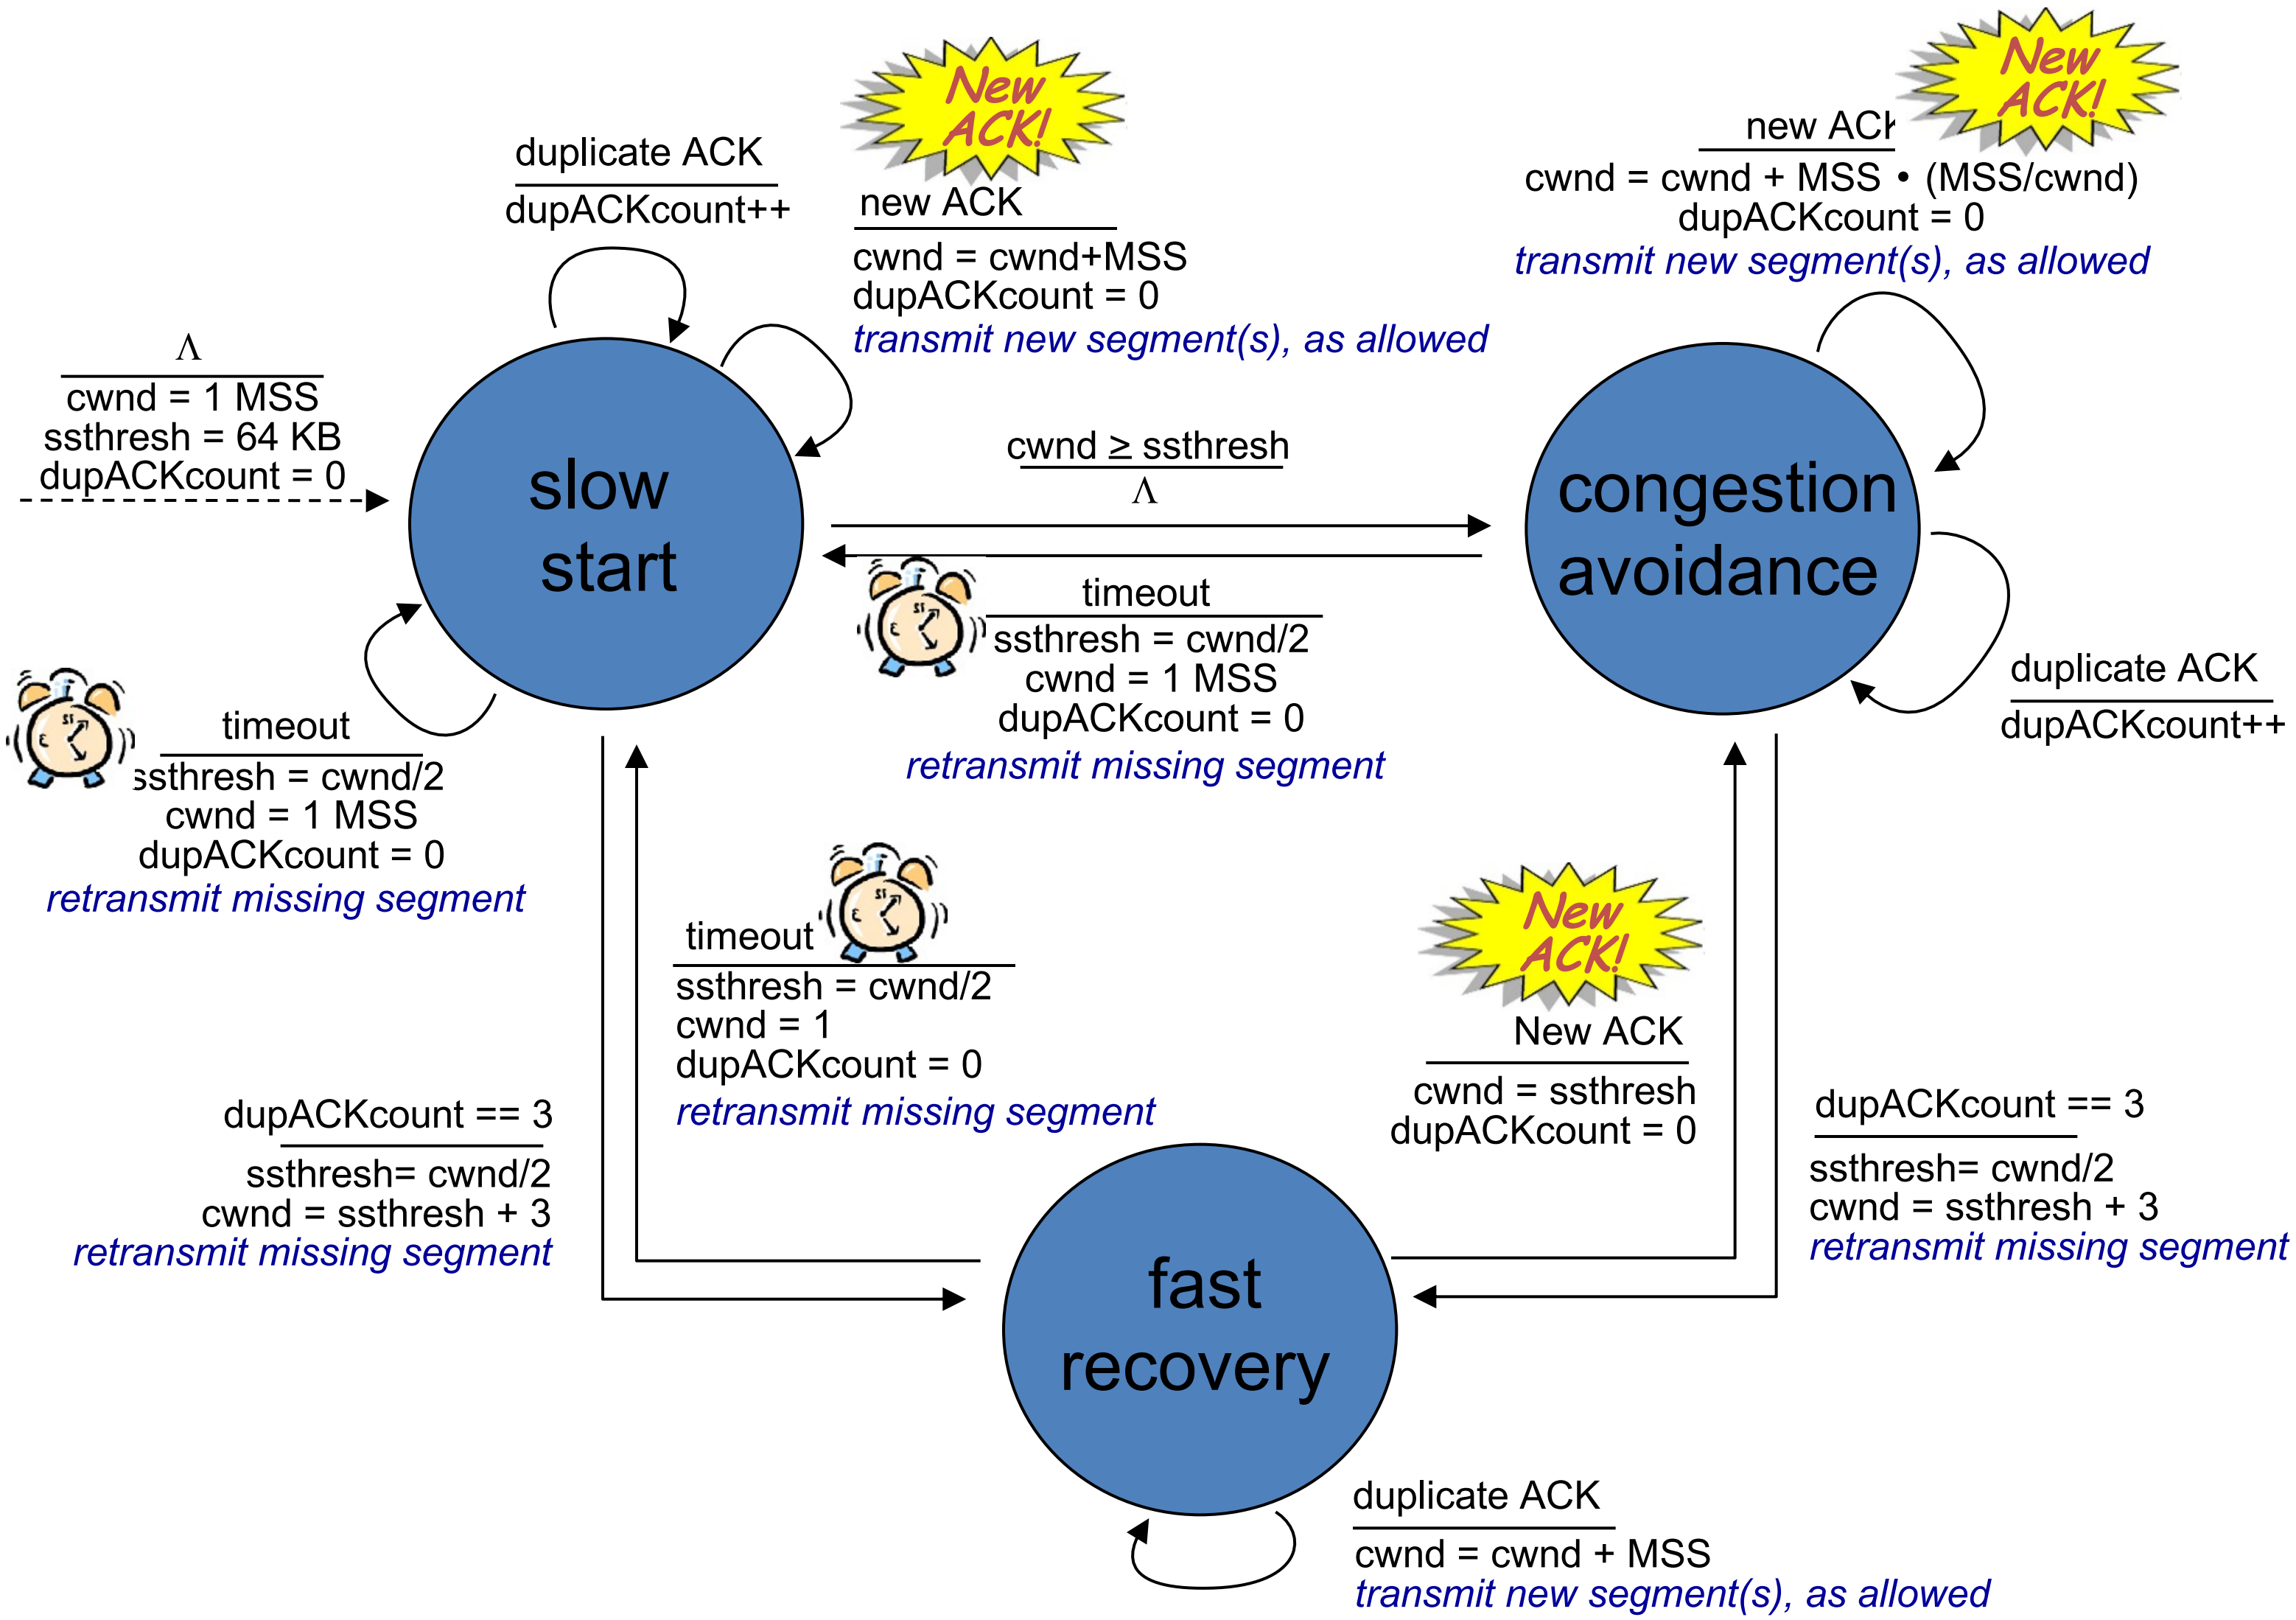

TCP throughput

- avg. TCP throughput as function of window size, RTT?
  - ignore slow start, assume always data to send
- W: window size (measured in bytes) where loss occurs
  - avg. window size (# in-flight bytes) is ¾ W
  - avg. throughput is 3/4W per RTT

$$\text{avg TCP thruput} = \frac{3}{4}\frac{W}{RTT} \text{ bytes/sec}$$

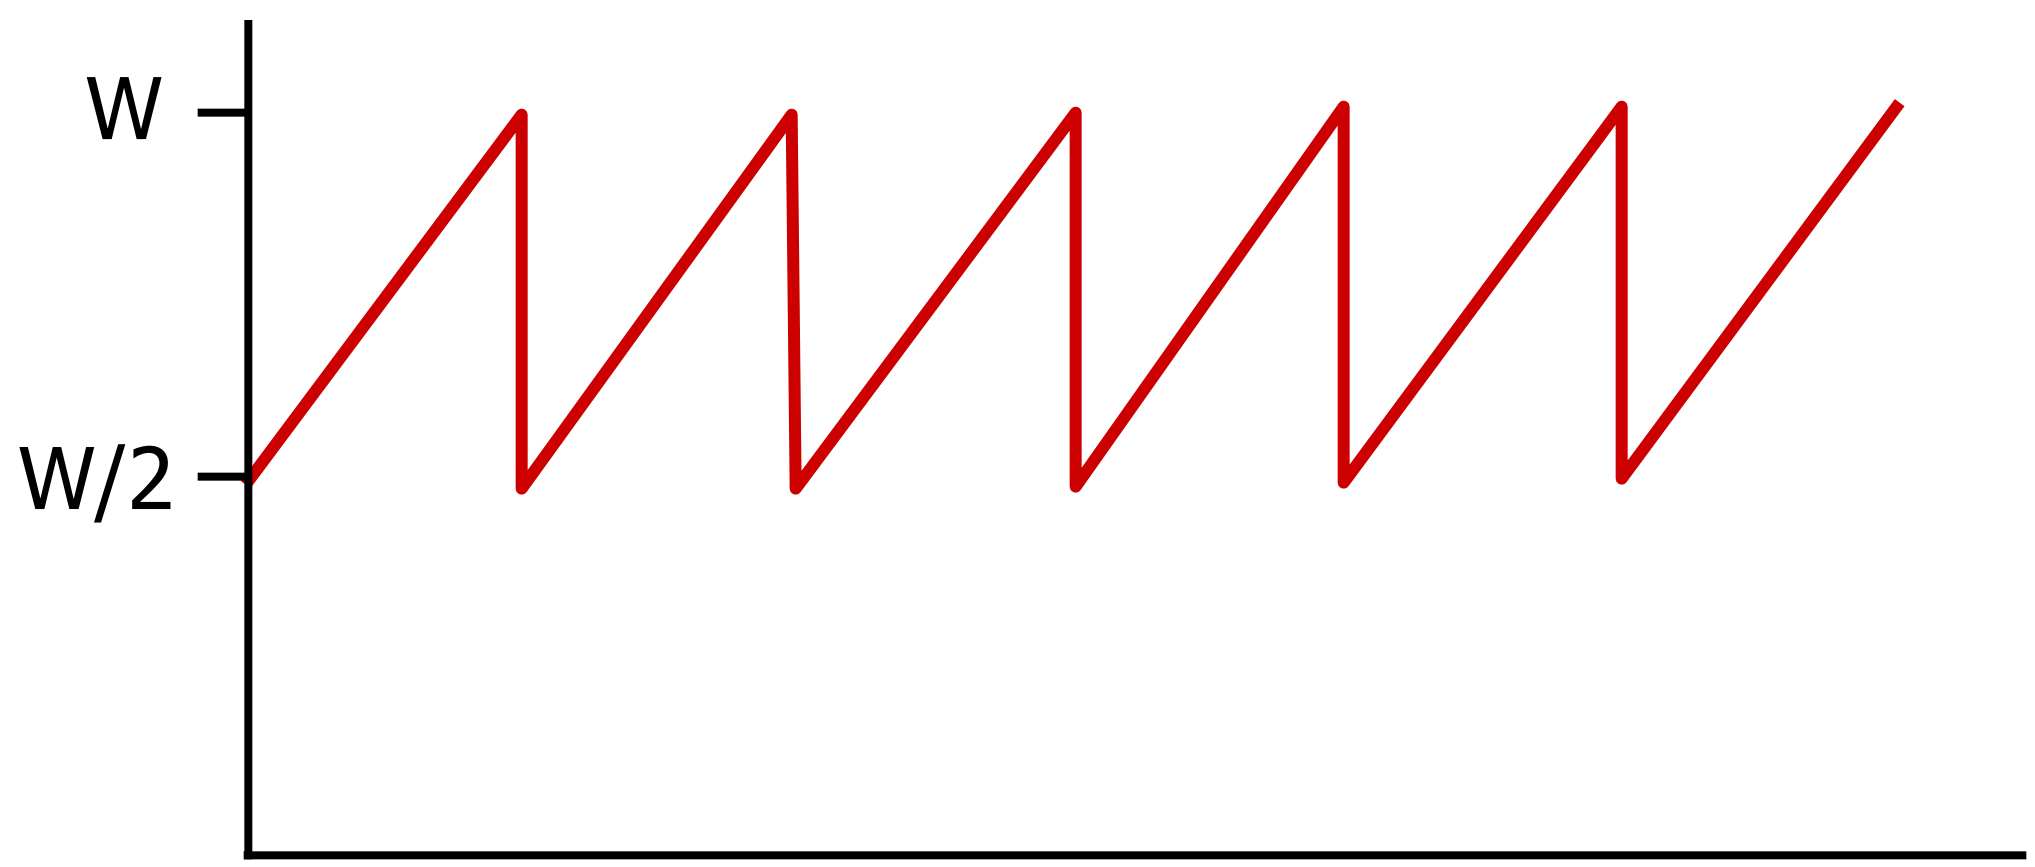

TCP Fairness

fairness goal: if K TCP sessions share the same bottleneck link of bandwidth R, each should have average rate of R/K

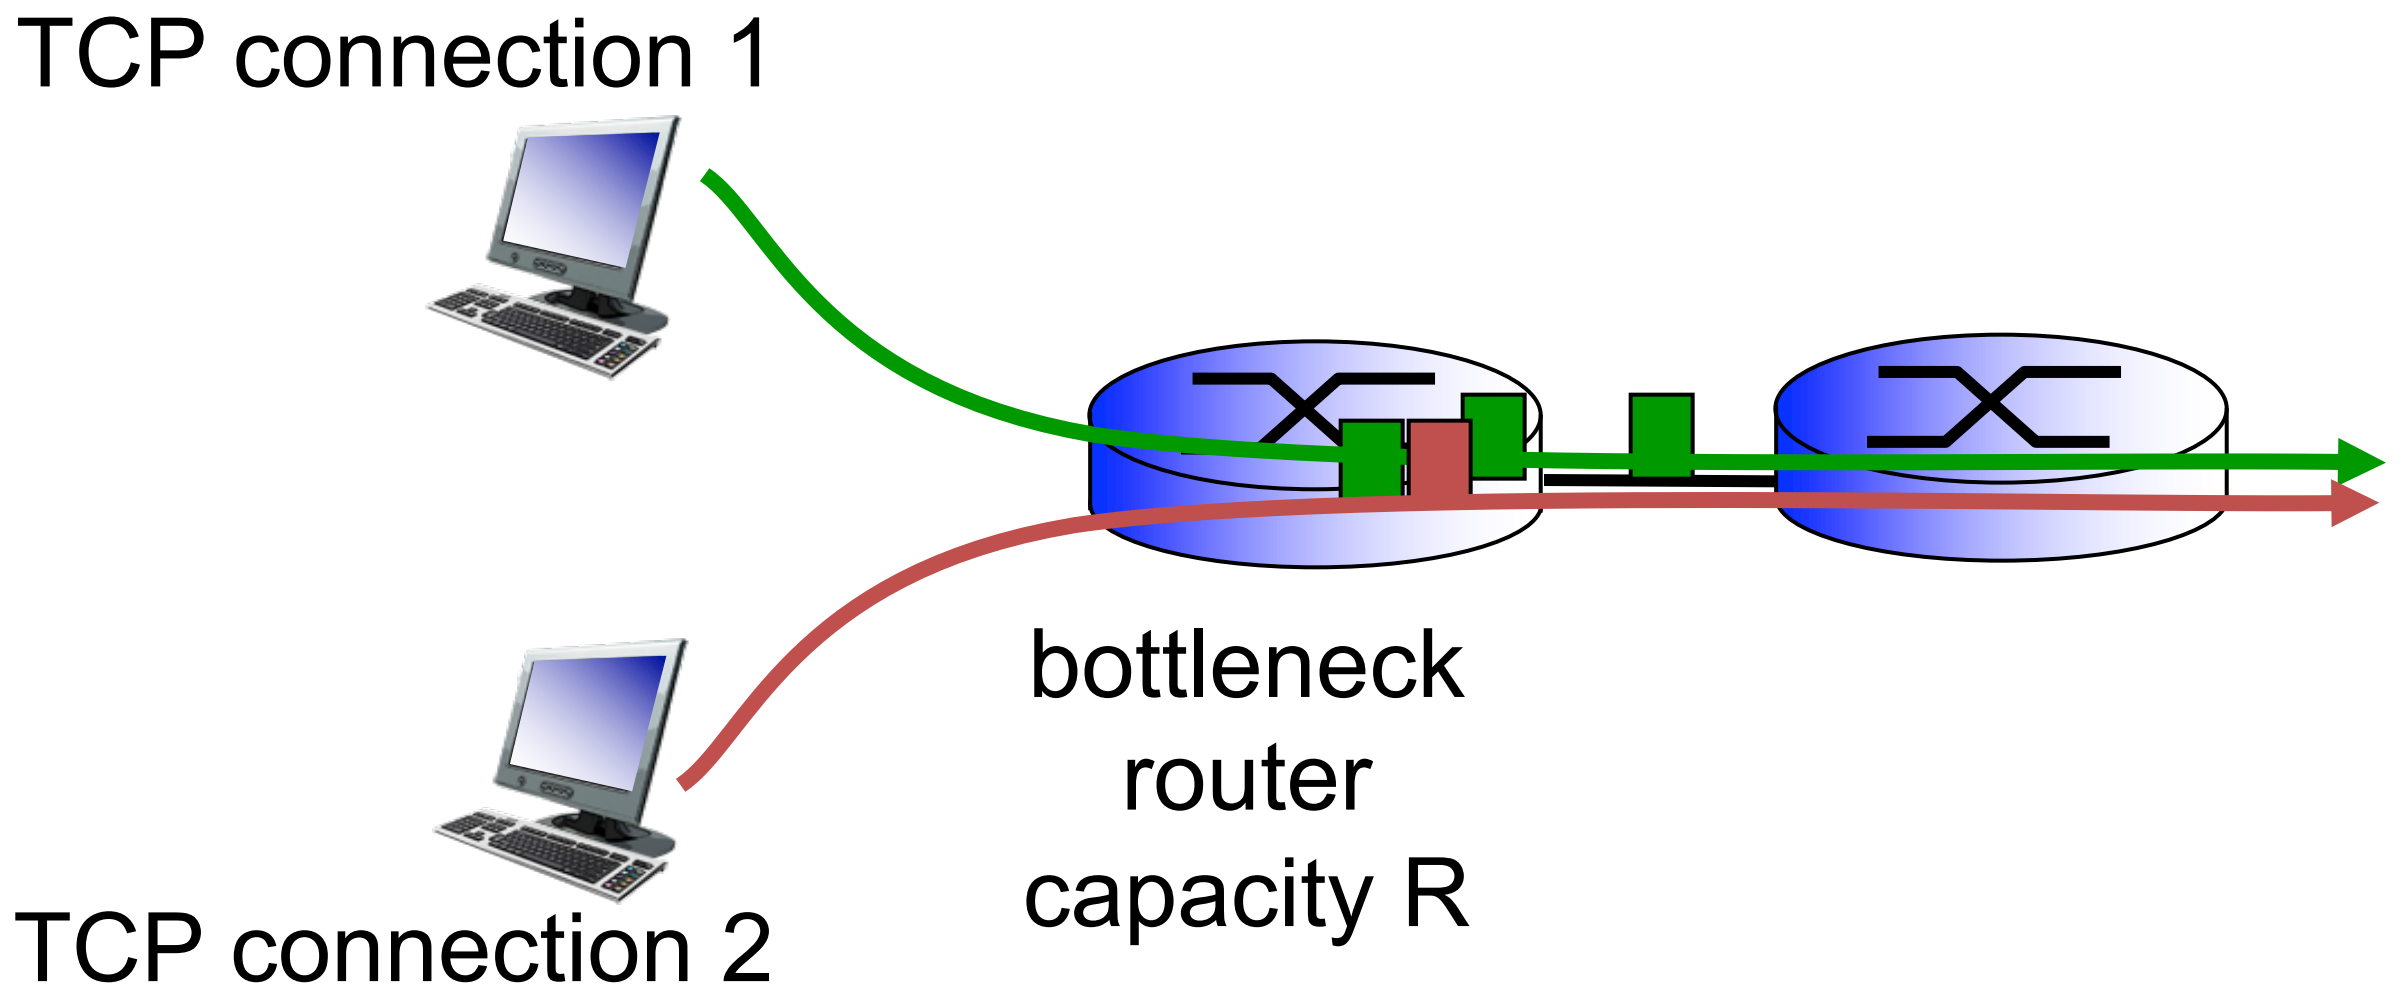

Why is TCP fair?

two competing sessions:

- additive increase gives slope of 1, as throughout increases
- multiplicative decrease decreases throughput proportionally

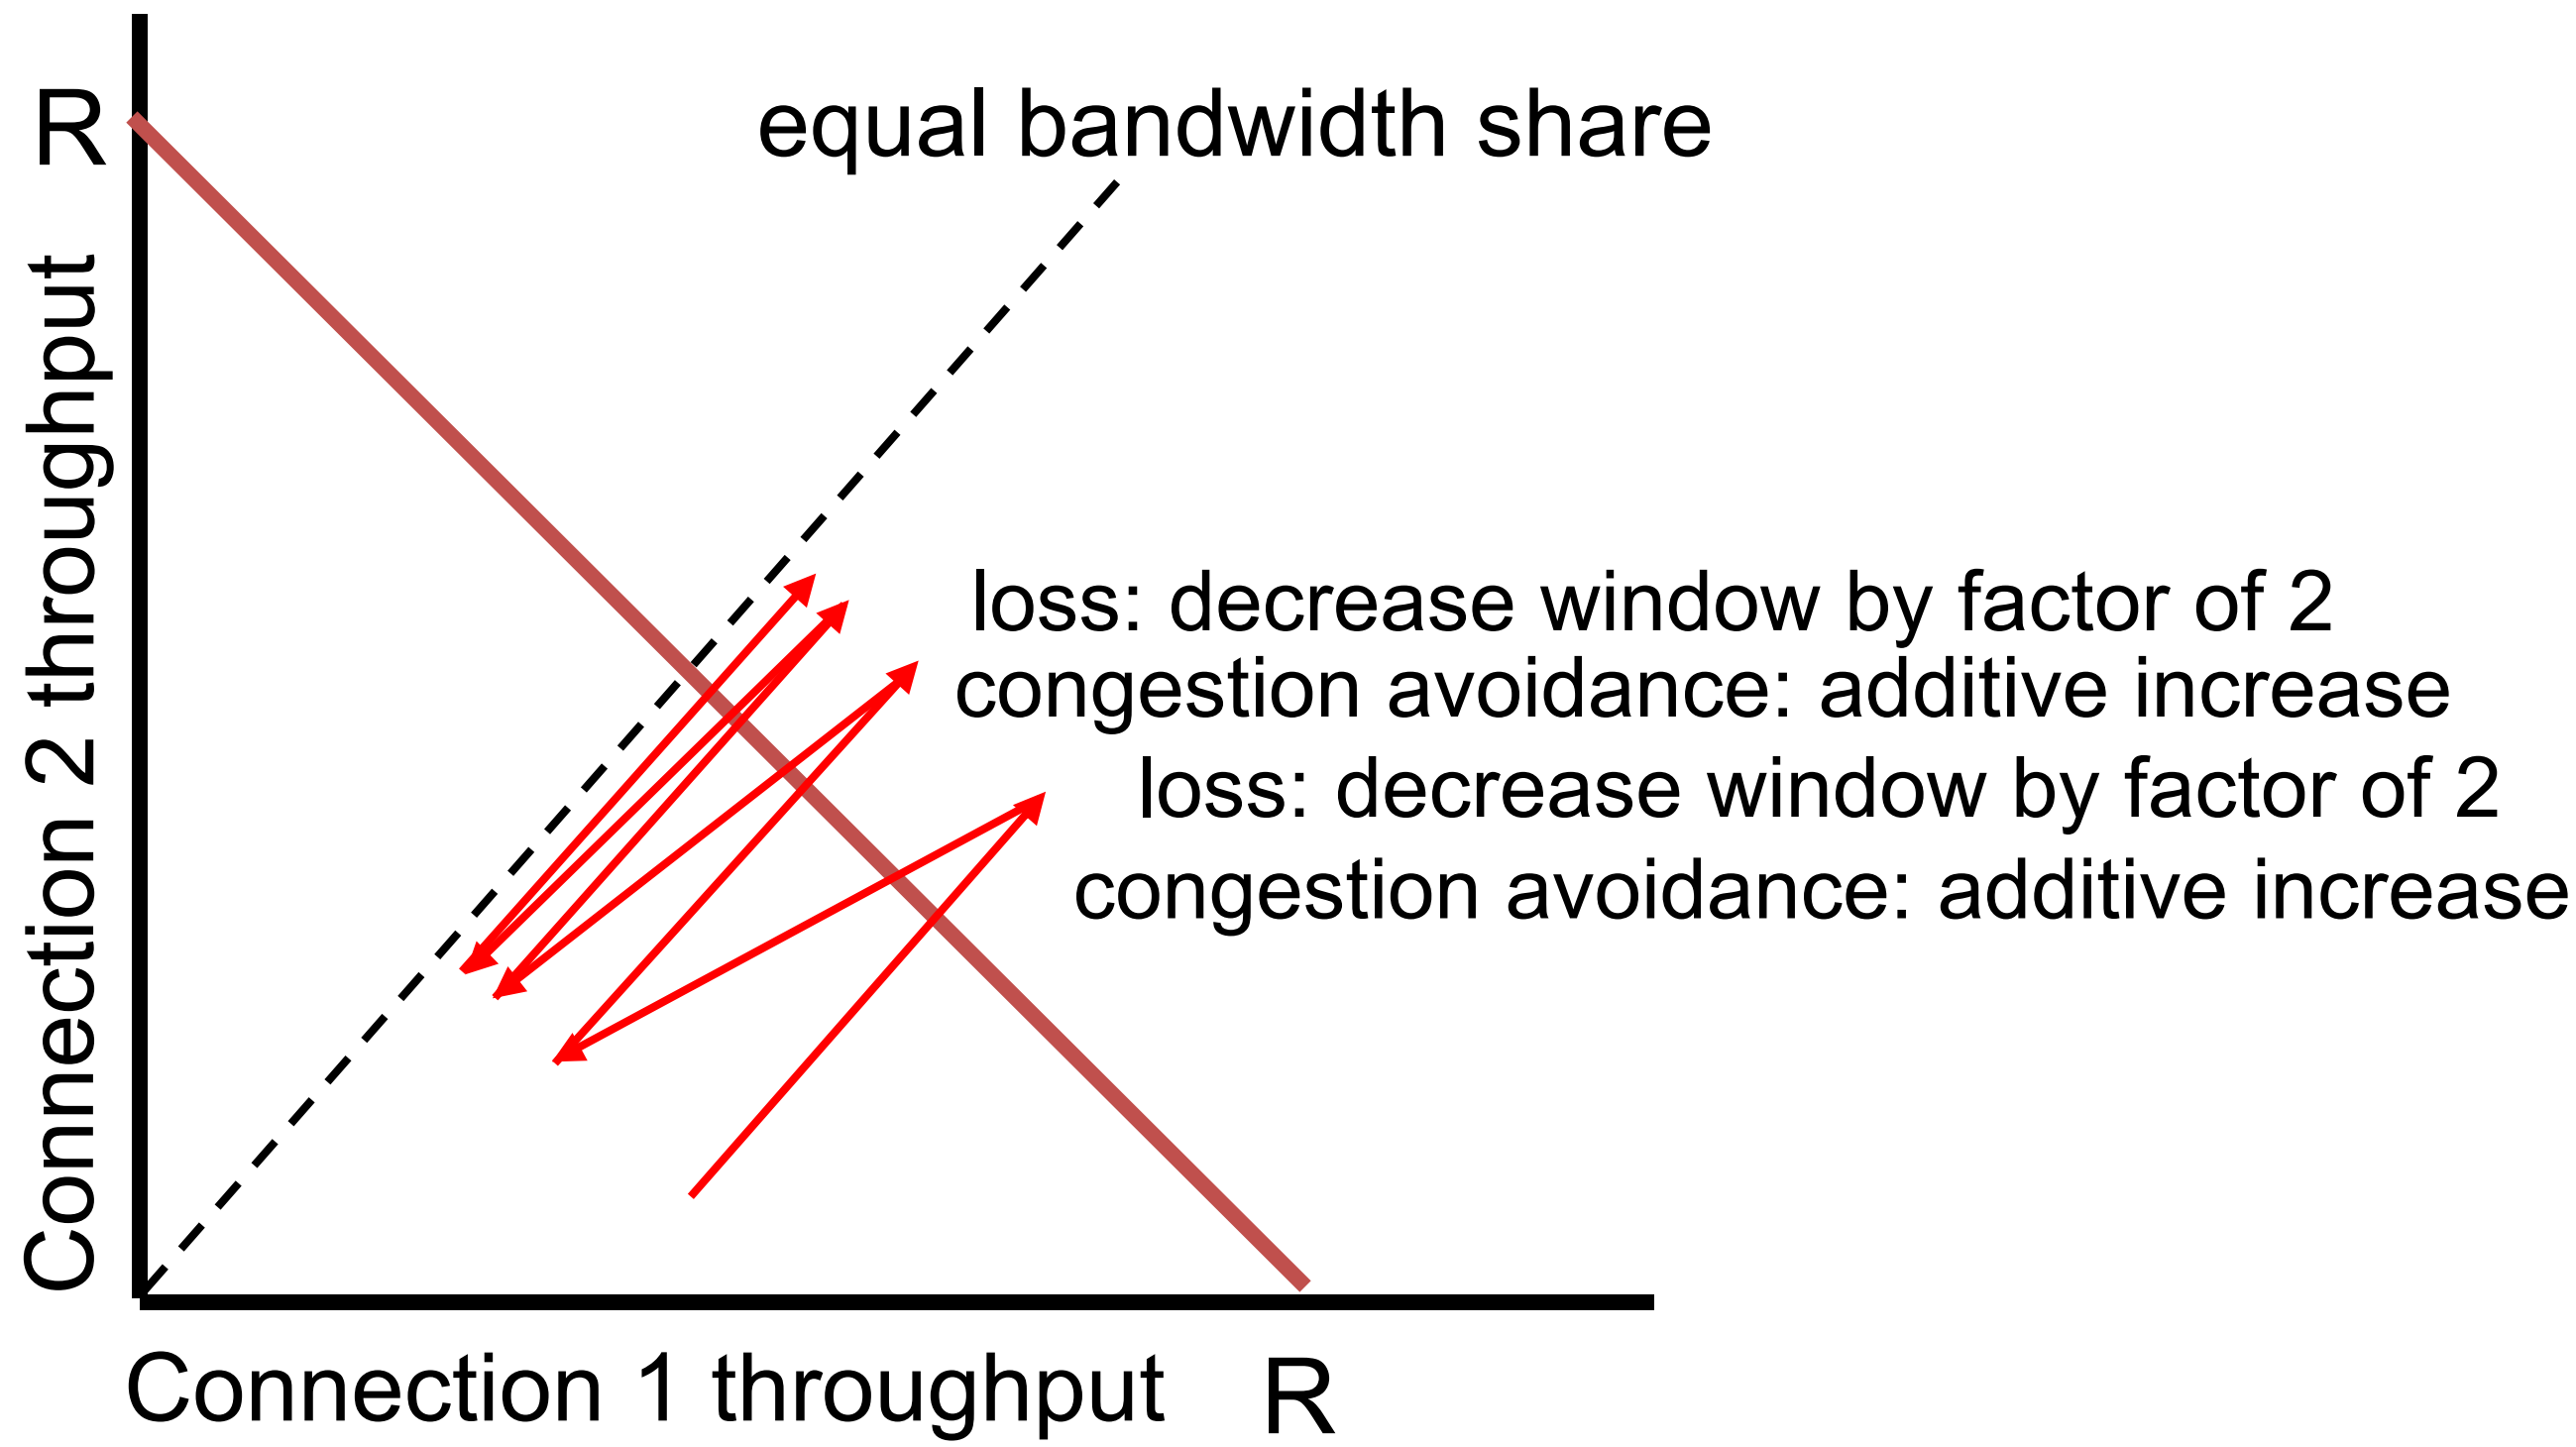

Fairness (more)

Fairness and UDP

- multimedia apps often do not use TCP
  - do not want rate throttled by congestion control
- instead use UDP:
  - send audio/video at constant rate, tolerate packet loss

Fairness, parallel TCP connections

- application can open multiple parallel connections between two hosts
- web browsers do this
- e.g., link of rate R with 9 existing connections:
  - new app asks for 1 TCP, gets rate R/10
  - new app asks for 11 TCPs, can get > R/2