
Nimbus


A small square computer. Blueprint for 3D printing, drawn from the CAD (nimbus_cad.py). Dimensions in mm.

FRONT

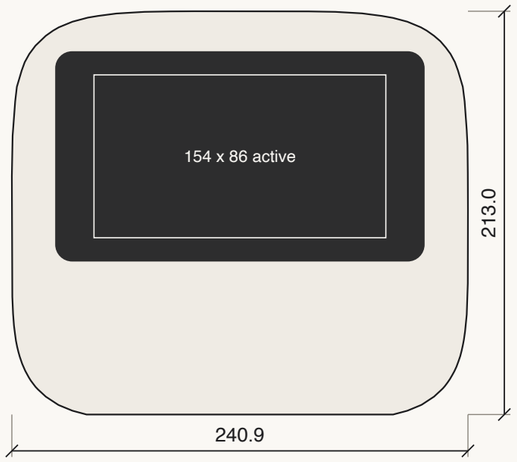


front 240 x 210, squircle n = 4.8, wall 2.4

SIDE

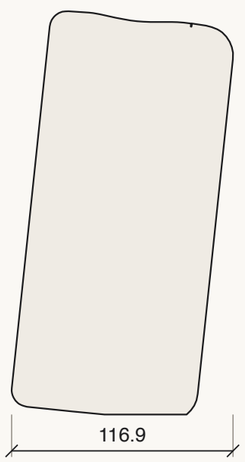


leans back 6 degrees

REAR

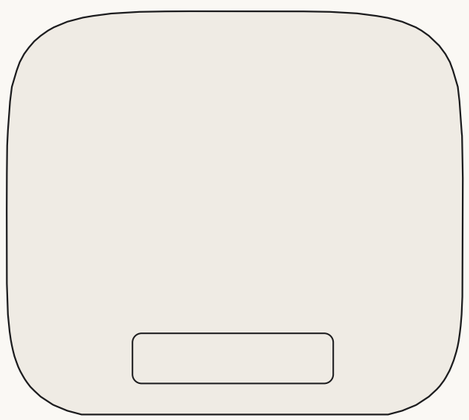


one recessed port strip

TOP

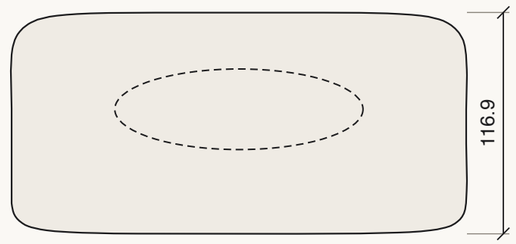


handle recess: a smooth scoop, wall kept at 2.4

UNDERSIDE

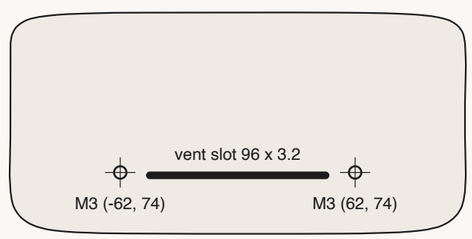

screws go up from underneath; the flat rear pad is the foot

EXPLODED

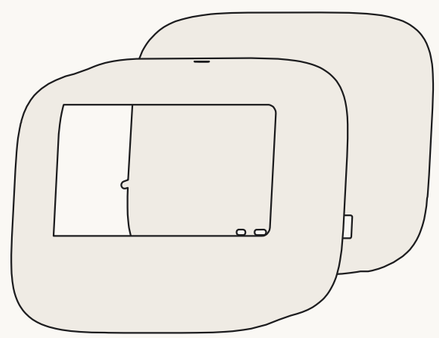

front shell and back cover, apart

PARTS AND PRINT SETTINGS



Front shell

240.9 x 210.3 x 90.1 mm
face down on the bed
no supports
0.2 mm layers, 6 walls (2.4 mm)
15 percent gyroid infill
PLA matte #EFEBE4
teardrop standoffs and the screw holes bridge



Back cover

240.8 x 208.5 x 91.2 mm
back panel down on the bed
no supports
0.2 mm layers, 6 walls (2.4 mm)
15 percent gyroid infill
PLA matte #EFEBE4
the port windows sit in the first layers



Mark ground inlay

17.3 x 1.4 x 0.5 mm
flat, one colour change
no supports
0.2 mm layers, 6 walls (2.4 mm)
15 percent gyroid infill
PLA matte terracotta #B5502C
a 0.5 mm filament-swap line

Fasteners and fit

2 x M3 x 12 self-tapping from underneath, at (-62, 74), (62, 74)
4 x M2.5 x 6 for the Pi 4 on teardrop standoffs, board 24 mm off the floor
wall 2.4 mm everywhere; one 0.5 mm reveal, half-lap joint
display: official Pi 7 inch touch, 194 x 110 glass, 154.08 x 86 active, glued to a 2 mm ledge
the display numbers are stand-ins: check them with calipers before printing
the front leans 6 degrees back; the flat rear pad is the foot, so the chin hovers

Joshua Tree OS, hardware, CC BY-NC-SA 4.0