
Nimbus


A small square computer. Blueprint for 3D printing, drawn from the CAD (nimbus_cad.py). Dimensions in mm.

FRONT

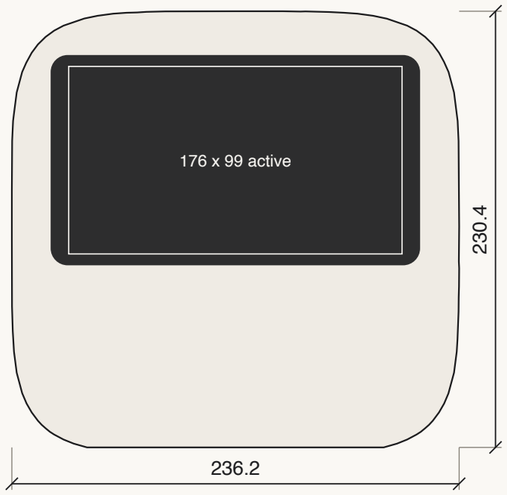

front 236 x 228, squircle n = 4.8, wall 2.4

SIDE

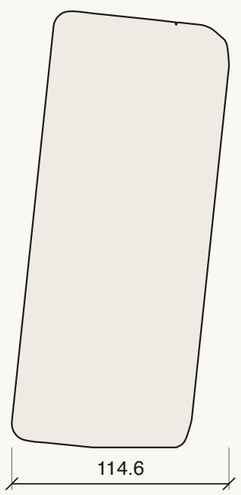


leans back 6 degrees

REAR




one slim strip: two USB-C and a round jack

TOP

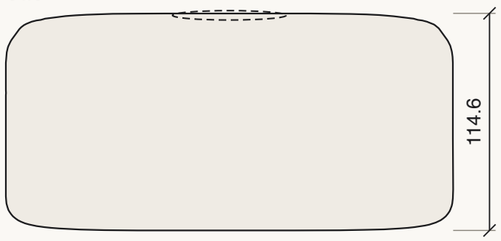


finger scoop: a small flat-floored recess in the back face, wall kept at 2.4

UNDERSIDE

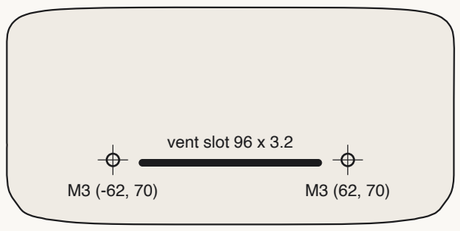


screws go up from underneath; the flat rear pad is the foot

EXPLODED

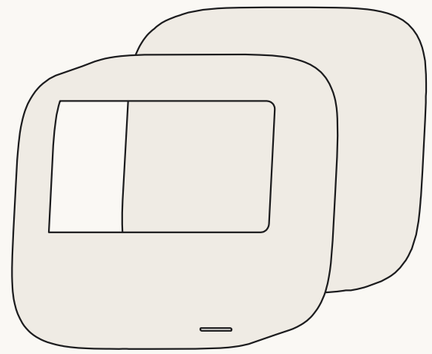


front shell and back cover, apart

PARTS AND PRINT SETTINGS



Front shell

236.4 x 228.3 x 86.1 mm
face down on the bed
no supports
0.2 mm layers, 6 walls (2.4 mm)
15 percent gyroid infill
PLA matte #EFEBE4
teardrop standoffs and the screw holes bridge



Back cover

236.0 x 226.7 x 87.5 mm
back panel down on the bed
no supports
0.2 mm layers, 6 walls (2.4 mm)
15 percent gyroid infill
PLA matte #EFEBE4
the port windows sit in the first layers



Mark ground inlay

27.1 x 1.1 x 0.6 mm
flat, one colour change
no supports
0.2 mm layers, 6 walls (2.4 mm)
15 percent gyroid infill
PLA matte terracotta #B5502C
a 0.5 mm filament-swap line

Fasteners and fit

2 x M3 x 12 self-tapping from underneath, at (-62, 70), (62, 70)
4 x M2.5 x 6 for the Pi 4 on teardrop standoffs, board 26 mm off the floor
wall 2.4 mm everywhere; one 0.5 mm reveal, half-lap joint
display (stand-in 16:9 panel): 194 x 110 glass, 176 x 99 active, glued to a 2 mm ledge
the display numbers are stand-ins: check them with calipers before printing
the front leans 6 degrees back; the flat rear pad is the foot, so the chin hovers

Joshua Tree OS, hardware, CC BY-NC-SA 4.0