




MSP430 DriverLib for MSP430FR57xx Devices

User's Guide

Copyright

Copyright © 2019 Texas Instruments Incorporated. All rights reserved. MSP430 and MSP430Ware are trademarks of Texas Instruments Instruments. ARM and Thumb are registered trademarks and Cortex is a trademark of ARM Limited. Other names and brands may be claimed as the property of others.

 Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this document.

Texas Instruments
13532 N. Central Expressway MS3810
Dallas, TX 75243
www.ti.com/



Revision Information

This is version 2.91.11.01 of this document, last updated on Wed Feb 20 2019 12:04:55.

Table of Contents

Copyright	1
Revision Information	1
1 Introduction	5
2 Navigating to driverlib through CCS Resource Explorer	7
2.1 Introduction	7
3 How to create a new CCS project that uses Driverlib	19
3.1 Introduction	19
4 How to include driverlib into your existing CCS project	21
4.1 Introduction	21
5 How to create a new IAR project that uses Driverlib	23
5.1 Introduction	23
6 How to include driverlib into your existing IAR project	26
6.1 Introduction	26
7 10-Bit Analog-to-Digital Converter (ADC10_B)	29
7.1 Introduction	29
7.2 API Functions	29
7.3 Programming Example	47
8 Comparator (COMP_D)	49
8.1 Introduction	49
8.2 API Functions	49
8.3 Programming Example	59
9 Cyclical Redundancy Check (CRC)	61
9.1 Introduction	61
9.2 API Functions	61
9.3 Programming Example	65
10 Clock System (CS)	66
10.1 Introduction	66
10.2 API Functions	67
10.3 Programming Example	79
11 Direct Memory Access (DMA)	80
11.1 Introduction	80
11.2 API Functions	80
11.3 Programming Example	93
12 EUSCI Universal Asynchronous Receiver/Transmitter (EUSCI_A_UART)	94
12.1 Introduction	94
12.2 API Functions	94
12.3 Programming Example	105
13 EUSCI Synchronous Peripheral Interface (EUSCI_A_SPI)	106
13.1 Introduction	106
13.2 Functions	106
13.3 Programming Example	115
14 EUSCI Synchronous Peripheral Interface (EUSCI_B_SPI)	116
14.1 Introduction	116
14.2 Functions	116
14.3 Programming Example	125

15	EUSCI Inter-Integrated Circuit (EUSCI_B_I2C)	126
15.1	Introduction	126
15.2	Master Operations	126
15.3	Slave Operations	127
15.4	API Functions	128
15.5	Programming Example	149
16	FRAMctl - FRAM Controller	150
16.1	Introduction	150
16.2	API Functions	150
16.3	Programming Example	151
17	GPIO	152
17.1	Introduction	152
17.2	API Functions	153
17.3	Programming Example	184
18	Memory Protection Unit (MPU)	186
18.1	Introduction	186
18.2	API Functions	186
18.3	Programming Example	193
19	32-Bit Hardware Multiplier (MPY32)	194
19.1	Introduction	194
19.2	API Functions	194
19.3	Programming Example	203
20	Power Management Module (PMM)	204
20.1	Introduction	204
20.2	API Functions	204
20.3	Programming Example	209
21	Internal Reference (REF)	211
21.1	Introduction	211
21.2	API Functions	211
21.3	Programming Example	216
22	Real-Time Clock (RTC_B)	217
22.1	Introduction	217
22.2	API Functions	217
22.3	Programming Example	229
23	SFR Module	231
23.1	Introduction	231
23.2	API Functions	231
23.3	Programming Example	236
24	System Control Module	237
24.1	Introduction	237
24.2	API Functions	237
24.3	Programming Example	243
25	16-Bit Timer_A (TIMER_A)	244
25.1	Introduction	244
25.2	API Functions	245
25.3	Programming Example	260
26	16-Bit Timer_B (TIMER_B)	262
26.1	Introduction	262

26.2 API Functions	263
26.3 Programming Example	281
27 Tag Length Value	282
27.1 Introduction	282
27.2 API Functions	282
27.3 Programming Example	289
28 WatchDog Timer (WDT_A)	290
28.1 Introduction	290
28.2 API Functions	290
28.3 Programming Example	294
29 Data Structure Documentation	295
29.1 Data Structures	295
29.2 Timer_B_initContinuousModeParam Struct Reference	296
29.3 Comp_D_initParam Struct Reference	298
29.4 Timer_A_initUpModeParam Struct Reference	300
29.5 EUSCI_B_SPI_initSlaveParam Struct Reference	303
29.6 Timer_A_initCompareModeParam Struct Reference	304
29.7 EUSCI_B_SPI_changeMasterClockParam Struct Reference	306
29.8 Timer_B_initUpDownModeParam Struct Reference	306
29.9 Timer_A_initContinuousModeParam Struct Reference	308
29.10EUSCI_B_I2C_initSlaveParam Struct Reference	310
29.11Timer_A_initCaptureModeParam Struct Reference	311
29.12MPU_initThreeSegmentsParam Struct Reference	314
29.13EUSCI_A_UART_initParam Struct Reference	315
29.14Timer_B_outputPWMPParam Struct Reference	318
29.15EUSCI_B_I2C_initMasterParam Struct Reference	320
29.16EUSCI_A_SPI_changeMasterClockParam Struct Reference	321
29.17Timer_B_initUpModeParam Struct Reference	322
29.18Timer_B_initCompareModeParam Struct Reference	324
29.19EUSCI_A_SPI_initMasterParam Struct Reference	326
29.20Timer_B_initCaptureModeParam Struct Reference	328
29.21EUSCI_B_SPI_initMasterParam Struct Reference	330
29.22DMA_initParam Struct Reference	332
29.23Calendar Struct Reference	335
29.24Timer_A_initUpDownModeParam Struct Reference	335
29.25EUSCI_A_SPI_initSlaveParam Struct Reference	338
29.26RTC_B_configureCalendarAlarmParam Struct Reference	339
29.27Timer_A_outputPWMPParam Struct Reference	341
IMPORTANT NOTICE	344

1 Introduction

The Texas Instruments® MSP430® Peripheral Driver Library is a set of drivers for accessing the peripherals found on the MSP430 FR5xx/FR6xx family of microcontrollers. While they are not drivers in the pure operating system sense (that is, they do not have a common interface and do not connect into a global device driver infrastructure), they do provide a mechanism that makes it easy to use the device's peripherals.

The capabilities and organization of the drivers are governed by the following design goals:

- They are written entirely in C except where absolutely not possible.
- They demonstrate how to use the peripheral in its common mode of operation.
- They are easy to understand.
- They are reasonably efficient in terms of memory and processor usage.
- They are as self-contained as possible.
- Where possible, computations that can be performed at compile time are done there instead of at run time.
- They can be built with more than one tool chain.

Some consequences of these design goals are:

- The drivers are not necessarily as efficient as they could be (from a code size and/or execution speed point of view). While the most efficient piece of code for operating a peripheral would be written in assembly and custom tailored to the specific requirements of the application, further size optimizations of the drivers would make them more difficult to understand.
- The drivers do not support the full capabilities of the hardware. Some of the peripherals provide complex capabilities which cannot be utilized by the drivers in this library, though the existing code can be used as a reference upon which to add support for the additional capabilities.
- The APIs have a means of removing all error checking code. Because the error checking is usually only useful during initial program development, it can be removed to improve code size and speed.

For many applications, the drivers can be used as is. But in some cases, the drivers will have to be enhanced or rewritten in order to meet the functionality, memory, or processing requirements of the application. If so, the existing driver can be used as a reference on how to operate the peripheral.

Each MSP430ware driverlib API takes in the base address of the corresponding peripheral as the first parameter. This base address is obtained from the msp430 device specific header files (or from the device datasheet). The example code for the various peripherals show how base address is used. When using CCS, the eclipse shortcut "Ctrl + Space" helps. Type `__MSP430` and "Ctrl + Space", and the list of base addresses from the included device specific header files is listed.

The following tool chains are supported:

- IAR Embedded Workbench®
- Texas Instruments Code Composer Studio™


Using assert statements to debug

Assert statements are disabled by default. To enable the assert statement edit the hw_regaccess.h file in the inc folder. Comment out the statement `#define NDEBUG` -> `//#define NDEBUG` Asserts in CCS work only if the project is optimized for size.


2 Navigating to driverlib through CCS Resource Explorer

2.1 Introduction


In CCS, click View->TI Resource Explorer

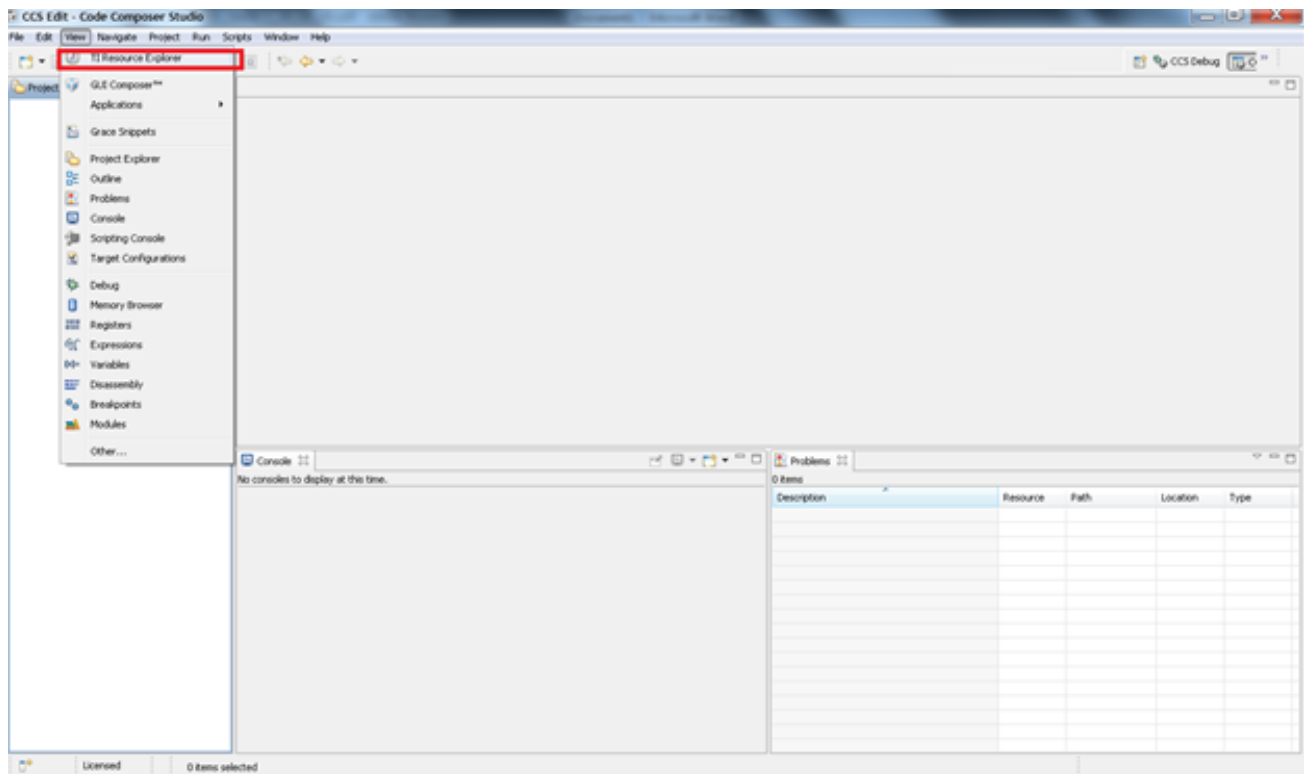


In Resource Explorer View, click on MSP430ware

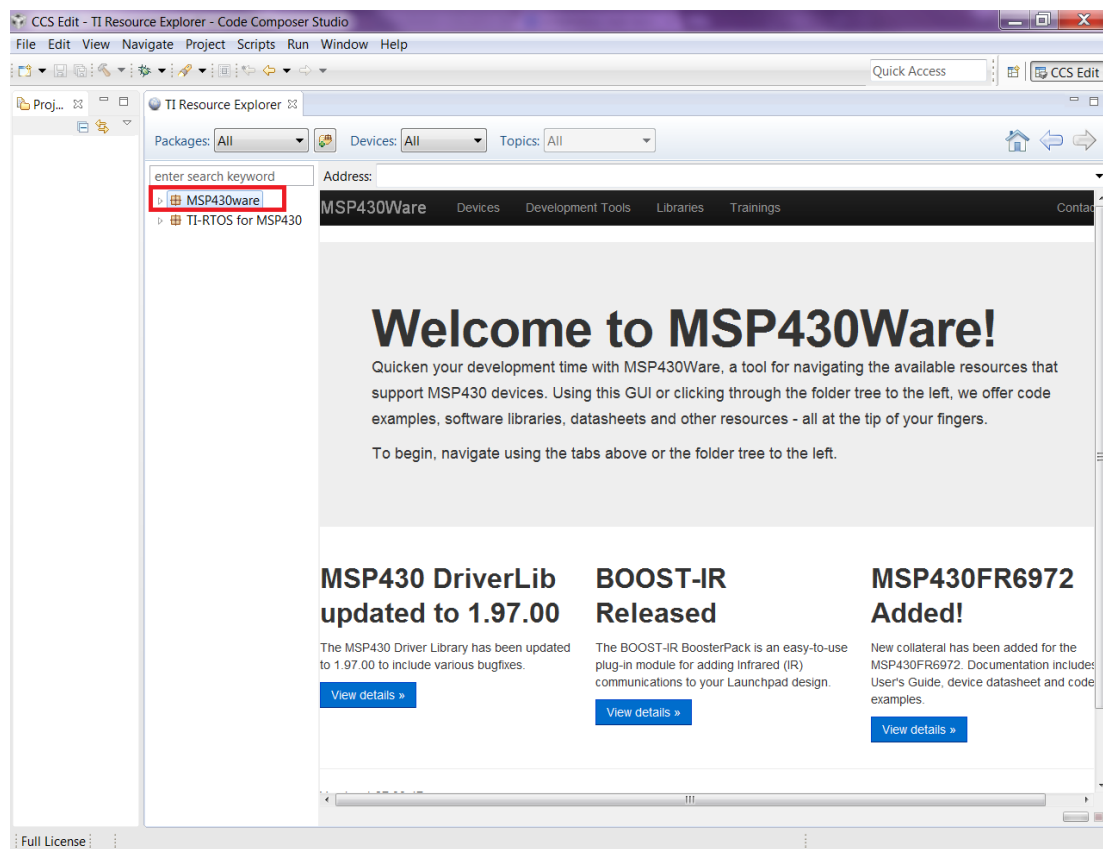


Clicking MSP430ware takes you to the introductory page. The version of the latest MSP430ware installed is available in this page. In this screenshot the version is 1.30.00.15 The various software, collateral, code examples, datasheets and user guides can be navigated by clicking the different topics under MSP430ware. To proceed to driverlib, click on Libraries->Driverlib as shown in the next two screenshots.

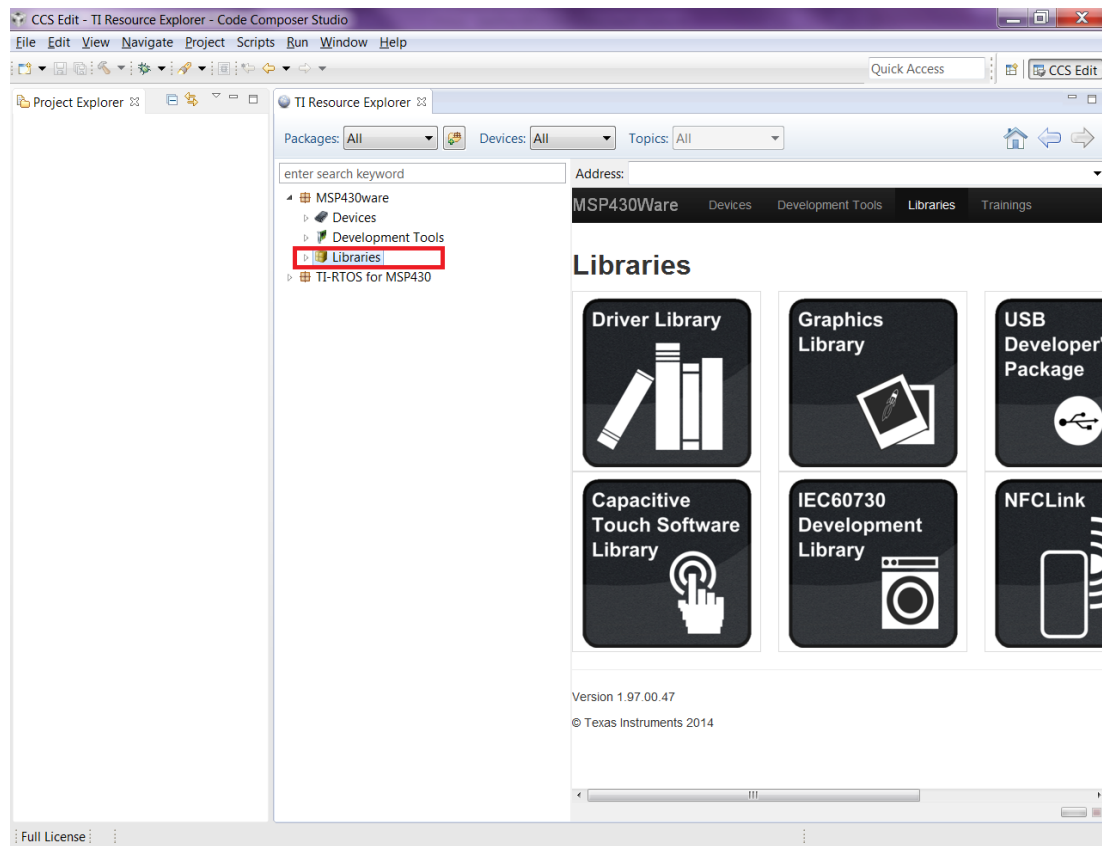


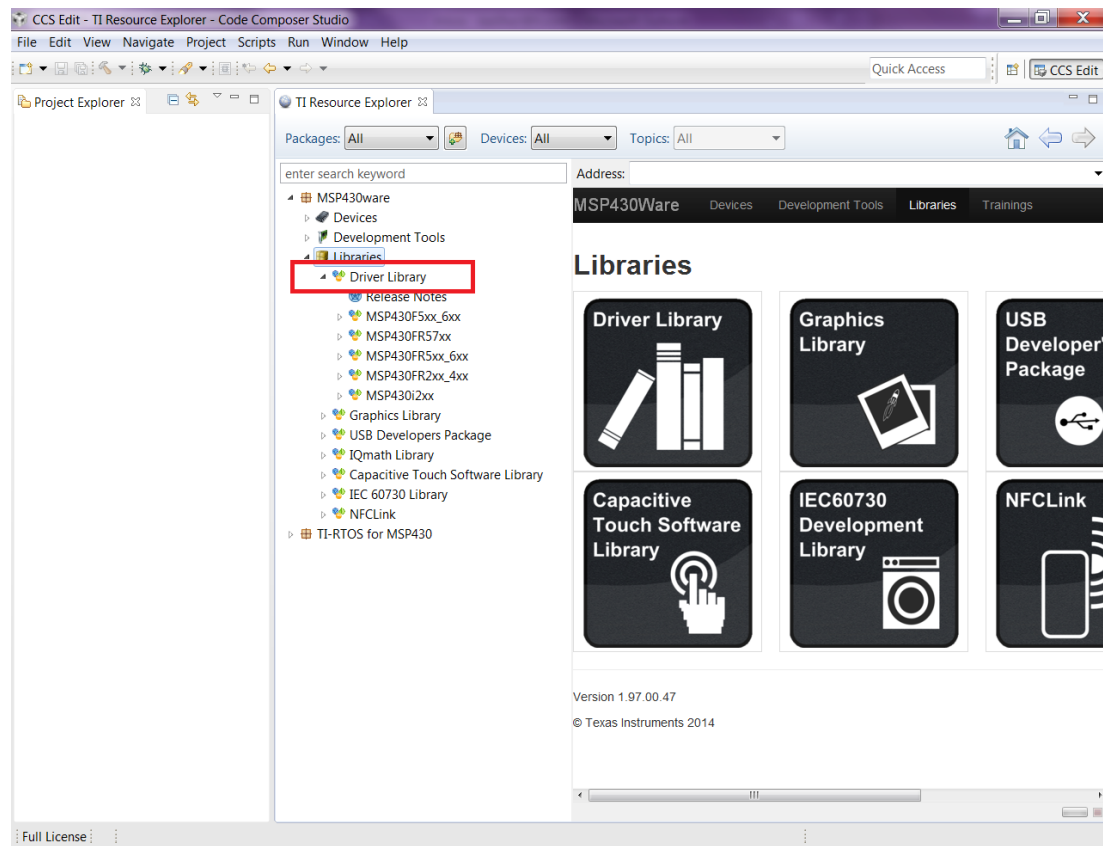


Driverlib is designed per Family. If a common device family user's guide exists for a group of devices, these devices belong to the same 'family'. Currently driverlib is available for the following family of devices. MSP430F5xx_6xx MSP430FR57xx MSP430FR2xx_4xx MSP430FR5xx_6xx MSP430i2xx




Click on the MSP430FR5xx_6xx to navigate to the driverlib based example code for that family.

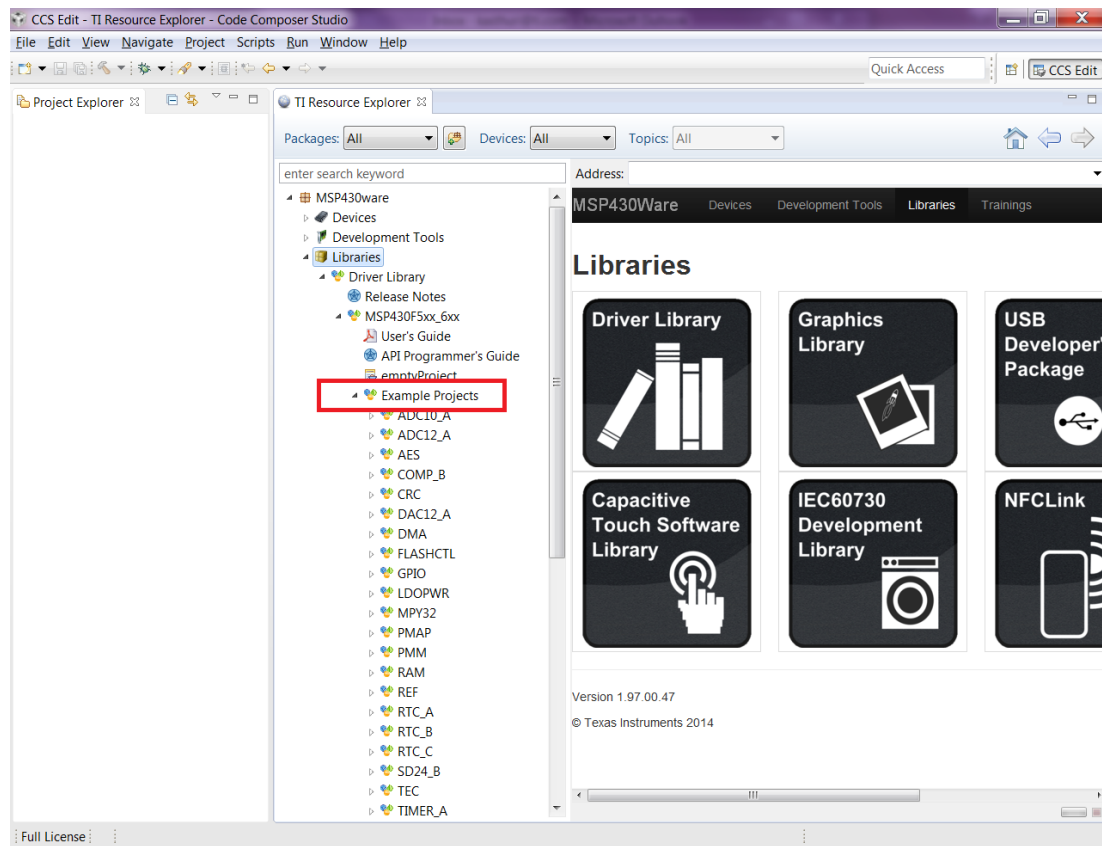


The various peripherals are listed in alphabetical order. The names of peripherals are as in device family user's guide. Clicking on a peripheral name lists the driverlib example code for that peripheral. The screenshot below shows an example when the user clicks on GPIO peripheral.

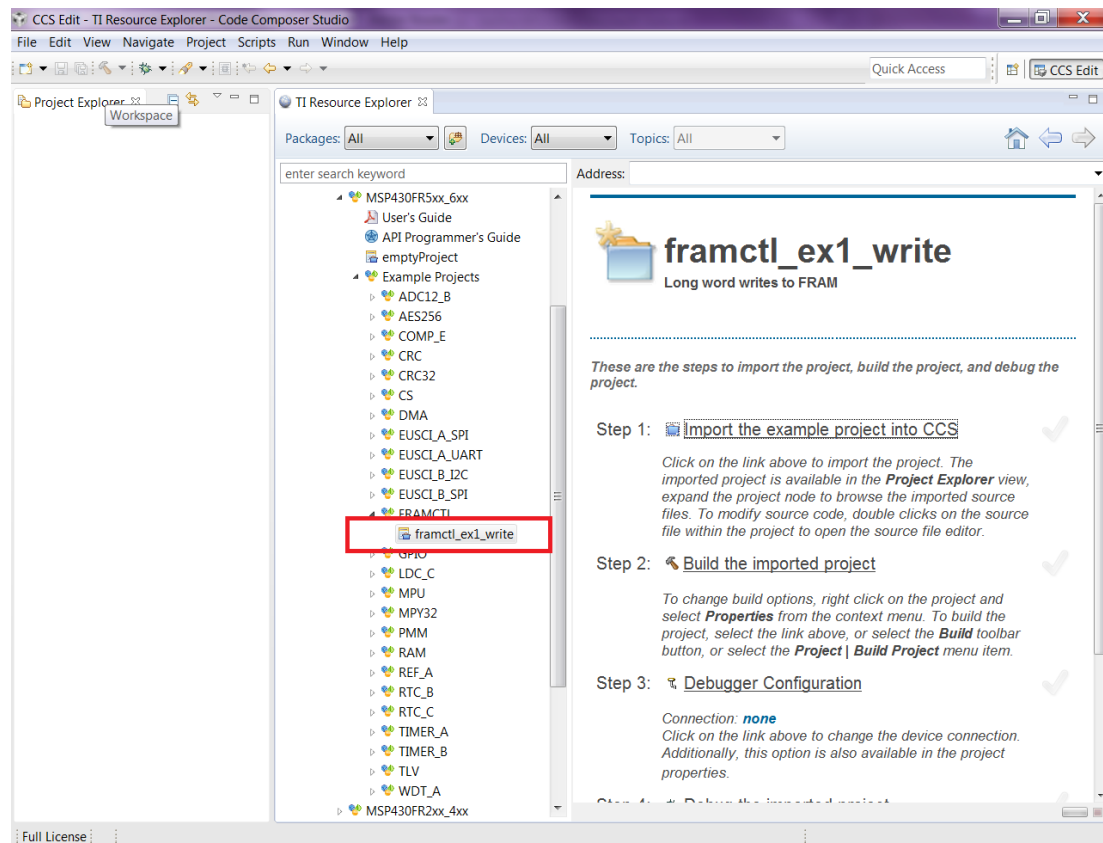


Now click on the specific example you are interested in. On the right side there are options to Import/Build/Download and Debug. Import the project by clicking on the "Import the example project into CCS"

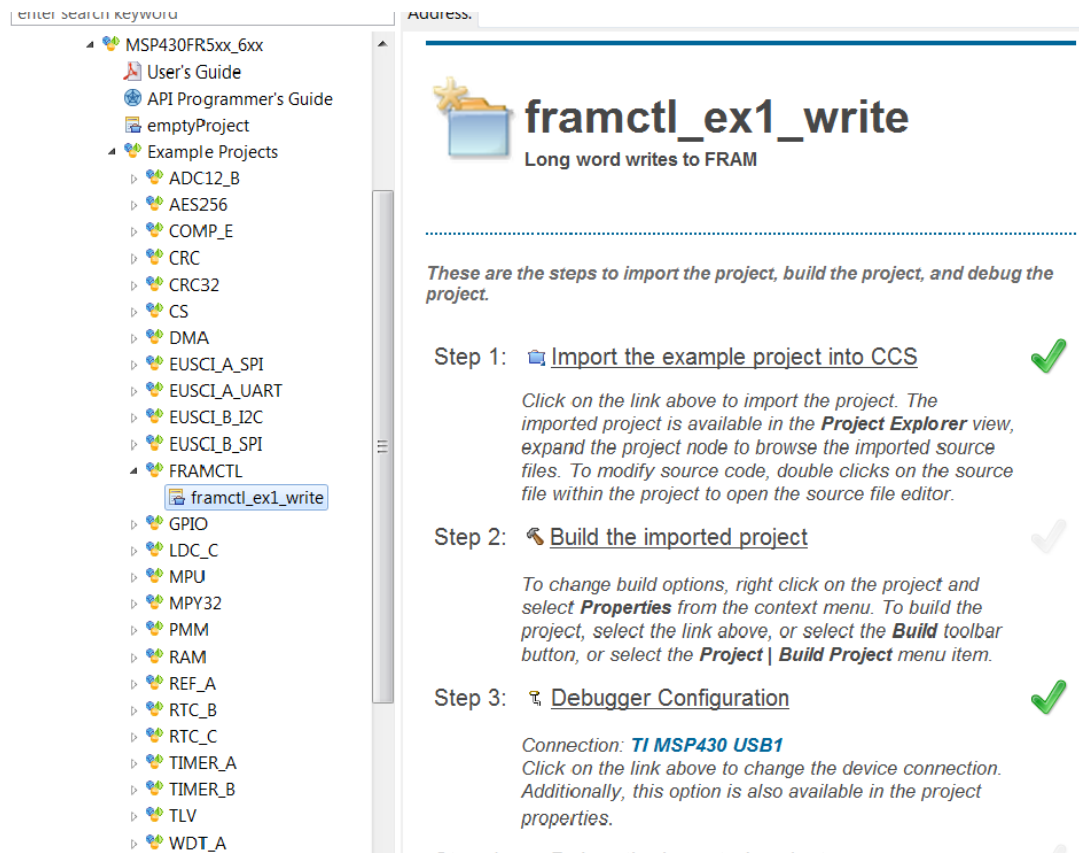

The imported project can be viewed on the left in the Project Explorer. All required driverlib source and header files are included inside the driverlib folder. All driverlib source and header files are linked to the example projects. So if the user modifies any of these source or header files, the original copy of the installed MSP430ware driverlib source and header files get modified.

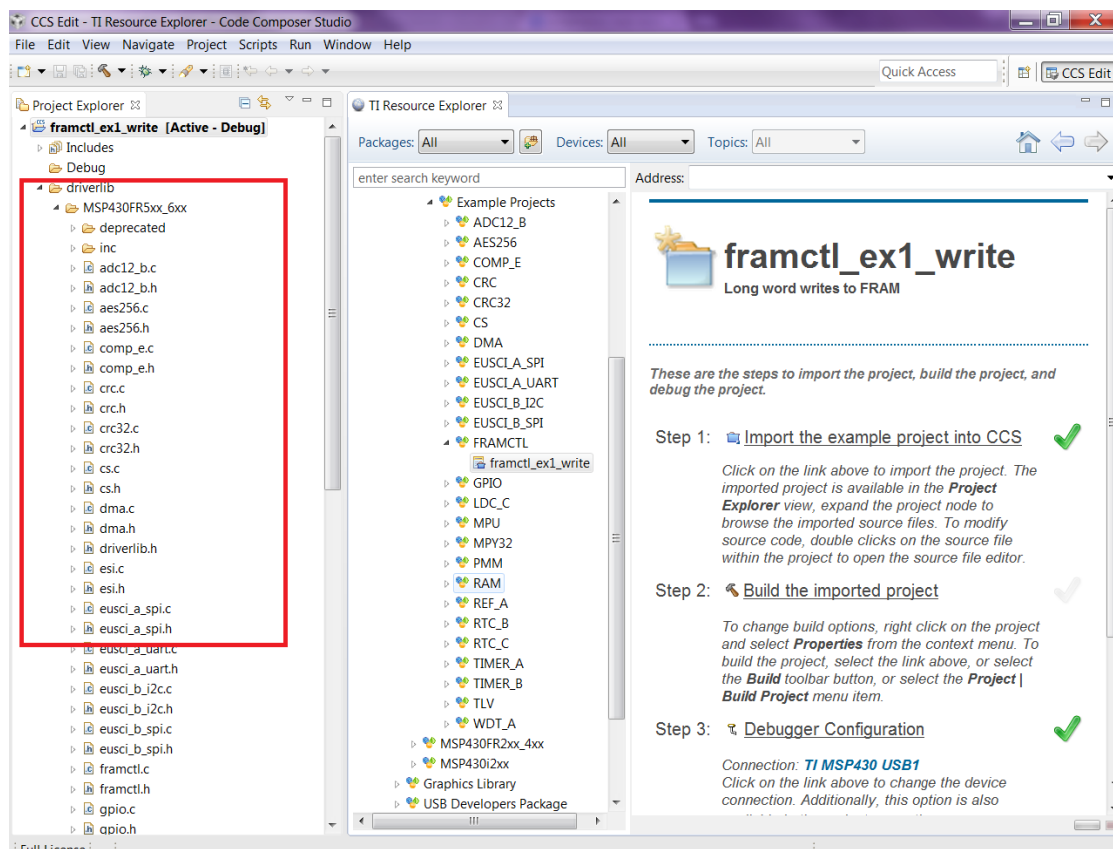

Now click on Build the imported project on the right to build the example project.

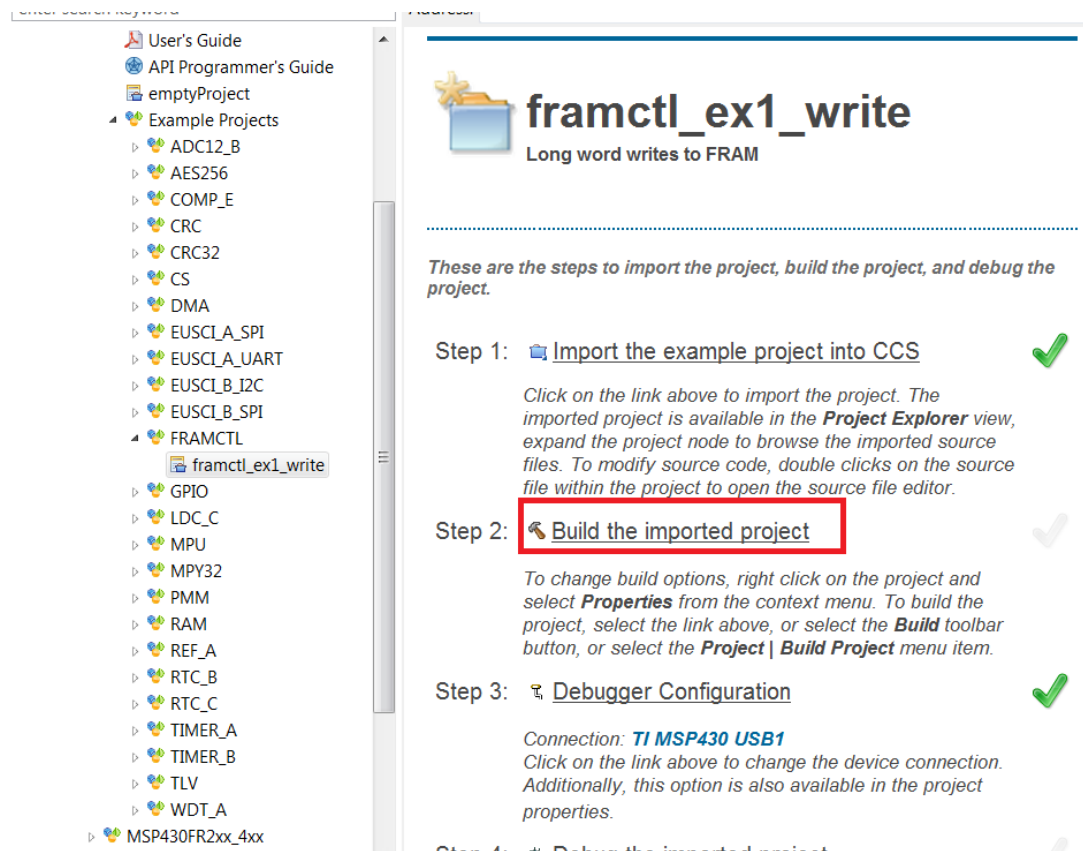

Now click on Build the imported project on the right to build the example project.

API Programmer's Guide

- emptyProject
- Example Projects
 - ADC12_B
 - AES256
 - COMP_E
 - CRC
 - CRC32
 - CS
 - DMA
 - EUSCL_A_SPI
 - EUSCL_A_UART
 - EUSCL_B_I2C
 - EUSCL_B_SPI
 - FRAMCTL
 - framctl_ex1_write
 - GPIO
 - LDC_C
 - MPU
 - MPY32
 - PMM
 - RAM
 - REF_A
 - RTC_B
 - RTC_C
 - TIMER_A
 - TIMER_B
 - TLV
 - WDT_A
- MSP430FR2xx_4xx
- MSP430i2xx

Step 1: [Import the example project into CCS](#)

Click on the link above to import the project. The imported project is available in the **Project Explorer** view, expand the project node to browse the imported source files. To modify source code, double clicks on the source file within the project to open the source file editor.

Step 2: [Build the imported project](#)

To change build options, right click on the project and select **Properties** from the context menu. To build the project, select the link above, or select the **Build** toolbar button, or select the **Project | Build Project** menu item.

Step 3: [Debugger Configuration](#)


Connection: **TI MSP430 USB1**
Click on the link above to change the device connection. Additionally, this option is also available in the project properties.

Step 4: [Debug the imported project](#)

Click on the link above to launch a debug session for the **framctl_ex1_write** project and switch to the **CCS Debug Perspective**. Additionally, these are other methods to start a project debug session. Select the project in the **Project Explorer** view and click on the bug toolbar button. To relaunch a previous debug session, click on the small arrow beside the bug toolbar button and select one of the debug session from the history.

The COM port to download to can be changed using the Debugger Configuration option on the right if required.

To get started on a new project we recommend getting started on an empty project we provide. This project has all the driverlib source files, header files, project paths are set by default.

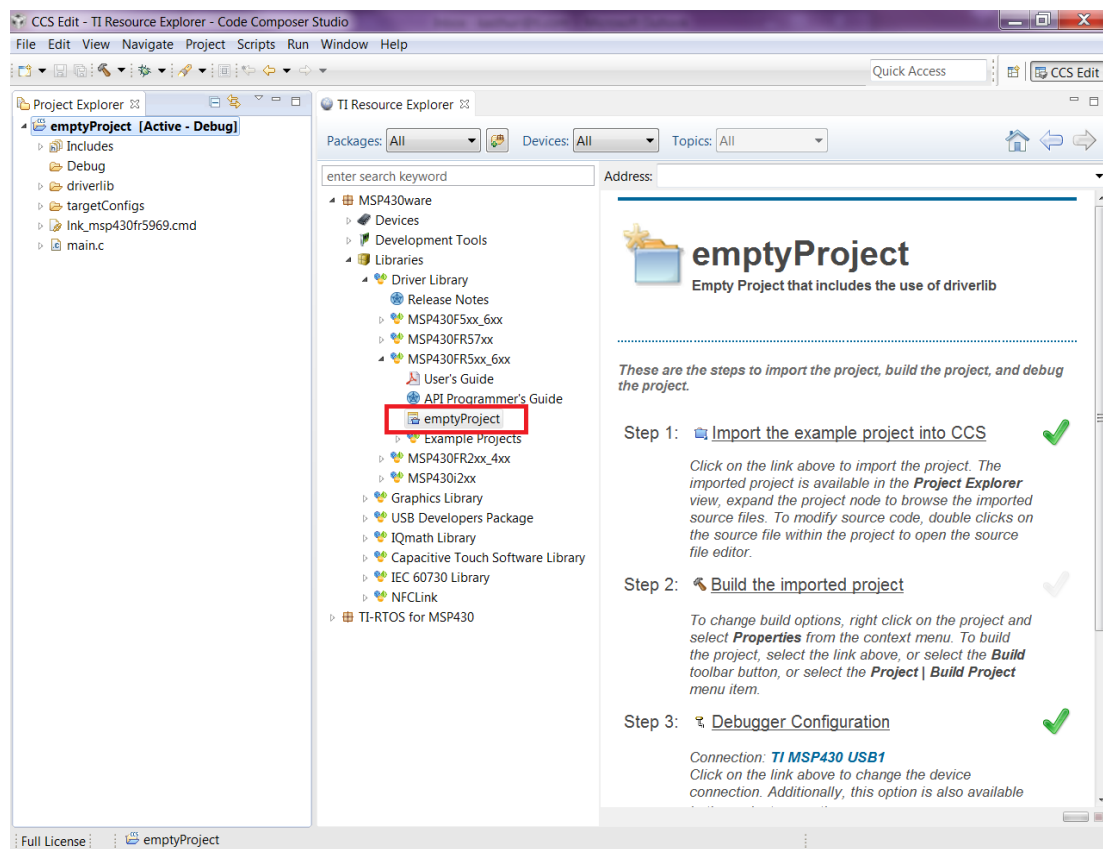


The main.c included with the empty project can be modified to include user code.

3 How to create a new CCS project that uses Driverlib


3.1 Introduction

To get started on a new project we recommend using the new project wizard. For driver library to work with the new project wizard CCS must have discovered the driver library RTSC product. For more information refer to the installation steps of the release notes. The new project wizard adds the needed driver library source files and adds the driver library include path.

To open the new project wizard go to File -> New -> CCS Project as seen in the screenshot below.

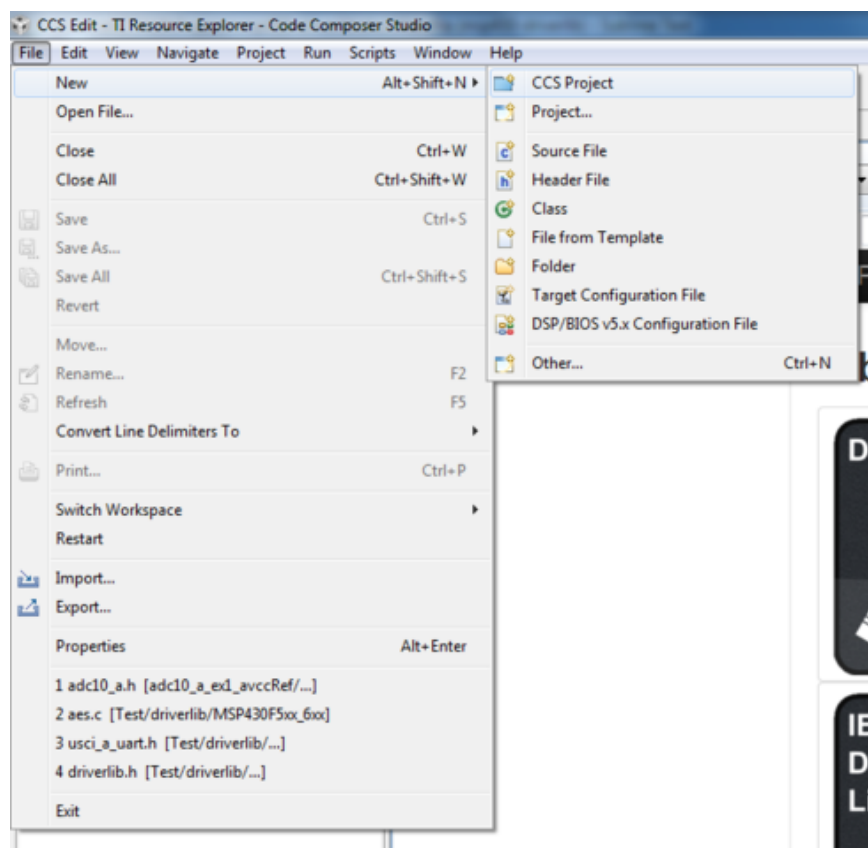

Once the new project wizard has been opened name your project and choose the device you would like to create a Driver Library project for. The device must be supported by driver library. Then under "Project templates and examples" choose "Empty Project with DriverLib Source" as seen below.

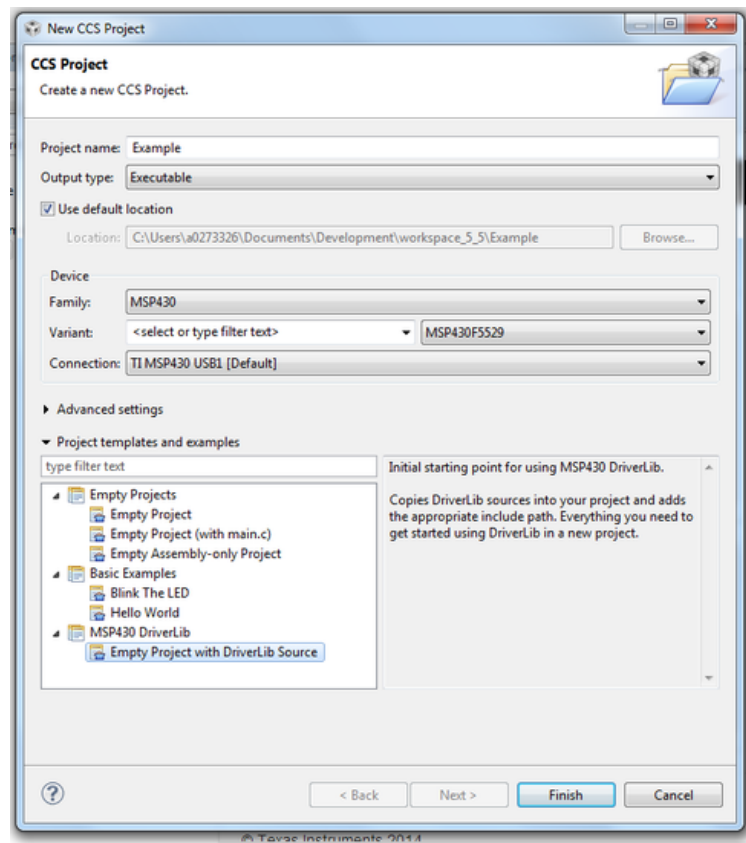


Finally click "Finish" and begin developing with your Driver Library enabled project.

We recommend -O4 compiler settings for more efficient optimizations for projects using driverlib

4 How to include driverlib into your existing CCS project


4.1 Introduction

To add driver library to an existing project we recommend using CCS project templates. For driver library to work with project templates CCS must have discovered the driver library RTSC product. For more information refer to the installation steps of the release notes. CCS project templates adds the needed driver library source files and adds the driver library include path. To apply a project template right click on an existing project then go to Source -> Apply Project Template as seen in the screenshot below.

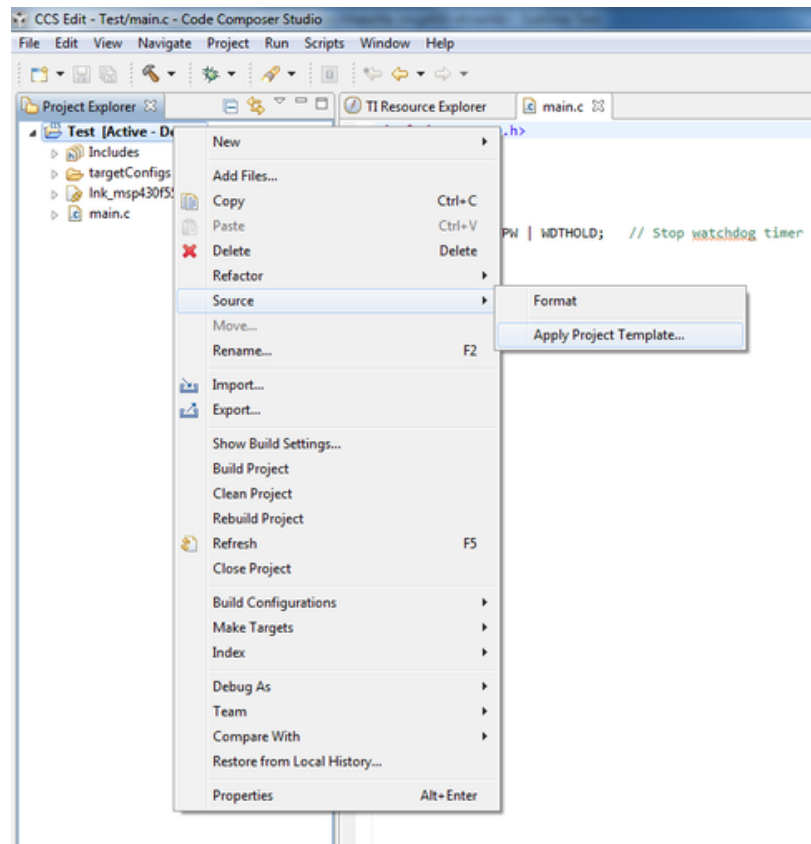

In the "Apply Project Template" dialog box under "MSP430 DriverLib Additions" choose either "Add Local Copy" or "Point to Installed DriverLib" as seen in the screenshot below. Most users will want to add a local copy which copies the DriverLib source into the project and sets the compiler settings needed.

Pointing to an installed DriverLib is for advanced users who are including a static library in their project and want to add the DriverLib header files to their include path.

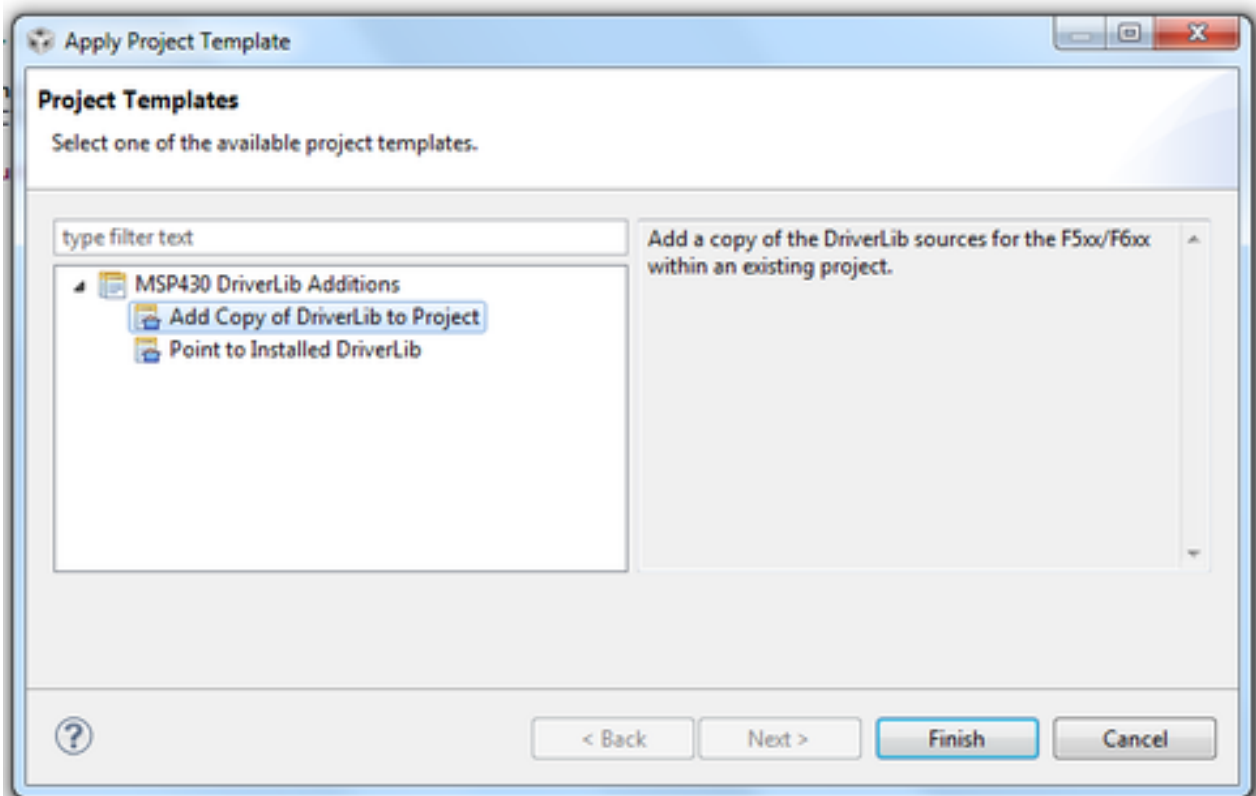



Click "Finish" and start developing with driver library in your project.


5 How to create a new IAR project that uses Driverlib

5.1 Introduction

It is recommended to get started with an Empty Driverlib Project. Browse to the empty project in your device's family. This is available in the driverlib instal folder\00_emptyProject

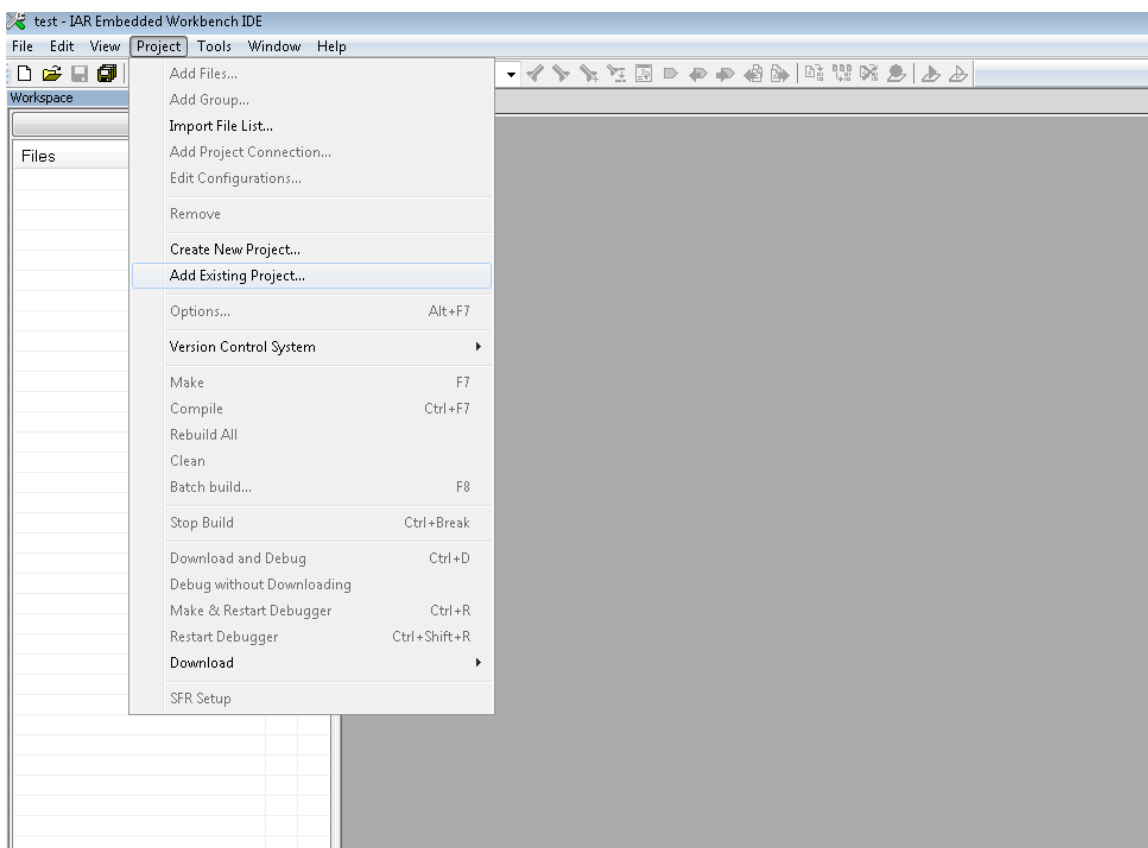

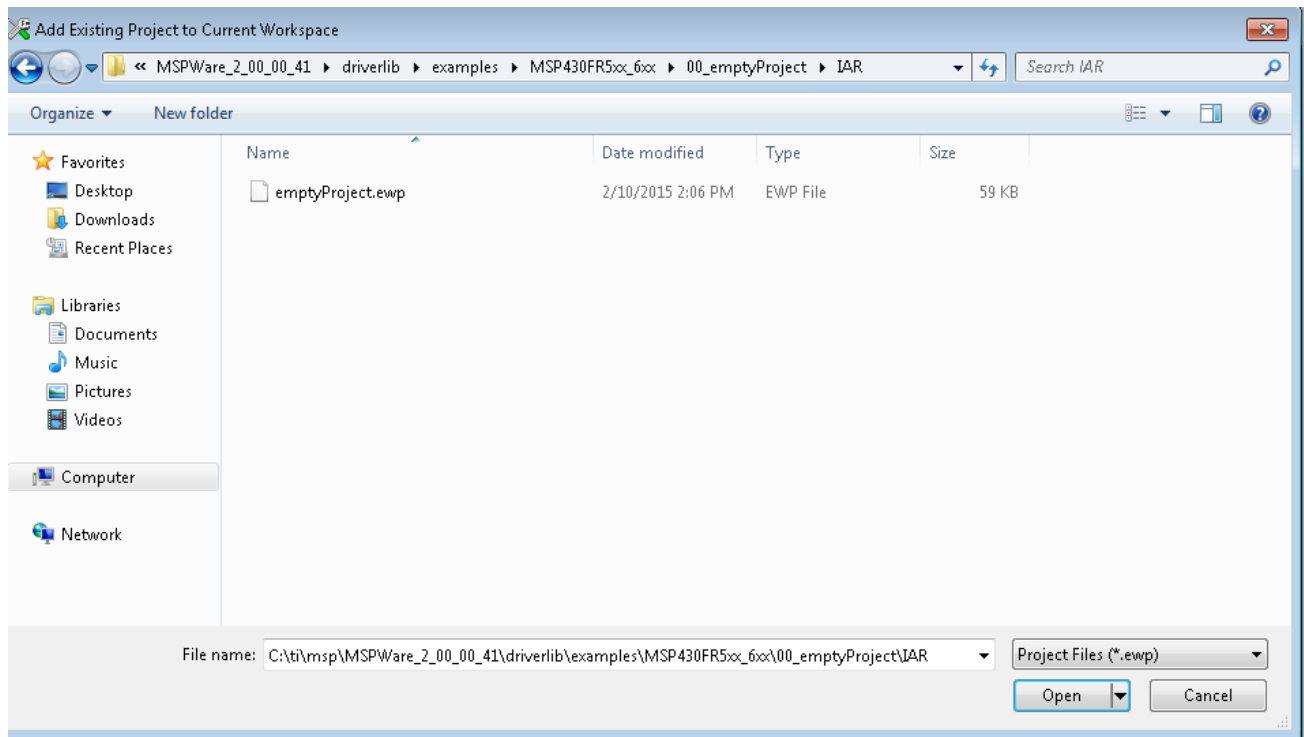


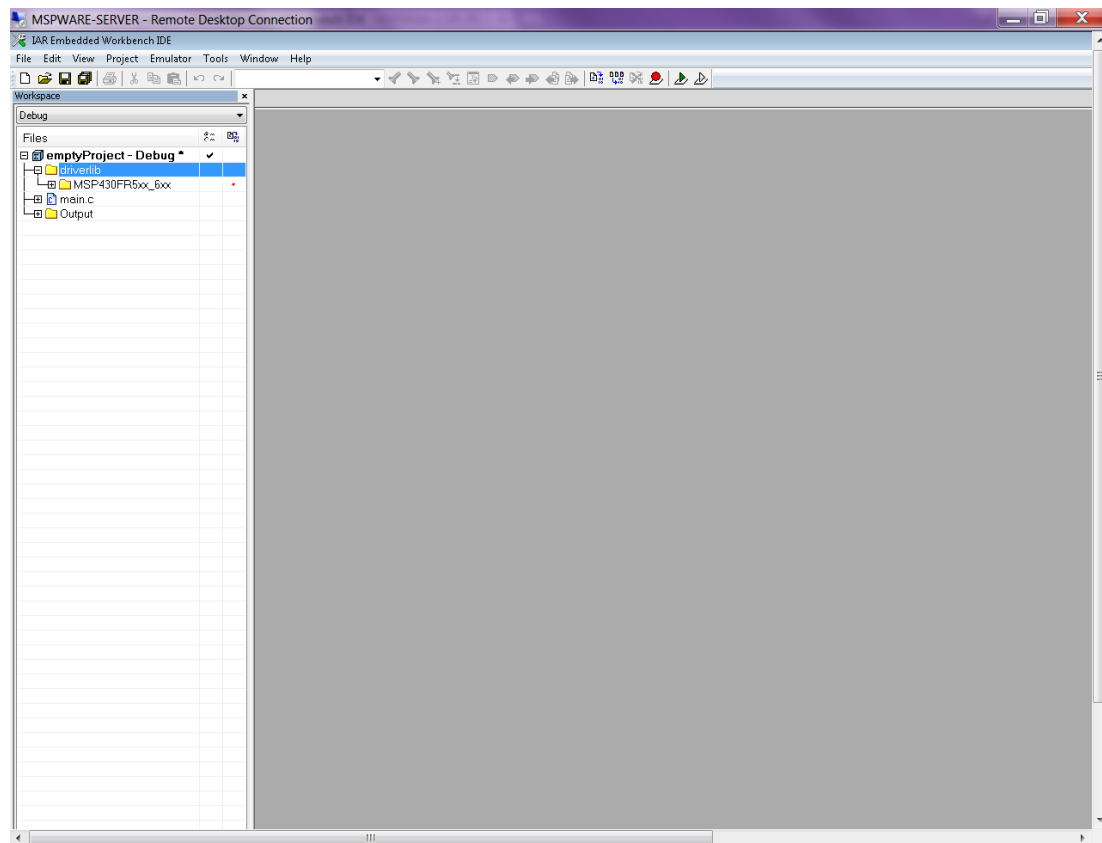


6 How to include driverlib into your existing IAR project

6.1 Introduction


To add driver library to an existing project, right click project click on Add Group - "driverlib"

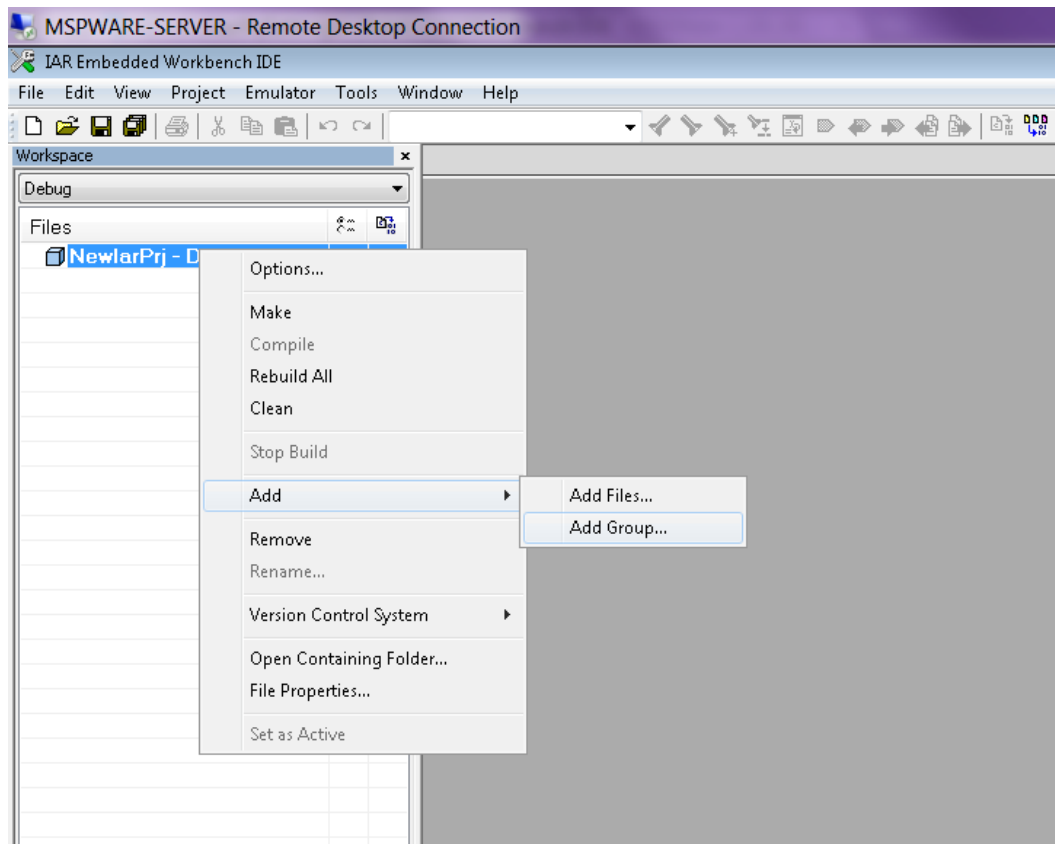

Now click Add files and browse through driverlib folder and add all source files of the family the device belongs to.

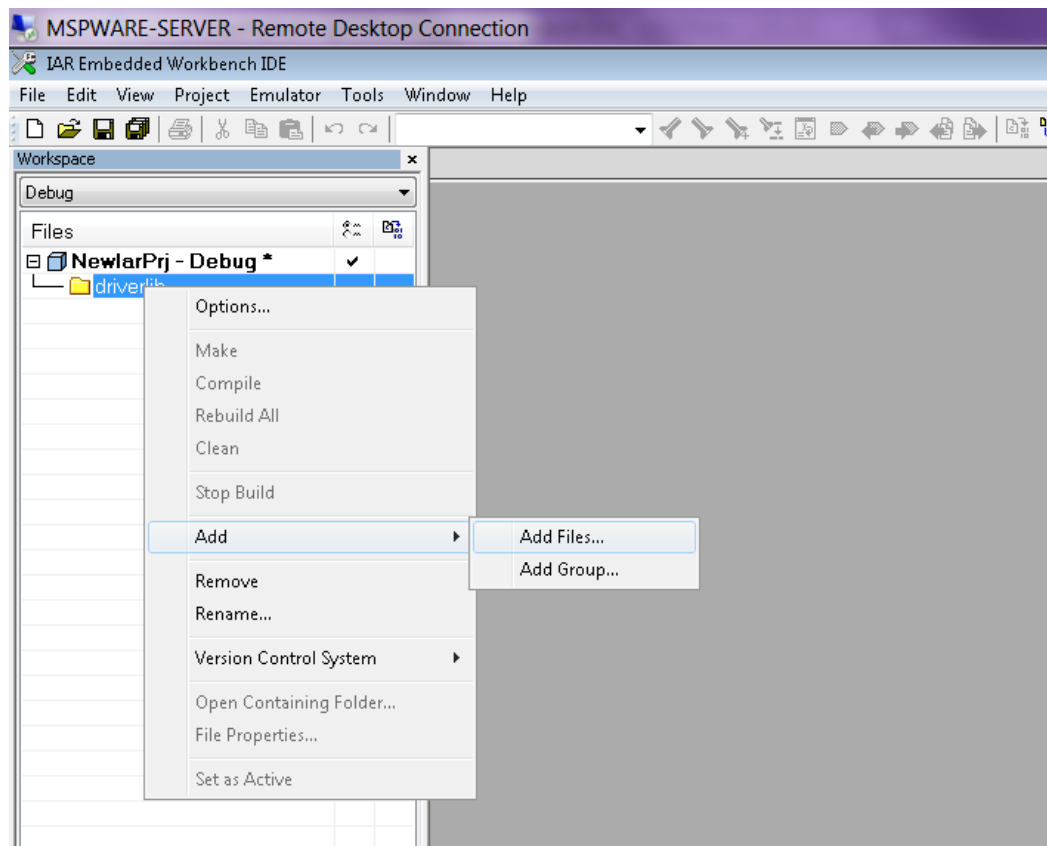

Add another group via "Add Group" and add inc folder. Add all files in the same driverlib family inc folder

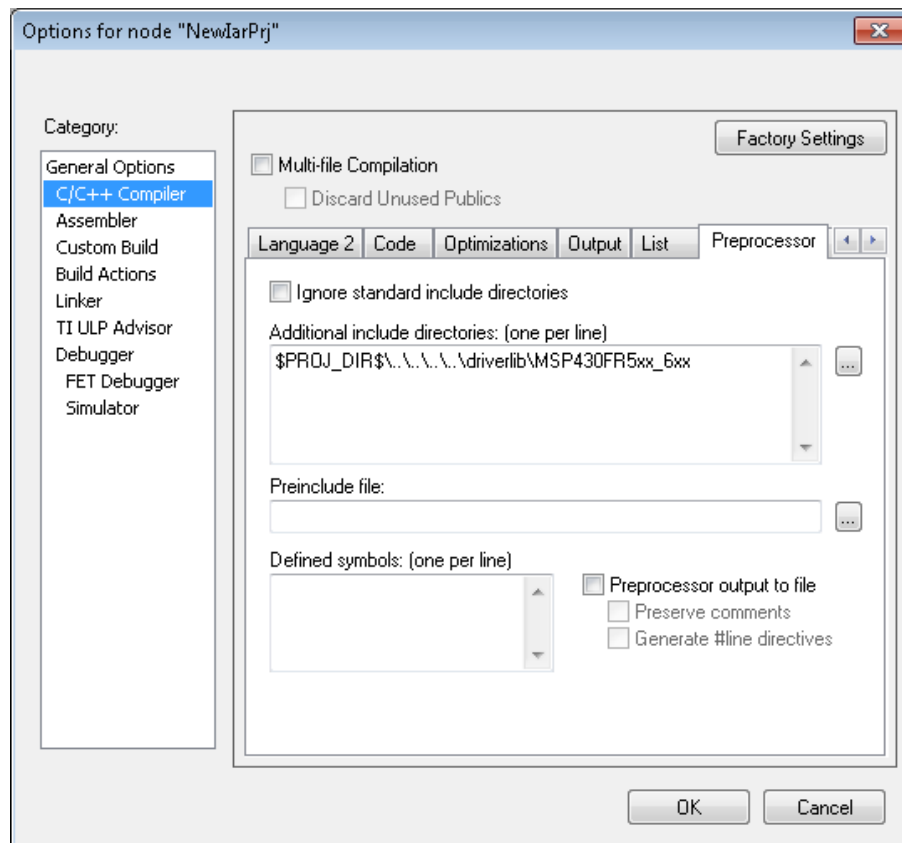

Click "Finish" and start developing with driver library in your project.

7 10-Bit Analog-to-Digital Converter (ADC10_B)

Introduction	29
API Functions	29
Programming Example	47

7.1 Introduction

The 10-Bit Analog-to-Digital (ADC10_B) API provides a set of functions for using the MSP430Ware ADC10_B modules. Functions are provided to initialize the ADC10_B modules, setup signal sources and reference voltages, and manage interrupts for the ADC10_B modules.

The ADC10_B module supports fast 10-bit analog-to-digital conversions. The module implements a 10-bit SAR core together, sample select control and a window comparator.

ADC10_B features include:

- Greater than 200-ksps maximum conversion rate
- Monotonic 10-bit converter with no missing codes
- Sample-and-hold with programmable sampling periods controlled by software or timers
- Conversion initiation by software or different timers
- Software-selectable on chip reference using the REF module or external reference
- Twelve individually configurable external input channels
- Conversion channel for temperature sensor of the REF module
- Selectable conversion clock source
- Single-channel, repeat-single-channel, sequence, and repeat-sequence conversion modes
- Window comparator for low-power monitoring of input signals
- Interrupt vector register for fast decoding of six ADC interrupts (ADC10IFG0, ADC10TOVIFG, ADC10OVIFG, ADC10LOIFG, ADC10INIFG, ADC10HIIFG)

7.2 API Functions

Functions

- bool [ADC10_B_init](#) (uint16_t baseAddress, uint16_t sampleHoldSignalSourceSelect, uint8_t clockSourceSelect, uint16_t clockSourceDivider)
Initializes the ADC10B Module.
- void [ADC10_B_enable](#) (uint16_t baseAddress)
Enables the ADC10B block.
- void [ADC10_B_disable](#) (uint16_t baseAddress)
Disables the ADC10B block.
- void [ADC10_B_setupSamplingTimer](#) (uint16_t baseAddress, uint16_t clockCycleHoldCount, uint16_t multipleSamplesEnabled)

- Sets up and enables the Sampling Timer Pulse Mode.*
- void `ADC10_B_disableSamplingTimer` (uint16_t baseAddress)
- Disables Sampling Timer Pulse Mode.*
- void `ADC10_B_configureMemory` (uint16_t baseAddress, uint8_t inputSourceSelect, uint8_t positiveRefVoltageSourceSelect, uint8_t negativeRefVoltageSourceSelect)
- Configures the controls of the selected memory buffer.*
- void `ADC10_B_enableInterrupt` (uint16_t baseAddress, uint8_t interruptMask)
- Enables selected ADC10B interrupt sources.*
- void `ADC10_B_disableInterrupt` (uint16_t baseAddress, uint8_t interruptMask)
- Disables selected ADC10B interrupt sources.*
- void `ADC10_B_clearInterrupt` (uint16_t baseAddress, uint8_t interruptFlagMask)
- Clears ADC10B selected interrupt flags.*
- uint8_t `ADC10_B_getInterruptStatus` (uint16_t baseAddress, uint8_t interruptFlagMask)
- Returns the status of the selected memory interrupt flags.*
- void `ADC10_B_startConversion` (uint16_t baseAddress, uint8_t conversionSequenceModeSelect)
- Enables/Starts an Analog-to-Digital Conversion.*
- void `ADC10_B_disableConversions` (uint16_t baseAddress, bool preempt)
- Disables the ADC from converting any more signals.*
- uint16_t `ADC10_B_getResults` (uint16_t baseAddress)
- Returns the raw contents of the specified memory buffer.*
- void `ADC10_B_setResolution` (uint16_t baseAddress, uint8_t resolutionSelect)
- Use to change the resolution of the converted data.*
- void `ADC10_B_setSampleHoldSignalInversion` (uint16_t baseAddress, uint16_t invertedSignal)
- Use to invert or un-invert the sample/hold signal.*
- void `ADC10_B_setDataReadBackFormat` (uint16_t baseAddress, uint16_t readBackFormat)
- Use to set the read-back format of the converted data.*
- void `ADC10_B_enableReferenceBurst` (uint16_t baseAddress)
- Enables the reference buffer's burst ability.*
- void `ADC10_B_disableReferenceBurst` (uint16_t baseAddress)
- Disables the reference buffer's burst ability.*
- void `ADC10_B_setReferenceBufferSamplingRate` (uint16_t baseAddress, uint16_t samplingRateSelect)
- Use to set the reference buffer's sampling rate.*
- void `ADC10_B_setWindowComp` (uint16_t baseAddress, uint16_t highThreshold, uint16_t lowThreshold)
- Sets the high and low threshold for the window comparator feature.*
- uint32_t `ADC10_B_getMemoryAddressForDMA` (uint16_t baseAddress)
- Returns the address of the memory buffer for the DMA module.*
- uint8_t `ADC10_B_isBusy` (uint16_t baseAddress)
- Returns the busy status of the ADC10B core.*

7.2.1 Detailed Description

The ADC10_B API is broken into three groups of functions: those that deal with initialization and conversions, those that handle interrupts, and those that handle Auxiliary features of the ADC10.

The ADC10_B initialization and conversion functions are

- `ADC10_B_init()`
- `ADC10_B_configureMemory()`

- `ADC10_B_setupSamplingTimer()`
- `ADC10_B_disableSamplingTimer()`
- `ADC10_B_setWindowComp()`
- `ADC10_B_startConversion()`
- `ADC10_B_disableConversions()`
- `ADC10_B_getResults()`
- `ADC10_B_isBusy()`

The ADC10_B interrupts are handled by

- `ADC10_B_enableInterrupt()`
- `ADC10_B_disableInterrupt()`
- `ADC10_B_clearInterrupt()`
- `ADC10_B_getInterruptStatus()`

Auxiliary features of the ADC10_B are handled by

- `ADC10_B_setResolution()`
- `ADC10_B_setSampleHoldSignalInversion()`
- `ADC10_B_setDataReadBackFormat()`
- `ADC10_B_enableReferenceBurst()`
- `ADC10_B_disableReferenceBurst()`
- `ADC10_B_setReferenceBufferSamplingRate()`
- `ADC10_B_getMemoryAddressForDMA()`
- `ADC10_B_enable()`
- `ADC10_B_disable()`

7.2.2 Function Documentation

ADC10_B_clearInterrupt()

```
void ADC10_B_clearInterrupt (
    uint16_t baseAddress,
    uint8_t interruptFlagMask )
```

Clears ADC10B selected interrupt flags.

The selected ADC10B interrupt flags are cleared, so that it no longer asserts. The memory buffer interrupt flags are only cleared when the memory buffer is accessed.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Parameters

<i>interruptFlagMask</i>	<p>is a bit mask of the interrupt flags to be cleared. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ ADC10_B_OVIFG - Interrupt flag for when a new conversion is about to overwrite the previous one ■ ADC10_B_TOVIFG - Interrupt flag for when a new conversion is starting before the previous one has finished ■ ADC10_B_HIIFG - Interrupt flag for when the input signal has gone above the high threshold of the window comparator ■ ADC10_B_LOIFG - Interrupt flag for when the input signal has gone below the low threshold of the window comparator ■ ADC10_B_INIFG - Interrupt flag for when the input signal is in between the high and low thresholds of the window comparator ■ ADC10_B_IFG0 - Interrupt flag for new conversion data in the memory buffer
--------------------------	--

Modified bits of **ADC10IFG** register.

Returns

None

ADC10_B_configureMemory()

```
void ADC10_B_configureMemory (
    uint16_t baseAddress,
    uint8_t inputSourceSelect,
    uint8_t positiveRefVoltageSourceSelect,
    uint8_t negativeRefVoltageSourceSelect )
```

Configures the controls of the selected memory buffer.

Maps an input signal conversion into the memory buffer, as well as the positive and negative reference voltages for each conversion being stored into the memory buffer. If the internal reference is used for the positive reference voltage, the internal REF module has to control the voltage level. Note that if a conversion has been started with the `startConversion()` function, then a call to `disableConversions()` is required before this function may be called. If conversion is not disabled, this function does nothing.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Parameters

<i>inputSourceSelect</i>	<p>is the input that will store the converted data into the specified memory buffer. Valid values are:</p> <ul style="list-style-type: none"> ■ ADC10_B_INPUT_A0 [Default] ■ ADC10_B_INPUT_A1 ■ ADC10_B_INPUT_A2 ■ ADC10_B_INPUT_A3 ■ ADC10_B_INPUT_A4 ■ ADC10_B_INPUT_A5 ■ ADC10_B_INPUT_A6 ■ ADC10_B_INPUT_A7 ■ ADC10_B_INPUT_VREF_P ■ ADC10_B_INPUT_VREF_N ■ ADC10_B_INPUT_TEMPSENSOR ■ ADC10_B_INPUT_BATTERYMONITOR ■ ADC10_B_INPUT_A12 ■ ADC10_B_INPUT_A13 ■ ADC10_B_INPUT_A14 ■ ADC10_B_INPUT_A15 <p>Modified bits are ADC10INCHx of ADC10MCTL0 register.</p>
<i>positiveRefVoltageSourceSelect</i>	<p>is the reference voltage source to set as the upper limit for the conversion that is to be stored in the specified memory buffer. Valid values are:</p> <ul style="list-style-type: none"> ■ ADC10_B_VREFPOS_AVCC [Default] ■ ADC10_B_VREFPOS_EXT ■ ADC10_B_VREFPOS_INT <p>Modified bits are ADC10SREF of ADC10MCTL0 register.</p>
<i>negativeRefVoltageSourceSelect</i>	<p>is the reference voltage source to set as the lower limit for the conversion that is to be stored in the specified memory buffer. Valid values are:</p> <ul style="list-style-type: none"> ■ ADC10_B_VREFNEG_AVSS [Default] ■ ADC10_B_VREFNEG_EXT <p>Modified bits are ADC10SREF of ADC10MCTL0 register.</p>

Returns

None

ADC10_B_disable()

```
void ADC10_B_disable (
    uint16_t baseAddress )
```

Disables the ADC10B block.

This will disable operation of the ADC10B block.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Modified bits are **ADC10ON** of **ADC10CTL0** register.

Returns

None

ADC10_B_disableConversions()

```
void ADC10_B_disableConversions (
    uint16_t baseAddress,
    bool preempt )
```

Disables the ADC from converting any more signals.

Disables the ADC from converting any more signals. If there is a conversion in progress, this function can stop it immediately if the preempt parameter is set as **ADC10_B_PREEMPTCONVERSION**, by changing the conversion mode to single-channel, single-conversion and disabling conversions. If the conversion mode is set as single-channel, single-conversion and this function is called without preemption, then the ADC core conversion status is polled until the conversion is complete before disabling conversions to prevent unpredictable data. If the **ADC10CTL1** and **ADC10CTL0**

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
<i>preempt</i>	specifies if the current conversion should be pre-empted stopped before the end of the conversion Valid values are: <ul style="list-style-type: none"> ■ ADC10_B_COMPLETECONVERSION - Allows the ADC10B to end the current conversion before disabling conversions. ■ ADC10_B_PREEMPTCONVERSION - Stops the ADC10B immediately, with unpredictable results of the current conversion. Cannot be used with repeated conversion.

Modified bits of **ADC10CTL1** register and bits of **ADC10CTL0** register.

Returns

None

ADC10_B_disableInterrupt()

```
void ADC10_B_disableInterrupt (
    uint16_t baseAddress,
    uint8_t interruptMask )
```

Disables selected ADC10B interrupt sources.

Disables the indicated ADC10B interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
<i>interruptMask</i>	is the bit mask of the memory buffer interrupt sources to be disabled. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ ADC10_B_OVIE - Interrupts when a new conversion is about to overwrite the previous one ■ ADC10_B_TOVIE - Interrupts when a new conversion is starting before the previous one has finished ■ ADC10_B_HIIE - Interrupts when the input signal has gone above the high threshold of the window comparator ■ ADC10_B_LOIE - Interrupts when the input signal has gone below the low threshold of the low window comparator ■ ADC10_B_INIE - Interrupts when the input signal is in between the high and low thresholds of the window comparator ■ ADC10_B_IE0 - Interrupt for new conversion data in the memory buffer

Modified bits of **ADC10IE** register.

Returns

None

ADC10_B_disableReferenceBurst()

```
void ADC10_B_disableReferenceBurst (
    uint16_t baseAddress )
```

Disables the reference buffer's burst ability.

Disables the reference buffer's burst ability, forcing the reference buffer to remain on continuously.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Modified bits are **ADC10REFBURST** of **ADC10CTL2** register.

Returns

None

ADC10_B_disableSamplingTimer()

```
void ADC10_B_disableSamplingTimer (
    uint16_t baseAddress )
```

Disables Sampling Timer Pulse Mode.

Disables the Sampling Timer Pulse Mode. Note that if a conversion has been started with the `startConversion()` function, then a call to `disableConversions()` is required before this function may be called.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Modified bits are **ADC10SHP** of **ADC10CTL1** register.

Returns

None

ADC10_B_enable()

```
void ADC10_B_enable (
    uint16_t baseAddress )
```

Enables the ADC10B block.

This will enable operation of the ADC10B block.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Modified bits are **ADC10ON** of **ADC10CTL0** register.

Returns

None

ADC10_B_enableInterrupt()

```
void ADC10_B_enableInterrupt (
    uint16_t baseAddress,
```

```
uint8_t interruptMask )
```

Enables selected ADC10B interrupt sources.

Enables the indicated ADC10B interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor. Does not clear interrupt flags.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
<i>interruptMask</i>	is the bit mask of the memory buffer interrupt sources to be enabled. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ ADC10_B_OVIE - Interrupts when a new conversion is about to overwrite the previous one ■ ADC10_B_TOVIE - Interrupts when a new conversion is starting before the previous one has finished ■ ADC10_B_HIIE - Interrupts when the input signal has gone above the high threshold of the window comparator ■ ADC10_B_LOIE - Interrupts when the input signal has gone below the low threshold of the low window comparator ■ ADC10_B_INIE - Interrupts when the input signal is in between the high and low thresholds of the window comparator ■ ADC10_B_IE0 - Interrupt for new conversion data in the memory buffer

Modified bits of **ADC10IE** register.

Returns

None

ADC10_B_enableReferenceBurst()

```
void ADC10_B_enableReferenceBurst (
    uint16_t baseAddress )
```

Enables the reference buffer's burst ability.

Enables the reference buffer's burst ability, allowing the reference buffer to turn off while the ADC is not converting, and automatically turning on when the ADC needs the generated reference voltage for a conversion.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Modified bits are **ADC10REFBURST** of **ADC10CTL2** register.

Returns

None

ADC10_B_getInterruptStatus()

```
uint8_t ADC10_B_getInterruptStatus (
    uint16_t baseAddress,
    uint8_t interruptFlagMask )
```

Returns the status of the selected memory interrupt flags.

Returns the status of the selected interrupt flags.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
<i>interruptFlagMask</i>	is a bit mask of the interrupt flags status to be returned. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ ADC10_B_OVIFG - Interrupt flag for when a new conversion is about to overwrite the previous one ■ ADC10_B_TOVIFG - Interrupt flag for when a new conversion is starting before the previous one has finished ■ ADC10_B_HIIFG - Interrupt flag for when the input signal has gone above the high threshold of the window comparator ■ ADC10_B_LOIFG - Interrupt flag for when the input signal has gone below the low threshold of the window comparator ■ ADC10_B_INIFG - Interrupt flag for when the input signal is in between the high and low thresholds of the window comparator ■ ADC10_B_IFG0 - Interrupt flag for new conversion data in the memory buffer

Modified bits of **ADC10IFG** register.**Returns**

The current interrupt flag status for the corresponding mask.

ADC10_B_getMemoryAddressForDMA()

```
uint32_t ADC10_B_getMemoryAddressForDMA (
    uint16_t baseAddress )
```

Returns the address of the memory buffer for the DMA module.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Returns

Returns the address of the memory buffer. This can be used in conjunction with the DMA to store the converted data directly to memory.

ADC10_B_getResults()

```
uint16_t ADC10_B_getResults (
    uint16_t baseAddress )
```

Returns the raw contents of the specified memory buffer.

Returns the raw contents of the specified memory buffer. The format of the content depends on the read-back format of the data: if the data is in signed 2's complement format then the contents in the memory buffer will be left-justified with the least-significant bits as 0's, whereas if the data is in unsigned format then the contents in the memory buffer will be right-justified with the most-significant bits as 0's.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Returns

A Signed Integer of the contents of the specified memory buffer.

ADC10_B_init()

```
bool ADC10_B_init (
    uint16_t baseAddress,
    uint16_t sampleHoldSignalSourceSelect,
    uint8_t clockSourceSelect,
    uint16_t clockSourceDivider )
```

Initializes the ADC10B Module.

This function initializes the ADC module to allow for analog-to-digital conversions. Specifically this function sets up the sample-and-hold signal and clock sources for the ADC core to use for conversions. Upon successful completion of the initialization all of the ADC control registers will be reset, excluding the memory controls and reference module bits, the given parameters will be set, and the ADC core will be turned on (Note, that the ADC core only draws power during conversions and remains off when not converting). Note that sample/hold signal sources are device dependent. Note that if re-initializing the ADC after starting a conversion with the startConversion() function, the disableConversion() must be called BEFORE this function can be called.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Parameters

<i>sampleHoldSignalSourceSelect</i>	<p>is the signal that will trigger a sample-and-hold for an input signal to be converted. This parameter is device specific and sources should be found in the device's datasheet. Valid values are:</p> <ul style="list-style-type: none"> ■ ADC10_B_SAMPLEHOLDSOURCE_SC [Default] ■ ADC10_B_SAMPLEHOLDSOURCE_1 ■ ADC10_B_SAMPLEHOLDSOURCE_2 ■ ADC10_B_SAMPLEHOLDSOURCE_3 <p>Modified bits are ADC10SHSx of ADC10CTL1 register.</p>
<i>clockSourceSelect</i>	<p>selects the clock that will be used by the ADC10B core and the sampling timer if a sampling pulse mode is enabled. Valid values are:</p> <ul style="list-style-type: none"> ■ ADC10_B_CLOCKSOURCE_ADC10OSC [Default] - MODOSC 5 MHz oscillator from the clock system ■ ADC10_B_CLOCKSOURCE_ACLK - The Auxiliary Clock ■ ADC10_B_CLOCKSOURCE_MCLK - The Master Clock ■ ADC10_B_CLOCKSOURCE_SMCLK - The Sub-Master Clock <p>Modified bits are ADC10SSELx of ADC10CTL1 register.</p>

Parameters

<i>clockSourceDivider</i>	<p>selects the amount that the clock will be divided. Valid values are:</p> <ul style="list-style-type: none"> ■ ADC10_B_CLOCKDIVIDER_1 [Default] ■ ADC10_B_CLOCKDIVIDER_2 ■ ADC10_B_CLOCKDIVIDER_3 ■ ADC10_B_CLOCKDIVIDER_4 ■ ADC10_B_CLOCKDIVIDER_5 ■ ADC10_B_CLOCKDIVIDER_6 ■ ADC10_B_CLOCKDIVIDER_7 ■ ADC10_B_CLOCKDIVIDER_8 ■ ADC10_B_CLOCKDIVIDER_12 ■ ADC10_B_CLOCKDIVIDER_16 ■ ADC10_B_CLOCKDIVIDER_20 ■ ADC10_B_CLOCKDIVIDER_24 ■ ADC10_B_CLOCKDIVIDER_28 ■ ADC10_B_CLOCKDIVIDER_32 ■ ADC10_B_CLOCKDIVIDER_64 ■ ADC10_B_CLOCKDIVIDER_128 ■ ADC10_B_CLOCKDIVIDER_192 ■ ADC10_B_CLOCKDIVIDER_256 ■ ADC10_B_CLOCKDIVIDER_320 ■ ADC10_B_CLOCKDIVIDER_384 ■ ADC10_B_CLOCKDIVIDER_448 ■ ADC10_B_CLOCKDIVIDER_512 <p>Modified bits are ADC10DIVx of ADC10CTL1 register; bits ADC10PDIVx of ADC10CTL2 register.</p>
---------------------------	--

Returns

STATUS_SUCCESS or STATUS_FAILURE of the initialization process.

ADC10_B_isBusy()

```
uint8_t ADC10_B_isBusy (
    uint16_t baseAddress )
```

Returns the busy status of the ADC10B core.

Returns the status of the ADC core if there is a conversion currently taking place.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Returns

ADC10_B_BUSY or ADC10_B_NOTBUSY dependent if there is a conversion currently taking place. Return one of the following:

- **ADC10_B_NOTBUSY**
- **ADC10_B_BUSY**

ADC10_B_setDataReadBackFormat()

```
void ADC10_B_setDataReadBackFormat (
    uint16_t baseAddress,
    uint16_t readBackFormat )
```

Use to set the read-back format of the converted data.

Sets the format of the converted data: how it will be stored into the memory buffer, and how it should be read back. The format can be set as right-justified (default), which indicates that the number will be unsigned, or left-justified, which indicates that the number will be signed in 2's complement format. This change affects all memory buffers for subsequent conversions.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
<i>readBackFormat</i>	is the specified format to store the conversions in the memory buffer. Valid values are: <ul style="list-style-type: none"> ■ ADC10_B_UNSIGNED_BINARY [Default] ■ ADC10_B_SIGNED_2SCOMPLEMENT Modified bits are ADC10DF of ADC10CTL2 register.

Returns

None

ADC10_B_setReferenceBufferSamplingRate()

```
void ADC10_B_setReferenceBufferSamplingRate (
    uint16_t baseAddress,
    uint16_t samplingRateSelect )
```

Use to set the reference buffer's sampling rate.

Sets the reference buffer's sampling rate to the selected sampling rate. The default sampling rate is maximum of 200-ksps, and can be reduced to a maximum of 50-ksps to conserve power.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
<i>samplingRateSelect</i>	is the specified maximum sampling rate. Valid values are: <ul style="list-style-type: none"> ■ ADC10_B_MAXSAMPLINGRATE_200KSPS [Default] ■ ADC10_B_MAXSAMPLINGRATE_50KSPS Modified bits are ADC10SR of ADC10CTL2 register.

Modified bits of **ADC10CTL2** register.

Returns

None

ADC10_B_setResolution()

```
void ADC10_B_setResolution (
    uint16_t baseAddress,
    uint8_t resolutionSelect )
```

Use to change the resolution of the converted data.

This function can be used to change the resolution of the converted data from the default of 12-bits.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
<i>resolutionSelect</i>	determines the resolution of the converted data. Valid values are: <ul style="list-style-type: none"> ■ ADC10_B_RESOLUTION_8BIT ■ ADC10_B_RESOLUTION_10BIT [Default] Modified bits are ADC10RES of ADC10CTL2 register.

Returns

None

ADC10_B_setSampleHoldSignalInversion()

```
void ADC10_B_setSampleHoldSignalInversion (
    uint16_t baseAddress,
    uint16_t invertedSignal )
```

Use to invert or un-invert the sample/hold signal.

This function can be used to invert or un-invert the sample/hold signal. Note that if a conversion has been started with the `startConversion()` function, then a call to `disableConversions()` is required before this function may be called.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
<i>invertedSignal</i>	set if the sample/hold signal should be inverted Valid values are: <ul style="list-style-type: none"> ■ ADC10_B_NONINVERTEDSIGNAL [Default] - a sample-and-hold of an input signal for conversion will be started on a rising edge of the sample/hold signal. ■ ADC10_B_INVERTEDSIGNAL - a sample-and-hold of an input signal for conversion will be started on a falling edge of the sample/hold signal. Modified bits are ADC10ISSH of ADC10CTL1 register.

Returns

None

ADC10_B_setupSamplingTimer()

```
void ADC10_B_setupSamplingTimer (
    uint16_t baseAddress,
    uint16_t clockCycleHoldCount,
    uint16_t multipleSamplesEnabled )
```

Sets up and enables the Sampling Timer Pulse Mode.

This function sets up the sampling timer pulse mode which allows the sample/hold signal to trigger a sampling timer to sample-and-hold an input signal for a specified number of clock cycles without having to hold the sample/hold signal for the entire period of sampling. Note that if a conversion has been started with the startConversion() function, then a call to disableConversions() is required before this function may be called.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Parameters

<i>clockCycleHoldCount</i>	<p>sets the amount of clock cycles to sample-and- hold for the memory buffer. Valid values are:</p> <ul style="list-style-type: none"> ■ ADC10_B_CYCLEHOLD_4_CYCLES [Default] ■ ADC10_B_CYCLEHOLD_8_CYCLES ■ ADC10_B_CYCLEHOLD_16_CYCLES ■ ADC10_B_CYCLEHOLD_32_CYCLES ■ ADC10_B_CYCLEHOLD_64_CYCLES ■ ADC10_B_CYCLEHOLD_96_CYCLES ■ ADC10_B_CYCLEHOLD_128_CYCLES ■ ADC10_B_CYCLEHOLD_192_CYCLES ■ ADC10_B_CYCLEHOLD_256_CYCLES ■ ADC10_B_CYCLEHOLD_384_CYCLES ■ ADC10_B_CYCLEHOLD_512_CYCLES ■ ADC10_B_CYCLEHOLD_768_CYCLES ■ ADC10_B_CYCLEHOLD_1024_CYCLES <p>Modified bits are ADC10SHTx of ADC10CTL0 register.</p>
<i>multipleSamplesEnabled</i>	<p>allows multiple conversions to start without a trigger signal from the sample/hold signal Valid values are:</p> <ul style="list-style-type: none"> ■ ADC10_B_MULTIPLESAMPLESDISABLE - a timer trigger will be needed to start every ADC conversion. ■ ADC10_B_MULTIPLESAMPLESENABLE - during a sequenced and/or repeated conversion mode, after the first conversion, no sample/hold signal is necessary to start subsequent samples. <p>Modified bits are ADC10MSC of ADC10CTL0 register.</p>

Returns

None

ADC10_B_setWindowComp()

```
void ADC10_B_setWindowComp (
    uint16_t baseAddress,
    uint16_t highThreshold,
    uint16_t lowThreshold )
```

Sets the high and low threshold for the window comparator feature.

Sets the high and low threshold for the window comparator feature. Use the ADC10HIIE, ADC10INIE, ADC10LOIE interrupts to utilize this feature.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
<i>highThreshold</i>	is the upper bound that could trip an interrupt for the window comparator.
<i>lowThreshold</i>	is the lower bound that could trip on interrupt for the window comparator.

Modified bits of **ADC10LO** register and bits of **ADC10HI** register.

Returns

None

ADC10_B_startConversion()

```
void ADC10_B_startConversion (
    uint16_t baseAddress,
    uint8_t conversionSequenceModeSelect )
```

Enables/Starts an Analog-to-Digital Conversion.

This function enables/starts the conversion process of the ADC. If the sample/hold signal source chosen during initialization was ADC10OSC, then the conversion is started immediately, otherwise the chosen sample/hold signal source starts the conversion by a rising edge of the signal. Keep in mind when selecting conversion modes, that for sequenced and/or repeated modes, to keep the sample/hold-and-convert process continuing without a trigger from the sample/hold signal source, the multiple samples must be enabled using the [ADC10_B_setupSamplingTimer\(\)](#) function. Also note that when a sequence conversion mode is selected, the first input channel is the one mapped to the memory buffer, the next input channel selected for conversion is one less than the input channel just converted (i.e. A1 comes after A2), until A0 is reached, and if in repeating mode, then the next input channel will again be the one mapped to the memory buffer. Note that after this function is called, the `ADC10_B_stopConversions()` has to be called to re-initialize the ADC, reconfigure a memory buffer control, enable/disable the sampling timer, or to change the internal reference voltage.

Parameters

<i>baseAddress</i>	is the base address of the ADC10B module.
--------------------	---

Parameters

<i>conversionSequenceModeSelect</i>	<p>determines the ADC operating mode. Valid values are:</p> <ul style="list-style-type: none"> ■ ADC10_B_SINGLECHANNEL [Default] - one-time conversion of a single channel into a single memory buffer ■ ADC10_B_SEQOFCHANNELS - one time conversion of multiple channels into the specified starting memory buffer and each subsequent memory buffer up until the conversion is stored in a memory buffer dedicated as the end-of-sequence by the memory's control register ■ ADC10_B_REPEATED_SINGLECHANNEL - repeated conversions of one channel into a single memory buffer ■ ADC10_B_REPEATED_SEQOFCHANNELS - repeated conversions of multiple channels into the specified starting memory buffer and each subsequent memory buffer up until the conversion is stored in a memory buffer dedicated as the end-of-sequence by the memory's control register <p>Modified bits are ADC10CONSEQx of ADC10CTL1 register.</p>
-------------------------------------	--

Returns

None

7.3 Programming Example

The following example shows how to initialize and use the ADC10_B API to start a single channel, single conversion.

```
// Initialize ADC10_B with ADC10_B's built-in oscillator
ADC10_B_init (ADC10_B_BASE,
              ADC10_B_SAMPLEHOLDSOURCE_SC,
              ADC10_B_CLOCKSOURCE_ADC10OSC,
              ADC10_B_CLOCKDIVIDEBY_1);

//Switch ON ADC10_B
ADC10_B_enable(ADC10_B_BASE);

// Setup sampling timer to sample-and-hold for 16 clock cycles
ADC10_B_setupSamplingTimer (ADC10_B_BASE,
                            ADC10_B_CYCLEHOLD_16_CYCLES,
                            FALSE);

// Configure the Input to the Memory Buffer with the specified Reference Voltages
ADC10_B_configureMemory(ADC10_B_BASE,
                       ADC10_B_INPUT_A0,
                       ADC10_B_VREFPOS_AVCC, // Vref+ = AVcc
                       ADC10_B_VREFNEG_AVSS, // Vref- = AVss
                       );

while (1)
{
    // Start a single conversion, no repeating or sequences.
```



```
ADC10_B_startConversion (ADC10_B_BASE,  
                        ADC10_B_SINGLECHANNEL);  
  
// Wait for the Interrupt Flag to assert  
while( !(ADC10_B_getInterruptStatus(ADC10_B_BASE,ADC10_IFG0)) );  
  
// Clear the Interrupt Flag and start another conversion  
ADC10_B_clearInterrupt (ADC10_B_BASE,ADC10_IFG0);  
}
```

8 Comparator (COMP_D)

Introduction	49
API Functions	49
Programming Example	59

8.1 Introduction

The Comparator D (Comp_D) API provides a set of functions for using the MSP430Ware Comp_D modules. Functions are provided to initialize the Comp_D modules, setup reference voltages for input, and manage interrupts for the Comp_D modules.

The Comp_D module provides the ability to compare two analog signals and use the output in software and on an output pin. The output represents whether the signal on the positive terminal is higher than the signal on the negative terminal. The Comp_D may be used to generate a hysteresis. There are 16 different inputs that can be used, as well as the ability to short 2 input together. The Comp_D module also has control over the REF module to generate a reference voltage as an input.

The Comp_D module can generate multiple interrupts. An interrupt may be asserted for the output, with separate interrupts on whether the output rises, or falls.

8.2 API Functions

Functions

- bool [Comp_D_init](#) (uint16_t baseAddress, [Comp_D_initParam](#) *param)
Initializes the Comp_D Module.
- void [Comp_D_setReferenceVoltage](#) (uint16_t baseAddress, uint16_t supplyVoltageReferenceBase, uint16_t lowerLimitSupplyVoltageFractionOf32, uint16_t upperLimitSupplyVoltageFractionOf32)
Generates a Reference Voltage to the terminal selected during initialization.
- void [Comp_D_setReferenceAccuracy](#) (uint16_t baseAddress, uint16_t referenceAccuracy)
Sets the reference accuracy.
- void [Comp_D_enableInterrupt](#) (uint16_t baseAddress, uint16_t interruptMask)
Enables selected Comparator interrupt sources.
- void [Comp_D_disableInterrupt](#) (uint16_t baseAddress, uint16_t interruptMask)
Disables selected Comparator interrupt sources.
- void [Comp_D_clearInterrupt](#) (uint16_t baseAddress, uint16_t interruptFlagMask)
Clears Comparator interrupt flags.
- uint8_t [Comp_D_getInterruptStatus](#) (uint16_t baseAddress, uint16_t interruptFlagMask)
Gets the current Comparator interrupt status.
- void [Comp_D_setInterruptEdgeDirection](#) (uint16_t baseAddress, uint16_t edgeDirection)
Explicitly sets the edge direction that would trigger an interrupt.
- void [Comp_D_toggleInterruptEdgeDirection](#) (uint16_t baseAddress)
Toggles the edge direction that would trigger an interrupt.
- void [Comp_D_enable](#) (uint16_t baseAddress)
Turns on the Comparator module.

- void `Comp_D_disable` (uint16_t baseAddress)
Turns off the Comparator module.
- void `Comp_D_shortInputs` (uint16_t baseAddress)
Shorts the two input pins chosen during initialization.
- void `Comp_D_unshortInputs` (uint16_t baseAddress)
Disables the short of the two input pins chosen during initialization.
- void `Comp_D_disableInputBuffer` (uint16_t baseAddress, uint8_t inputPort)
Disables the input buffer of the selected input port to effectively allow for analog signals.
- void `Comp_D_enableInputBuffer` (uint16_t baseAddress, uint8_t inputPort)
Enables the input buffer of the selected input port to allow for digital signals.
- void `Comp_D_swapIO` (uint16_t baseAddress)
Toggles the bit that swaps which terminals the inputs go to, while also inverting the output of the comparator.
- uint16_t `Comp_D_outputValue` (uint16_t baseAddress)
Returns the output value of the Comp_D module.

8.2.1 Detailed Description

The API is broken into three groups of functions: those that deal with initialization and output, those that handle interrupts, and those that handle Auxiliary features of the Comp_D.

The Comp_D initialization and output functions are

- `Comp_D_init()`
- `Comp_D_setReferenceVoltage()`
- `Comp_D_enable()`
- `Comp_D_disable()`
- `Comp_D_outputValue()`

The Comp_D interrupts are handled by

- `Comp_D_enableInterrupt()`
- `Comp_D_disableInterrupt()`
- `Comp_D_clearInterrupt()`
- `Comp_D_getInterruptStatus()`
- `Comp_D_setInterruptEdgeDirection()`
- `Comp_D_toggleInterruptEdgeDirection()`

Auxiliary features of the Comp_D are handled by

- `Comp_D_enableShortOfInputs()`
- `Comp_D_disableShortOfInputs()`
- `Comp_D_disableInputBuffer()`
- `Comp_D_enableInputBuffer()`
- `Comp_D_swapIO()`
- `Comp_D_setReferenceAccuracy()`

8.2.2 Function Documentation

Comp_D_clearInterrupt()

```
void Comp_D_clearInterrupt (
    uint16_t baseAddress,
    uint16_t interruptFlagMask )
```

Clears Comparator interrupt flags.

The Comparator interrupt source is cleared, so that it no longer asserts. The highest interrupt flag is automatically cleared when an interrupt vector generator is used.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
<i>interruptFlagMask</i>	Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ COMP_D_INTERRUPT_FLAG - Output interrupt flag ■ COMP_D_INTERRUPT_FLAG_INVERTED_POLARITY - Output interrupt flag inverted polarity

Comp_D_disable()

```
void Comp_D_disable (
    uint16_t baseAddress )
```

Turns off the Comparator module.

This function clears the CDON bit disabling the operation of the Comparator module, saving from excess power consumption.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
--------------------	---

Returns

None

Comp_D_disableInputBuffer()

```
void Comp_D_disableInputBuffer (
    uint16_t baseAddress,
    uint8_t inputPort )
```

Disables the input buffer of the selected input port to effectively allow for analog signals.

This function sets the bit to disable the buffer for the specified input port to allow for analog signals from any of the comparator input pins. This bit is automatically set when the input is initialized to

be used with the comparator module. This function should be used whenever an analog input is connected to one of these pins to prevent parasitic voltage from causing unexpected results.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
<i>inputPort</i>	<p>is the port in which the input buffer will be disabled. Valid values are:</p> <ul style="list-style-type: none"> ■ COMP_D_INPUT0 [Default] ■ COMP_D_INPUT1 ■ COMP_D_INPUT2 ■ COMP_D_INPUT3 ■ COMP_D_INPUT4 ■ COMP_D_INPUT5 ■ COMP_D_INPUT6 ■ COMP_D_INPUT7 ■ COMP_D_INPUT8 ■ COMP_D_INPUT9 ■ COMP_D_INPUT10 ■ COMP_D_INPUT11 ■ COMP_D_INPUT12 ■ COMP_D_INPUT13 ■ COMP_D_INPUT14 ■ COMP_D_INPUT15 ■ COMP_D_VREF <p>Modified bits are CDPDx of CDCTL3 register.</p>

Returns

None

Comp_D_disableInterrupt()

```
void Comp_D_disableInterrupt (
    uint16_t baseAddress,
    uint16_t interruptMask )
```

Disables selected Comparator interrupt sources.

Disables the indicated Comparator interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
--------------------	---

Parameters

<i>interruptMask</i>	Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ COMP_D_INTERRUPT - Output interrupt ■ COMP_D_INTERRUPT_INVERTED_POLARITY - Output interrupt inverted polarity
----------------------	--

Comp_D_enable()

```
void Comp_D_enable (
    uint16_t baseAddress )
```

Turns on the Comparator module.

This function sets the bit that enables the operation of the Comparator module.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
--------------------	---

Returns

None

Comp_D_enableInputBuffer()

```
void Comp_D_enableInputBuffer (
    uint16_t baseAddress,
    uint8_t inputPort )
```

Enables the input buffer of the selected input port to allow for digital signals.

This function clears the bit to enable the buffer for the specified input port to allow for digital signals from any of the comparator input pins. This should not be reset if there is an analog signal connected to the specified input pin to prevent from unexpected results.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
--------------------	---

Parameters

<i>inputPort</i>	<p>is the port in which the input buffer will be enabled. Valid values are:</p> <ul style="list-style-type: none"> ■ COMP_D_INPUT0 [Default] ■ COMP_D_INPUT1 ■ COMP_D_INPUT2 ■ COMP_D_INPUT3 ■ COMP_D_INPUT4 ■ COMP_D_INPUT5 ■ COMP_D_INPUT6 ■ COMP_D_INPUT7 ■ COMP_D_INPUT8 ■ COMP_D_INPUT9 ■ COMP_D_INPUT10 ■ COMP_D_INPUT11 ■ COMP_D_INPUT12 ■ COMP_D_INPUT13 ■ COMP_D_INPUT14 ■ COMP_D_INPUT15 ■ COMP_D_VREF <p>Modified bits are CDPDx of CDCTL3 register.</p>
------------------	---

Returns

None

Comp_D_enableInterrupt()

```
void Comp_D_enableInterrupt (
    uint16_t baseAddress,
    uint16_t interruptMask )
```

Enables selected Comparator interrupt sources.

Enables the indicated Comparator interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor. **Does not clear interrupt flags.**

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
<i>interruptMask</i>	<p>Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ COMP_D_INTERRUPT - Output interrupt ■ COMP_D_INTERRUPT_INVERTED_POLARITY - Output interrupt inverted polarity

Comp_D_getInterruptStatus()

```
uint8_t Comp_D_getInterruptStatus (
    uint16_t baseAddress,
    uint16_t interruptFlagMask )
```

Gets the current Comparator interrupt status.

This returns the interrupt status for the Comparator module based on which flag is passed.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
<i>interruptFlagMask</i>	Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ COMP_D_INTERRUPT_FLAG - Output interrupt flag ■ COMP_D_INTERRUPT_FLAG_INVERTED_POLARITY - Output interrupt flag inverted polarity

Comp_D_init()

```
bool Comp_D_init (
    uint16_t baseAddress,
    Comp_D_initParam * param )
```

Initializes the Comp_D Module.

Upon successful initialization of the Comp_D module, this function will have reset all necessary register bits and set the given options in the registers. To actually use the Comp_D module, the [Comp_D_enable\(\)](#) function must be explicitly called before use. If a Reference Voltage is set to a terminal, the Voltage should be set using the [setReferenceVoltage\(\)](#) function.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
<i>param</i>	is the pointer to struct for initialization.

Returns

STATUS_SUCCESS or STATUS_FAILURE of the initialization process

References [Comp_D_initParam::invertedOutputPolarity](#), [Comp_D_initParam::negativeTerminalInput](#), [Comp_D_initParam::outputFilterEnableAndDelayLevel](#), and [Comp_D_initParam::positiveTerminalInput](#).

Comp_D_outputValue()

```
uint16_t Comp_D_outputValue (
    uint16_t baseAddress )
```


Returns the output value of the Comp_D module.

Returns the output value of the Comp_D module.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
--------------------	---

Returns

Comp_D_HIGH or Comp_D_LOW as the output value of the Comparator module. Return one of the following:

- **COMP_D_HIGH**
- **COMP_D_LOW**
indicates the output should be normal

Comp_D_setInterruptEdgeDirection()

```
void Comp_D_setInterruptEdgeDirection (
    uint16_t baseAddress,
    uint16_t edgeDirection )
```

Explicitly sets the edge direction that would trigger an interrupt.

This function will set which direction the output will have to go, whether rising or falling, to generate an interrupt based on a non-inverted interrupt.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
<i>edgeDirection</i>	determines which direction the edge would have to go to generate an interrupt based on the non-inverted interrupt flag. Valid values are: <ul style="list-style-type: none"> ■ COMP_D_FALLINGEDGE [Default] - sets the bit to generate an interrupt when the output of the comparator falls from HIGH to LOW if the normal interrupt bit is set (and LOW to HIGH if the inverted interrupt enable bit is set). ■ COMP_D_RISINGEDGE - sets the bit to generate an interrupt when the output of the comparator rises from LOW to HIGH if the normal interrupt bit is set (and HIGH to LOW if the inverted interrupt enable bit is set). Modified bits are CDIES of CDCTL1 register.

Returns

None

Comp_D_setReferenceAccuracy()

```
void Comp_D_setReferenceAccuracy (
```

```
uint16_t baseAddress,
uint16_t referenceAccuracy )
```

Sets the reference accuracy.

The reference accuracy is set to the desired setting. Clocked is better for low power operations but has a lower accuracy.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
<i>referenceAccuracy</i>	is the reference accuracy setting of the comparator. Clocked is for low power/low accuracy. Valid values are: <ul style="list-style-type: none"> ■ COMP_D_ACCURACY_STATIC ■ COMP_D_ACCURACY_CLOCKED Modified bits are CDREFACC of CDCTL2 register.

Returns

None

Comp_D_setReferenceVoltage()

```
void Comp_D_setReferenceVoltage (
    uint16_t baseAddress,
    uint16_t supplyVoltageReferenceBase,
    uint16_t lowerLimitSupplyVoltageFractionOf32,
    uint16_t upperLimitSupplyVoltageFractionOf32 )
```

Generates a Reference Voltage to the terminal selected during initialization.

Use this function to generate a voltage to serve as a reference to the terminal selected at initialization. The voltage is determined by the equation: $V_{base} * (\text{Numerator} / 32)$. If the upper and lower limit voltage numerators are equal, then a static reference is defined, whereas they are different then a hysteresis effect is generated. Note that the "limit" voltage is the voltage triggers a change in COMP_D value.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
<i>supplyVoltageReferenceBase</i>	decides the source and max amount of Voltage that can be used as a reference. Valid values are: <ul style="list-style-type: none"> ■ COMP_D_REFERENCE_AMPLIFIER_DISABLED ■ COMP_D_VREFBASE1_5V ■ COMP_D_VREFBASE2_0V ■ COMP_D_VREFBASE2_5V Modified bits are CDREFL of CDCTL2 register.

Parameters

<i>lowerLimitSupplyVoltageFractionOf32</i>	is the numerator of the equation to generate the reference voltage for the lower limit reference voltage. Modified bits are CDREF0 of CDCTL2 register.
<i>upperLimitSupplyVoltageFractionOf32</i>	is the numerator of the equation to generate the reference voltage for the upper limit reference voltage. Modified bits are CDREF1 of CDCTL2 register.

Returns

None

Comp_D_shortInputs()

```
void Comp_D_shortInputs (
    uint16_t baseAddress )
```

Shorts the two input pins chosen during initialization.

This function sets the bit that shorts the devices attached to the input pins chosen from the initialization of the comparator.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
--------------------	---

Returns

None

Comp_D_swapIO()

```
void Comp_D_swapIO (
    uint16_t baseAddress )
```

Toggles the bit that swaps which terminals the inputs go to, while also inverting the output of the comparator.

This function toggles the bit that controls which input goes to which terminal. After initialization, this bit is set to 0, after toggling it once the inputs are routed to the opposite terminal and the output is inverted.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
--------------------	---

Returns

None

Comp_D_toggleInterruptEdgeDirection()

```
void Comp_D_toggleInterruptEdgeDirection (
    uint16_t baseAddress )
```

Toggles the edge direction that would trigger an interrupt.

This function will toggle which direction the output will have to go, whether rising or falling, to generate an interrupt based on a non-inverted interrupt. If the direction was rising, it is now falling, if it was falling, it is now rising.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
--------------------	---

Returns

None

Comp_D_unshortInputs()

```
void Comp_D_unshortInputs (
    uint16_t baseAddress )
```

Disables the short of the two input pins chosen during initialization.

This function clears the bit that shorts the devices attached to the input pins chosen from the initialization of the comparator.

Parameters

<i>baseAddress</i>	is the base address of the COMP_D module.
--------------------	---

Returns

None

8.3 Programming Example

The following example shows how to initialize and use the Comp_D API to turn on an LED when the input to the positive terminal is higher than the input to the negative terminal.

```
// Initialize the Comparator D module
/* Base Address of Comparator D,
   Pin CD2 to Positive(+) Terminal,
   Reference Voltage to Negative(-) Terminal,
```

```

    Normal Power Mode,
    Output Filter On with minimal delay,
    Non-Inverted Output Polarity
*/
Comp_D_initParam param = {0};
param.positiveTerminalInput = COMP_D_INPUT2;
param.negativeTerminalInput = COMP_D_VREF;
param.outputFilterEnableAndDelayLevel = COMP_D_FILTEROUTPUT_OFF;
param.invertedOutputPolarity = COMP_D_NORMALOUTPUTPOLARITY;
Comp_D_init(COMP_D_BASE, &param);

// Set the reference voltage that is being supplied to the (-) terminal
/* Base Address of Comparator D,
   Reference Voltage of 2.0 V,
   Upper Limit of 2.0*(32/32) = 2.0V,
   Lower Limit of 2.0*(32/32) = 2.0V
*/
Comp_D_setReferenceVoltage(COMP_D_BASE,
    COMP_D_VREFBASE2_0V,
    32,
    32,
    COMP_D_ACCURACY_STATIC
);

//Disable Input Buffer on P1.2/CD2
/* Base Address of Comparator D,
   * Input Buffer port
   * Selecting the CDx input pin to the comparator
   * multiplexer with the CDx bits automatically
   * disables output driver and input buffer for
   * that pin, regardless of the state of the
   * associated CDPD.x bit
*/
Comp_D_disableInputBuffer(COMP_D_BASE,
    COMP_D_INPUT2);
// Allow power to Comparator module
Comp_D_enable(COMP_D_BASE);

__delay_cycles(400);           // delay for the reference to settle

```

9 Cyclical Redundancy Check (CRC)

Introduction	61
API Functions	61
Programming Example	65

9.1 Introduction

The Cyclic Redundancy Check (CRC) API provides a set of functions for using the MSP430Ware CRC module. Functions are provided to initialize the CRC and create a CRC signature to check the validity of data. This is mostly useful in the communication of data, or as a startup procedure to as a more complex and accurate check of data.

The CRC module offers no interrupts and is used only to generate CRC signatures to verify against pre-made CRC signatures (Checksums).

9.2 API Functions

Functions

- void [CRC_setSeed](#) (uint16_t baseAddress, uint16_t seed)
Sets the seed for the CRC.
- void [CRC_set16BitData](#) (uint16_t baseAddress, uint16_t dataIn)
Sets the 16 bit data to add into the CRC module to generate a new signature.
- void [CRC_set8BitData](#) (uint16_t baseAddress, uint8_t dataIn)
Sets the 8 bit data to add into the CRC module to generate a new signature.
- void [CRC_set16BitDataReversed](#) (uint16_t baseAddress, uint16_t dataIn)
Translates the 16 bit data by reversing the bits in each byte and then sets this data to add into the CRC module to generate a new signature.
- void [CRC_set8BitDataReversed](#) (uint16_t baseAddress, uint8_t dataIn)
Translates the 8 bit data by reversing the bits in each byte and then sets this data to add into the CRC module to generate a new signature.
- uint16_t [CRC_getData](#) (uint16_t baseAddress)
Returns the value currently in the Data register.
- uint16_t [CRC_getResult](#) (uint16_t baseAddress)
Returns the value of the Signature Result.
- uint16_t [CRC_getResultBitsReversed](#) (uint16_t baseAddress)
Returns the bit-wise reversed format of the Signature Result.

9.2.1 Detailed Description

The CRC API is one group that controls the CRC module. The APIs that are used to set the seed and data are

- [CRC_setSeed\(\)](#)
- [CRC_set16BitData\(\)](#)

- [CRC_set8BitData\(\)](#)
- [CRC_set16BitDataReversed\(\)](#)
- [CRC_set8BitDataReversed\(\)](#)
- [CRC_setSeed\(\)](#)

The APIs that are used to get the data and results are

- [CRC_getData\(\)](#)
- [CRC_getResult\(\)](#)
- [CRC_getResultBitsReversed\(\)](#)

9.2.2 Function Documentation

CRC_getData()

```
uint16_t CRC_getData (
    uint16_t baseAddress )
```

Returns the value currently in the Data register.

This function returns the value currently in the data register. If set in byte bits reversed format, then the translated data would be returned.

Parameters

<i>baseAddress</i>	is the base address of the CRC module.
--------------------	--

Returns

The value currently in the data register

CRC_getResult()

```
uint16_t CRC_getResult (
    uint16_t baseAddress )
```

Returns the value pf the Signature Result.

This function returns the value of the signature result generated by the CRC.

Parameters

<i>baseAddress</i>	is the base address of the CRC module.
--------------------	--

Returns

The value currently in the data register

CRC_getResultBitsReversed()

```
uint16_t CRC_getResultBitsReversed (
    uint16_t baseAddress )
```

Returns the bit-wise reversed format of the Signature Result.

This function returns the bit-wise reversed format of the Signature Result.

Parameters

<i>baseAddress</i>	is the base address of the CRC module.
--------------------	--

Returns

The bit-wise reversed format of the Signature Result

CRC_set16BitData()

```
void CRC_set16BitData (
    uint16_t baseAddress,
    uint16_t dataIn )
```

Sets the 16 bit data to add into the CRC module to generate a new signature.

This function sets the given data into the CRC module to generate the new signature from the current signature and new data.

Parameters

<i>baseAddress</i>	is the base address of the CRC module.
<i>dataIn</i>	is the data to be added, through the CRC module, to the signature. Modified bits are CRCDI of CRCDI register.

Returns

None

CRC_set16BitDataReversed()

```
void CRC_set16BitDataReversed (
    uint16_t baseAddress,
    uint16_t dataIn )
```

Translates the 16 bit data by reversing the bits in each byte and then sets this data to add into the CRC module to generate a new signature.

This function first reverses the bits in each byte of the data and then generates the new signature from the current signature and new translated data.

Parameters

<i>baseAddress</i>	is the base address of the CRC module.
<i>dataIn</i>	is the data to be added, through the CRC module, to the signature. Modified bits are CRCDIRB of CRCDIRB register.

Returns

None

CRC_set8BitData()

```
void CRC_set8BitData (
    uint16_t baseAddress,
    uint8_t dataIn )
```

Sets the 8 bit data to add into the CRC module to generate a new signature.

This function sets the given data into the CRC module to generate the new signature from the current signature and new data.

Parameters

<i>baseAddress</i>	is the base address of the CRC module.
<i>dataIn</i>	is the data to be added, through the CRC module, to the signature. Modified bits are CRCDI of CRCDI register.

Returns

None

CRC_set8BitDataReversed()

```
void CRC_set8BitDataReversed (
    uint16_t baseAddress,
    uint8_t dataIn )
```

Translates the 8 bit data by reversing the bits in each byte and then sets this data to add into the CRC module to generate a new signature.

This function first reverses the bits in each byte of the data and then generates the new signature from the current signature and new translated data.

Parameters

<i>baseAddress</i>	is the base address of the CRC module.
<i>dataIn</i>	is the data to be added, through the CRC module, to the signature. Modified bits are CRCDIRB of CRCDIRB register.

Returns

None

CRC_setSeed()

```
void CRC_setSeed (
    uint16_t baseAddress,
    uint16_t seed )
```

Sets the seed for the CRC.

This function sets the seed for the CRC to begin generating a signature with the given seed and all passed data. Using this function resets the CRC signature.

Parameters

<i>baseAddress</i>	is the base address of the CRC module.
<i>seed</i>	is the seed for the CRC to start generating a signature from. Modified bits are CRCINIRES of CRCINIRES register.

Returns

None

9.3 Programming Example

The following example shows how to initialize and use the CRC API to generate a CRC signature on an array of data.

```
unsigned int crcSeed = 0xBEEF;
unsigned int data[] = {0x0123,
                      0x4567,
                      0x8910,
                      0x1112,
                      0x1314};

unsigned int crcResult;
int i;

// Stop WDT
WDT_hold(WDT_A_BASE);

// Set P1.0 as an output
GPIO_setAsOutputPin(GPIO_PORT_P1,
                    GPIO_PIN0);

// Set the CRC seed
CRC_setSeed(CRC_BASE,
            crcSeed);

for (i = 0; i < 5; i++)
{
    //Add all of the values into the CRC signature
    CRC_set16BitData(CRC_BASE,
                    data[i]);
}

// Save the current CRC signature checksum to be compared for later
crcResult = CRC_getResult(CRC_BASE);
```

10 Clock System (CS)

Introduction	66
API Functions	67
Programming Example	79

10.1 Introduction

The clock system module supports low system cost and low power consumption. Using three internal clock signals, the user can select the best balance of performance and low power consumption. The clock module can be configured to operate without any external components, with one or two external crystals, or with resonators, under full software control.

The clock system module includes up to five clock sources:

- XT1CLK - Low-frequency/high-frequency oscillator that can be used either with low-frequency 32768-Hz watch crystals, standard crystals, resonators, or external clock sources in the 4 MHz to 24 MHz range. When optional XT2 is present, the XT1 high-frequency mode may or may not be available, depending on the device configuration. See the device-specific data sheet for supported functions.
- VLOCLK - Internal very-low-power low-frequency oscillator with 10-kHz typical frequency
- DCOCLK - Internal digitally controlled oscillator (DCO) with three selectable fixed frequencies
- XT2CLK - Optional high-frequency oscillator that can be used with standard crystals, resonators, or external clock sources in the 4 MHz to 24 MHz range. See device-specific data sheet for availability.

Four system clock signals are available from the clock module:

- ACLK - Auxiliary clock. The ACLK is software selectable as XT1CLK, VLOCLK, DCOCLK, and when available, XT2CLK. ACLK can be divided by 1, 2, 4, 8, 16, or 32. ACLK is software selectable by individual peripheral modules.
- MCLK - Master clock. MCLK is software selectable as XT1CLK, VLOCLK, DCOCLK, and when available, XT2CLK. MCLK can be divided by 1, 2, 4, 8, 16, or 32. MCLK is used by the CPU and system.
- SMCLK - Subsystem master clock. SMCLK is software selectable as XT1CLK, VLOCLK, DCOCLK, and when available, XT2CLK. SMCLK is software selectable by individual peripheral modules.
- MODCLK - Module clock. MODCLK is used by various peripheral modules and is sourced by MODOSC.

Fail-Safe logic The crystal oscillator faults are set if the corresponding crystal oscillator is turned on and not operating properly. Once set, the fault bits remain set until reset in software, regardless if the fault condition no longer exists. If the user clears the fault bits and the fault condition still exists, the fault bits are automatically set, otherwise they remain cleared.

The OFIFG oscillator-fault interrupt flag is set and latched at POR or when any oscillator fault is detected. When OFIFG is set and OFIE is set, the OFIFG requests a user NMI. When the interrupt is granted, the OFIE is not reset automatically as it is in previous MSP430 families. It is no longer required to reset the OFIE. NMI entry/exit circuitry removes this requirement. The OFIFG flag

must be cleared by software. The source of the fault can be identified by checking the individual fault bits.

If XT1 in LF mode is sourcing any system clock (ACLK, MCLK, or SMCLK), and a fault is detected, the system clock is automatically switched to the VLO for its clock source (VLOCLK). Similarly, if XT1 in HF mode is sourcing any system clock and a fault is detected, the system clock is automatically switched to MODOSC for its clock source (MODCLK).

When XT2 (if available) is sourcing any system clock and a fault is detected, the system clock is automatically switched to MODOSC for its clock source (MODCLK).

The fail-safe logic does not change the respective SELA, SELM, and SELS bit settings. The fail-safe mechanism behaves the same in normal and bypass modes.

10.2 API Functions

Macros

- #define **CS_DCO_FREQ_1** 5330000
- #define **CS_DCO_FREQ_2** 6670000
- #define **CS_DCO_FREQ_3** 8000000
- #define **CS_DCO_FREQ_4** 16000000
- #define **CS_DCO_FREQ_5** 20000000
- #define **CS_DCO_FREQ_6** 24000000
- #define **CS_VLOCLK_FREQUENCY** 10000
- #define **CS_MODCLK_FREQUENCY** 5000000
- #define **CS_LFMODCLK_FREQUENCY** 39062
- #define **XT1_FREQUENCY_THRESHOLD** 50000

Functions

- void **CS_setExternalClockSource** (uint32_t XT1CLK_frequency, uint32_t XT2CLK_frequency)
Sets the external clock source.
- void **CS_initClockSignal** (uint8_t selectedClockSignal, uint16_t clockSource, uint16_t clockSourceDivider)
Initializes clock signal.
- void **CS_turnOnXT1** (uint16_t xt1drive)
Initializes the XT1 crystal oscillator in low frequency mode.
- void **CS_turnOnSMCLK** (void)
Turn on SMCLK.
- void **CS_turnOffSMCLK** (void)
Turn off SMCLK.
- void **CS_bypassXT1** (void)
Bypasses the XT1 crystal oscillator.
- bool **CS_turnOnXT1WithTimeout** (uint16_t xt1drive, uint32_t timeout)
Initializes the XT1 crystal oscillator in low frequency mode with timeout.
- bool **CS_bypassXT1WithTimeout** (uint32_t timeout)
Bypasses the XT1 crystal oscillator with timeout.
- void **CS_turnOffXT1** (void)
Stops the XT1 oscillator using the XT1OFF bit.
- void **CS_turnOnXT2** (uint16_t xt2drive)

- *Starts the XT2 crystal.*
- void `CS_bypassXT2` (void)
- *Bypasses the XT2 crystal oscillator.*
- bool `CS_turnOnXT2WithTimeout` (uint16_t xt2drive, uint32_t timeout)
- *Initializes the XT2 crystal oscillator with timeout.*
- bool `CS_bypassXT2WithTimeout` (uint32_t timeout)
- *Bypasses the XT2 crystal oscillator with timeout.*
- void `CS_turnOffXT2` (void)
- *Stops the XT2 oscillator using the XT2OFF bit.*
- void `CS_enableClockRequest` (uint8_t selectClock)
- *Enables conditional module requests.*
- void `CS_disableClockRequest` (uint8_t selectClock)
- *Disables conditional module requests.*
- uint8_t `CS_getFaultFlagStatus` (uint8_t mask)
- *Gets the current CS fault flag status.*
- void `CS_clearFaultFlag` (uint8_t mask)
- *Clears the current CS fault flag status for the masked bit.*
- uint32_t `CS_getACLK` (void)
- *Get the current ACLK frequency.*
- uint32_t `CS_getSMCLK` (void)
- *Get the current SMCLK frequency.*
- uint32_t `CS_getMCLK` (void)
- *Get the current MCLK frequency.*
- uint16_t `CS_clearAllOscFlagsWithTimeout` (uint32_t timeout)
- *Clears all the Oscillator Flags.*
- void `CS_setDCOFreq` (uint16_t dcorssel, uint16_t dcofsel)
- *Set DCO frequency.*

10.2.1 Detailed Description

The CS API is broken into four groups of functions: an API that initializes the clock module, those that deal with clock configuration and control, and external crystal and bypass specific configuration and initialization, and those that handle interrupts.

General CS configuration and initialization are handled by the following API

- `CS_initClockSignal()`
- `CS_enableClockRequest()`
- `CS_disableClockRequest()`
- `CS_getACLK()`
- `CS_getSMCLK()`
- `CS_getMCLK()`
- `CS_setDCOFreq()`

The following external crystal and bypass specific configuration and initialization functions are available for FR57xx devices:

- `CS_turnOnXT1()`
- `CS_bypassXT1()`
- `CS_bypassXT1WithTimeout()`

- `CS_turnOnXT1WithTimeout()`
- `CS_turnOffXT1()`
- `CS_turnOnXT2()`
- `CS_bypassXT2()`
- `CS_turnOnXT2WithTimeout()`
- `CS_bypassXT2WithTimeout()`
- `CS_turnOffXT2()`
- `CS_turnOnSMCLK()`
- `CS_turnOffSMCLK()`

The CS interrupts are handled by

- `CS_enableClockRequest()`
- `CS_disableClockRequest()`
- `CS_getFaultFlagStatus()`
- `CS_clearFaultFlag()`
- `CS_clearAllOscFlagsWithTimeout()`

`CS_setExternalClockSource` must be called if an external crystal XT1 or XT2 is used and the user intends to call `CS_getMCLK`, `CS_getSMCLK` or `CS_getACLK` APIs and `turnOnXT1`, `XT1ByPass`, `turnOnXT1WithTimeout`, `XT1ByPassWithTimeout`. If not any of the previous API are going to be called, it is not necessary to invoke this API.

10.2.2 Function Documentation

`CS_bypassXT1()`

```
void CS_bypassXT1 (
    void )
```

Bypasses the XT1 crystal oscillator.

Loops until all oscillator fault flags are cleared, with no timeout. IMPORTANT: User must call `CS_setExternalClockSource` function to set frequency of external clocks before calling this function.

Modified bits of **CSCTL0** register, bits of **CSCTL5** register, bits of **CSCTL4** register and bits of **SFRIFG** register.

Returns

None

`CS_bypassXT1WithTimeout()`

```
bool CS_bypassXT1WithTimeout (
    uint32_t timeout )
```

Bypasses the XT1 crystal oscillator with timeout.

Loops until all oscillator fault flags are cleared or until a timeout counter is decremented and equals to zero. **IMPORTANT:** User must call `CS_setExternalClockSource` to set frequency of external clocks before calling this function

Parameters

<i>timeout</i>	is the count value that gets decremented every time the loop that clears oscillator fault flags gets executed.
----------------	--

Modified bits of **CSCTL0** register, bits of **CSCTL5** register, bits of **CSCTL4** register and bits of **SFRIFG** register.

Returns

STATUS_SUCCESS or STATUS_FAIL

CS_bypassXT2()

```
void CS_bypassXT2 (
    void )
```

Bypasses the XT2 crystal oscillator.

Bypasses the XT2 crystal oscillator which supports crystal frequencies between 4 MHz and 32 MHz. Loops until all oscillator fault flags are cleared, with no timeout. **NOTE:** User must call `CS_setExternalClockSource` to set frequency of external clocks before calling this function.

Modified bits of **CSCTL5** register, bits of **CSCTL4** register and bits of **SFRIFG** register.

Returns

None

CS_bypassXT2WithTimeout()

```
bool CS_bypassXT2WithTimeout (
    uint32_t timeout )
```

Bypasses the XT2 crystal oscillator with timeout.

Bypasses the XT2 crystal oscillator with timeout, which supports crystal frequencies between 4 MHz and 32 MHz. Loops until all oscillator fault flags are cleared or until a timeout counter is decremented and equals to zero. **NOTE:** User must call `CS_setExternalClockSource` to set frequency of external clocks before calling this function.

Parameters

<i>timeout</i>	is the count value that gets decremented every time the loop that clears oscillator fault flags gets executed.
----------------	--

Modified bits of **CSCTL5** register, bits of **CSCTL4** register and bits of **SFRIFG1** register.

Returns

STATUS_SUCCESS or STATUS_FAIL

CS_clearAllOscFlagsWithTimeout()

```
uint16_t CS_clearAllOscFlagsWithTimeout (
    uint32_t timeout )
```

Clears all the Oscillator Flags.

Parameters

<i>timeout</i>	is the count value that gets decremented every time the loop that clears oscillator fault flags gets executed.
----------------	--

Modified bits of **CSCTL5** register and bits of **SFRIFG1** register.

Returns

the mask of the oscillator flag status

CS_clearFaultFlag()

```
void CS_clearFaultFlag (
    uint8_t mask )
```

Clears the current CS fault flag status for the masked bit.

Parameters

<i>mask</i>	is the masked interrupt flag status to be returned. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ CS_XT2OFFG - XT2 oscillator fault flag ■ CS_XT1OFFG - XT2 oscillator fault flag (HF mode)
-------------	--

Modified bits of **CSCTL5** register.

Returns

None

CS_disableClockRequest()

```
void CS_disableClockRequest (
    uint8_t selectClock )
```

Disables conditional module requests.

Parameters

<i>selectClock</i>	selects specific request enables. Valid values are: <ul style="list-style-type: none"> ■ CS_ACLK ■ CS_MCLK ■ CS_SMCLK ■ CS_MODOSC
--------------------	---

Modified bits of **CSCTL6** register.

Returns

None

CS_enableClockRequest()

```
void CS_enableClockRequest (
    uint8_t selectClock )
```

Enables conditional module requests.

Parameters

<i>selectClock</i>	selects specific request enables. Valid values are: <ul style="list-style-type: none"> ■ CS_ACLK ■ CS_MCLK ■ CS_SMCLK ■ CS_MODOSC
--------------------	---

Modified bits of **CSCTL6** register.

Returns

None

CS_getACLK()

```
uint32_t CS_getACLK (
    void )
```

Get the current ACLK frequency.

If a oscillator fault is set, the frequency returned will be based on the fail safe mechanism of CS module. The user of this API must ensure that CS_externalClockSourceInit API was invoked before in case XT1 or XT2 is being used.

Returns

Current ACLK frequency in Hz

CS_getFaultFlagStatus()

```
uint8_t CS_getFaultFlagStatus (
    uint8_t mask )
```

Gets the current CS fault flag status.

Parameters

<i>mask</i>	<p>is the masked interrupt flag status to be returned. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ CS_XT2OFFG - XT2 oscillator fault flag ■ CS_XT1OFFG - XT2 oscillator fault flag (HF mode)
-------------	---

Returns

Logical OR of any of the following:

- **CS_XT2OFFG** XT2 oscillator fault flag
- **CS_XT1OFFG** XT2 oscillator fault flag (HF mode)
indicating the status of the masked interrupts

CS_getMCLK()

```
uint32_t CS_getMCLK (
    void )
```

Get the current MCLK frequency.

If a oscillator fault is set, the frequency returned will be based on the fail safe mechanism of CS module. The user of this API must ensure that CS_externalClockSourceInit API was invoked before in case XT1 or XT2 is being used.

Returns

Current MCLK frequency in Hz

CS_getSMCLK()

```
uint32_t CS_getSMCLK (
    void )
```

Get the current SMCLK frequency.

If a oscillator fault is set, the frequency returned will be based on the fail safe mechanism of CS module. The user of this API must ensure that CS_externalClockSourceInit API was invoked before in case XT1 or XT2 is being used.

Returns

Current SMCLK frequency in Hz

CS_initClockSignal()

```
void CS_initClockSignal (
    uint8_t selectedClockSignal,
    uint16_t clockSource,
    uint16_t clockSourceDivider )
```

Initializes clock signal.

This function initializes each of the clock signals. The user must ensure that this function is called for each clock signal. If not, the default state is assumed for the particular clock signal. Refer to MSP430ware documentation for CS module or Device Family User's Guide for details of default clock signal states.

Parameters

<i>selectedClockSignal</i>	is the selected clock signal Valid values are: <ul style="list-style-type: none"> ■ CS_ACLK ■ CS_MCLK ■ CS_SMCLK ■ CS_MODOSC
<i>clockSource</i>	is Clock source for the selectedClock Valid values are: <ul style="list-style-type: none"> ■ CS_XT1CLK_SELECT ■ CS_VLOCLK_SELECT ■ CS_DCOCLK_SELECT ■ CS_XT2CLK_SELECT
<i>clockSourceDivider</i>	selects the clock divider to calculate clock signal from clock source. Valid values are: <ul style="list-style-type: none"> ■ CS_CLOCK_DIVIDER_1 - [Default for ACLK] ■ CS_CLOCK_DIVIDER_2 ■ CS_CLOCK_DIVIDER_4 ■ CS_CLOCK_DIVIDER_8 - [Default for SMCLK and MCLK] ■ CS_CLOCK_DIVIDER_16 ■ CS_CLOCK_DIVIDER_32

Modified bits of **CSCTL0** register, bits of **CSCTL3** register and bits of **CSCTL2** register.

Returns

None

CS_setDCOFreq()

```
void CS_setDCOFreq (
    uint16_t dcorssel,
    uint16_t dcofsel )
```

Set DCO frequency.

Parameters

<i>dcorssel</i>	selects frequency range option. Valid options are: CS_DCORSEL_0 [Default] CS_DCORSEL_1 Valid values are: <ul style="list-style-type: none"> ■ CS_DCORSEL_0 ■ CS_DCORSEL_1
<i>dcofsel</i>	selects valid frequency options based on dco frequency range selection (dcorssel). Valid values are: <ul style="list-style-type: none"> ■ CS_DCOFSEL_0 - Low frequency option 5.33MHZ. High frequency option 16MHz. ■ CS_DCOFSEL_1 - Low frequency option 6.67MHZ. High frequency option 20MHz. ■ CS_DCOFSEL_2 - Low frequency option 5.33MHZ. High frequency option 16MHz. ■ CS_DCOFSEL_3 [Default] - Low frequency option 8MHZ. High frequency option 24MHz.

Returns

None

CS_setExternalClockSource()

```
void CS_setExternalClockSource (
    uint32_t XT1CLK_frequency,
    uint32_t XT2CLK_frequency )
```

Sets the external clock source.

This function sets the external clock sources XT1 and XT2 crystal oscillator frequency values. This function must be called if an external crystal XT1 or XT2 is used and the user intends to call CS_getMCLK, CS_getSMCLK, CS_getACLK and turnOnXT1, XT1ByPass, turnOnXT1WithTimeout, XT1ByPassWithTimeout.

Parameters

<i>XT1CLK_frequency</i>	is the XT1 crystal frequencies in Hz
-------------------------	--------------------------------------

Parameters

<i>XT2CLK_frequency</i>	is the XT2 crystal frequencies in Hz
-------------------------	--------------------------------------

Returns

None

CS_turnOffSMCLK()

```
void CS_turnOffSMCLK (
    void )
```

Turn off SMCLK.

Modified bits of **CSCTL4** register.**Returns**

None

CS_turnOffXT1()

```
void CS_turnOffXT1 (
    void )
```

Stops the XT1 oscillator using the XT1OFF bit.

Modified bits of **CSCTL4** register.**Returns**

None

CS_turnOffXT2()

```
void CS_turnOffXT2 (
    void )
```

Stops the XT2 oscillator using the XT2OFF bit.

Modified bits of **CSCTL4** register.**Returns**

None

CS_turnOnSMCLK()

```
void CS_turnOnSMCLK (
    void )
```

Turn on SMCLK.

Modified bits of **CSCTL4** register.

Returns

None

CS_turnOnXT1()

```
void CS_turnOnXT1 (
    uint16_t xt1drive )
```

Initializes the XT1 crystal oscillator in low frequency mode.

Loops until all oscillator fault flags are cleared, with no timeout. See the device-specific data sheet for appropriate drive settings. **IMPORTANT:** User must call CS_setExternalClockSource function to set frequency of external clocks before calling this function.

Parameters

<i>xt1drive</i>	is the target drive strength for the XT1 crystal oscillator. Valid values are: <ul style="list-style-type: none"> ■ CS_XT1_DRIVE_0 ■ CS_XT1_DRIVE_1 ■ CS_XT1_DRIVE_2 ■ CS_XT1_DRIVE_3 [Default]
-----------------	---

Modified bits of **CSCTL0** register, bits of **CSCTL5** register, bits of **CSCTL4** register and bits of **SFRIFG1** register.

Returns

None

CS_turnOnXT1WithTimeout()

```
bool CS_turnOnXT1WithTimeout (
    uint16_t xt1drive,
    uint32_t timeout )
```

Initializes the XT1 crystal oscillator in low frequency mode with timeout.

Loops until all oscillator fault flags are cleared or until a timeout counter is decremented and equals to zero. See the device-specific datasheet for appropriate drive settings. **IMPORTANT:** User must call CS_setExternalClockSource function to set frequency of external clocks before calling this function.

Parameters

<i>xt1drive</i>	is the target drive strength for the XT1 crystal oscillator. Valid values are: <ul style="list-style-type: none"> ■ CS_XT1_DRIVE_0 ■ CS_XT1_DRIVE_1 ■ CS_XT1_DRIVE_2 ■ CS_XT1_DRIVE_3 [Default]
<i>timeout</i>	is the count value that gets decremented every time the loop that clears oscillator fault flags gets executed.

Modified bits of **CSCTL0** register, bits of **CSCTL5** register, bits of **CSCTL4** register and bits of **SFRIFG1** register.

Returns

STATUS_SUCCESS or STATUS_FAIL

CS_turnOnXT2()

```
void CS_turnOnXT2 (
    uint16_t xt2drive )
```

Starts the XT2 crystal.

Initializes the XT2 crystal oscillator, which supports crystal frequencies between 4 MHz and 32 MHz, depending on the selected drive strength. Loops until all oscillator fault flags are cleared, with no timeout. See the device-specific data sheet for appropriate drive settings. NOTE: User must call CS_setExternalClockSource to set frequency of external clocks before calling this function.

Parameters

<i>xt2drive</i>	is the target drive strength for the XT2 crystal oscillator. Valid values are: <ul style="list-style-type: none"> ■ CS_XT2_DRIVE_4MHZ_8MHZ ■ CS_XT2_DRIVE_8MHZ_16MHZ ■ CS_XT2_DRIVE_16MHZ_24MHZ ■ CS_XT2_DRIVE_24MHZ_32MHZ [Default]
-----------------	--

Modified bits of **CSCTL0** register, bits of **CSCTL5** register, bits of **CSCTL4** register and bits of **SFRIFG1** register.

Returns

None

CS_turnOnXT2WithTimeout()

```
bool CS_turnOnXT2WithTimeout (
    uint16_t xt2drive,
    uint32_t timeout )
```

Initializes the XT2 crystal oscillator with timeout.

Initializes the XT2 crystal oscillator, which supports crystal frequencies between 4 MHz and 32 MHz, depending on the selected drive strength. Loops until all oscillator fault flags are cleared or until a timeout counter is decremented and equals to zero. See the device-specific data sheet for appropriate drive settings. NOTE: User must call CS_setExternalClockSource to set frequency of external clocks before calling this function.

Parameters

<i>xt2drive</i>	is the target drive strength for the XT2 crystal oscillator. Valid values are: <ul style="list-style-type: none"> ■ CS_XT2_DRIVE_4MHZ_8MHZ ■ CS_XT2_DRIVE_8MHZ_16MHZ ■ CS_XT2_DRIVE_16MHZ_24MHZ ■ CS_XT2_DRIVE_24MHZ_32MHZ [Default]
<i>timeout</i>	is the count value that gets decremented every time the loop that clears oscillator fault flags gets executed.

Modified bits of **CSCTL5** register, bits of **CSCTL4** register and bits of **SFRIFG1** register.

Returns

STATUS_SUCCESS or STATUS_FAIL

10.3 Programming Example

The following example shows the configuration of the CS module that sets ACLK=SMCLK=MCLK=DCOCLK

```
//Set DCO Frequency to 8MHz
CS_setDCOFreq(CS_BASE, CS_DCORSEL_0, CS_DCOFSEL_3);

//configure MCLK, SMCLK and ACLK to be source by DCOCLK
CS_initClockSignal(CS_BASE, CS_ACLK, CS_DCOCLK_SELECT, CS_CLOCK_DIVIDER_1);
CS_initClockSignal(CS_BASE, CS_SMCLK, CS_DCOCLK_SELECT, CS_CLOCK_DIVIDER_1);
CS_initClockSignal(CS_BASE, CS_MCLK, CS_DCOCLK_SELECT, CS_CLOCK_DIVIDER_1);
```


11 Direct Memory Access (DMA)

Introduction	80
API Functions	80
Programming Example	93

11.1 Introduction

The Direct Memory Access (DMA) API provides a set of functions for using the MSP430Ware DMA modules. Functions are provided to initialize and setup each DMA channel with the source and destination addresses, manage the interrupts for each channel, and set bits that affect all DMA channels.

The DMA module provides the ability to move data from one address in the device to another, and that includes other peripheral addresses to RAM or vice-versa, all without the actual use of the CPU. Please be advised, that the DMA module does halt the CPU for 2 cycles while transferring, but does not have to edit any registers or anything. The DMA can transfer by bytes or words at a time, and will automatically increment or decrement the source or destination address if desired. There are also 6 different modes to transfer by, including single-transfer, block-transfer, and burst-block-transfer, as well as repeated versions of those three different kinds which allows transfers to be repeated without having re-enable transfers.

The DMA settings that affect all DMA channels include prioritization, from a fixed priority to dynamic round-robin priority. Another setting that can be changed is when transfers occur, the CPU may be in a read-modify-write operation which can be disastrous to time sensitive material, so this can be disabled. And Non-Maskable-Interrupts can indeed be maskable to the DMA module if not enabled.

The DMA module can generate one interrupt per channel. The interrupt is only asserted when the specified amount of transfers has been completed. With single-transfer, this occurs when that many single transfers have occurred, while with block or burst-block transfers, once the block is completely transferred the interrupt is asserted.

11.2 API Functions

Functions

- void `DMA_init` (`DMA_initParam` *param)
Initializes the specified DMA channel.
- void `DMA_setTransferSize` (`uint8_t` channelSelect, `uint16_t` transferSize)
Sets the specified amount of transfers for the selected DMA channel.
- `uint16_t` `DMA_getTransferSize` (`uint8_t` channelSelect)
Gets the amount of transfers for the selected DMA channel.
- void `DMA_setSrcAddress` (`uint8_t` channelSelect, `uint32_t` srcAddress, `uint16_t` directionSelect)
Sets source address and the direction that the source address will move after a transfer.
- void `DMA_setDstAddress` (`uint8_t` channelSelect, `uint32_t` dstAddress, `uint16_t` directionSelect)

- Sets the destination address and the direction that the destination address will move after a transfer.*
- void `DMA_enableTransfers` (uint8_t channelSelect)
Enables transfers to be triggered.
- void `DMA_disableTransfers` (uint8_t channelSelect)
Disables transfers from being triggered.
- void `DMA_startTransfer` (uint8_t channelSelect)
Starts a transfer if using the default trigger source selected in initialization.
- void `DMA_enableInterrupt` (uint8_t channelSelect)
Enables the DMA interrupt for the selected channel.
- void `DMA_disableInterrupt` (uint8_t channelSelect)
Disables the DMA interrupt for the selected channel.
- uint16_t `DMA_getInterruptStatus` (uint8_t channelSelect)
Returns the status of the interrupt flag for the selected channel.
- void `DMA_clearInterrupt` (uint8_t channelSelect)
Clears the interrupt flag for the selected channel.
- uint16_t `DMA_getNMIAbortStatus` (uint8_t channelSelect)
Returns the status of the NMIAbort for the selected channel.
- void `DMA_clearNMIAbort` (uint8_t channelSelect)
Clears the status of the NMIAbort to proceed with transfers for the selected channel.
- void `DMA_disableTransferDuringReadModifyWrite` (void)
Disables the DMA from stopping the CPU during a Read-Modify-Write Operation to start a transfer.
- void `DMA_enableTransferDuringReadModifyWrite` (void)
Enables the DMA to stop the CPU during a Read-Modify-Write Operation to start a transfer.
- void `DMA_enableRoundRobinPriority` (void)
Enables Round Robin prioritization.
- void `DMA_disableRoundRobinPriority` (void)
Disables Round Robin prioritization.
- void `DMA_enableNMIAbort` (void)
Enables a NMI to interrupt a DMA transfer.
- void `DMA_disableNMIAbort` (void)
Disables any NMI from interrupting a DMA transfer.

11.2.1 Detailed Description

The DMA API is broken into three groups of functions: those that deal with initialization and transfers, those that handle interrupts, and those that affect all DMA channels.

The DMA initialization and transfer functions are: `DMA_init()` `DMA_setSrcAddress()` `DMA_setDstAddress()` `DMA_enableTransfers()` `DMA_disableTransfers()` `DMA_startTransfer()` `DMA_setTransferSize()` `DMA_getTransferSize()`

The DMA interrupts are handled by: `DMA_enableInterrupt()` `DMA_disableInterrupt()` `DMA_getInterruptStatus()` `DMA_clearInterrupt()` `DMA_getNMIAbortStatus()` `DMA_clearNMIAbort()`

Features of the DMA that affect all channels are handled by: `DMA_disableTransferDuringReadModifyWrite()` `DMA_enableTransferDuringReadModifyWrite()` `DMA_enableRoundRobinPriority()` `DMA_disableRoundRobinPriority()` `DMA_enableNMIAbort()` `DMA_disableNMIAbort()`

11.2.2 Function Documentation

DMA_clearInterrupt()

```
void DMA_clearInterrupt (
    uint8_t channelSelect )
```

Clears the interrupt flag for the selected channel.

This function clears the DMA interrupt flag is cleared, so that it no longer asserts.

Parameters

<i>channelSelect</i>	is the specified channel to clear the interrupt flag for. Valid values are: <ul style="list-style-type: none">■ DMA_CHANNEL_0■ DMA_CHANNEL_1■ DMA_CHANNEL_2■ DMA_CHANNEL_3■ DMA_CHANNEL_4■ DMA_CHANNEL_5■ DMA_CHANNEL_6■ DMA_CHANNEL_7
----------------------	---

Returns

None

DMA_clearNMIAbort()

```
void DMA_clearNMIAbort (
    uint8_t channelSelect )
```

Clears the status of the NMIAbort to proceed with transfers for the selected channel.

This function clears the status of the NMI Abort flag for the selected channel to allow for transfers on the channel to continue.

Parameters

<i>channelSelect</i>	is the specified channel to clear the NMI Abort flag for. Valid values are: <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
----------------------	--

Returns

None

DMA_disableInterrupt()

```
void DMA_disableInterrupt (
    uint8_t channelSelect )
```

Disables the DMA interrupt for the selected channel.

Disables the DMA interrupt source. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor.

Parameters

<i>channelSelect</i>	is the specified channel to disable the interrupt for. Valid values are: <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
----------------------	---

Returns

None

DMA_disableNMIAbort()

```
void DMA_disableNMIAbort (
    void )
```

Disables any NMI from interrupting a DMA transfer.

This function disables NMI's from interrupting any DMA transfer currently in progress.

Returns

None

DMA_disableRoundRobinPriority()

```
void DMA_disableRoundRobinPriority (
    void )
```

Disables Round Robin prioritization.

This function disables Round Robin Prioritization, enabling static prioritization of the DMA channels. In static prioritization, the DMA channels are prioritized with the lowest DMA channel index having the highest priority (i.e. DMA Channel 0 has the highest priority).

Returns

None

DMA_disableTransferDuringReadModifyWrite()

```
void DMA_disableTransferDuringReadModifyWrite (
    void )
```

Disables the DMA from stopping the CPU during a Read-Modify-Write Operation to start a transfer.

This function allows the CPU to finish any read-modify-write operations it may be in the middle of before transfers of and DMA channel stop the CPU.

Returns

None

DMA_disableTransfers()

```
void DMA_disableTransfers (
    uint8_t channelSelect )
```

Disables transfers from being triggered.

This function disables transfer from being triggered for the selected channel. This function should be called before any re-initialization of the selected DMA channel.

Parameters

<i>channelSelect</i>	<p>is the specified channel to disable transfers for. Valid values are:</p> <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
----------------------	--

Returns

None

DMA_enableInterrupt()

```
void DMA_enableInterrupt (
    uint8_t channelSelect )
```

Enables the DMA interrupt for the selected channel.

Enables the DMA interrupt source. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor. Does not clear interrupt flags.

Parameters

<i>channelSelect</i>	<p>is the specified channel to enable the interrupt for. Valid values are:</p> <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
----------------------	---

Returns

None

DMA_enableNMIAbort()

```
void DMA_enableNMIAbort (
    void )
```

Enables a NMI to interrupt a DMA transfer.

This function allow NMI's to interrupting any DMA transfer currently in progress and stops any future transfers to begin before the NMI is done processing.

Returns

None

DMA_enableRoundRobinPriority()

```
void DMA_enableRoundRobinPriority (
    void )
```

Enables Round Robin prioritization.

This function enables Round Robin Prioritization of DMA channels. In the case of Round Robin Prioritization, the last DMA channel to have transferred data then has the last priority, which comes into play when multiple DMA channels are ready to transfer at the same time.

Returns

None

DMA_enableTransferDuringReadModifyWrite()

```
void DMA_enableTransferDuringReadModifyWrite (
    void )
```

Enables the DMA to stop the CPU during a Read-Modify-Write Operation to start a transfer.

This function allows the DMA to stop the CPU in the middle of a read- modify-write operation to transfer data.

Returns

None

DMA_enableTransfers()

```
void DMA_enableTransfers (
    uint8_t channelSelect )
```

Enables transfers to be triggered.

This function enables transfers upon appropriate trigger of the selected trigger source for the selected channel.

Parameters

<i>channelSelect</i>	<p>is the specified channel to enable transfer for. Valid values are:</p> <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
----------------------	--

Returns

None

DMA_getInterruptStatus()

```
uint16_t DMA_getInterruptStatus (
    uint8_t channelSelect )
```

Returns the status of the interrupt flag for the selected channel.

Returns the status of the interrupt flag for the selected channel.

Parameters

<i>channelSelect</i>	<p>is the specified channel to return the interrupt flag status from. Valid values are:</p> <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
----------------------	--

Returns

One of the following:

- **DMA_INT_INACTIVE**
- **DMA_INT_ACTIVE**
indicating the status of the current interrupt flag

DMA_getNMIAbortStatus()

```
uint16_t DMA_getNMIAbortStatus (
    uint8_t channelSelect )
```

Returns the status of the NMIAbort for the selected channel.

This function returns the status of the NMI Abort flag for the selected channel. If this flag has been set, it is because a transfer on this channel was aborted due to a interrupt from an NMI.

Parameters

<i>channelSelect</i>	<p>is the specified channel to return the status of the NMI Abort flag for. Valid values are:</p> <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
----------------------	--

Returns

One of the following:

- **DMA_NOTABORTED**
- **DMA_ABORTED**
indicating the status of the NMIAbort for the selected channel

DMA_getTransferSize()

```
uint16_t DMA_getTransferSize (
    uint8_t channelSelect )
```

Gets the amount of transfers for the selected DMA channel.

This function gets the amount of transfers for the selected DMA channel without having to reinitialize the DMA channel.

Parameters

<i>channelSelect</i>	is the specified channel to set source address direction for. Valid values are: <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
----------------------	--

Returns

the amount of transfers

DMA_init()

```
void DMA_init (
    DMA_initParam * param )
```

Initializes the specified DMA channel.

This function initializes the specified DMA channel. Upon successful completion of initialization of the selected channel the control registers will be cleared and the given variables will be set. Please note, if transfers have been enabled with the `enableTransfers()` function, then a call to `disableTransfers()` is necessary before re-initialization. Also note, that the trigger sources are device dependent and can be found in the device family data sheet. The amount of DMA channels available are also device specific.

Parameters

<i>param</i>	is the pointer to struct for initialization.
--------------	--

Returns

STATUS_SUCCESS or STATUS_FAILURE of the initialization process.

References `DMA_initParam::channelSelect`, `DMA_initParam::transferModeSelect`, `DMA_initParam::transferSize`, `DMA_initParam::transferUnitSelect`, `DMA_initParam::triggerSourceSelect`, and `DMA_initParam::triggerTypeSelect`.

DMA_setDstAddress()

```
void DMA_setDstAddress (
    uint8_t channelSelect,
    uint32_t dstAddress,
```

```
uint16_t directionSelect )
```

Sets the destination address and the direction that the destination address will move after a transfer.

This function sets the destination address and the direction that the destination address will move after a transfer is complete. It may be incremented, decremented, or unchanged.

Parameters

<i>channelSelect</i>	is the specified channel to set the destination address direction for. Valid values are: <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
<i>dstAddress</i>	is the address of where the data will be transferred to. Modified bits are DMAxDA of DMAxDA register.
<i>directionSelect</i>	is the specified direction of the destination address after a transfer. Valid values are: <ul style="list-style-type: none"> ■ DMA_DIRECTION_UNCHANGED ■ DMA_DIRECTION_DECREMENT ■ DMA_DIRECTION_INCREMENT Modified bits are DMADSTINCR of DMAxCTL register.

Returns

None

DMA_setSrcAddress()

```
void DMA_setSrcAddress (
    uint8_t channelSelect,
    uint32_t srcAddress,
    uint16_t directionSelect )
```

Sets source address and the direction that the source address will move after a transfer.

This function sets the source address and the direction that the source address will move after a transfer is complete. It may be incremented, decremented or unchanged.

Parameters

<i>channelSelect</i>	<p>is the specified channel to set source address direction for. Valid values are:</p> <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
<i>srcAddress</i>	<p>is the address of where the data will be transferred from. Modified bits are DMAxSA of DMAxSA register.</p>
<i>directionSelect</i>	<p>is the specified direction of the source address after a transfer. Valid values are:</p> <ul style="list-style-type: none"> ■ DMA_DIRECTION_UNCHANGED ■ DMA_DIRECTION_DECREMENT ■ DMA_DIRECTION_INCREMENT <p>Modified bits are DMASRCINCR of DMAxCTL register.</p>

Returns

None

DMA_setTransferSize()

```
void DMA_setTransferSize (
    uint8_t channelSelect,
    uint16_t transferSize )
```

Sets the specified amount of transfers for the selected DMA channel.

This function sets the specified amount of transfers for the selected DMA channel without having to reinitialize the DMA channel.

Parameters

<i>channelSelect</i>	is the specified channel to set source address direction for. Valid values are: <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
<i>transferSize</i>	is the amount of transfers to complete in a block transfer mode, as well as how many transfers to complete before the interrupt flag is set. Valid value is between 1-65535, if 0, no transfers will occur. Modified bits are DMAxSZ of DMAxSZ register.

Returns

None

DMA_startTransfer()

```
void DMA_startTransfer (
    uint8_t channelSelect )
```

Starts a transfer if using the default trigger source selected in initialization.

This functions triggers a transfer of data from source to destination if the trigger source chosen from initialization is the **DMA_TRIGGERSOURCE_0**. Please note, this function needs to be called for each (repeated-)single transfer, and when transferAmount of transfers have been complete in (repeated-)block transfers.

Parameters

<i>channelSelect</i>	is the specified channel to start transfers for. Valid values are: <ul style="list-style-type: none"> ■ DMA_CHANNEL_0 ■ DMA_CHANNEL_1 ■ DMA_CHANNEL_2 ■ DMA_CHANNEL_3 ■ DMA_CHANNEL_4 ■ DMA_CHANNEL_5 ■ DMA_CHANNEL_6 ■ DMA_CHANNEL_7
----------------------	---

Returns

None

11.3 Programming Example

The following example shows how to initialize and use the DMA API to transfer words from one spot in RAM to another.

```
// Initialize and Setup DMA Channel 0
/*
 * Base Address of the DMA Module
 * Configure DMA channel 0
 * Configure channel for repeated block transfers
 * DMA interrupt flag will be set after every 16 transfers
 * Use DMA_startTransfer() function to trigger transfers
 * Transfer Word-to-Word
 * Trigger upon Rising Edge of Trigger Source Signal
 */
DMA_initParam param = {0};
param.channelSelect = DMA_CHANNEL_0;
param.transferModeSelect = DMA_TRANSFER_REPEATED_BLOCK;
param.transferSize = 16;
param.triggerSourceSelect = DMA_TRIGGERSOURCE_0;
param.transferUnitSelect = DMA_SIZE_SRCWORD_DSTWORD;
param.triggerTypeSelect = DMA_TRIGGER_RISINGEDGE;
DMA_init(&param);
/*
 * Base Address of the DMA Module
 * Configure DMA channel 0
 * Use 0x1C00 as source
 * Increment source address after every transfer
 */
DMA_setSrcAddress(DMA_CHANNEL_0,
                  0x1C00,
                  DMA_DIRECTION_INCREMENT);
/*
 * Base Address of the DMA Module
 * Configure DMA channel 0
 * Use 0x1C20 as destination
 * Increment destination address after every transfer
 */
DMA_setDstAddress(DMA_CHANNEL_0,
                  0x1C20,
                  DMA_DIRECTION_INCREMENT);

// Enable transfers on DMA channel 0
DMA_enableTransfers(DMA_CHANNEL_0);

while(1)
{
    // Start block transfer on DMA channel 0
    DMA_startTransfer(DMA_CHANNEL_0);
}
```

12 EUSCI Universal Asynchronous Receiver/Transmitter (EUSCI_A_UART)

Introduction	94
API Functions	94
Programming Example	105

12.1 Introduction

The MSP430Ware library for UART mode features include:

- Odd, even, or non-parity
- Independent transmit and receive shift registers
- Separate transmit and receive buffer registers
- LSB-first or MSB-first data transmit and receive
- Built-in idle-line and address-bit communication protocols for multiprocessor systems
- Receiver start-edge detection for auto wake up from LPMx modes
- Status flags for error detection and suppression
- Status flags for address detection
- Independent interrupt capability for receive and transmit

In UART mode, the USCI transmits and receives characters at a bit rate asynchronous to another device. Timing for each character is based on the selected baud rate of the USCI. The transmit and receive functions use the same baud-rate frequency.

12.2 API Functions

Functions

- bool [EUSCI_A_UART_init](#) (uint16_t baseAddress, [EUSCI_A_UART_initParam](#) *param)
Advanced initialization routine for the UART block. The values to be written into the clockPrescaler, firstModReg, secondModReg and overSampling parameters should be pre-computed and passed into the initialization function.
- void [EUSCI_A_UART_transmitData](#) (uint16_t baseAddress, uint8_t transmitData)
Transmits a byte from the UART Module. Please note that if TX interrupt is disabled, this function manually polls the TX IFG flag waiting for an indication that it is safe to write to the transmit buffer and does not time-out.
- uint8_t [EUSCI_A_UART_receiveData](#) (uint16_t baseAddress)
Receives a byte that has been sent to the UART Module.
- void [EUSCI_A_UART_enableInterrupt](#) (uint16_t baseAddress, uint8_t mask)
Enables individual UART interrupt sources.
- void [EUSCI_A_UART_disableInterrupt](#) (uint16_t baseAddress, uint8_t mask)
Disables individual UART interrupt sources.
- uint8_t [EUSCI_A_UART_getInterruptStatus](#) (uint16_t baseAddress, uint8_t mask)

- Gets the current UART interrupt status.*
- void [EUSCI_A_UART_clearInterrupt](#) (uint16_t baseAddress, uint16_t mask)
- Clears UART interrupt sources.*
- void [EUSCI_A_UART_enable](#) (uint16_t baseAddress)
- Enables the UART block.*
- void [EUSCI_A_UART_disable](#) (uint16_t baseAddress)
- Disables the UART block.*
- uint8_t [EUSCI_A_UART_queryStatusFlags](#) (uint16_t baseAddress, uint8_t mask)
- Gets the current UART status flags.*
- void [EUSCI_A_UART_setDormant](#) (uint16_t baseAddress)
- Sets the UART module in dormant mode.*
- void [EUSCI_A_UART_resetDormant](#) (uint16_t baseAddress)
- Re-enables UART module from dormant mode.*
- void [EUSCI_A_UART_transmitAddress](#) (uint16_t baseAddress, uint8_t transmitAddress)
- Transmits the next byte to be transmitted marked as address depending on selected multiprocessor mode.*
- void [EUSCI_A_UART_transmitBreak](#) (uint16_t baseAddress)
- Transmit break.*
- uint32_t [EUSCI_A_UART_getReceiveBufferAddress](#) (uint16_t baseAddress)
- Returns the address of the RX Buffer of the UART for the DMA module.*
- uint32_t [EUSCI_A_UART_getTransmitBufferAddress](#) (uint16_t baseAddress)
- Returns the address of the TX Buffer of the UART for the DMA module.*
- void [EUSCI_A_UART_selectDeglitchTime](#) (uint16_t baseAddress, uint16_t deglitchTime)
- Sets the deglitch time.*

12.2.1 Detailed Description

The EUSCI_A_UART API provides the set of functions required to implement an interrupt driven EUSCI_A_UART driver. The EUSCI_A_UART initialization with the various modes and features is done by the [EUSCI_A_UART_init\(\)](#). At the end of this function EUSCI_A_UART is initialized and stays disabled. [EUSCI_A_UART_enable\(\)](#) enables the EUSCI_A_UART and the module is now ready for transmit and receive. It is recommended to initialize the EUSCI_A_UART via [EUSCI_A_UART_init\(\)](#), enable the required interrupts and then enable EUSCI_A_UART via [EUSCI_A_UART_enable\(\)](#).

The EUSCI_A_UART API is broken into three groups of functions: those that deal with configuration and control of the EUSCI_A_UART modules, those used to send and receive data, and those that deal with interrupt handling and those dealing with DMA.

Configuration and control of the EUSCI_UART are handled by the

- [EUSCI_A_UART_init\(\)](#)
- [EUSCI_A_UART_initAdvance\(\)](#)
- [EUSCI_A_UART_enable\(\)](#)
- [EUSCI_A_UART_disable\(\)](#)
- [EUSCI_A_UART_setDormant\(\)](#)
- [EUSCI_A_UART_resetDormant\(\)](#)
- [EUSCI_A_UART_selectDeglitchTime\(\)](#)

Sending and receiving data via the EUSCI_UART is handled by the

- [EUSCI_A_UART_transmitData\(\)](#)
- [EUSCI_A_UART_receiveData\(\)](#)
- [EUSCI_A_UART_transmitAddress\(\)](#)
- [EUSCI_A_UART_transmitBreak\(\)](#)
- [EUSCI_A_UART_getTransmitBufferAddress\(\)](#)
- [EUSCI_A_UART_getTransmitBufferAddress\(\)](#)

Managing the EUSCI_UART interrupts and status are handled by the

- [EUSCI_A_UART_enableInterrupt\(\)](#)
- [EUSCI_A_UART_disableInterrupt\(\)](#)
- [EUSCI_A_UART_getInterruptStatus\(\)](#)
- [EUSCI_A_UART_clearInterrupt\(\)](#)
- [EUSCI_A_UART_queryStatusFlags\(\)](#)

12.2.2 Function Documentation

EUSCI_A_UART_clearInterrupt()

```
void EUSCI_A_UART_clearInterrupt (
    uint16_t baseAddress,
    uint16_t mask )
```

Clears UART interrupt sources.

The UART interrupt source is cleared, so that it no longer asserts. The highest interrupt flag is automatically cleared when an interrupt vector generator is used.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
<i>mask</i>	is a bit mask of the interrupt sources to be cleared. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ EUSCI_A_UART_RECEIVE_INTERRUPT_FLAG ■ EUSCI_A_UART_TRANSMIT_INTERRUPT_FLAG ■ EUSCI_A_UART_STARTBIT_INTERRUPT_FLAG ■ EUSCI_A_UART_TRANSMIT_COMPLETE_INTERRUPT_FLAG

Modified bits of **UCAxIFG** register.

Returns

None

EUSCI_A_UART_disable()

```
void EUSCI_A_UART_disable (
    uint16_t baseAddress )
```

Disables the UART block.

This will disable operation of the UART block.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
--------------------	---

Modified bits are **UCSWRST** of **UCAxCTL1** register.**Returns**

None

EUSCI_A_UART_disableInterrupt()

```
void EUSCI_A_UART_disableInterrupt (
    uint16_t baseAddress,
    uint8_t mask )
```

Disables individual UART interrupt sources.

Disables the indicated UART interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
<i>mask</i>	<p>is the bit mask of the interrupt sources to be disabled. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ EUSCI_A_UART_RECEIVE_INTERRUPT - Receive interrupt ■ EUSCI_A_UART_TRANSMIT_INTERRUPT - Transmit interrupt ■ EUSCI_A_UART_RECEIVE_ERRONEOUSCHAR_INTERRUPT - Receive erroneous-character interrupt enable ■ EUSCI_A_UART_BREAKCHAR_INTERRUPT - Receive break character interrupt enable ■ EUSCI_A_UART_STARTBIT_INTERRUPT - Start bit received interrupt enable ■ EUSCI_A_UART_TRANSMIT_COMPLETE_INTERRUPT - Transmit complete interrupt enable

Modified bits of **UCAxCTL1** register and bits of **UCAxIE** register.

Returns

None

EUSCI_A_UART_enable()

```
void EUSCI_A_UART_enable (
    uint16_t baseAddress )
```

Enables the UART block.

This will enable operation of the UART block.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
--------------------	---

Modified bits are **UCSWRST** of **UCAxCTL1** register.

Returns

None

EUSCI_A_UART_enableInterrupt()

```
void EUSCI_A_UART_enableInterrupt (
    uint16_t baseAddress,
    uint8_t mask )
```

Enables individual UART interrupt sources.

Enables the indicated UART interrupt sources. The interrupt flag is first and then the corresponding interrupt is enabled. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor. Does not clear interrupt flags.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
--------------------	---

Parameters

<i>mask</i>	<p>is the bit mask of the interrupt sources to be enabled. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ EUSCI_A_UART_RECEIVE_INTERRUPT - Receive interrupt ■ EUSCI_A_UART_TRANSMIT_INTERRUPT - Transmit interrupt ■ EUSCI_A_UART_RECEIVE_ERRONEOUSCHAR_INTERRUPT - Receive erroneous-character interrupt enable ■ EUSCI_A_UART_BREAKCHAR_INTERRUPT - Receive break character interrupt enable ■ EUSCI_A_UART_STARTBIT_INTERRUPT - Start bit received interrupt enable ■ EUSCI_A_UART_TRANSMIT_COMPLETE_INTERRUPT - Transmit complete interrupt enable
-------------	---

Modified bits of **UCAxCTL1** register and bits of **UCAxIE** register.

Returns

None

EUSCI_A_UART_getInterruptStatus()

```
uint8_t EUSCI_A_UART_getInterruptStatus (
    uint16_t baseAddress,
    uint8_t mask )
```

Gets the current UART interrupt status.

This returns the interrupt status for the UART module based on which flag is passed.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
<i>mask</i>	<p>is the masked interrupt flag status to be returned. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ EUSCI_A_UART_RECEIVE_INTERRUPT_FLAG ■ EUSCI_A_UART_TRANSMIT_INTERRUPT_FLAG ■ EUSCI_A_UART_STARTBIT_INTERRUPT_FLAG ■ EUSCI_A_UART_TRANSMIT_COMPLETE_INTERRUPT_FLAG

Modified bits of **UCAxIFG** register.

Returns

Logical OR of any of the following:

- **EUSCI_A_UART_RECEIVE_INTERRUPT_FLAG**

- **EUSCI_A_UART_TRANSMIT_INTERRUPT_FLAG**
- **EUSCI_A_UART_STARTBIT_INTERRUPT_FLAG**
- **EUSCI_A_UART_TRANSMIT_COMPLETE_INTERRUPT_FLAG**
indicating the status of the masked flags

EUSCI_A_UART_getReceiveBufferAddress()

```
uint32_t EUSCI_A_UART_getReceiveBufferAddress (
    uint16_t baseAddress )
```

Returns the address of the RX Buffer of the UART for the DMA module.

Returns the address of the UART RX Buffer. This can be used in conjunction with the DMA to store the received data directly to memory.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
--------------------	---

Returns

Address of RX Buffer

EUSCI_A_UART_getTransmitBufferAddress()

```
uint32_t EUSCI_A_UART_getTransmitBufferAddress (
    uint16_t baseAddress )
```

Returns the address of the TX Buffer of the UART for the DMA module.

Returns the address of the UART TX Buffer. This can be used in conjunction with the DMA to obtain transmitted data directly from memory.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
--------------------	---

Returns

Address of TX Buffer

EUSCI_A_UART_init()

```
bool EUSCI_A_UART_init (
    uint16_t baseAddress,
    EUSCI_A_UART_initParam * param )
```

Advanced initialization routine for the UART block. The values to be written into the clockPrescaler, firstModReg, secondModReg and overSampling parameters should be pre-computed and passed into the initialization function.

Upon successful initialization of the UART block, this function will have initialized the module, but the UART block still remains disabled and must be enabled with [EUSCI_A_UART_enable\(\)](#). To calculate values for clockPrescalar, firstModReg, secondModReg and overSampling please use the link below.

http://software-dl.ti.com/msp430/msp430_public_sw/mcu/msp430/MSP430BaudRateConverter/index.html

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
<i>param</i>	is the pointer to struct for initialization.

Modified bits are **UCPEN**, **UCPAR**, **UCMSB**, **UC7BIT**, **UCSPB**, **UCMODEx** and **UCSYNC** of **UCAxCTL0** register; bits **UCSSELx** and **UCSWRST** of **UCAxCTL1** register.

Returns

STATUS_SUCCESS or STATUS_FAIL of the initialization process

References EUSCI_A_UART_initParam::clockPrescalar, EUSCI_A_UART_initParam::firstModReg, EUSCI_A_UART_initParam::msborLsbFirst, EUSCI_A_UART_initParam::numberOfStopBits, EUSCI_A_UART_initParam::overSampling, EUSCI_A_UART_initParam::parity, EUSCI_A_UART_initParam::secondModReg, EUSCI_A_UART_initParam::selectClockSource, and EUSCI_A_UART_initParam::uartMode.

EUSCI_A_UART_queryStatusFlags()

```
uint8_t EUSCI_A_UART_queryStatusFlags (
    uint16_t baseAddress,
    uint8_t mask )
```

Gets the current UART status flags.

This returns the status for the UART module based on which flag is passed.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
<i>mask</i>	is the masked interrupt flag status to be returned. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ EUSCI_A_UART_LISTEN_ENABLE ■ EUSCI_A_UART_FRAMING_ERROR ■ EUSCI_A_UART_OVERRUN_ERROR ■ EUSCI_A_UART_PARITY_ERROR ■ EUSCI_A_UART_BREAK_DETECT ■ EUSCI_A_UART_RECEIVE_ERROR ■ EUSCI_A_UART_ADDRESS_RECEIVED ■ EUSCI_A_UART_IDLELINE ■ EUSCI_A_UART_BUSY

Modified bits of **UCAxSTAT** register.

Returns

Logical OR of any of the following:

- **EUSCI_A_UART_LISTEN_ENABLE**
- **EUSCI_A_UART_FRAMING_ERROR**
- **EUSCI_A_UART_OVERRUN_ERROR**
- **EUSCI_A_UART_PARITY_ERROR**
- **EUSCI_A_UART_BREAK_DETECT**
- **EUSCI_A_UART_RECEIVE_ERROR**
- **EUSCI_A_UART_ADDRESS_RECEIVED**
- **EUSCI_A_UART_IDLELINE**
- **EUSCI_A_UART_BUSY**

indicating the status of the masked interrupt flags

EUSCI_A_UART_receiveData()

```
uint8_t EUSCI_A_UART_receiveData (
    uint16_t baseAddress )
```

Receives a byte that has been sent to the UART Module.

This function reads a byte of data from the UART receive data Register.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
--------------------	---

Modified bits of **UCAxRXBUF** register.

Returns

Returns the byte received from by the UART module, cast as an uint8_t.

EUSCI_A_UART_resetDormant()

```
void EUSCI_A_UART_resetDormant (
    uint16_t baseAddress )
```

Re-enables UART module from dormant mode.

Not dormant. All received characters set UCRXIFG.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
--------------------	---

Modified bits are **UCDORM** of **UCAxCTL1** register.

Returns

None

EUSCI_A_UART_selectDeglitchTime()

```
void EUSCI_A_UART_selectDeglitchTime (
    uint16_t baseAddress,
    uint16_t deglitchTime )
```

Sets the deglitch time.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
<i>deglitchTime</i>	is the selected deglitch time Valid values are: <ul style="list-style-type: none"> ■ EUSCI_A_UART_DEGLITCH_TIME_2ns ■ EUSCI_A_UART_DEGLITCH_TIME_50ns ■ EUSCI_A_UART_DEGLITCH_TIME_100ns ■ EUSCI_A_UART_DEGLITCH_TIME_200ns

Returns

None

EUSCI_A_UART_setDormant()

```
void EUSCI_A_UART_setDormant (
    uint16_t baseAddress )
```

Sets the UART module in dormant mode.

Puts USCI in sleep mode Only characters that are preceded by an idle-line or with address bit set UCRXIFG. In UART mode with automatic baud-rate detection, only the combination of a break and sync field sets UCRXIFG.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
--------------------	---

Modified bits of **UCAxCTL1** register.

Returns

None

EUSCI_A_UART_transmitAddress()

```
void EUSCI_A_UART_transmitAddress (
    uint16_t baseAddress,
    uint8_t transmitAddress )
```

Transmits the next byte to be transmitted marked as address depending on selected multiprocessor mode.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
<i>transmitAddress</i>	is the next byte to be transmitted

Modified bits of **UCAxTXBUF** register and bits of **UCAxCTL1** register.

Returns

None

EUSCI_A_UART_transmitBreak()

```
void EUSCI_A_UART_transmitBreak (
    uint16_t baseAddress )
```

Transmit break.

Transmits a break with the next write to the transmit buffer. In UART mode with automatic baud-rate detection, EUSCI_A_UART_AUTOMATICBAUDRATE_SYNC(0x55) must be written into UCAxTXBUF to generate the required break/sync fields. Otherwise, DEFAULT_SYNC(0x00) must be written into the transmit buffer. Also ensures module is ready for transmitting the next data.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
--------------------	---

Modified bits of **UCAxTXBUF** register and bits of **UCAxCTL1** register.

Returns

None

EUSCI_A_UART_transmitData()

```
void EUSCI_A_UART_transmitData (
```

```
uint16_t baseAddress,
uint8_t transmitData )
```

Transmits a byte from the UART Module. Please note that if TX interrupt is disabled, this function manually polls the TX IFG flag waiting for an indication that it is safe to write to the transmit buffer and does not time-out.

This function will place the supplied data into UART transmit data register to start transmission

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_UART module.
<i>transmitData</i>	data to be transmitted from the UART module

Modified bits of **UCAxTXBUF** register.

Returns

None

12.3 Programming Example

The following example shows how to use the EUSCI_UART API to initialize the EUSCI_UART, transmit characters, and receive characters.

```
// Configure UART
EUSCI_A_UART_initParam param = {0};
param.selectClockSource = EUSCI_A_UART_CLOCKSOURCE_ACLK;
param.clockPrescaler = 15;
param.firstModReg = 0;
param.secondModReg = 68;
param.parity = EUSCI_A_UART_NO_PARITY;
param.msborLsbFirst = EUSCI_A_UART_LSB_FIRST;
param.numberofStopBits = EUSCI_A_UART_ONE_STOP_BIT;
param.uartMode = EUSCI_A_UART_MODE;
param.overSampling = EUSCI_A_UART_LOW_FREQUENCY_BAUDRATE_GENERATION;

if (STATUS_FAIL == EUSCI_A_UART_init(EUSCI_A0_BASE, &param)) {
    return;
}

EUSCI_A_UART_enable(EUSCI_A0_BASE);

// Enable USCI_A0 RX interrupt
EUSCI_A_UART_enableInterrupt(EUSCI_A0_BASE,
    EUSCI_A_UART_RECEIVE_INTERRUPT);
```

13 EUSCI Synchronous Peripheral Interface (EUSCI_A_SPI)

Introduction	106
API Functions	106
Programming Example	115

13.1 Introduction

The Serial Peripheral Interface Bus or SPI bus is a synchronous serial data link standard named by Motorola that operates in full duplex mode. Devices communicate in master/slave mode where the master device initiates the data frame.

This library provides the API for handling a SPI communication using EUSCI.

The SPI module can be configured as either a master or a slave device.

The SPI module also includes a programmable bit rate clock divider and prescaler to generate the output serial clock derived from the module's input clock.

13.2 Functions

Functions

- void [EUSCI_A_SPI_initMaster](#) (uint16_t baseAddress, [EUSCI_A_SPI_initMasterParam](#) *param)
Initializes the SPI Master block.
- void [EUSCI_A_SPI_select4PinFunctionality](#) (uint16_t baseAddress, uint16_t select4PinFunctionality)
Selects 4Pin Functionality.
- void [EUSCI_A_SPI_changeMasterClock](#) (uint16_t baseAddress, [EUSCI_A_SPI_changeMasterClockParam](#) *param)
Initializes the SPI Master clock. At the end of this function call, SPI module is left enabled.
- void [EUSCI_A_SPI_initSlave](#) (uint16_t baseAddress, [EUSCI_A_SPI_initSlaveParam](#) *param)
Initializes the SPI Slave block.
- void [EUSCI_A_SPI_changeClockPhasePolarity](#) (uint16_t baseAddress, uint16_t clockPhase, uint16_t clockPolarity)
Changes the SPI clock phase and polarity. At the end of this function call, SPI module is left enabled.
- void [EUSCI_A_SPI_transmitData](#) (uint16_t baseAddress, uint8_t transmitData)
Transmits a byte from the SPI Module.
- uint8_t [EUSCI_A_SPI_receiveData](#) (uint16_t baseAddress)
Receives a byte that has been sent to the SPI Module.
- void [EUSCI_A_SPI_enableInterrupt](#) (uint16_t baseAddress, uint16_t mask)
Enables individual SPI interrupt sources.
- void [EUSCI_A_SPI_disableInterrupt](#) (uint16_t baseAddress, uint16_t mask)
Disables individual SPI interrupt sources.

- `uint8_t EUSCI_A_SPI_getInterruptStatus` (`uint16_t baseAddress`, `uint8_t mask`)
Gets the current SPI interrupt status.
- `void EUSCI_A_SPI_clearInterrupt` (`uint16_t baseAddress`, `uint16_t mask`)
Clears the selected SPI interrupt status flag.
- `void EUSCI_A_SPI_enable` (`uint16_t baseAddress`)
Enables the SPI block.
- `void EUSCI_A_SPI_disable` (`uint16_t baseAddress`)
Disables the SPI block.
- `uint32_t EUSCI_A_SPI_getReceiveBufferAddress` (`uint16_t baseAddress`)
Returns the address of the RX Buffer of the SPI for the DMA module.
- `uint32_t EUSCI_A_SPI_getTransmitBufferAddress` (`uint16_t baseAddress`)
Returns the address of the TX Buffer of the SPI for the DMA module.
- `uint16_t EUSCI_A_SPI_isBusy` (`uint16_t baseAddress`)
Indicates whether or not the SPI bus is busy.

13.2.1 Detailed Description

To use the module as a master, the user must call `EUSCI_A_SPI_initMaster()` to configure the SPI Master. This is followed by enabling the SPI module using `EUSCI_A_SPI_enable()`. The interrupts are then enabled (if needed). It is recommended to enable the SPI module before enabling the interrupts. A data transmit is then initiated using `EUSCI_A_SPI_transmitData()` and then when the receive flag is set, the received data is read using `EUSCI_A_SPI_receiveData()` and this indicates that an RX/TX operation is complete.

To use the module as a slave, initialization is done using `EUSCI_A_SPI_initSlave()` and this is followed by enabling the module using `EUSCI_A_SPI_enable()`. Following this, the interrupts may be enabled as needed. When the receive flag is set, data is first transmitted using `EUSCI_A_SPI_transmitData()` and this is followed by a data reception by `EUSCI_A_SPI_receiveData()`.

The SPI API is broken into 3 groups of functions: those that deal with status and initialization, those that handle data, and those that manage interrupts.

The status and initialization of the SPI module are managed by

- `EUSCI_A_SPI_initMaster()`
- `EUSCI_A_SPI_initSlave()`
- `EUSCI_A_SPI_disable()`
- `EUSCI_A_SPI_enable()`
- `EUSCI_A_SPI_masterChangeClock()`
- `EUSCI_A_SPI_isBusy()`
- `EUSCI_A_SPI_select4PinFunctionality()`
- `EUSCI_A_SPI_changeClockPhasePolarity()`

Data handling is done by

- `EUSCI_A_SPI_transmitData()`
- `EUSCI_A_SPI_receiveData()`

Interrupts from the SPI module are managed using

- [EUSCI_A_SPI_disableInterrupt\(\)](#)
- [EUSCI_A_SPI_enableInterrupt\(\)](#)
- [EUSCI_A_SPI_getInterruptStatus\(\)](#)
- [EUSCI_A_SPI_clearInterrupt\(\)](#)

DMA related

- [EUSCI_A_SPI_getReceiveBufferAddressForDMA\(\)](#)
- [EUSCI_A_SPI_getTransmitBufferAddressForDMA\(\)](#)

13.2.2 Function Documentation

EUSCI_A_SPI_changeClockPhasePolarity()

```
void EUSCI_A_SPI_changeClockPhasePolarity (
    uint16_t baseAddress,
    uint16_t clockPhase,
    uint16_t clockPolarity )
```

Changes the SPI clock phase and polarity. At the end of this function call, SPI module is left enabled.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
<i>clockPhase</i>	is clock phase select. Valid values are: <ul style="list-style-type: none"> ■ EUSCI_A_SPI_PHASE_DATA_CHANGED_ONFIRST_CAPTURED_ON_NEXT [Default] ■ EUSCI_A_SPI_PHASE_DATA_CAPTURED_ONFIRST_CHANGED_ON_NEXT
<i>clockPolarity</i>	is clock polarity select Valid values are: <ul style="list-style-type: none"> ■ EUSCI_A_SPI_CLOCKPOLARITY_INACTIVITY_HIGH ■ EUSCI_A_SPI_CLOCKPOLARITY_INACTIVITY_LOW [Default]

Modified bits are **UCCKPL**, **UCCKPH** and **UCSWRST** of **UCAxCTLW0** register.

Returns

None

EUSCI_A_SPI_changeMasterClock()

```
void EUSCI_A_SPI_changeMasterClock (
    uint16_t baseAddress,
    EUSCI_A_SPI_changeMasterClockParam * param )
```

Initializes the SPI Master clock. At the end of this function call, SPI module is left enabled.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
<i>param</i>	is the pointer to struct for master clock setting.

Modified bits are **UCSWRST** of **UCAxCTLW0** register.

Returns

None

References EUSCI_A_SPI_changeMasterClockParam::clockSourceFrequency, and EUSCI_A_SPI_changeMasterClockParam::desiredSpiClock.

EUSCI_A_SPI_clearInterrupt()

```
void EUSCI_A_SPI_clearInterrupt (
    uint16_t baseAddress,
    uint16_t mask )
```

Clears the selected SPI interrupt status flag.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
<i>mask</i>	is the masked interrupt flag to be cleared. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ EUSCI_A_SPI_TRANSMIT_INTERRUPT ■ EUSCI_A_SPI_RECEIVE_INTERRUPT

Modified bits of **UCAxIFG** register.

Returns

None

EUSCI_A_SPI_disable()

```
void EUSCI_A_SPI_disable (
    uint16_t baseAddress )
```

Disables the SPI block.

This will disable operation of the SPI block.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
--------------------	--

Modified bits are **UCSWRST** of **UCAxCTLW0** register.

Returns

None

EUSCI_A_SPI_disableInterrupt()

```
void EUSCI_A_SPI_disableInterrupt (
    uint16_t baseAddress,
    uint16_t mask )
```

Disables individual SPI interrupt sources.

Disables the indicated SPI interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
<i>mask</i>	is the bit mask of the interrupt sources to be disabled. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ EUSCI_A_SPI_TRANSMIT_INTERRUPT ■ EUSCI_A_SPI_RECEIVE_INTERRUPT

Modified bits of **UCAxIE** register.

Returns

None

EUSCI_A_SPI_enable()

```
void EUSCI_A_SPI_enable (
    uint16_t baseAddress )
```

Enables the SPI block.

This will enable operation of the SPI block.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
--------------------	--

Modified bits are **UCSWRST** of **UCAxCTLW0** register.

Returns

None

EUSCI_A_SPI_enableInterrupt()

```
void EUSCI_A_SPI_enableInterrupt (
    uint16_t baseAddress,
    uint16_t mask )
```

Enables individual SPI interrupt sources.

Enables the indicated SPI interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor. Does not clear interrupt flags.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
<i>mask</i>	is the bit mask of the interrupt sources to be enabled. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ EUSCI_A_SPI_TRANSMIT_INTERRUPT ■ EUSCI_A_SPI_RECEIVE_INTERRUPT

Modified bits of **UCAxIFG** register and bits of **UCAxIE** register.

Returns

None

EUSCI_A_SPI_getInterruptStatus()

```
uint8_t EUSCI_A_SPI_getInterruptStatus (
    uint16_t baseAddress,
    uint8_t mask )
```

Gets the current SPI interrupt status.

This returns the interrupt status for the SPI module based on which flag is passed.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
<i>mask</i>	is the masked interrupt flag status to be returned. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ EUSCI_A_SPI_TRANSMIT_INTERRUPT ■ EUSCI_A_SPI_RECEIVE_INTERRUPT

Returns

Logical OR of any of the following:

- **EUSCI_A_SPI_TRANSMIT_INTERRUPT**
 - **EUSCI_A_SPI_RECEIVE_INTERRUPT**
- indicating the status of the masked interrupts

EUSCI_A_SPI_getReceiveBufferAddress()

```
uint32_t EUSCI_A_SPI_getReceiveBufferAddress (
    uint16_t baseAddress )
```

Returns the address of the RX Buffer of the SPI for the DMA module.

Returns the address of the SPI RX Buffer. This can be used in conjunction with the DMA to store the received data directly to memory.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
--------------------	--

Returns

the address of the RX Buffer

EUSCI_A_SPI_getTransmitBufferAddress()

```
uint32_t EUSCI_A_SPI_getTransmitBufferAddress (
    uint16_t baseAddress )
```

Returns the address of the TX Buffer of the SPI for the DMA module.

Returns the address of the SPI TX Buffer. This can be used in conjunction with the DMA to obtain transmitted data directly from memory.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
--------------------	--

Returns

the address of the TX Buffer

EUSCI_A_SPI_initMaster()

```
void EUSCI_A_SPI_initMaster (
    uint16_t baseAddress,
    EUSCI_A_SPI_initMasterParam * param )
```

Initializes the SPI Master block.

Upon successful initialization of the SPI master block, this function will have set the bus speed for the master, but the SPI Master block still remains disabled and must be enabled with [EUSCI_A_SPI_enable\(\)](#)

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI Master module.
<i>param</i>	is the pointer to struct for master initialization.

Modified bits are **UCCKPH**, **UCCKPL**, **UC7BIT**, **UCMSB**, **UCSSELx** and **UCSWRST** of **UCAxCTLW0** register.

Returns

STATUS_SUCCESS

References EUSCI_A_SPI_initMasterParam::clockPhase, EUSCI_A_SPI_initMasterParam::clockPolarity, EUSCI_A_SPI_initMasterParam::clockSourceFrequency, EUSCI_A_SPI_initMasterParam::desiredSpiClock, EUSCI_A_SPI_initMasterParam::msbFirst, EUSCI_A_SPI_initMasterParam::selectClockSource, and EUSCI_A_SPI_initMasterParam::spiMode.

EUSCI_A_SPI_initSlave()

```
void EUSCI_A_SPI_initSlave (
    uint16_t baseAddress,
    EUSCI_A_SPI_initSlaveParam * param )
```

Initializes the SPI Slave block.

Upon successful initialization of the SPI slave block, this function will have initialized the slave block, but the SPI Slave block still remains disabled and must be enabled with [EUSCI_A_SPI_enable\(\)](#)

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI Slave module.
<i>param</i>	is the pointer to struct for slave initialization.

Modified bits are **UCMSB**, **UCMST**, **UC7BIT**, **UCCKPL**, **UCCKPH**, **UCMODE** and **UCSWRST** of **UCAxCTLW0** register.

Returns

STATUS_SUCCESS

References EUSCI_A_SPI_initSlaveParam::clockPhase, EUSCI_A_SPI_initSlaveParam::clockPolarity, EUSCI_A_SPI_initSlaveParam::msbFirst, and EUSCI_A_SPI_initSlaveParam::spiMode.

EUSCI_A_SPI_isBusy()

```
uint16_t EUSCI_A_SPI_isBusy (
    uint16_t baseAddress )
```

Indicates whether or not the SPI bus is busy.

This function returns an indication of whether or not the SPI bus is busy. This function checks the status of the bus via UCBBUSY bit

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
--------------------	--

Returns

One of the following:

- **EUSCI_A_SPI_BUSY**
- **EUSCI_A_SPI_NOT_BUSY**
indicating if the EUSCI_A_SPI is busy

EUSCI_A_SPI_receiveData()

```
uint8_t EUSCI_A_SPI_receiveData (
    uint16_t baseAddress )
```

Receives a byte that has been sent to the SPI Module.

This function reads a byte of data from the SPI receive data Register.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
--------------------	--

Returns

Returns the byte received from by the SPI module, cast as an uint8_t.

EUSCI_A_SPI_select4PinFunctionality()

```
void EUSCI_A_SPI_select4PinFunctionality (
    uint16_t baseAddress,
    uint16_t select4PinFunctionality )
```

Selects 4Pin Functionality.

This function should be invoked only in 4-wire mode. Invoking this function has no effect in 3-wire mode.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
--------------------	--

Parameters

<i>select4PinFunctionality</i>	<p>selects 4 pin functionality Valid values are:</p> <ul style="list-style-type: none"> ■ EUSCI_A_SPI_PREVENT_CONFLICTS_WITH_OTHER_MASTERS ■ EUSCI_A_SPI_ENABLE_SIGNAL_FOR_4WIRE_SLAVE
--------------------------------	--

Modified bits are **UCSTEM** of **UCAxCTLW0** register.

Returns

None

EUSCI_A_SPI_transmitData()

```
void EUSCI_A_SPI_transmitData (
    uint16_t baseAddress,
    uint8_t transmitData )
```

Transmits a byte from the SPI Module.

This function will place the supplied data into SPI transmit data register to start transmission.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_A_SPI module.
<i>transmitData</i>	data to be transmitted from the SPI module

Returns

None

13.3 Programming Example

The following example shows how to use the SPI API to configure the SPI module as a master device, and how to do a simple send of data.

```
//Initialize slave to MSB first, inactive high clock polarity and 3 wire SPI
EUSCI_A_SPI_initSlaveParam param = {0};
param.msbFirst = EUSCI_A_SPI_MSB_FIRST;
param.clockPhase = EUSCI_A_SPI_PHASE_DATA_CHANGED_ONFIRST_CAPTURED_ON_NEXT;
param.clockPolarity = EUSCI_A_SPI_CLOCKPOLARITY_INACTIVITY_HIGH;
param.spiMode = EUSCI_A_SPI_3PIN;
EUSCI_A_SPI_initSlave(EUSCI_A0_BASE, &param);

//Enable SPI Module
EUSCI_A_SPI_enable(EUSCI_A0_BASE);

//Enable Receive interrupt
EUSCI_A_SPI_enableInterrupt(EUSCI_A0_BASE,
    EUSCI_A_SPI_RECEIVE_INTERRUPT
);
```

14 EUSCI Synchronous Peripheral Interface (EUSCI_B_SPI)

Introduction	116
API Functions	116
Programming Example	125

14.1 Introduction

The Serial Peripheral Interface Bus or SPI bus is a synchronous serial data link standard named by Motorola that operates in full duplex mode. Devices communicate in master/slave mode where the master device initiates the data frame.

This library provides the API for handling a SPI communication using EUSCI.

The SPI module can be configured as either a master or a slave device.

The SPI module also includes a programmable bit rate clock divider and prescaler to generate the output serial clock derived from the module's input clock.

14.2 Functions

Functions

- void [EUSCI_B_SPI_initMaster](#) (uint16_t baseAddress, [EUSCI_B_SPI_initMasterParam](#) *param)
Initializes the SPI Master block.
- void [EUSCI_B_SPI_select4PinFunctionality](#) (uint16_t baseAddress, uint16_t select4PinFunctionality)
Selects 4Pin Functionality.
- void [EUSCI_B_SPI_changeMasterClock](#) (uint16_t baseAddress, [EUSCI_B_SPI_changeMasterClockParam](#) *param)
Initializes the SPI Master clock. At the end of this function call, SPI module is left enabled.
- void [EUSCI_B_SPI_initSlave](#) (uint16_t baseAddress, [EUSCI_B_SPI_initSlaveParam](#) *param)
Initializes the SPI Slave block.
- void [EUSCI_B_SPI_changeClockPhasePolarity](#) (uint16_t baseAddress, uint16_t clockPhase, uint16_t clockPolarity)
Changes the SPI clock phase and polarity. At the end of this function call, SPI module is left enabled.
- void [EUSCI_B_SPI_transmitData](#) (uint16_t baseAddress, uint8_t transmitData)
Transmits a byte from the SPI Module.
- uint8_t [EUSCI_B_SPI_receiveData](#) (uint16_t baseAddress)
Receives a byte that has been sent to the SPI Module.
- void [EUSCI_B_SPI_enableInterrupt](#) (uint16_t baseAddress, uint16_t mask)
Enables individual SPI interrupt sources.
- void [EUSCI_B_SPI_disableInterrupt](#) (uint16_t baseAddress, uint16_t mask)
Disables individual SPI interrupt sources.

- `uint8_t EUSCI_B_SPI_getInterruptStatus` (`uint16_t baseAddress`, `uint8_t mask`)
Gets the current SPI interrupt status.
- `void EUSCI_B_SPI_clearInterrupt` (`uint16_t baseAddress`, `uint16_t mask`)
Clears the selected SPI interrupt status flag.
- `void EUSCI_B_SPI_enable` (`uint16_t baseAddress`)
Enables the SPI block.
- `void EUSCI_B_SPI_disable` (`uint16_t baseAddress`)
Disables the SPI block.
- `uint32_t EUSCI_B_SPI_getReceiveBufferAddress` (`uint16_t baseAddress`)
Returns the address of the RX Buffer of the SPI for the DMA module.
- `uint32_t EUSCI_B_SPI_getTransmitBufferAddress` (`uint16_t baseAddress`)
Returns the address of the TX Buffer of the SPI for the DMA module.
- `uint16_t EUSCI_B_SPI_isBusy` (`uint16_t baseAddress`)
Indicates whether or not the SPI bus is busy.

14.2.1 Detailed Description

To use the module as a master, the user must call `EUSCI_B_SPI_masterInit()` to configure the SPI Master. This is followed by enabling the SPI module using `EUSCI_B_SPI_enable()`. The interrupts are then enabled (if needed). It is recommended to enable the SPI module before enabling the interrupts. A data transmit is then initiated using `EUSCI_B_SPI_transmitData()` and then when the receive flag is set, the received data is read using `EUSCI_B_SPI_receiveData()` and this indicates that an RX/TX operation is complete.

To use the module as a slave, initialization is done using `EUSCI_B_SPI_slaveInit()` and this is followed by enabling the module using `EUSCI_B_SPI_enable()`. Following this, the interrupts may be enabled as needed. When the receive flag is set, data is first transmitted using `EUSCI_B_SPI_transmitData()` and this is followed by a data reception by `EUSCI_B_SPI_receiveData()`.

The SPI API is broken into 3 groups of functions: those that deal with status and initialization, those that handle data, and those that manage interrupts.

The status and initialization of the SPI module are managed by

- `EUSCI_B_SPI_masterInit()`
- `EUSCI_B_SPI_slaveInit()`
- `EUSCI_B_SPI_disable()`
- `EUSCI_B_SPI_enable()`
- `EUSCI_B_SPI_masterChangeClock()`
- `EUSCI_B_SPI_isBusy()`
- `EUSCI_B_SPI_select4PinFunctionality()`
- `EUSCI_B_SPI_changeClockPhasePolarity()`

Data handling is done by

- `EUSCI_B_SPI_transmitData()`
- `EUSCI_B_SPI_receiveData()`

Interrupts from the SPI module are managed using

- [EUSCI_B_SPI_disableInterrupt\(\)](#)
- [EUSCI_B_SPI_enableInterrupt\(\)](#)
- [EUSCI_B_SPI_getInterruptStatus\(\)](#)
- [EUSCI_B_SPI_clearInterrupt\(\)](#)

DMA related

- [EUSCI_B_SPI_getReceiveBufferAddressForDMA\(\)](#)
- [EUSCI_B_SPI_getTransmitBufferAddressForDMA\(\)](#)

14.2.2 Function Documentation

EUSCI_B_SPI_changeClockPhasePolarity()

```
void EUSCI_B_SPI_changeClockPhasePolarity (
    uint16_t baseAddress,
    uint16_t clockPhase,
    uint16_t clockPolarity )
```

Changes the SPI clock phase and polarity. At the end of this function call, SPI module is left enabled.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
<i>clockPhase</i>	is clock phase select. Valid values are: <ul style="list-style-type: none"> ■ EUSCI_B_SPI_PHASE_DATA_CHANGED_ONFIRST_CAPTURED_ON_NEXT [Default] ■ EUSCI_B_SPI_PHASE_DATA_CAPTURED_ONFIRST_CHANGED_ON_NEXT
<i>clockPolarity</i>	is clock polarity select Valid values are: <ul style="list-style-type: none"> ■ EUSCI_B_SPI_CLOCKPOLARITY_INACTIVITY_HIGH ■ EUSCI_B_SPI_CLOCKPOLARITY_INACTIVITY_LOW [Default]

Modified bits are **UCCKPL**, **UCCKPH** and **UCSWRST** of **UCAxCTLW0** register.

Returns

None

EUSCI_B_SPI_changeMasterClock()

```
void EUSCI_B_SPI_changeMasterClock (
    uint16_t baseAddress,
    EUSCI_B_SPI_changeMasterClockParam * param )
```

Initializes the SPI Master clock. At the end of this function call, SPI module is left enabled.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
<i>param</i>	is the pointer to struct for master clock setting.

Modified bits are **UCSWRST** of **UCAxCTLW0** register.

Returns

None

References EUSCI_B_SPI_changeMasterClockParam::clockSourceFrequency, and EUSCI_B_SPI_changeMasterClockParam::desiredSpiClock.

EUSCI_B_SPI_clearInterrupt()

```
void EUSCI_B_SPI_clearInterrupt (
    uint16_t baseAddress,
    uint16_t mask )
```

Clears the selected SPI interrupt status flag.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
<i>mask</i>	is the masked interrupt flag to be cleared. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ EUSCI_B_SPI_TRANSMIT_INTERRUPT ■ EUSCI_B_SPI_RECEIVE_INTERRUPT

Modified bits of **UCAxIFG** register.

Returns

None

EUSCI_B_SPI_disable()

```
void EUSCI_B_SPI_disable (
    uint16_t baseAddress )
```

Disables the SPI block.

This will disable operation of the SPI block.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
--------------------	--

Modified bits are **UCSWRST** of **UCAxCTLW0** register.

Returns

None

EUSCI_B_SPI_disableInterrupt()

```
void EUSCI_B_SPI_disableInterrupt (
    uint16_t baseAddress,
    uint16_t mask )
```

Disables individual SPI interrupt sources.

Disables the indicated SPI interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
<i>mask</i>	is the bit mask of the interrupt sources to be disabled. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ EUSCI_B_SPI_TRANSMIT_INTERRUPT ■ EUSCI_B_SPI_RECEIVE_INTERRUPT

Modified bits of **UCAxIE** register.

Returns

None

EUSCI_B_SPI_enable()

```
void EUSCI_B_SPI_enable (
    uint16_t baseAddress )
```

Enables the SPI block.

This will enable operation of the SPI block.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
--------------------	--

Modified bits are **UCSWRST** of **UCAxCTLW0** register.

Returns

None

EUSCI_B_SPI_enableInterrupt()

```
void EUSCI_B_SPI_enableInterrupt (
    uint16_t baseAddress,
    uint16_t mask )
```

Enables individual SPI interrupt sources.

Enables the indicated SPI interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor. Does not clear interrupt flags.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
<i>mask</i>	is the bit mask of the interrupt sources to be enabled. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ EUSCI_B_SPI_TRANSMIT_INTERRUPT ■ EUSCI_B_SPI_RECEIVE_INTERRUPT

Modified bits of **UCAxIFG** register and bits of **UCAxIE** register.

Returns

None

EUSCI_B_SPI_getInterruptStatus()

```
uint8_t EUSCI_B_SPI_getInterruptStatus (
    uint16_t baseAddress,
    uint8_t mask )
```

Gets the current SPI interrupt status.

This returns the interrupt status for the SPI module based on which flag is passed.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
<i>mask</i>	is the masked interrupt flag status to be returned. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ EUSCI_B_SPI_TRANSMIT_INTERRUPT ■ EUSCI_B_SPI_RECEIVE_INTERRUPT

Returns

Logical OR of any of the following:

- **EUSCI_B_SPI_TRANSMIT_INTERRUPT**
 - **EUSCI_B_SPI_RECEIVE_INTERRUPT**
- indicating the status of the masked interrupts

EUSCI_B_SPI_getReceiveBufferAddress()

```
uint32_t EUSCI_B_SPI_getReceiveBufferAddress (
    uint16_t baseAddress )
```

Returns the address of the RX Buffer of the SPI for the DMA module.

Returns the address of the SPI RX Buffer. This can be used in conjunction with the DMA to store the received data directly to memory.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
--------------------	--

Returns

the address of the RX Buffer

EUSCI_B_SPI_getTransmitBufferAddress()

```
uint32_t EUSCI_B_SPI_getTransmitBufferAddress (
    uint16_t baseAddress )
```

Returns the address of the TX Buffer of the SPI for the DMA module.

Returns the address of the SPI TX Buffer. This can be used in conjunction with the DMA to obtain transmitted data directly from memory.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
--------------------	--

Returns

the address of the TX Buffer

EUSCI_B_SPI_initMaster()

```
void EUSCI_B_SPI_initMaster (
    uint16_t baseAddress,
    EUSCI_B_SPI_initMasterParam * param )
```

Initializes the SPI Master block.

Upon successful initialization of the SPI master block, this function will have set the bus speed for the master, but the SPI Master block still remains disabled and must be enabled with [EUSCI_B_SPI_enable\(\)](#)

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI Master module.
<i>param</i>	is the pointer to struct for master initialization.

Modified bits are **UCCKPH**, **UCCKPL**, **UC7BIT**, **UCMSB**, **UCSSELx** and **UCSWRST** of **UCAxCTLW0** register.

Returns

STATUS_SUCCESS

References EUSCI_B_SPI_initMasterParam::clockPhase, EUSCI_B_SPI_initMasterParam::clockPolarity, EUSCI_B_SPI_initMasterParam::clockSourceFrequency, EUSCI_B_SPI_initMasterParam::desiredSpiClock, EUSCI_B_SPI_initMasterParam::msbFirst, EUSCI_B_SPI_initMasterParam::selectClockSource, and EUSCI_B_SPI_initMasterParam::spiMode.

EUSCI_B_SPI_initSlave()

```
void EUSCI_B_SPI_initSlave (
    uint16_t baseAddress,
    EUSCI_B_SPI_initSlaveParam * param )
```

Initializes the SPI Slave block.

Upon successful initialization of the SPI slave block, this function will have initialized the slave block, but the SPI Slave block still remains disabled and must be enabled with [EUSCI_B_SPI_enable\(\)](#)

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI Slave module.
<i>param</i>	is the pointer to struct for slave initialization.

Modified bits are **UCMSB**, **UCMST**, **UC7BIT**, **UCCKPL**, **UCCKPH**, **UCMODE** and **UCSWRST** of **UCAxCTLW0** register.

Returns

STATUS_SUCCESS

References EUSCI_B_SPI_initSlaveParam::clockPhase, EUSCI_B_SPI_initSlaveParam::clockPolarity, EUSCI_B_SPI_initSlaveParam::msbFirst, and EUSCI_B_SPI_initSlaveParam::spiMode.

EUSCI_B_SPI_isBusy()

```
uint16_t EUSCI_B_SPI_isBusy (
    uint16_t baseAddress )
```

Indicates whether or not the SPI bus is busy.

This function returns an indication of whether or not the SPI bus is busy. This function checks the status of the bus via UCBBUSY bit

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
--------------------	--

Returns

One of the following:

- **EUSCI_B_SPI_BUSY**
- **EUSCI_B_SPI_NOT_BUSY**
indicating if the EUSCI_B_SPI is busy

EUSCI_B_SPI_receiveData()

```
uint8_t EUSCI_B_SPI_receiveData (
    uint16_t baseAddress )
```

Receives a byte that has been sent to the SPI Module.

This function reads a byte of data from the SPI receive data Register.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
--------------------	--

Returns

Returns the byte received from by the SPI module, cast as an uint8_t.

EUSCI_B_SPI_select4PinFunctionality()

```
void EUSCI_B_SPI_select4PinFunctionality (
    uint16_t baseAddress,
    uint16_t select4PinFunctionality )
```

Selects 4Pin Functionality.

This function should be invoked only in 4-wire mode. Invoking this function has no effect in 3-wire mode.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
--------------------	--

Parameters

<i>select4PinFunctionality</i>	selects 4 pin functionality Valid values are: <ul style="list-style-type: none"> ■ EUSCI_B_SPI_PREVENT_CONFLICTS_WITH_OTHER_MASTERS ■ EUSCI_B_SPI_ENABLE_SIGNAL_FOR_4WIRE_SLAVE
--------------------------------	---

Modified bits are **UCSTEM** of **UCAxCTLW0** register.

Returns

None

EUSCI_B_SPI_transmitData()

```
void EUSCI_B_SPI_transmitData (
    uint16_t baseAddress,
    uint8_t transmitData )
```

Transmits a byte from the SPI Module.

This function will place the supplied data into SPI transmit data register to start transmission.

Parameters

<i>baseAddress</i>	is the base address of the EUSCI_B_SPI module.
<i>transmitData</i>	data to be transmitted from the SPI module

Returns

None

14.3 Programming Example

The following example shows how to use the SPI API to configure the SPI module as a master device, and how to do a simple send of data.

```
//Initialize slave to MSB first, inactive high clock polarity and 3 wire SPI
EUSCI_B_SPI_initSlaveParam param = {0};
param.msbFirst = EUSCI_B_SPI_MSB_FIRST;
param.clockPhase = EUSCI_B_SPI_PHASE_DATA_CHANGED_ONFIRST_CAPTURED_ON_NEXT;
param.clockPolarity = EUSCI_B_SPI_CLOCKPOLARITY_INACTIVITY_HIGH;
param.spiMode = EUSCI_B_SPI_3PIN;
EUSCI_B_SPI_initSlave(EUSCI_B0_BASE, &param);

//Enable SPI Module
EUSCI_B_SPI_enable(EUSCI_B0_BASE);

//Enable Receive interrupt
EUSCI_B_SPI_enableInterrupt(EUSCI_B0_BASE,
    EUSCI_B_SPI_RECEIVE_INTERRUPT
);
```

15 EUSCI Inter-Integrated Circuit (EUSCI_B_I2C)

Introduction	126
API Functions	128
Programming Example	149

15.1 Introduction

In I2C mode, the eUSCI_B module provides an interface between the device and I2C-compatible devices connected by the two-wire I2C serial bus. External components attached to the I2C bus serially transmit and/or receive serial data to/from the eUSCI_B module through the 2-wire I2C interface. The Inter-Integrated Circuit (I2C) API provides a set of functions for using the MSP430Ware I2C modules. Functions are provided to initialize the I2C modules, to send and receive data, obtain status, and to manage interrupts for the I2C modules.

The I2C module provide the ability to communicate to other IC devices over an I2C bus. The I2C bus is specified to support devices that can both transmit and receive (write and read) data. Also, devices on the I2C bus can be designated as either a master or a slave. The MSP430Ware I2C modules support both sending and receiving data as either a master or a slave, and also support the simultaneous operation as both a master and a slave.

I2C module can generate interrupts. The I2C module configured as a master will generate interrupts when a transmit or receive operation is completed (or aborted due to an error). The I2C module configured as a slave will generate interrupts when data has been sent or requested by a master.

15.2 Master Operations

To drive the master module, the APIs need to be invoked in the following order

- **EUSCI_B_I2C_initMaster**
- **EUSCI_B_I2C_setSlaveAddress**
- **EUSCI_B_I2C_setMode**
- **EUSCI_B_I2C_enable**
- **EUSCI_B_I2C_enableInterrupt** (if interrupts are being used) This may be followed by the APIs for transmit or receive as required

The user must first initialize the I2C module and configure it as a master with a call to [EUSCI_B_I2C_initMaster\(\)](#). That function will set the clock and data rates. This is followed by a call to set the slave address with which the master intends to communicate with using [EUSCI_B_I2C_setSlaveAddress](#). Then the mode of operation (transmit or receive) is chosen using [EUSCI_B_I2C_setMode](#). The I2C module may now be enabled using [EUSCI_B_I2C_enable](#). It is recommended to enable the EUSCI_B_I2C module before enabling the interrupts. Any transmission or reception of data may be initiated at this point after interrupts are enabled (if any).

The transaction can then be initiated on the bus by calling the transmit or receive related APIs as listed below.

Master Single Byte Transmission

- [EUSCI_B_I2C_masterSendSingleByte\(\)](#)

Master Multiple Byte Transmission

- [EUSCI_B_I2C_masterSendMultiByteStart\(\)](#)
- [EUSCI_B_I2C_masterSendMultiByteNext\(\)](#)
- [EUSCI_B_I2C_masterSendMultiByteStop\(\)](#)

Master Single Byte Reception

- [EUSCI_B_I2C_masterReceiveSingleByte\(\)](#)

Master Multiple Byte Reception

- [EUSCI_B_I2C_masterMultiByteReceiveStart\(\)](#)
- [EUSCI_B_I2C_masterReceiveMultiByteNext\(\)](#)
- [EUSCI_B_I2C_masterReceiveMultiByteFinish\(\)](#)
- [EUSCI_B_I2C_masterReceiveMultiByteStop\(\)](#)

For the interrupt-driven transaction, the user must register an interrupt handler for the I2C devices and enable the I2C interrupt.

15.3 Slave Operations

To drive the slave module, the APIs need to be invoked in the following order

- [EUSCI_B_I2C_initSlave\(\)](#)
- [EUSCI_B_I2C_setMode\(\)](#)
- [EUSCI_B_I2C_enable\(\)](#)
- [EUSCI_B_I2C_enableInterrupt\(\)](#) (if interrupts are being used) This may be followed by the APIs for transmit or receive as required

The user must first call the `EUSCI_B_I2C_initSlave` to initialize the slave module in I2C mode and set the slave address. This is followed by a call to set the mode of operation (transmit or receive). The I2C module may now be enabled using `EUSCI_B_I2C_enable`. It is recommended to enable the I2C module before enabling the interrupts. Any transmission or reception of data may be initiated at this point after interrupts are enabled (if any).

The transaction can then be initiated on the bus by calling the transmit or receive related APIs as listed below.

Slave Transmission API

- [EUSCI_B_I2C_slavePutData\(\)](#)

Slave Reception API

- `EUSCI_B_I2C_slaveGetData()`

For the interrupt-driven transaction, the user must register an interrupt handler for the I2C devices and enable the I2C interrupt.

15.4 API Functions

Functions

- void `EUSCI_B_I2C_initMaster` (uint16_t baseAddress, `EUSCI_B_I2C_initMasterParam` *param)
Initializes the I2C Master block.
- void `EUSCI_B_I2C_initSlave` (uint16_t baseAddress, `EUSCI_B_I2C_initSlaveParam` *param)
Initializes the I2C Slave block.
- void `EUSCI_B_I2C_enable` (uint16_t baseAddress)
Enables the I2C block.
- void `EUSCI_B_I2C_disable` (uint16_t baseAddress)
Disables the I2C block.
- void `EUSCI_B_I2C_setSlaveAddress` (uint16_t baseAddress, uint8_t slaveAddress)
Sets the address that the I2C Master will place on the bus.
- void `EUSCI_B_I2C_setMode` (uint16_t baseAddress, uint16_t mode)
Sets the mode of the I2C device.
- uint8_t `EUSCI_B_I2C_getMode` (uint16_t baseAddress)
Gets the mode of the I2C device.
- void `EUSCI_B_I2C_slavePutData` (uint16_t baseAddress, uint8_t transmitData)
Transmits a byte from the I2C Module.
- uint8_t `EUSCI_B_I2C_slaveGetData` (uint16_t baseAddress)
Receives a byte that has been sent to the I2C Module.
- uint16_t `EUSCI_B_I2C_isBusBusy` (uint16_t baseAddress)
Indicates whether or not the I2C bus is busy.
- uint16_t `EUSCI_B_I2C_masterIsStopSent` (uint16_t baseAddress)
Indicates whether STOP got sent.
- uint16_t `EUSCI_B_I2C_masterIsStartSent` (uint16_t baseAddress)
Indicates whether Start got sent.
- void `EUSCI_B_I2C_enableInterrupt` (uint16_t baseAddress, uint16_t mask)
Enables individual I2C interrupt sources.
- void `EUSCI_B_I2C_disableInterrupt` (uint16_t baseAddress, uint16_t mask)
Disables individual I2C interrupt sources.
- void `EUSCI_B_I2C_clearInterrupt` (uint16_t baseAddress, uint16_t mask)
Clears I2C interrupt sources.
- uint16_t `EUSCI_B_I2C_getInterruptStatus` (uint16_t baseAddress, uint16_t mask)
Gets the current I2C interrupt status.
- void `EUSCI_B_I2C_masterSendSingleByte` (uint16_t baseAddress, uint8_t txData)
Does single byte transmission from Master to Slave.
- uint8_t `EUSCI_B_I2C_masterReceiveSingleByte` (uint16_t baseAddress)
Does single byte reception from Slave.
- bool `EUSCI_B_I2C_masterSendSingleByteWithTimeout` (uint16_t baseAddress, uint8_t txData, uint32_t timeout)
Does single byte transmission from Master to Slave with timeout.
- void `EUSCI_B_I2C_masterSendMultiByteStart` (uint16_t baseAddress, uint8_t txData)

- Starts multi-byte transmission from Master to Slave.*
- bool `EUSCI_B_I2C_masterSendMultiByteStartWithTimeout` (uint16_t baseAddress, uint8_t txData, uint32_t timeout)
- Starts multi-byte transmission from Master to Slave with timeout.*
- void `EUSCI_B_I2C_masterSendMultiByteNext` (uint16_t baseAddress, uint8_t txData)
- Continues multi-byte transmission from Master to Slave.*
- bool `EUSCI_B_I2C_masterSendMultiByteNextWithTimeout` (uint16_t baseAddress, uint8_t txData, uint32_t timeout)
- Continues multi-byte transmission from Master to Slave with timeout.*
- void `EUSCI_B_I2C_masterSendMultiByteFinish` (uint16_t baseAddress, uint8_t txData)
- Finishes multi-byte transmission from Master to Slave.*
- bool `EUSCI_B_I2C_masterSendMultiByteFinishWithTimeout` (uint16_t baseAddress, uint8_t txData, uint32_t timeout)
- Finishes multi-byte transmission from Master to Slave with timeout.*
- void `EUSCI_B_I2C_masterSendStart` (uint16_t baseAddress)
- This function is used by the Master module to initiate START.*
- void `EUSCI_B_I2C_masterSendMultiByteStop` (uint16_t baseAddress)
- Sends STOP byte at the end of a multi-byte transmission from Master to Slave.*
- bool `EUSCI_B_I2C_masterSendMultiByteStopWithTimeout` (uint16_t baseAddress, uint32_t timeout)
- Sends STOP byte at the end of a multi-byte transmission from Master to Slave with timeout.*
- void `EUSCI_B_I2C_masterReceiveStart` (uint16_t baseAddress)
- Starts reception at the Master end.*
- uint8_t `EUSCI_B_I2C_masterReceiveMultiByteNext` (uint16_t baseAddress)
- Starts multi-byte reception at the Master end one byte at a time.*
- uint8_t `EUSCI_B_I2C_masterReceiveMultiByteFinish` (uint16_t baseAddress)
- Finishes multi-byte reception at the Master end.*
- bool `EUSCI_B_I2C_masterReceiveMultiByteFinishWithTimeout` (uint16_t baseAddress, uint8_t *txData, uint32_t timeout)
- Finishes multi-byte reception at the Master end with timeout.*
- void `EUSCI_B_I2C_masterReceiveMultiByteStop` (uint16_t baseAddress)
- Sends the STOP at the end of a multi-byte reception at the Master end.*
- void `EUSCI_B_I2C_enableMultiMasterMode` (uint16_t baseAddress)
- Enables Multi Master Mode.*
- void `EUSCI_B_I2C_disableMultiMasterMode` (uint16_t baseAddress)
- Disables Multi Master Mode.*
- uint8_t `EUSCI_B_I2C_masterReceiveSingle` (uint16_t baseAddress)
- receives a byte that has been sent to the I2C Master Module.*
- uint32_t `EUSCI_B_I2C_getReceiveBufferAddress` (uint16_t baseAddress)
- Returns the address of the RX Buffer of the I2C for the DMA module.*
- uint32_t `EUSCI_B_I2C_getTransmitBufferAddress` (uint16_t baseAddress)
- Returns the address of the TX Buffer of the I2C for the DMA module.*
- void `EUSCI_B_I2C_setTimeout` (uint16_t baseAddress, uint16_t timeout)
- Enforces a timeout if the I2C clock is held low longer than a defined time.*

15.4.1 Detailed Description

The eUSCI I2C API is broken into three groups of functions: those that deal with interrupts, those that handle status and initialization, and those that deal with sending and receiving data.

The I2C master and slave interrupts are handled by

- EUSCI_B_I2C_enableInterrupt
- EUSCI_B_I2C_disableInterrupt
- EUSCI_B_I2C_clearInterrupt
- EUSCI_B_I2C_getInterruptStatus

Status and initialization functions for the I2C modules are

- EUSCI_B_I2C_initMaster
- EUSCI_B_I2C_enable
- EUSCI_B_I2C_disable
- EUSCI_B_I2C_isBusBusy
- EUSCI_B_I2C_isBusy
- EUSCI_B_I2C_initSlave
- EUSCI_B_I2C_interruptStatus
- EUSCI_B_I2C_setSlaveAddress
- EUSCI_B_I2C_setMode
- EUSCI_B_I2C_masterIsStopSent
- EUSCI_B_I2C_masterIsStartSent
- EUSCI_B_I2C_selectMasterEnvironmentSelect

Sending and receiving data from the I2C slave module is handled by

- EUSCI_B_I2C_slavePutData
- EUSCI_B_I2C_slaveGetData

Sending and receiving data from the I2C slave module is handled by

- EUSCI_B_I2C_masterSendSingleByte
- EUSCI_B_I2C_masterSendStart
- EUSCI_B_I2C_masterSendMultiByteStart
- EUSCI_B_I2C_masterSendMultiByteNext
- EUSCI_B_I2C_masterSendMultiByteFinish
- EUSCI_B_I2C_masterSendMultiByteStop
- EUSCI_B_I2C_masterReceiveMultiByteNext
- EUSCI_B_I2C_masterReceiveMultiByteFinish
- EUSCI_B_I2C_masterReceiveMultiByteStop
- EUSCI_B_I2C_masterReceiveStart
- EUSCI_B_I2C_masterReceiveSingle

15.4.2 Function Documentation

EUSCI_B_I2C_clearInterrupt()

```
void EUSCI_B_I2C_clearInterrupt (
```

```
uint16_t baseAddress,
uint16_t mask )
```

Clears I2C interrupt sources.

The I2C interrupt source is cleared, so that it no longer asserts. The highest interrupt flag is automatically cleared when an interrupt vector generator is used.

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
<i>mask</i>	<p>is a bit mask of the interrupt sources to be cleared. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ EUSCI_B_I2C_NAK_INTERRUPT - Not-acknowledge interrupt ■ EUSCI_B_I2C_ARBITRATIONLOST_INTERRUPT - Arbitration lost interrupt ■ EUSCI_B_I2C_STOP_INTERRUPT - STOP condition interrupt ■ EUSCI_B_I2C_START_INTERRUPT - START condition interrupt ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT0 - Transmit interrupt0 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT1 - Transmit interrupt1 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT2 - Transmit interrupt2 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT3 - Transmit interrupt3 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT0 - Receive interrupt0 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT1 - Receive interrupt1 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT2 - Receive interrupt2 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT3 - Receive interrupt3 ■ EUSCI_B_I2C_BIT9_POSITION_INTERRUPT - Bit position 9 interrupt ■ EUSCI_B_I2C_CLOCK_LOW_TIMEOUT_INTERRUPT - Clock low timeout interrupt enable ■ EUSCI_B_I2C_BYTE_COUNTER_INTERRUPT - Byte counter interrupt enable

Modified bits of **UCBxIFG** register.

Returns

None

EUSCI_B_I2C_disable()

```
void EUSCI_B_I2C_disable (
    uint16_t baseAddress )
```

Disables the I2C block.

This will disable operation of the I2C block.

Parameters

<i>baseAddress</i>	is the base address of the USCI I2C module.
--------------------	---

Modified bits are **UCSWRST** of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_disableInterrupt()

```
void EUSCI_B_I2C_disableInterrupt (
    uint16_t baseAddress,
    uint16_t mask )
```

Disables individual I2C interrupt sources.

Disables the indicated I2C interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor.

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
<i>mask</i>	<p>is the bit mask of the interrupt sources to be disabled. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ EUSCI_B_I2C_NAK_INTERRUPT - Not-acknowledge interrupt ■ EUSCI_B_I2C_ARBITRATIONLOST_INTERRUPT - Arbitration lost interrupt ■ EUSCI_B_I2C_STOP_INTERRUPT - STOP condition interrupt ■ EUSCI_B_I2C_START_INTERRUPT - START condition interrupt ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT0 - Transmit interrupt0 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT1 - Transmit interrupt1 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT2 - Transmit interrupt2 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT3 - Transmit interrupt3 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT0 - Receive interrupt0 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT1 - Receive interrupt1 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT2 - Receive interrupt2 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT3 - Receive interrupt3 ■ EUSCI_B_I2C_BIT9_POSITION_INTERRUPT - Bit position 9 interrupt ■ EUSCI_B_I2C_CLOCK_LOW_TIMEOUT_INTERRUPT - Clock low timeout interrupt enable ■ EUSCI_B_I2C_BYTE_COUNTER_INTERRUPT - Byte counter interrupt enable

Modified bits of **UCBxIE** register.

Returns

None

EUSCI_B_I2C_disableMultiMasterMode()

```
void EUSCI_B_I2C_disableMultiMasterMode (
    uint16_t baseAddress )
```

Disables Multi Master Mode.

At the end of this function, the I2C module is still disabled till EUSCI_B_I2C_enable is invoked

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
--------------------	--

Modified bits are **UCSWRST** and **UCMM** of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_enable()

```
void EUSCI_B_I2C_enable (
    uint16_t baseAddress )
```

Enables the I2C block.

This will enable operation of the I2C block.

Parameters

<i>baseAddress</i>	is the base address of the USCI I2C module.
--------------------	---

Modified bits are **UCSWRST** of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_enableInterrupt()

```
void EUSCI_B_I2C_enableInterrupt (
    uint16_t baseAddress,
    uint16_t mask )
```

Enables individual I2C interrupt sources.

Enables the indicated I2C interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor.

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
<i>mask</i>	<p>is the bit mask of the interrupt sources to be enabled. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ EUSCI_B_I2C_NAK_INTERRUPT - Not-acknowledge interrupt ■ EUSCI_B_I2C_ARBITRATIONLOST_INTERRUPT - Arbitration lost interrupt ■ EUSCI_B_I2C_STOP_INTERRUPT - STOP condition interrupt ■ EUSCI_B_I2C_START_INTERRUPT - START condition interrupt ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT0 - Transmit interrupt0 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT1 - Transmit interrupt1 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT2 - Transmit interrupt2 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT3 - Transmit interrupt3 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT0 - Receive interrupt0 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT1 - Receive interrupt1 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT2 - Receive interrupt2 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT3 - Receive interrupt3 ■ EUSCI_B_I2C_BIT9_POSITION_INTERRUPT - Bit position 9 interrupt ■ EUSCI_B_I2C_CLOCK_LOW_TIMEOUT_INTERRUPT - Clock low timeout interrupt enable ■ EUSCI_B_I2C_BYTE_COUNTER_INTERRUPT - Byte counter interrupt enable

Modified bits of **UCBxIE** register.

Returns

None

EUSCI_B_I2C_enableMultiMasterMode()

```
void EUSCI_B_I2C_enableMultiMasterMode (
    uint16_t baseAddress )
```

Enables Multi Master Mode.

At the end of this function, the I2C module is still disabled till EUSCI_B_I2C_enable is invoked

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
--------------------	--

Modified bits are **UCSWRST** and **UCMM** of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_getInterruptStatus()

```
uint16_t EUSCI_B_I2C_getInterruptStatus (
    uint16_t baseAddress,
    uint16_t mask )
```

Gets the current I2C interrupt status.

This returns the interrupt status for the I2C module based on which flag is passed.

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
<i>mask</i>	<p>is the masked interrupt flag status to be returned. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ EUSCI_B_I2C_NAK_INTERRUPT - Not-acknowledge interrupt ■ EUSCI_B_I2C_ARBITRATIONLOST_INTERRUPT - Arbitration lost interrupt ■ EUSCI_B_I2C_STOP_INTERRUPT - STOP condition interrupt ■ EUSCI_B_I2C_START_INTERRUPT - START condition interrupt ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT0 - Transmit interrupt0 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT1 - Transmit interrupt1 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT2 - Transmit interrupt2 ■ EUSCI_B_I2C_TRANSMIT_INTERRUPT3 - Transmit interrupt3 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT0 - Receive interrupt0 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT1 - Receive interrupt1 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT2 - Receive interrupt2 ■ EUSCI_B_I2C_RECEIVE_INTERRUPT3 - Receive interrupt3 ■ EUSCI_B_I2C_BIT9_POSITION_INTERRUPT - Bit position 9 interrupt ■ EUSCI_B_I2C_CLOCK_LOW_TIMEOUT_INTERRUPT - Clock low timeout interrupt enable ■ EUSCI_B_I2C_BYTE_COUNTER_INTERRUPT - Byte counter interrupt enable

Returns

Logical OR of any of the following:

- **EUSCI_B_I2C_NAK_INTERRUPT** Not-acknowledge interrupt
- **EUSCI_B_I2C_ARBITRATIONLOST_INTERRUPT** Arbitration lost interrupt
- **EUSCI_B_I2C_STOP_INTERRUPT** STOP condition interrupt

- **EUSCI_B_I2C_START_INTERRUPT** START condition interrupt
- **EUSCI_B_I2C_TRANSMIT_INTERRUPT0** Transmit interrupt0
- **EUSCI_B_I2C_TRANSMIT_INTERRUPT1** Transmit interrupt1
- **EUSCI_B_I2C_TRANSMIT_INTERRUPT2** Transmit interrupt2
- **EUSCI_B_I2C_TRANSMIT_INTERRUPT3** Transmit interrupt3
- **EUSCI_B_I2C_RECEIVE_INTERRUPT0** Receive interrupt0
- **EUSCI_B_I2C_RECEIVE_INTERRUPT1** Receive interrupt1
- **EUSCI_B_I2C_RECEIVE_INTERRUPT2** Receive interrupt2
- **EUSCI_B_I2C_RECEIVE_INTERRUPT3** Receive interrupt3
- **EUSCI_B_I2C_BIT9_POSITION_INTERRUPT** Bit position 9 interrupt
- **EUSCI_B_I2C_CLOCK_LOW_TIMEOUT_INTERRUPT** Clock low timeout interrupt enable
- **EUSCI_B_I2C_BYTE_COUNTER_INTERRUPT** Byte counter interrupt enable indicating the status of the masked interrupts

EUSCI_B_I2C_getMode()

```
uint8_t EUSCI_B_I2C_getMode (
    uint16_t baseAddress )
```

Gets the mode of the I2C device.

Current I2C transmit/receive mode.

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
--------------------	--

Modified bits are **UCTR** of **UCBxCTLW0** register.

Returns

One of the following:

- **EUSCI_B_I2C_TRANSMIT_MODE**
 - **EUSCI_B_I2C_RECEIVE_MODE**
- indicating the current mode

EUSCI_B_I2C_getReceiveBufferAddress()

```
uint32_t EUSCI_B_I2C_getReceiveBufferAddress (
    uint16_t baseAddress )
```

Returns the address of the RX Buffer of the I2C for the DMA module.

Returns the address of the I2C RX Buffer. This can be used in conjunction with the DMA to store the received data directly to memory.

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
--------------------	--

Returns

The address of the I2C RX Buffer

EUSCI_B_I2C_getTransmitBufferAddress()

```
uint32_t EUSCI_B_I2C_getTransmitBufferAddress (
    uint16_t baseAddress )
```

Returns the address of the TX Buffer of the I2C for the DMA module.

Returns the address of the I2C TX Buffer. This can be used in conjunction with the DMA to obtain transmitted data directly from memory.

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
--------------------	--

Returns

The address of the I2C TX Buffer

EUSCI_B_I2C_initMaster()

```
void EUSCI_B_I2C_initMaster (
    uint16_t baseAddress,
    EUSCI_B_I2C_initMasterParam * param )
```

Initializes the I2C Master block.

This function initializes operation of the I2C Master block. Upon successful initialization of the I2C block, this function will have set the bus speed for the master; however I2C module is still disabled till EUSCI_B_I2C_enable is invoked.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>param</i>	is the pointer to the struct for master initialization.

Returns

None

References EUSCI_B_I2C_initMasterParam::autoSTOPGeneration, EUSCI_B_I2C_initMasterParam::byteCounterThreshold, EUSCI_B_I2C_initMasterParam::dataRate, EUSCI_B_I2C_initMasterParam::i2cClk, and EUSCI_B_I2C_initMasterParam::selectClockSource.

EUSCI_B_I2C_initSlave()

```
void EUSCI_B_I2C_initSlave (
    uint16_t baseAddress,
    EUSCI_B_I2C_initSlaveParam * param )
```

Initializes the I2C Slave block.

This function initializes operation of the I2C as a Slave mode. Upon successful initialization of the I2C blocks, this function will have set the slave address but the I2C module is still disabled till EUSCI_B_I2C_enable is invoked.

Parameters

<i>baseAddress</i>	is the base address of the I2C Slave module.
<i>param</i>	is the pointer to the struct for slave initialization.

Returns

None

References EUSCI_B_I2C_initSlaveParam::slaveAddress, EUSCI_B_I2C_initSlaveParam::slaveAddressOffset, and EUSCI_B_I2C_initSlaveParam::slaveOwnAddressEnable.

EUSCI_B_I2C_isBusBusy()

```
uint16_t EUSCI_B_I2C_isBusBusy (
    uint16_t baseAddress )
```

Indicates whether or not the I2C bus is busy.

This function returns an indication of whether or not the I2C bus is busy. This function checks the status of the bus via UCBBUSY bit in UCBxSTAT register.

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
--------------------	--

Returns

One of the following:

- **EUSCI_B_I2C_BUS_BUSY**

- **EUSCI_B_I2C_BUS_NOT_BUSY**
indicating whether the bus is busy

EUSCI_B_I2C_masterIsStartSent()

```
uint16_t EUSCI_B_I2C_masterIsStartSent (
    uint16_t baseAddress )
```

Indicates whether Start got sent.

This function returns an indication of whether or not Start got sent This function checks the status of the bus via UCTXSTT bit in UCBxCTL1 register.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
--------------------	---

Returns

One of the following:

- **EUSCI_B_I2C_START_SEND_COMPLETE**
- **EUSCI_B_I2C_SENDING_START**
indicating whether the start was sent

EUSCI_B_I2C_masterIsStopSent()

```
uint16_t EUSCI_B_I2C_masterIsStopSent (
    uint16_t baseAddress )
```

Indicates whether STOP got sent.

This function returns an indication of whether or not STOP got sent This function checks the status of the bus via UCTXSTP bit in UCBxCTL1 register.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
--------------------	---

Returns

One of the following:

- **EUSCI_B_I2C_STOP_SEND_COMPLETE**
- **EUSCI_B_I2C_SENDING_STOP**
indicating whether the stop was sent

EUSCI_B_I2C_masterReceiveMultiByteFinish()

```
uint8_t EUSCI_B_I2C_masterReceiveMultiByteFinish (
```

```
uint16_t baseAddress )
```

Finishes multi-byte reception at the Master end.

This function is used by the Master module to initiate completion of a multi-byte reception. This function receives the current byte and initiates the STOP from master to slave.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
--------------------	---

Modified bits are **UCTXSTP** of **UCBxCTLW0** register.

Returns

Received byte at Master end.

EUSCI_B_I2C_masterReceiveMultiByteFinishWithTimeout()

```
bool EUSCI_B_I2C_masterReceiveMultiByteFinishWithTimeout (
    uint16_t baseAddress,
    uint8_t * txData,
    uint32_t timeout )
```

Finishes multi-byte reception at the Master end with timeout.

This function is used by the Master module to initiate completion of a multi-byte reception. This function receives the current byte and initiates the STOP from master to slave.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>txData</i>	is a pointer to the location to store the received byte at master end
<i>timeout</i>	is the amount of time to wait until giving up

Modified bits are **UCTXSTP** of **UCBxCTLW0** register.

Returns

STATUS_SUCCESS or STATUS_FAILURE of the reception process

EUSCI_B_I2C_masterReceiveMultiByteNext()

```
uint8_t EUSCI_B_I2C_masterReceiveMultiByteNext (
    uint16_t baseAddress )
```

Starts multi-byte reception at the Master end one byte at a time.

This function is used by the Master module to receive each byte of a multi- byte reception. This function reads currently received byte.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
--------------------	---

Returns

Received byte at Master end.

EUSCI_B_I2C_masterReceiveMultiByteStop()

```
void EUSCI_B_I2C_masterReceiveMultiByteStop (
    uint16_t baseAddress )
```

Sends the STOP at the end of a multi-byte reception at the Master end.

This function is used by the Master module to initiate STOP

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
--------------------	---

Modified bits are **UCTXSTP** of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_masterReceiveSingle()

```
uint8_t EUSCI_B_I2C_masterReceiveSingle (
    uint16_t baseAddress )
```

receives a byte that has been sent to the I2C Master Module.

This function reads a byte of data from the I2C receive data Register.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
--------------------	---

Returns

Returns the byte received from by the I2C module, cast as an uint8_t.

EUSCI_B_I2C_masterReceiveSingleByte()

```
uint8_t EUSCI_B_I2C_masterReceiveSingleByte (
    uint16_t baseAddress )
```

Does single byte reception from Slave.

This function is used by the Master module to receive a single byte. This function sends start and stop, waits for data reception and then receives the data from the slave

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
--------------------	---

Modified bits of **UCBxTXBUF** register, bits of **UCBxCTLW0** register, bits of **UCBxIE** register and bits of **UCBxIFG** register.

Returns

STATUS_SUCCESS or STATUS_FAILURE of the transmission process.

EUSCI_B_I2C_masterReceiveStart()

```
void EUSCI_B_I2C_masterReceiveStart (
    uint16_t baseAddress )
```

Starts reception at the Master end.

This function is used by the Master module initiate reception of a single byte. This function sends a start.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
--------------------	---

Modified bits are **UCTXSTT** of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_masterSendMultiByteFinish()

```
void EUSCI_B_I2C_masterSendMultiByteFinish (
    uint16_t baseAddress,
    uint8_t txData )
```

Finishes multi-byte transmission from Master to Slave.

This function is used by the Master module to send the last byte and STOP. This function transmits the last data byte of a multi-byte transmission to the slave and then sends a stop.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>txData</i>	is the last data byte to be transmitted in a multi-byte transmission

Modified bits of **UCBxTXBUF** register and bits of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_masterSendMultiByteFinishWithTimeout()

```
bool EUSCI_B_I2C_masterSendMultiByteFinishWithTimeout (
    uint16_t baseAddress,
    uint8_t txData,
    uint32_t timeout )
```

Finishes multi-byte transmission from Master to Slave with timeout.

This function is used by the Master module to send the last byte and STOP. This function transmits the last data byte of a multi-byte transmission to the slave and then sends a stop.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>txData</i>	is the last data byte to be transmitted in a multi-byte transmission
<i>timeout</i>	is the amount of time to wait until giving up

Modified bits of **UCBxTXBUF** register and bits of **UCBxCTLW0** register.

Returns

STATUS_SUCCESS or STATUS_FAILURE of the transmission process.

EUSCI_B_I2C_masterSendMultiByteNext()

```
void EUSCI_B_I2C_masterSendMultiByteNext (
    uint16_t baseAddress,
    uint8_t txData )
```

Continues multi-byte transmission from Master to Slave.

This function is used by the Master module continue each byte of a multi- byte transmission. This function transmits each data byte of a multi-byte transmission to the slave.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>txData</i>	is the next data byte to be transmitted

Modified bits of **UCBxTXBUF** register.

Returns

None

EUSCI_B_I2C_masterSendMultiByteNextWithTimeout()

```
bool EUSCI_B_I2C_masterSendMultiByteNextWithTimeout (
    uint16_t baseAddress,
    uint8_t txData,
    uint32_t timeout )
```

Continues multi-byte transmission from Master to Slave with timeout.

This function is used by the Master module continue each byte of a multi- byte transmission. This function transmits each data byte of a multi-byte transmission to the slave.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>txData</i>	is the next data byte to be transmitted
<i>timeout</i>	is the amount of time to wait until giving up

Modified bits of **UCBxTXBUF** register.

Returns

STATUS_SUCCESS or STATUS_FAILURE of the transmission process.

EUSCI_B_I2C_masterSendMultiByteStart()

```
void EUSCI_B_I2C_masterSendMultiByteStart (
    uint16_t baseAddress,
    uint8_t txData )
```

Starts multi-byte transmission from Master to Slave.

This function is used by the master module to start a multi byte transaction.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>txData</i>	is the first data byte to be transmitted

Modified bits of **UCBxTXBUF** register, bits of **UCBxCTLW0** register, bits of **UCBxIE** register and bits of **UCBxIFG** register.

Returns

None

EUSCI_B_I2C_masterSendMultiByteStartWithTimeout()

```
bool EUSCI_B_I2C_masterSendMultiByteStartWithTimeout (
    uint16_t baseAddress,
    uint8_t txData,
```

```
uint32_t timeout )
```

Starts multi-byte transmission from Master to Slave with timeout.

This function is used by the master module to start a multi byte transaction.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>txData</i>	is the first data byte to be transmitted
<i>timeout</i>	is the amount of time to wait until giving up

Modified bits of **UCBxTXBUF** register, bits of **UCBxCTLW0** register, bits of **UCBxIE** register and bits of **UCBxIFG** register.

Returns

STATUS_SUCCESS or STATUS_FAILURE of the transmission process.

EUSCI_B_I2C_masterSendMultiByteStop()

```
void EUSCI_B_I2C_masterSendMultiByteStop (
    uint16_t baseAddress )
```

Send STOP byte at the end of a multi-byte transmission from Master to Slave.

This function is used by the Master module send STOP at the end of a multi- byte transmission. This function sends a stop after current transmission is complete.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
--------------------	---

Modified bits are **UCTXSTP** of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_masterSendMultiByteStopWithTimeout()

```
bool EUSCI_B_I2C_masterSendMultiByteStopWithTimeout (
    uint16_t baseAddress,
    uint32_t timeout )
```

Send STOP byte at the end of a multi-byte transmission from Master to Slave with timeout.

This function is used by the Master module send STOP at the end of a multi- byte transmission. This function sends a stop after current transmission is complete.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>timeout</i>	is the amount of time to wait until giving up

Modified bits are **UCTXSTP** of **UCBxCTLW0** register.

Returns

STATUS_SUCCESS or STATUS_FAILURE of the transmission process.

EUSCI_B_I2C_masterSendSingleByte()

```
void EUSCI_B_I2C_masterSendSingleByte (
    uint16_t baseAddress,
    uint8_t txData )
```

Does single byte transmission from Master to Slave.

This function is used by the Master module to send a single byte. This function sends a start, then transmits the byte to the slave and then sends a stop.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>txData</i>	is the data byte to be transmitted

Modified bits of **UCBxTXBUF** register, bits of **UCBxCTLW0** register, bits of **UCBxIE** register and bits of **UCBxIFG** register.

Returns

None

EUSCI_B_I2C_masterSendSingleByteWithTimeout()

```
bool EUSCI_B_I2C_masterSendSingleByteWithTimeout (
    uint16_t baseAddress,
    uint8_t txData,
    uint32_t timeout )
```

Does single byte transmission from Master to Slave with timeout.

This function is used by the Master module to send a single byte. This function sends a start, then transmits the byte to the slave and then sends a stop.

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
<i>txData</i>	is the data byte to be transmitted
<i>timeout</i>	is the amount of time to wait until giving up

Modified bits of **UCBxTXBUF** register, bits of **UCBxCTLW0** register, bits of **UCBxIE** register and bits of **UCBxIFG** register.

Returns

STATUS_SUCCESS or STATUS_FAILURE of the transmission process.

EUSCI_B_I2C_masterSendStart()

```
void EUSCI_B_I2C_masterSendStart (
    uint16_t baseAddress )
```

This function is used by the Master module to initiate START.

This function is used by the Master module to initiate START

Parameters

<i>baseAddress</i>	is the base address of the I2C Master module.
--------------------	---

Modified bits are **UCTXSTT** of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_setMode()

```
void EUSCI_B_I2C_setMode (
    uint16_t baseAddress,
    uint16_t mode )
```

Sets the mode of the I2C device.

When the mode parameter is set to EUSCI_B_I2C_TRANSMIT_MODE, the address will indicate that the I2C module is in send mode; otherwise, the I2C module is in receive mode.

Parameters

<i>baseAddress</i>	is the base address of the USC I I2C module.
<i>mode</i>	Mode for the EUSCI_B_I2C module Valid values are: <ul style="list-style-type: none"> ■ EUSCI_B_I2C_TRANSMIT_MODE [Default] ■ EUSCI_B_I2C_RECEIVE_MODE

Modified bits are **UCTR** of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_setSlaveAddress()

```
void EUSCI_B_I2C_setSlaveAddress (
    uint16_t baseAddress,
    uint8_t slaveAddress )
```

Sets the address that the I2C Master will place on the bus.

This function will set the address that the I2C Master will place on the bus when initiating a transaction.

Parameters

<i>baseAddress</i>	is the base address of the USCI I2C module.
<i>slaveAddress</i>	7-bit slave address

Modified bits of **UCBxI2CSA** register.

Returns

None

EUSCI_B_I2C_setTimeout()

```
void EUSCI_B_I2C_setTimeout (
    uint16_t baseAddress,
    uint16_t timeout )
```

Enforces a timeout if the I2C clock is held low longer than a defined time.

By using this function, the UCCLTOIFG interrupt will trigger if the clock is held low longer than this defined time. It is possible to detect the situation, when a clock is stretched by a master or slave for too long. The user can then handle this issue by, for example, resetting the eUSCI_B module. It is possible to select one of three predefined times for the clock low timeout.

Parameters

<i>baseAddress</i>	is the base address of the I2C module.
<i>timeout</i>	how long the clock can be low before a timeout triggers. Enables generation of the UCCLTOIFG interrupt. Valid values are: <ul style="list-style-type: none"> ■ EUSCI_B_I2C_TIMEOUT_DISABLE [Default] ■ EUSCI_B_I2C_TIMEOUT_28_MS ■ EUSCI_B_I2C_TIMEOUT_31_MS ■ EUSCI_B_I2C_TIMEOUT_34_MS

Modified bits are **UCCLTO** of **UCBxCTLW1** register; bits **UCSWRST** of **UCBxCTLW0** register.

Returns

None

EUSCI_B_I2C_slaveGetData()

```
uint8_t EUSCI_B_I2C_slaveGetData (
    uint16_t baseAddress )
```

Receives a byte that has been sent to the I2C Module.

This function reads a byte of data from the I2C receive data Register.

Parameters

<i>baseAddress</i>	is the base address of the I2C Slave module.
--------------------	--

Returns

Returns the byte received from by the I2C module, cast as an uint8_t.

EUSCI_B_I2C_slavePutData()

```
void EUSCI_B_I2C_slavePutData (
    uint16_t baseAddress,
    uint8_t transmitData )
```

Transmits a byte from the I2C Module.

This function will place the supplied data into I2C transmit data register to start transmission.

Parameters

<i>baseAddress</i>	is the base address of the I2C Slave module.
<i>transmitData</i>	data to be transmitted from the I2C module

Modified bits of **UCBxTXBUF** register.

Returns

None

15.5 Programming Example

The following example shows how to use the I2C API to send data as a master.

```
//Initialize Slave
EUSCI_B_I2C_initSlaveParam param = {0};
param.slaveAddress = 0x48;
param.slaveAddressOffset = EUSCI_B_I2C_OWN_ADDRESS_OFFSET0;
param.slaveOwnAddressEnable = EUSCI_B_I2C_OWN_ADDRESS_ENABLE;
EUSCI_B_I2C_initSlave(EUSCI_B0_BASE, &param);

EUSCI_B_I2C_enable(EUSCI_B0_BASE);

EUSCI_B_I2C_enableInterrupt(EUSCI_B0_BASE,
    EUSCI_B_I2C_TRANSMIT_INTERRUPT0 +
    EUSCI_B_I2C_STOP_INTERRUPT);
```

16 FRAMCtl - FRAM Controller

Introduction	150
API Functions	150
Programming Example	151

16.1 Introduction

FRAM memory is a non-volatile memory that reads and writes like standard SRAM. The MSP430 FRAM memory features include:

- Byte or word write access
- Automatic and programmable wait state control with independent wait state settings for access and cycle times
- Error Correction Code with bit error correction, extended bit error detection and flag indicators
- Cache for fast read

16.2 API Functions

FRAMCtl_enableInterrupt enables selected FRAM interrupt sources.

FRAMCtl_getInterruptStatus returns the status of the selected FRAM interrupt flags.

FRAMCtl_disableInterrupt disables selected FRAM interrupt sources.

Depending on the kind of writes being performed to the FRAM, this library provides APIs for FRAM writes.

FRAMCtl_write8 facilitates writing into the FRAM memory in byte format. FRAMCtl_write16 facilitates writing into the FRAM memory in word format. FRAMCtl_write32 facilitates writing into the FRAM memory in long format, pass by reference. FRAMCtl_memoryFill32 facilitates writing into the FRAM memory in long format, pass by value.

The FRAM API is broken into 3 groups of functions: those that write into FRAM, those that handle interrupts, and those that configure the wait state.

FRAM writes are managed by

- [FRAMCtl_write8\(\)](#)
- [FRAMCtl_write16\(\)](#)
- [FRAMCtl_write32\(\)](#)
- [FRAMCtl_memoryFill32\(\)](#)

The FRAM interrupts are handled by

- [FRAMCtl_enableInterrupt\(\)](#)
- [FRAMCtl_getInterruptStatus\(\)](#)
- [FRAMCtl_disableInterrupt\(\)](#)

The FRAM wait state is handled by

- `FRAMCtl_configureWaitStateControl()`

16.3 Programming Example

The following example shows some FRAM operations using the APIs

```
//Writes the value of "data", 128 times to FRAM
FRAMCtl_memoryFill132(FRAM_BASE,data,
    (unsigned long *)FRAMCTL_TEST_START,128);
```


17 GPIO

Introduction	152
API Functions	153
Programming Example	184

17.1 Introduction

The Digital I/O (GPIO) API provides a set of functions for using the MSP430Ware GPIO modules. Functions are provided to setup and enable use of input/output pins, setting them up with or without interrupts and those that access the pin value.

The digital I/O features include:

- Independently programmable individual I/Os
- Any combination of input or output
- Individually configurable P1 and P2 interrupts. Some devices may include additional port interrupts.
- Independent input and output data registers
- Individually configurable pullup or pulldown resistors

Devices within the family may have up to twelve digital I/O ports implemented (P1 to P11 and PJ). Most ports contain eight I/O lines; however, some ports may contain less (see the device-specific data sheet for ports available). Each I/O line is individually configurable for input or output direction, and each can be individually read or written. Each I/O line is individually configurable for pullup or pulldown resistors. PJ contains only four I/O lines.

Ports P1 and P2 always have interrupt capability. Each interrupt for the P1 and P2 I/O lines can be individually enabled and configured to provide an interrupt on a rising or falling edge of an input signal. All P1 I/O lines source a single interrupt vector P1IV, and all P2 I/O lines source a different, single interrupt vector P2IV. On some devices, additional ports with interrupt capability may be available (see the device-specific data sheet for details) and contain their own respective interrupt vectors. Individual ports can be accessed as byte-wide ports or can be combined into word-wide ports and accessed via word formats. Port pairs P1/P2, P3/P4, P5/P6, P7/P8, etc., are associated with the names PA, PB, PC, PD, etc., respectively. All port registers are handled in this manner with this naming convention except for the interrupt vector registers, P1IV and P2IV; that is, PAIV does not exist. When writing to port PA with word operations, all 16 bits are written to the port. When writing to the lower byte of the PA port using byte operations, the upper byte remains unchanged. Similarly, writing to the upper byte of the PA port using byte instructions leaves the lower byte unchanged. When writing to a port that contains less than the maximum number of bits possible, the unused bits are a "don't care". Ports PB, PC, PD, PE, and PF behave similarly.

Reading of the PA port using word operations causes all 16 bits to be transferred to the destination. Reading the lower or upper byte of the PA port (P1 or P2) and storing to memory using byte operations causes only the lower or upper byte to be transferred to the destination, respectively. Reading of the PA port and storing to a general-purpose register using byte operations causes the byte transferred to be written to the least significant byte of the register. The upper significant byte of the destination register is cleared automatically. Ports PB, PC, PD, PE, and PF behave similarly. When reading from ports that contain less than the maximum bits possible, unused bits are read as zeros (similarly for port PJ).

The GPIO pin may be configured as an I/O pin with `GPIO_setAsOutputPin()`, `GPIO_setAsInputPin()`, `GPIO_setAsInputPinWithPullDownresistor()` or `GPIO_setAsInputPinWithPullUpresistor()`. The GPIO pin may instead be configured to operate in the Peripheral Module assigned function by configuring the GPIO using `GPIO_setAsPeripheralModuleFunctionOutputPin()` or `GPIO_setAsPeripheralModuleFunctionInputPin()`.

17.2 API Functions

Functions

- void `GPIO_setAsOutputPin` (uint8_t selectedPort, uint16_t selectedPins)
This function configures the selected Pin as output pin.
- void `GPIO_setAsInputPin` (uint8_t selectedPort, uint16_t selectedPins)
This function configures the selected Pin as input pin.
- void `GPIO_setAsPeripheralModuleFunctionOutputPin` (uint8_t selectedPort, uint16_t selectedPins, uint8_t mode)
This function configures the peripheral module function in the output direction for the selected pin.
- void `GPIO_setAsPeripheralModuleFunctionInputPin` (uint8_t selectedPort, uint16_t selectedPins, uint8_t mode)
This function configures the peripheral module function in the input direction for the selected pin.
- void `GPIO_setOutputHighOnPin` (uint8_t selectedPort, uint16_t selectedPins)
This function sets output HIGH on the selected Pin.
- void `GPIO_setOutputLowOnPin` (uint8_t selectedPort, uint16_t selectedPins)
This function sets output LOW on the selected Pin.
- void `GPIO_toggleOutputOnPin` (uint8_t selectedPort, uint16_t selectedPins)
This function toggles the output on the selected Pin.
- void `GPIO_setAsInputPinWithPullDownResistor` (uint8_t selectedPort, uint16_t selectedPins)
This function sets the selected Pin in input Mode with Pull Down resistor.
- void `GPIO_setAsInputPinWithPullUpResistor` (uint8_t selectedPort, uint16_t selectedPins)
This function sets the selected Pin in input Mode with Pull Up resistor.
- uint8_t `GPIO_getInputPinValue` (uint8_t selectedPort, uint16_t selectedPins)
This function gets the input value on the selected pin.
- void `GPIO_enableInterrupt` (uint8_t selectedPort, uint16_t selectedPins)
This function enables the port interrupt on the selected pin.
- void `GPIO_disableInterrupt` (uint8_t selectedPort, uint16_t selectedPins)
This function disables the port interrupt on the selected pin.
- uint16_t `GPIO_getInterruptStatus` (uint8_t selectedPort, uint16_t selectedPins)
This function gets the interrupt status of the selected pin.
- void `GPIO_clearInterrupt` (uint8_t selectedPort, uint16_t selectedPins)
This function clears the interrupt flag on the selected pin.
- void `GPIO_selectInterruptEdge` (uint8_t selectedPort, uint16_t selectedPins, uint8_t edgeSelect)
This function selects on what edge the port interrupt flag should be set for a transition.

17.2.1 Detailed Description

The GPIO API is broken into three groups of functions: those that deal with configuring the GPIO pins, those that deal with interrupts, and those that access the pin value.

The GPIO pins are configured with

- `GPIO_setAsOutputPin()`
- `GPIO_setAsInputPin()`
- `GPIO_setAsInputPinWithPullDownResistor()`
- `GPIO_setAsInputPinWithPullUpResistor()`
- `GPIO_setAsPeripheralModuleFunctionOutputPin()`
- `GPIO_setAsPeripheralModuleFunctionInputPin()`

The GPIO interrupts are handled with

- `GPIO_enableInterrupt()`
- `GPIO_disableInterrupt()`
- `GPIO_clearInterrupt()`
- `GPIO_getInterruptStatus()`
- `GPIO_selectInterruptEdge()`

The GPIO pin state is accessed with

- `GPIO_setOutputHighOnPin()`
- `GPIO_setOutputLowOnPin()`
- `GPIO_toggleOutputOnPin()`
- `GPIO_getInputPinValue()`

17.2.2 Function Documentation

GPIO_clearInterrupt()

```
void GPIO_clearInterrupt (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function clears the interrupt flag on the selected pin.

This function clears the interrupt flag on the selected pin. Please refer to family user's guide for available ports with interrupt capability.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Modified bits of **PxIFG** register.

Returns

None

GPIO_disableInterrupt()

```
void GPIO_disableInterrupt (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function disables the port interrupt on the selected pin.

This function disables the port interrupt on the selected pin. Please refer to family user's guide for available ports with interrupt capability.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Modified bits of **PxIE** register.

Returns

None

GPIO_enableInterrupt()

```
void GPIO_enableInterrupt (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function enables the port interrupt on the selected pin.

This function enables the port interrupt on the selected pin. Please refer to family user's guide for available ports with interrupt capability.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Modified bits of **PxIE** register.

Returns

None

GPIO_getInputPinValue()

```
uint8_t GPIO_getInputPinValue (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function gets the input value on the selected pin.

This function gets the input value on the selected pin.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Valid values are:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Returns

One of the following:

- **GPIO_INPUT_PIN_HIGH**
 - **GPIO_INPUT_PIN_LOW**
- indicating the status of the pin

GPIO_getInterruptStatus()

```
uint16_t GPIO_getInterruptStatus (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function gets the interrupt status of the selected pin.

This function gets the interrupt status of the selected pin. Please refer to family user's guide for available ports with interrupt capability.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Returns

Logical OR of any of the following:

- GPIO_PIN0
- GPIO_PIN1
- GPIO_PIN2
- GPIO_PIN3
- GPIO_PIN4
- GPIO_PIN5
- GPIO_PIN6
- GPIO_PIN7
- GPIO_PIN8
- GPIO_PIN9
- GPIO_PIN10
- GPIO_PIN11
- GPIO_PIN12
- GPIO_PIN13
- GPIO_PIN14
- GPIO_PIN15
- GPIO_PIN_ALL8

■ **GPIO_PIN_ALL16**

indicating the interrupt status of the selected pins [Default: 0]

GPIO_selectInterruptEdge()

```
void GPIO_selectInterruptEdge (
    uint8_t selectedPort,
    uint16_t selectedPins,
    uint8_t edgeSelect )
```

This function selects on what edge the port interrupt flag should be set for a transition.

This function selects on what edge the port interrupt flag should be set for a transition. Values for edgeSelect should be GPIO_LOW_TO_HIGH_TRANSITION or GPIO_HIGH_TO_LOW_TRANSITION. Please refer to family user's guide for available ports with interrupt capability.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none"> ■ GPIO_PORT_P1 ■ GPIO_PORT_P2 ■ GPIO_PORT_P3 ■ GPIO_PORT_P4 ■ GPIO_PORT_P5 ■ GPIO_PORT_P6 ■ GPIO_PORT_P7 ■ GPIO_PORT_P8 ■ GPIO_PORT_P9 ■ GPIO_PORT_P10 ■ GPIO_PORT_P11 ■ GPIO_PORT_PA ■ GPIO_PORT_PB ■ GPIO_PORT_PC ■ GPIO_PORT_PD ■ GPIO_PORT_PE ■ GPIO_PORT_PF ■ GPIO_PORT_PJ
---------------------	---

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
<i>edgeSelect</i>	<p>specifies what transition sets the interrupt flag Valid values are:</p> <ul style="list-style-type: none"> ■ GPIO_HIGH_TO_LOW_TRANSITION ■ GPIO_LOW_TO_HIGH_TRANSITION

Modified bits of **PxIES** register.

Returns

None

GPIO_setAsInputPin()

```
void GPIO_setAsInputPin (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function configures the selected Pin as input pin.

This function selected pins on a selected port as input pins.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Modified bits of **PxDIR** register, bits of **PxREN** register and bits of **PxSEL** register.

Returns

None

GPIO_setAsInputPinWithPullDownResistor()

```
void GPIO_setAsInputPinWithPullDownResistor (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function sets the selected Pin in input Mode with Pull Down resistor.

This function sets the selected Pin in input Mode with Pull Down resistor.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Modified bits of **PxDIR** register, bits of **PxOUT** register and bits of **PxREN** register.

Returns

None

GPIO_setAsInputPinWithPullUpResistor()

```
void GPIO_setAsInputPinWithPullUpResistor (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function sets the selected Pin in input Mode with Pull Up resistor.

This function sets the selected Pin in input Mode with Pull Up resistor.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Modified bits of **PxDIR** register, bits of **PxOUT** register and bits of **PxREN** register.

Returns

None

GPIO_setAsOutputPin()

```
void GPIO_setAsOutputPin (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function configures the selected Pin as output pin.

This function selected pins on a selected port as output pins.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Modified bits of **PxDIR** register and bits of **PxSEL** register.

Returns

None

GPIO_setAsPeripheralModuleFunctionInputPin()

```
void GPIO_setAsPeripheralModuleFunctionInputPin (
    uint8_t selectedPort,
    uint16_t selectedPins,
    uint8_t mode )
```

This function configures the peripheral module function in the input direction for the selected pin.

This function configures the peripheral module function in the input direction for the selected pin for either primary, secondary or ternary module function modes. Note that MSP430F5xx/6xx family doesn't support these function modes.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
<i>mode</i>	<p>is the specified mode that the pin should be configured for the module function. Valid values are:</p> <ul style="list-style-type: none"> ■ GPIO_PRIMARY_MODULE_FUNCTION ■ GPIO_SECONDARY_MODULE_FUNCTION ■ GPIO_TERNARY_MODULE_FUNCTION

Modified bits of **PxDIR** register and bits of **PxSEL** register.

Returns

None

GPIO_setAsPeripheralModuleFunctionOutputPin()

```
void GPIO_setAsPeripheralModuleFunctionOutputPin (
    uint8_t selectedPort,
    uint16_t selectedPins,
    uint8_t mode )
```

This function configures the peripheral module function in the output direction for the selected pin.

This function configures the peripheral module function in the output direction for the selected pin for either primary, secondary or ternary module function modes. Note that MSP430F5xx/6xx family doesn't support these function modes.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
<i>mode</i>	<p>is the specified mode that the pin should be configured for the module function. Valid values are:</p> <ul style="list-style-type: none"> ■ GPIO_PRIMARY_MODULE_FUNCTION ■ GPIO_SECONDARY_MODULE_FUNCTION ■ GPIO_TERNARY_MODULE_FUNCTION

Modified bits of **PxDIR** register and bits of **PxSEL** register.

Returns

None

GPIO_setOutputHighOnPin()

```
void GPIO_setOutputHighOnPin (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function sets output HIGH on the selected Pin.

This function sets output HIGH on the selected port's pin.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Modified bits of **PxOUT** register.

Returns

None

GPIO_setOutputLowOnPin()

```
void GPIO_setOutputLowOnPin (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function sets output LOW on the selected Pin.

This function sets output LOW on the selected port's pin.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Modified bits of **PxOUT** register.

Returns

None

GPIO_toggleOutputOnPin()

```
void GPIO_toggleOutputOnPin (
    uint8_t selectedPort,
    uint16_t selectedPins )
```

This function toggles the output on the selected Pin.

This function toggles the output on the selected port's pin.

Parameters

<i>selectedPort</i>	<p>is the selected port. Valid values are:</p> <ul style="list-style-type: none">■ GPIO_PORT_P1■ GPIO_PORT_P2■ GPIO_PORT_P3■ GPIO_PORT_P4■ GPIO_PORT_P5■ GPIO_PORT_P6■ GPIO_PORT_P7■ GPIO_PORT_P8■ GPIO_PORT_P9■ GPIO_PORT_P10■ GPIO_PORT_P11■ GPIO_PORT_PA■ GPIO_PORT_PB■ GPIO_PORT_PC■ GPIO_PORT_PD■ GPIO_PORT_PE■ GPIO_PORT_PF■ GPIO_PORT_PJ
---------------------	--

Parameters

<i>selectedPins</i>	<p>is the specified pin in the selected port. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ GPIO_PIN0 ■ GPIO_PIN1 ■ GPIO_PIN2 ■ GPIO_PIN3 ■ GPIO_PIN4 ■ GPIO_PIN5 ■ GPIO_PIN6 ■ GPIO_PIN7 ■ GPIO_PIN8 ■ GPIO_PIN9 ■ GPIO_PIN10 ■ GPIO_PIN11 ■ GPIO_PIN12 ■ GPIO_PIN13 ■ GPIO_PIN14 ■ GPIO_PIN15 ■ GPIO_PIN_ALL8 ■ GPIO_PIN_ALL16
---------------------	---

Modified bits of **PxOUT** register.

Returns

None

17.3 Programming Example

The following example shows how to use the GPIO API. A trigger is generated on a hi "TO" low transition on P1.4 (pulled-up input pin), which will generate P1_ISR. In the ISR, we toggle P1.0 (output pin).

```
//Set P1.0 to output direction
GPIO_setAsOutputPin(
    GPIO_PORT_P1,
    GPIO_PIN0
);

//Enable P1.4 internal resistance as pull-Up resistance
GPIO_setAsInputPinWithPullUpresistor(
    GPIO_PORT_P1,
```

```

        GPIO_PIN4
    );

    //P1.4 interrupt enabled
    GPIO_enableInterrupt(
        GPIO_PORT_P1,
        GPIO_PIN4
    );

    //P1.4 Hi/Lo edge
    GPIO_selectInterruptEdge(
        GPIO_PORT_P1,
        GPIO_PIN4,
        GPIO_HIGH_TO_LOW_TRANSITION
    );

    //P1.4 IFG cleared
    GPIO_clearInterrupt(

        GPIO_PORT_P1,
        GPIO_PIN4
    );

    //Enter LPM4 w/interrupt
    __bis_SR_register(LPM4_bits + GIE);

    //For debugger
    __no_operation();
}

//*****
//
//This is the PORT1_VECTOR interrupt vector service routine
//
//*****
#pragma vector=PORT1_VECTOR
__interrupt void Port_1 (void)
{
    //P1.0 = toggle
    GPIO_toggleOutputOnPin(
        GPIO_PORT_P1,
        GPIO_PIN0
    );

    //P1.4 IFG cleared
    GPIO_clearInterrupt(
        GPIO_PORT_P1,
        GPIO_PIN4
    );
}

```

18 Memory Protection Unit (MPU)

Introduction	186
API Functions	186
Programming Example	193

18.1 Introduction

The MPU protects against accidental writes to designated read-only memory segments or execution of code from a constant memory segment memory. Clearing the MPUENA bit disables the MPU, making the complete memory accessible for read, write, and execute operations. After a BOR, the complete memory is accessible without restrictions for read, write, and execute operations.

MPU features include:

- Main memory can be configured up to three segments of variable size
- Access rights for each segment can be set independently
- Information memory can have its access rights set independently
- All MPU registers are protected from access by password

18.2 API Functions

Macros

- `#define MPU_MAX_SEG_VALUE 20`

Functions

- void `MPU_initTwoSegments` (uint16_t baseAddress, uint16_t seg1boundary, uint8_t seg1accmask, uint8_t seg2accmask)
Initializes MPU with two memory segments.
- void `MPU_initThreeSegments` (uint16_t baseAddress, `MPU_initThreeSegmentsParam` *param)
Initializes MPU with three memory segments.
- void `MPU_initInfoSegment` (uint16_t baseAddress, uint8_t accmask)
Initializes user information memory segment.
- void `MPU_start` (uint16_t baseAddress)
The following function enables the MPU module in the device.
- void `MPU_enablePUConViolation` (uint16_t baseAddress, uint16_t segment)
The following function enables PUC generation when an access violation has occurred on the memory segment selected by the user.
- void `MPU_disablePUConViolation` (uint16_t baseAddress, uint16_t segment)
The following function disables PUC generation when an access violation has occurred on the memory segment selected by the user.
- uint16_t `MPU_getInterruptStatus` (uint16_t baseAddress, uint16_t memAccFlag)

Returns the memory segment violation flag status requested by the user.

- `uint16_t MPU_clearInterrupt (uint16_t baseAddress, uint16_t memAccFlag)`

Clears the masked interrupt flags.

- `uint16_t MPU_clearAllInterrupts (uint16_t baseAddress)`

Clears all Memory Segment Access Violation Interrupt Flags.

18.2.1 Detailed Description

The MPU API is broken into three groups of functions: those that handle initialization, those that deal with memory segmentation and access rights definition, and those that handle interrupts. Please note that write access to all MPU registers is disabled after calling any MPU API.

The MPU initialization function is

- `MPU_start()`

The MPU memory segmentation and access right definition functions are

- `MPU_initTwoSegments()`
- `MPU_initThreeSegments()`
- `MPU_initInfoSegment()`

The MPU interrupt handler functions

- `MPU_enablePUCOnViolation()`
- `MPU_getInterruptStatus()`
- `MPU_clearInterrupt()`
- `MPU_clearAllInterrupts()`

18.2.2 Function Documentation

MPU_clearAllInterrupts()

```
uint16_t MPU_clearAllInterrupts (
    uint16_t baseAddress )
```

Clears all Memory Segment Access Violation Interrupt Flags.

Parameters

<code>baseAddress</code>	is the base address of the MPU module.
--------------------------	--

Modified bits of **MPUCTL1** register.

Returns

Logical OR of any of the following:

- **MPU_SEG_1_ACCESS_VIOLATION** is set if an access violation in Main Memory Segment 1 is detected

- **MPU_SEG_2_ACCESS_VIOLATION** is set if an access violation in Main Memory Segment 2 is detected
- **MPU_SEG_3_ACCESS_VIOLATION** is set if an access violation in Main Memory Segment 3 is detected
- **MPU_SEG_INFO_ACCESS_VIOLATION** is set if an access violation in User Information Memory Segment is detected indicating the status of the interrupt flags.

MPU_clearInterrupt()

```
uint16_t MPU_clearInterrupt (
    uint16_t baseAddress,
    uint16_t memAccFlag )
```

Clears the masked interrupt flags.

Returns the memory segment violation flag status requested by the user or if user is providing a bit mask value, the function will return a value indicating if all flags were cleared.

Parameters

<i>baseAddress</i>	is the base address of the MPU module.
<i>memAccFlag</i>	is the is the memory access violation flag. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ MPU_SEG_1_ACCESS_VIOLATION - is set if an access violation in Main Memory Segment 1 is detected ■ MPU_SEG_2_ACCESS_VIOLATION - is set if an access violation in Main Memory Segment 2 is detected ■ MPU_SEG_3_ACCESS_VIOLATION - is set if an access violation in Main Memory Segment 3 is detected ■ MPU_SEG_INFO_ACCESS_VIOLATION - is set if an access violation in User Information Memory Segment is detected

Returns

Logical OR of any of the following:

- **MPU_SEG_1_ACCESS_VIOLATION** is set if an access violation in Main Memory Segment 1 is detected
- **MPU_SEG_2_ACCESS_VIOLATION** is set if an access violation in Main Memory Segment 2 is detected
- **MPU_SEG_3_ACCESS_VIOLATION** is set if an access violation in Main Memory Segment 3 is detected
- **MPU_SEG_INFO_ACCESS_VIOLATION** is set if an access violation in User Information Memory Segment is detected indicating the status of the masked flags.

MPU_disablePUCOnViolation()

```
void MPU_disablePUCOnViolation (
    uint16_t baseAddress,
    uint16_t segment )
```

The following function disables PUC generation when an access violation has occurred on the memory segment selected by the user.

Note that only specified segments for PUC generation are disabled. Other segments for PUC generation are left untouched. Users may call [MPU_enablePUCOnViolation\(\)](#) and [MPU_disablePUCOnViolation\(\)](#) to assure that all the bits will be set and/or cleared.

Parameters

<i>baseAddress</i>	is the base address of the MPU module.
<i>segment</i>	is the bit mask of memory segment that will NOT generate a PUC when an access violation occurs. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ MPU_FIRST_SEG - PUC generation on first memory segment ■ MPU_SECOND_SEG - PUC generation on second memory segment ■ MPU_THIRD_SEG - PUC generation on third memory segment ■ MPU_INFO_SEG - PUC generation on user information memory segment

Modified bits of **MPUSAM** register and bits of **MPUCTL0** register.

Returns

None

MPU_enablePUCOnViolation()

```
void MPU_enablePUCOnViolation (
    uint16_t baseAddress,
    uint16_t segment )
```

The following function enables PUC generation when an access violation has occurred on the memory segment selected by the user.

Note that only specified segments for PUC generation are enabled. Other segments for PUC generation are left untouched. Users may call [MPU_enablePUCOnViolation\(\)](#) and [MPU_disablePUCOnViolation\(\)](#) to assure that all the bits will be set and/or cleared.

Parameters

<i>baseAddress</i>	is the base address of the MPU module.
--------------------	--

Parameters

<i>segment</i>	<p>is the bit mask of memory segment that will generate a PUC when an access violation occurs. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ MPU_FIRST_SEG - PUC generation on first memory segment ■ MPU_SECOND_SEG - PUC generation on second memory segment ■ MPU_THIRD_SEG - PUC generation on third memory segment ■ MPU_INFO_SEG - PUC generation on user information memory segment
----------------	---

Modified bits of **MPUSAM** register and bits of **MPUCTLO** register.

Returns

None

MPU_getInterruptStatus()

```
uint16_t MPU_getInterruptStatus (
    uint16_t baseAddress,
    uint16_t memAccFlag )
```

Returns the memory segment violation flag status requested by the user.

Parameters

<i>baseAddress</i>	is the base address of the MPU module.
<i>memAccFlag</i>	<p>is the is the memory access violation flag. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ MPU_SEG_1_ACCESS_VIOLATION - is set if an access violation in Main Memory Segment 1 is detected ■ MPU_SEG_2_ACCESS_VIOLATION - is set if an access violation in Main Memory Segment 2 is detected ■ MPU_SEG_3_ACCESS_VIOLATION - is set if an access violation in Main Memory Segment 3 is detected ■ MPU_SEG_INFO_ACCESS_VIOLATION - is set if an access violation in User Information Memory Segment is detected

Returns

Logical OR of any of the following:

- **MPU_SEG_1_ACCESS_VIOLATION** is set if an access violation in Main Memory Segment 1 is detected
- **MPU_SEG_2_ACCESS_VIOLATION** is set if an access violation in Main Memory Segment 2 is detected
- **MPU_SEG_3_ACCESS_VIOLATION** is set if an access violation in Main Memory Segment 3 is detected

- **MPU_SEG_INFO_ACCESS_VIOLATION** is set if an access violation in User Information Memory Segment is detected indicating the status of the masked flags.

MPU_initInfoSegment()

```
void MPU_initInfoSegment (
    uint16_t baseAddress,
    uint8_t accmask )
```

Initializes user information memory segment.

This function initializes user information memory segment with specified access rights.

Parameters

<i>baseAddress</i>	is the base address of the MPU module.
<i>accmask</i>	is the bit mask of access right for user information memory segment. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ MPU_READ - Read rights ■ MPU_WRITE - Write rights ■ MPU_EXEC - Execute rights ■ MPU_NO_READ_WRITE_EXEC - no read/write/execute rights

Modified bits of **MPUSAM** register and bits of **MPUCTL0** register.

Returns

None

MPU_initThreeSegments()

```
void MPU_initThreeSegments (
    uint16_t baseAddress,
    MPU_initThreeSegmentsParam * param )
```

Initializes MPU with three memory segments.

This function creates three memory segments in FRAM allowing the user to set access right to each segment. To set the correct value for seg1boundary, the user must consult the Device Family User's Guide and provide the MPUSBx value corresponding to the memory address where the user wants to create the partition. Consult the "Segment Border Setting" section in the User's Guide to find the options available for MPUSBx.

Parameters

<i>baseAddress</i>	is the base address of the MPU module.
<i>param</i>	is the pointer to struct for initializing three segments.

Modified bits of **MPUSAM** register, bits of **MPUSEG** register and bits of **MPUCTL0** register.

Returns

None

References MPU_initThreeSegmentsParam::seg1accmask, MPU_initThreeSegmentsParam::seg1boundary, MPU_initThreeSegmentsParam::seg2accmask, MPU_initThreeSegmentsParam::seg2boundary, and MPU_initThreeSegmentsParam::seg3accmask.

MPU_initTwoSegments()

```
void MPU_initTwoSegments (
    uint16_t baseAddress,
    uint16_t seg1boundary,
    uint8_t  seg1accmask,
    uint8_t  seg2accmask )
```

Initializes MPU with two memory segments.

This function creates two memory segments in FRAM allowing the user to set access right to each segment. To set the correct value for seg1boundary, the user must consult the Device Family User's Guide and provide the MPUSBx value corresponding to the memory address where the user wants to create the partition. Consult the "Segment Border Setting" section in the User's Guide to find the options available for MPUSBx.

Parameters

<i>baseAddress</i>	is the base address of the MPU module.
<i>seg1boundary</i>	Valid values can be found in the Family User's Guide
<i>seg1accmask</i>	is the bit mask of access right for memory segment 1. Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ MPU_READ - Read rights ■ MPU_WRITE - Write rights ■ MPU_EXEC - Execute rights ■ MPU_NO_READ_WRITE_EXEC - no read/write/execute rights
<i>seg2accmask</i>	is the bit mask of access right for memory segment 2 Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ MPU_READ - Read rights ■ MPU_WRITE - Write rights ■ MPU_EXEC - Execute rights ■ MPU_NO_READ_WRITE_EXEC - no read/write/execute rights

Modified bits of **MPUSAM** register, bits of **MPUSEG** register and bits of **MPUCTL0** register.

Returns

None

MPU_start()

```
void MPU_start (
    uint16_t baseAddress )
```

The following function enables the MPU module in the device.

This function needs to be called once all memory segmentation has been done. If this function is not called the MPU module will not be activated.

Parameters

<i>baseAddress</i>	is the base address of the MPU module.
--------------------	--

Modified bits of **MPUCTLO** register.

Returns

None

18.3 Programming Example

The following example shows some MPU operations using the APIs

```
//Initialize struct for three segments configuration
MPU_initThreeSegmentsParam threeSegParam;
threeSegParam.seg1boundary = 0x04;
threeSegParam.seg1boundary = 0x08;
threeSegParam.seg1accmask = MPU_READ|MPU_WRITE|MPU_EXEC;
threeSegParam.seg2accmask = MPU_READ;
threeSegParam.seg3accmask = MPU_READ|MPU_WRITE|MPU_EXEC;

//Define memory segment boundaries and set access right for each memory segment
MPU_initThreeSegments(MPU_BASE, &threeSegParam);

// Configures MPU to generate a PUC on access violation on the second segment
MPU_enablePUCOnViolation(MPU_BASE, MPU_SECOND_SEG);

//Enables the MPU module
MPU_start(MPU_BASE);
```

19 32-Bit Hardware Multiplier (MPY32)

Introduction	194
API Functions	194
Programming Example	203

19.1 Introduction

The 32-Bit Hardware Multiplier (MPY32) API provides a set of functions for using the MSP430Ware MPY32 modules. Functions are provided to setup the MPY32 modules, set the operand registers, and obtain the results.

The MPY32 Modules does not generate any interrupts.

19.2 API Functions

Functions

- void [MPY32_setWriteDelay](#) (uint16_t writeDelaySelect)
Sets the write delay setting for the MPY32 module.
- void [MPY32_enableSaturationMode](#) (void)
Enables Saturation Mode.
- void [MPY32_disableSaturationMode](#) (void)
Disables Saturation Mode.
- uint8_t [MPY32_getSaturationMode](#) (void)
Gets the Saturation Mode.
- void [MPY32_enableFractionalMode](#) (void)
Enables Fraction Mode.
- void [MPY32_disableFractionalMode](#) (void)
Disables Fraction Mode.
- uint8_t [MPY32_getFractionalMode](#) (void)
Gets the Fractional Mode.
- void [MPY32_setOperandOne8Bit](#) (uint8_t multiplicationType, uint8_t operand)
Sets an 8-bit value into operand 1.
- void [MPY32_setOperandOne16Bit](#) (uint8_t multiplicationType, uint16_t operand)
Sets an 16-bit value into operand 1.
- void [MPY32_setOperandOne24Bit](#) (uint8_t multiplicationType, uint32_t operand)
Sets an 24-bit value into operand 1.
- void [MPY32_setOperandOne32Bit](#) (uint8_t multiplicationType, uint32_t operand)
Sets an 32-bit value into operand 1.
- void [MPY32_setOperandTwo8Bit](#) (uint8_t operand)
Sets an 8-bit value into operand 2, which starts the multiplication.
- void [MPY32_setOperandTwo16Bit](#) (uint16_t operand)
Sets an 16-bit value into operand 2, which starts the multiplication.
- void [MPY32_setOperandTwo24Bit](#) (uint32_t operand)
Sets an 24-bit value into operand 2, which starts the multiplication.
- void [MPY32_setOperandTwo32Bit](#) (uint32_t operand)

- *Sets an 32-bit value into operand 2, which starts the multiplication.*
 ■ `uint64_t MPY32_getResult` (void)
- *Returns an 64-bit result of the last multiplication operation.*
 ■ `uint16_t MPY32_getSumExtension` (void)
- *Returns the Sum Extension of the last multiplication operation.*
 ■ `uint16_t MPY32_getCarryBitValue` (void)
- *Returns the Carry Bit of the last multiplication operation.*
 ■ `void MPY32_clearCarryBitValue` (void)
- *Clears the Carry Bit of the last multiplication operation.*
 ■ `void MPY32_preloadResult` (uint64_t result)
- *Preloads the result register.*

19.2.1 Detailed Description

The MPY32 API is broken into three groups of functions: those that control the settings, those that set the operand registers, and those that return the results, sum extension, and carry bit value.

The settings are handled by

- `MPY32_setWriteDelay()`
- `MPY32_enableSaturationMode()`
- `MPY32_disableSaturationMode()`
- `MPY32_enableFractionalMode()`
- `MPY32_disableFractionalMode()`
- `MPY32_preloadResult()`

The operand registers are set by

- `MPY32_setOperandOne8Bit()`
- `MPY32_setOperandOne16Bit()`
- `MPY32_setOperandOne24Bit()`
- `MPY32_setOperandOne32Bit()`
- `MPY32_setOperandTwo8Bit()`
- `MPY32_setOperandTwo16Bit()`
- `MPY32_setOperandTwo24Bit()`
- `MPY32_setOperandTwo32Bit()`

The results can be returned by

- `MPY32_getResult()`
- `MPY32_getSumExtension()`
- `MPY32_getCarryBitValue()`
- `MPY32_getSaturationMode()`
- `MPY32_getFractionalMode()`

19.2.2 Function Documentation

MPY32_clearCarryBitValue()

```
void MPY32_clearCarryBitValue (  
    void )
```

Clears the Carry Bit of the last multiplication operation.

This function clears the Carry Bit of the MPY module

Returns

The value of the MPY32 module Carry Bit 0x0 or 0x1.

MPY32_disableFractionalMode()

```
void MPY32_disableFractionalMode (  
    void )
```

Disables Fraction Mode.

This function disables fraction mode.

Returns

None

MPY32_disableSaturationMode()

```
void MPY32_disableSaturationMode (  
    void )
```

Disables Saturation Mode.

This function disables saturation mode, which allows the raw result of the MPY result registers to be returned.

Returns

None

MPY32_enableFractionalMode()

```
void MPY32_enableFractionalMode (  
    void )
```

Enables Fraction Mode.

This function enables fraction mode.

Returns

None

MPY32_enableSaturationMode()

```
void MPY32_enableSaturationMode (
    void )
```

Enables Saturation Mode.

This function enables saturation mode. When this is enabled, the result read out from the MPY result registers is converted to the most-positive number in the case of an overflow, or the most-negative number in the case of an underflow. Please note, that the raw value in the registers does not reflect the result returned, and if the saturation mode is disabled, then the raw value of the registers will be returned instead.

Returns

None

MPY32_getCarryBitValue()

```
uint16_t MPY32_getCarryBitValue (
    void )
```

Returns the Carry Bit of the last multiplication operation.

This function returns the Carry Bit of the MPY module, which either gives the sign after a signed operation or shows a carry after a multiply- and- accumulate operation.

Returns

The value of the MPY32 module Carry Bit 0x0 or 0x1.

MPY32_getFractionalMode()

```
uint8_t MPY32_getFractionalMode (
    void )
```

Gets the Fractional Mode.

This function gets the current fractional mode.

Returns

Gets the fractional mode Return one of the following:

- **MPY32_FRACTIONAL_MODE_DISABLED**
- **MPY32_FRACTIONAL_MODE_ENABLED**

Gets the Fractional Mode

MPY32_getResult()

```
uint64_t MPY32_getResult (
    void )
```

Returns an 64-bit result of the last multiplication operation.

This function returns all 64 bits of the result registers

Returns

The 64-bit result is returned as a `uint64_t` type

MPY32_getSaturationMode()

```
uint8_t MPY32_getSaturationMode (
    void )
```

Gets the Saturation Mode.

This function gets the current saturation mode.

Returns

Gets the Saturation Mode Return one of the following:

- **MPY32_SATURATION_MODE_DISABLED**
 - **MPY32_SATURATION_MODE_ENABLED**
- Gets the Saturation Mode

MPY32_getSumExtension()

```
uint16_t MPY32_getSumExtension (
    void )
```

Returns the Sum Extension of the last multiplication operation.

This function returns the Sum Extension of the MPY module, which either gives the sign after a signed operation or shows a carry after a multiply- and-accumulate operation. The Sum Extension acts as a check for overflows or underflows.

Returns

The value of the MPY32 module Sum Extension.

MPY32_preloadResult()

```
void MPY32_preloadResult (
    uint64_t result )
```

Preloads the result register.

This function Preloads the result register

Parameters

<i>result</i>	value to preload the result register to
---------------	---

Returns

None

MPY32_setOperandOne16Bit()

```
void MPY32_setOperandOne16Bit (
    uint8_t multiplicationType,
    uint16_t operand )
```

Sets an 16-bit value into operand 1.

This function sets the first operand for multiplication and determines what type of operation should be performed. Once the second operand is set, then the operation will begin.

Parameters

<i>multiplicationType</i>	is the type of multiplication to perform once the second operand is set. Valid values are: <ul style="list-style-type: none"> ■ MPY32_MULTIPLY_UNSIGNED ■ MPY32_MULTIPLY_SIGNED ■ MPY32_MULTIPLYACCUMULATE_UNSIGNED ■ MPY32_MULTIPLYACCUMULATE_SIGNED
<i>operand</i>	is the 16-bit value to load into the 1st operand.

Returns

None

MPY32_setOperandOne24Bit()

```
void MPY32_setOperandOne24Bit (
    uint8_t multiplicationType,
    uint32_t operand )
```

Sets an 24-bit value into operand 1.

This function sets the first operand for multiplication and determines what type of operation should be performed. Once the second operand is set, then the operation will begin.

Parameters

<i>multiplicationType</i>	is the type of multiplication to perform once the second operand is set. Valid values are: <ul style="list-style-type: none"> ■ MPY32_MULTIPLY_UNSIGNED ■ MPY32_MULTIPLY_SIGNED ■ MPY32_MULTIPLYACCUMULATE_UNSIGNED ■ MPY32_MULTIPLYACCUMULATE_SIGNED
<i>operand</i>	is the 24-bit value to load into the 1st operand.

Returns

None

MPY32_setOperandOne32Bit()

```
void MPY32_setOperandOne32Bit (
    uint8_t multiplicationType,
    uint32_t operand )
```

Sets an 32-bit value into operand 1.

This function sets the first operand for multiplication and determines what type of operation should be performed. Once the second operand is set, then the operation will begin.

Parameters

<i>multiplicationType</i>	is the type of multiplication to perform once the second operand is set. Valid values are: <ul style="list-style-type: none"> ■ MPY32_MULTIPLY_UNSIGNED ■ MPY32_MULTIPLY_SIGNED ■ MPY32_MULTIPLYACCUMULATE_UNSIGNED ■ MPY32_MULTIPLYACCUMULATE_SIGNED
<i>operand</i>	is the 32-bit value to load into the 1st operand.

Returns

None

MPY32_setOperandOne8Bit()

```
void MPY32_setOperandOne8Bit (
    uint8_t multiplicationType,
    uint8_t operand )
```

Sets an 8-bit value into operand 1.

This function sets the first operand for multiplication and determines what type of operation should be performed. Once the second operand is set, then the operation will begin.

Parameters

<i>multiplicationType</i>	is the type of multiplication to perform once the second operand is set. Valid values are: <ul style="list-style-type: none"> ■ MPY32_MULTIPLY_UNSIGNED ■ MPY32_MULTIPLY_SIGNED ■ MPY32_MULTIPLYACCUMULATE_UNSIGNED ■ MPY32_MULTIPLYACCUMULATE_SIGNED
---------------------------	--

Parameters

<i>operand</i>	is the 8-bit value to load into the 1st operand.
----------------	--

Returns

None

MPY32_setOperandTwo16Bit()

```
void MPY32_setOperandTwo16Bit (  
    uint16_t operand )
```

Sets an 16-bit value into operand 2, which starts the multiplication.

This function sets the second operand of the multiplication operation and starts the operation.

Parameters

<i>operand</i>	is the 16-bit value to load into the 2nd operand.
----------------	---

Returns

None

MPY32_setOperandTwo24Bit()

```
void MPY32_setOperandTwo24Bit (  
    uint32_t operand )
```

Sets an 24-bit value into operand 2, which starts the multiplication.

This function sets the second operand of the multiplication operation and starts the operation.

Parameters

<i>operand</i>	is the 24-bit value to load into the 2nd operand.
----------------	---

Returns

None

MPY32_setOperandTwo32Bit()

```
void MPY32_setOperandTwo32Bit (  
    uint32_t operand )
```

Sets an 32-bit value into operand 2, which starts the multiplication.

This function sets the second operand of the multiplication operation and starts the operation.

Parameters

<i>operand</i>	is the 32-bit value to load into the 2nd operand.
----------------	---

Returns

None

MPY32_setOperandTwo8Bit()

```
void MPY32_setOperandTwo8Bit (
    uint8_t operand )
```

Sets an 8-bit value into operand 2, which starts the multiplication.

This function sets the second operand of the multiplication operation and starts the operation.

Parameters

<i>operand</i>	is the 8-bit value to load into the 2nd operand.
----------------	--

Returns

None

MPY32_setWriteDelay()

```
void MPY32_setWriteDelay (
    uint16_t writeDelaySelect )
```

Sets the write delay setting for the MPY32 module.

This function sets up a write delay to the MPY module's registers, which holds any writes to the registers until all calculations are complete. There are two different settings, one which waits for 32-bit results to be ready, and one which waits for 64-bit results to be ready. This prevents unpredictable results if registers are changed before the results are ready.

Parameters

<i>writeDelaySelect</i>	<p>delays the write to any MPY32 register until the selected bit size of result has been written. Valid values are:</p> <ul style="list-style-type: none"> ■ MPY32_WRITEDELAY_OFF [Default] - writes are not delayed ■ MPY32_WRITEDELAY_32BIT - writes are delayed until a 32-bit result is available in the result registers ■ MPY32_WRITEDELAY_64BIT - writes are delayed until a 64-bit result is available in the result registers <p>Modified bits are MPYDLY32 and MPYDLYWRNEN of MPY32CTLO register.</p>
-------------------------	--

Returns

None

19.3 Programming Example

The following example shows how to initialize and use the MPY32 API to calculate a 16-bit by 16-bit unsigned multiplication operation.

[illegible]

20 Power Management Module (PMM)

Introduction	204
API Functions	204
Programming Example	209

20.1 Introduction

The PMM manages all functions related to the power supply and its supervision for the device. Its primary functions are first to generate a supply voltage for the core logic, and second, provide several mechanisms for the supervision of the voltage applied to the device (DVCC).

The PMM uses an integrated low-dropout voltage regulator (LDO) to produce a secondary core voltage (VCORE) from the primary one applied to the device (DVCC). In general, VCORE supplies the CPU, memories, and the digital modules, while DVCC supplies the I/Os and analog modules. The VCORE output is maintained using a dedicated voltage reference. The input or primary side of the regulator is referred to as its high side. The output or secondary side is referred to as its low side.

20.2 API Functions

Functions

- void [PMM_enableSVSL](#) (void)
Enables the low-side SVS circuitry.
- void [PMM_disableSVSL](#) (void)
Disables the low-side SVS circuitry.
- void [PMM_enableSVSH](#) (void)
Enables the high-side SVS circuitry.
- void [PMM_disableSVSH](#) (void)
Disables the high-side SVS circuitry.
- void [PMM_turnOnRegulator](#) (void)
Makes the low-dropout voltage regulator (LDO) remain ON when going into LPM 3/4.
- void [PMM_turnOffRegulator](#) (void)
Turns OFF the low-dropout voltage regulator (LDO) when going into LPM3/4, thus the system will enter LPM3.5 or LPM4.5 respectively.
- void [PMM_trigPOR](#) (void)
Calling this function will trigger a software Power On Reset (POR).
- void [PMM_trigBOR](#) (void)
Calling this function will trigger a software Brown Out Rest (BOR).
- void [PMM_clearInterrupt](#) (uint16_t mask)
Clears interrupt flags for the PMM.
- uint16_t [PMM_getInterruptStatus](#) (uint16_t mask)
Returns interrupt status.
- void [PMM_unlockLPM5](#) (void)
Unlock LPM5.

20.2.1 Detailed Description

PMM_enableSVSH() / **PMM_disableSVSH()** If disabled on FR57xx, High-side SVS (SVSH) is disabled in LPM4.5. SVSH is always enabled in active mode and LPM0/1/2/3/4 and LPM3.5. If enabled, SVSH is always enabled. Note: this API has different functionality depending on the part.

PMM_enableSVSL() / **PMM_disableSVSL()** If disabled, Low-side SVS (SVSL) is disabled in low power modes. SVSL is always enabled in active mode and LPM0. If enabled, SVSL is enabled in LPM0/1/2. SVSL is always enabled in AM and always disabled in LPM3/4 and LPM3.5/4.5.

PMM_turnOffRegulator() / **PMM_turnOnRegulator()** If off, Regulator is turned off when going to LPM3/4. System enters LPM3.5 or LPM4.5, respectively. If on, Regulator remains on when going into LPM3/4

PMM_clearInterrupt() Clear selected or all interrupt flags for the PMM

PMM_getInterruptStatus() Returns interrupt status of the selected flag in the PMM module

PMM_lockLPM5() / **PMM_unlockLPM5()** If unlocked, LPMx.5 configuration is not locked and defaults to its reset condition. if locked, LPMx.5 configuration remains locked. Pin state is held during LPMx.5 entry and exit.

20.2.2 Function Documentation

PMM_clearInterrupt()

```
void PMM_clearInterrupt (
    uint16_t mask )
```

Clears interrupt flags for the PMM.

Parameters

<i>mask</i>	<p>is the mask for specifying the required flag Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ PMM_BOR_INTERRUPT - Software BOR interrupt ■ PMM_RST_INTERRUPT - RESET pin interrupt ■ PMM_POR_INTERRUPT - Software POR interrupt ■ PMM_SVSH_INTERRUPT - SVS high side interrupt ■ PMM_SVSL_INTERRUPT - SVS low side interrupt, not available for FR58xx/59xx ■ PMM_LPM5_INTERRUPT - LPM5 indication ■ PMM_ALL - All interrupts
-------------	--

Modified bits of **PMMCTL0** register and bits of **PMMIFG** register.

Returns

None

PMM_disableSVSH()

```
void PMM_disableSVSH (  
    void )
```

Disables the high-side SVS circuitry.

Modified bits of **PMMCTL0** register.**Returns**

None

PMM_disableSVSL()

```
void PMM_disableSVSL (  
    void )
```

Disables the low-side SVS circuitry.

Modified bits of **PMMCTL0** register.**Returns**

None

PMM_enableSVSH()

```
void PMM_enableSVSH (  
    void )
```

Enables the high-side SVS circuitry.

Modified bits of **PMMCTL0** register.**Returns**

None

PMM_enableSVSL()

```
void PMM_enableSVSL (  
    void )
```

Enables the low-side SVS circuitry.

Modified bits of **PMMCTL0** register.

Returns

None

PMM_getInterruptStatus()

```
uint16_t PMM_getInterruptStatus (
    uint16_t mask )
```

Returns interrupt status.

Parameters

<i>mask</i>	<p>is the mask for specifying the required flag Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ PMM_BOR_INTERRUPT - Software BOR interrupt ■ PMM_RST_INTERRUPT - RESET pin interrupt ■ PMM_POR_INTERRUPT - Software POR interrupt ■ PMM_SVSH_INTERRUPT - SVS high side interrupt ■ PMM_SVSL_INTERRUPT - SVS low side interrupt, not available for FR58xx/59xx ■ PMM_LPM5_INTERRUPT - LPM5 indication ■ PMM_ALL - All interrupts
-------------	--

Returns

Logical OR of any of the following:

- **PMM_BOR_INTERRUPT** Software BOR interrupt
- **PMM_RST_INTERRUPT** RESET pin interrupt
- **PMM_POR_INTERRUPT** Software POR interrupt
- **PMM_SVSH_INTERRUPT** SVS high side interrupt
- **PMM_SVSL_INTERRUPT** SVS low side interrupt, not available for FR58xx/59xx
- **PMM_LPM5_INTERRUPT** LPM5 indication
- **PMM_ALL** All interrupts

indicating the status of the selected interrupt flags

PMM_trigBOR()

```
void PMM_trigBOR (
    void )
```

Calling this function will trigger a software Brown Out Rest (BOR).
Modified bits of **PMMCTL0** register.

Returns

None

PMM_trigPOR()

```
void PMM_trigPOR (
    void )
```

Calling this function will trigger a software Power On Reset (POR).

Modified bits of **PMMCTL0** register.

Returns

None

PMM_turnOffRegulator()

```
void PMM_turnOffRegulator (
    void )
```

Turns OFF the low-dropout voltage regulator (LDO) when going into LPM3/4, thus the system will enter LPM3.5 or LPM4.5 respectively.

Modified bits of **PMMCTL0** register.

Returns

None

PMM_turnOnRegulator()

```
void PMM_turnOnRegulator (
    void )
```

Makes the low-dropout voltage regulator (LDO) remain ON when going into LPM 3/4.

Modified bits of **PMMCTL0** register.

Returns

None

PMM_unlockLPM5()

```
void PMM_unlockLPM5 (
    void )
```

Unlock LPM5.

LPMx.5 configuration is not locked and defaults to its reset condition. Disable the GPIO power-on default high-impedance mode to activate previously configured port settings.

Returns

None

20.3 Programming Example

The following example shows some pmm operations using the APIs

```
//Unlock the GPIO pins.
/*
 * By default, the pins are unlocked unless waking
 * up from an LPMx.5 state in which case all GPIO
 * are previously locked.
 */
PMM_unlockLPM5();

//Get Interrupt Status from the PMMIFG register.
/* mask:
 * PMM_BOR_INTERRUPT
 * PMM_RST_INTERRUPT,
 * PMM_POR_INTERRUPT,
 * PMM_SVSL_INTERRUPT,
 * PMM_SVSH_INTERRUPT
 * PMM_LPM5_INTERRUPT,
 * return STATUS_SUCCESS (0x01) or STATUS_FAIL (0x00)
 */
if (PMM_getInterruptStatus(PMM_LPM5_INTERRUPT)) // Was this device in LPMx.5 mode
    before the reset was triggered?
{
    //Clear Interrupt Flag from the PMMIFG register.
    /* mask:
     * PMM_BOR_INTERRUPT
     * PMM_RST_INTERRUPT,
     * PMM_POR_INTERRUPT,
     * PMM_SVSL_INTERRUPT,
     * PMM_SVSH_INTERRUPT
     * PMM_LPM5_INTERRUPT,
     * PMM_ALL
     */
    PMM_clearInterrupt(PMM_LPM5_INTERRUPT);        // Clear the LPMx.5 flag
}

if (PMM_getInterruptStatus(PMM_RST_INTERRUPT)) // Was this reset triggered by the
    Reset flag?
{
    PMM_clearInterrupt(PMM_RST_INTERRUPT);        // Clear reset flag

    //Trigger a software Brown Out Reset (BOR)
    /*
     * Base Address of PMM,
     * Forces the devices to perform a BOR.
     */
    PMM_trigBOR();                                // Software trigger a BOR.
}

if (PMM_getInterruptStatus(PMM_BOR_INTERRUPT)) // Was this reset triggered by the
    BOR flag?
{
    PMM_clearInterrupt(PMM_BOR_INTERRUPT);        // Clear BOR flag

    //Disable SVSH
    /*
     * High-side SVS (SVSH) is disabled in LPM4.5. SVSH is
     * always enabled in active mode and LPM0/1/2/3/4 and LPM3.5.
     */
    PMM_disableSVSH();
    //Disable SVSL
    /*
     * Low-side SVS (SVSL) is disabled in low power modes.
     * SVSL is always enabled in active mode and LPM0.
     */
    PMM_disableSVSL();
    //Disable Regulator
    /*
     * Regulator is turned off when going to LPM3/4.
     * System enters LPM3.5 or LPM4.5, respectively.
     */
    PMM_turnOffRegulator();
    __bis_SR_register(LPM4_bits); // Enter LPM4.5, This automatically locks
```

```
                                //(if not locked already) all GPIO pins.  
                                // and will set the LPM5 flag and set the LOCKLPM5 bit  
                                // in the PM5CTL0 register upon wake up.  
    }  
  
    while (1)  
    {  
        __no_operation();      // Don't sleep  
    }
```

21 Internal Reference (REF)

Introduction	211
API Functions	211
Programming Example	216

21.1 Introduction

The Internal Reference (REF) API provides a set of functions for using the MSP430Ware REF modules. Functions are provided to setup and enable use of the Reference voltage, enable or disable the internal temperature sensor, and view the status of the inner workings of the REF module.

The reference module (REF) is responsible for generation of all critical reference voltages that can be used by various analog peripherals in a given device. These include but are not limited to the ADC12_B and COMP_B modules, dependent upon the particular device. The heart of the reference system is the bandgap from which all other references are derived by unity or non-inverting gain stages. The REFGEN sub-system consists of the bandgap, the bandgap bias, and the non-inverting buffer stage which generates the three primary voltage reference available in the system, namely 1.5 V, 2.0 V, and 2.5 V. In addition, when enabled, a buffered bandgap voltage is also available.

21.2 API Functions

Functions

- void [Ref_setReferenceVoltage](#) (uint16_t baseAddress, uint8_t referenceVoltageSelect)
Sets the reference voltage for the voltage generator.
- void [Ref_disableTempSensor](#) (uint16_t baseAddress)
Disables the internal temperature sensor to save power consumption.
- void [Ref_enableTempSensor](#) (uint16_t baseAddress)
Enables the internal temperature sensor.
- void [Ref_enableReferenceVoltage](#) (uint16_t baseAddress)
Enables the reference voltage to be used by peripherals.
- void [Ref_disableReferenceVoltage](#) (uint16_t baseAddress)
Disables the reference voltage.
- uint16_t [Ref_getBandgapMode](#) (uint16_t baseAddress)
Returns the bandgap mode of the Ref module.
- bool [Ref_isBandgapActive](#) (uint16_t baseAddress)
Returns the active status of the bandgap in the Ref module.
- uint16_t [Ref_isRefGenBusy](#) (uint16_t baseAddress)
Returns the busy status of the reference generator in the Ref module.
- bool [Ref_isRefGenActive](#) (uint16_t baseAddress)
Returns the active status of the reference generator in the Ref module.

21.2.1 Detailed Description

The REF API is broken into three groups of functions: those that deal with the reference voltage, those that handle the internal temperature sensor, and those that return the status of the REF module.

The reference voltage of the REF module is handled by

- [Ref_setReferenceVoltage\(\)](#)
- [Ref_enableReferenceVoltage\(\)](#)
- [Ref_disableReferenceVoltage\(\)](#)

The internal temperature sensor is handled by

- [Ref_disableTempSensor\(\)](#)
- [Ref_enableTempSensor\(\)](#)

The status of the REF module is handled by

- [Ref_getBandgapMode\(\)](#)
- [Ref_isBandgapActive\(\)](#)
- [Ref_isRefGenBusy\(\)](#)
- [Ref_isRefGen\(\)](#)

21.2.2 Function Documentation

Ref_disableReferenceVoltage()

```
void Ref_disableReferenceVoltage (
    uint16_t baseAddress )
```

Disables the reference voltage.

This function is used to disable the generated reference voltage. Please note, if the

Parameters

<i>baseAddress</i>	is the base address of the REF module.
--------------------	--

Modified bits are **REFON** of **REFCTL0** register.

Returns

None

Ref_disableTempSensor()

```
void Ref_disableTempSensor (
    uint16_t baseAddress )
```

Disables the internal temperature sensor to save power consumption.

This function is used to turn off the internal temperature sensor to save on power consumption. The temperature sensor is enabled by default. Please note, that giving ADC12 module control over the Ref module, the state of the temperature sensor is dependent on the controls of the ADC12 module. Please note, if the [Ref_isRefGenBusy\(\)](#) returns Ref_BUSY, this function will have no effect.

Parameters

<i>baseAddress</i>	is the base address of the REF module.
--------------------	--

Modified bits are **REFTCOFF** of **REFCTL0** register.

Returns

None

Ref_enableReferenceVoltage()

```
void Ref_enableReferenceVoltage (
    uint16_t baseAddress )
```

Enables the reference voltage to be used by peripherals.

This function is used to enable the generated reference voltage to be used other peripherals or by an output pin, if enabled. Please note, that giving ADC12 module control over the Ref module, the state of the reference voltage is dependent on the controls of the ADC12 module. Please note, if the [Ref_isRefGenBusy\(\)](#) returns Ref_BUSY, this function will have no effect.

Parameters

<i>baseAddress</i>	is the base address of the REF module.
--------------------	--

Modified bits are **REFON** of **REFCTL0** register.

Returns

None

Ref_enableTempSensor()

```
void Ref_enableTempSensor (
    uint16_t baseAddress )
```

Enables the internal temperature sensor.

This function is used to turn on the internal temperature sensor to use by other peripherals. The temperature sensor is enabled by default. Please note, if the [Ref_isRefGenBusy\(\)](#) returns Ref_BUSY, this function will have no effect.

Parameters

<i>baseAddress</i>	is the base address of the REF module.
--------------------	--

Modified bits are **REFTCOFF** of **REFCTL0** register.

Returns

None

Ref_getBandgapMode()

```
uint16_t Ref_getBandgapMode (
    uint16_t baseAddress )
```

Returns the bandgap mode of the Ref module.

This function is used to return the bandgap mode of the Ref module, requested by the peripherals using the bandgap. If a peripheral requests static mode, then the bandgap mode will be static for all modules, whereas if all of the peripherals using the bandgap request sample mode, then that will be the mode returned. Sample mode allows the bandgap to be active only when necessary to save on power consumption, static mode requires the bandgap to be active until no peripherals are using it anymore.

Parameters

<i>baseAddress</i>	is the base address of the REF module.
--------------------	--

Returns

One of the following:

- **REF_STATICMODE** if the bandgap is operating in static mode
 - **REF_SAMPLEMODE** if the bandgap is operating in sample mode
- bandgap mode of the Ref module

Ref_isBandgapActive()

```
bool Ref_isBandgapActive (
    uint16_t baseAddress )
```

Returns the active status of the bandgap in the Ref module.

This function is used to return the active status of the bandgap in the Ref module. If the bandgap is in use by a peripheral, then the status will be seen as active.

Parameters

<i>baseAddress</i>	is the base address of the REF module.
--------------------	--

Returns

One of the following:

- **REF_ACTIVE** if active
 - **REF_INACTIVE** if not active
- indicating the bandgap active status of the module

Ref_isRefGenActive()

```
bool Ref_isRefGenActive (
    uint16_t baseAddress )
```

Returns the active status of the reference generator in the Ref module.

This function is used to return the active status of the reference generator in the Ref module. If the ref. generator is on and ready to use, then the status will be seen as active.

Parameters

<i>baseAddress</i>	is the base address of the REF module.
--------------------	--

Returns

One of the following:

- **REF_ACTIVE** if active
 - **REF_INACTIVE** if not active
- indicating the reference generator active status of the module

Ref_isRefGenBusy()

```
uint16_t Ref_isRefGenBusy (
    uint16_t baseAddress )
```

Returns the busy status of the reference generator in the Ref module.

This function is used to return the busy status of the reference generator in the Ref module. If the ref. generator is in use by a peripheral, then the status will be seen as busy.

Parameters

<i>baseAddress</i>	is the base address of the REF module.
--------------------	--

Returns

One of the following:

- **REF_NOTBUSY** if the reference generator is not being used
 - **REF_BUSY** if the reference generator is being used, disallowing changes to be made to the REF module controls
- indicating the reference generator busy status of the module

Ref_setReferenceVoltage()

```
void Ref_setReferenceVoltage (
    uint16_t baseAddress,
    uint8_t referenceVoltageSelect )
```

Sets the reference voltage for the voltage generator.

This function sets the reference voltage generated by the voltage generator to be used by other peripherals. This reference voltage will only be valid while the Ref module is in control. Please note, if the [Ref_isRefGenBusy\(\)](#) returns Ref_BUSY, this function will have no effect.

Parameters

<i>baseAddress</i>	is the base address of the REF module.
<i>referenceVoltageSelect</i>	is the desired voltage to generate for a reference voltage. Valid values are: <ul style="list-style-type: none"> ■ REF_VREF1_5V [Default] ■ REF_VREF2_0V ■ REF_VREF2_5V Modified bits are REFVSEL of REFCTL0 register.

Returns

None

21.3 Programming Example

The following example shows how to initialize and use the REF API with the ADC12 module to use as a positive reference to the analog signal input.

```
// By default, REFMSTR=1 => REFCTL is used to configure the internal reference

// If ref generator busy, WAIT
while(Ref_refGenBusyStatus(REF_BASE));
// Select internal ref = 2.5V
Ref_setReferenceVoltage(REF_BASE,
    REF_VREF2_5V);
// Internal Reference ON
Ref_enableReferenceVoltage(REF_BASE);

__delay_cycles(75);                // Delay (~75us) for Ref to settle
```

22 Real-Time Clock (RTC_B)

Introduction	217
API Functions	217
Programming Example	229

22.1 Introduction

The Real Time Clock (RTC_B) API provides a set of functions for using the MSP430Ware RTC_B modules. Functions are provided to calibrate the clock, initialize the RTC modules in calendar mode, and setup conditions for, and enable, interrupts for the RTC modules. If an RTC_B module is used, then prescale counters are also initialized.

The RTC_B module provides the ability to keep track of the current time and date in calendar mode.

The RTC_B module generates multiple interrupts. There are 2 interrupts that can be defined in calendar mode, and 1 interrupt for user-configured event, as well as an interrupt for each prescaler.

22.2 API Functions

Functions

- void [RTC_B_startClock](#) (uint16_t baseAddress)
Starts the RTC.
- void [RTC_B_holdClock](#) (uint16_t baseAddress)
Holds the RTC.
- void [RTC_B_setCalibrationFrequency](#) (uint16_t baseAddress, uint16_t frequencySelect)
Allows and Sets the frequency output to RTCCLK pin for calibration measurement.
- void [RTC_B_setCalibrationData](#) (uint16_t baseAddress, uint8_t offsetDirection, uint8_t offsetValue)
Sets the specified calibration for the RTC.
- void [RTC_B_initCalendar](#) (uint16_t baseAddress, [Calendar](#) *CalendarTime, uint16_t formatSelect)
Initializes the settings to operate the RTC in calendar mode.
- [Calendar](#) [RTC_B_getCalendarTime](#) (uint16_t baseAddress)
Returns the [Calendar](#) Time stored in the [Calendar](#) registers of the RTC.
- void [RTC_B_configureCalendarAlarm](#) (uint16_t baseAddress, [RTC_B_configureCalendarAlarmParam](#) *param)
Sets and Enables the desired [Calendar](#) Alarm settings.
- void [RTC_B_setCalendarEvent](#) (uint16_t baseAddress, uint16_t eventSelect)
Sets a single specified [Calendar](#) interrupt condition.
- void [RTC_B_definePrescaleEvent](#) (uint16_t baseAddress, uint8_t prescaleSelect, uint8_t prescaleEventDivider)
Sets up an interrupt condition for the selected Prescaler.
- uint8_t [RTC_B_getPrescaleValue](#) (uint16_t baseAddress, uint8_t prescaleSelect)
Returns the selected prescaler value.

- void `RTC_B_setPrescaleValue` (uint16_t baseAddress, uint8_t prescaleSelect, uint8_t prescaleCounterValue)
Sets the selected prescaler value.
- void `RTC_B_enableInterrupt` (uint16_t baseAddress, uint8_t interruptMask)
Enables selected RTC interrupt sources.
- void `RTC_B_disableInterrupt` (uint16_t baseAddress, uint8_t interruptMask)
Disables selected RTC interrupt sources.
- uint8_t `RTC_B_getInterruptStatus` (uint16_t baseAddress, uint8_t interruptFlagMask)
Returns the status of the selected interrupts flags.
- void `RTC_B_clearInterrupt` (uint16_t baseAddress, uint8_t interruptFlagMask)
Clears selected RTC interrupt flags.
- uint16_t `RTC_B_convertBCDToBinary` (uint16_t baseAddress, uint16_t valueToConvert)
Convert the given BCD value to binary format.
- uint16_t `RTC_B_convertBinaryToBCD` (uint16_t baseAddress, uint16_t valueToConvert)
Convert the given binary value to BCD format.

22.2.1 Detailed Description

The RTC_B API is broken into 5 groups of functions: clock settings, calender mode, prescale counter, interrupt condition setup/enable functions and data conversion.

The RTC_B clock settings are handled by

- `RTC_B_startClock()`
- `RTC_B_holdClock()`
- `RTC_B_setCalibrationFrequency()`
- `RTC_B_setCalibrationData()`

The RTC_B calender mode is initialized and handled by

- `RTC_B_initCalendar()`
- `RTC_B_configureCalendarAlarm()`
- `RTC_B_getCalendarTime()`

The RTC_B prescale counter is handled by

- `RTC_B_getPrescaleValue()`
- `RTC_B_setPrescaleValue()`

The RTC_B interrupts are handled by

- `RTC_B_definePrescaleEvent()`
- `RTC_B_setCalendarEvent()`
- `RTC_B_enableInterrupt()`
- `RTC_B_disableInterrupt()`
- `RTC_B_getInterruptStatus()`
- `RTC_B_clearInterrupt()`

The RTC_B conversions are handled by

- `RTC_B_convertBCDToBinary()`
- `RTC_B_convertBinaryToBCD()`

22.2.2 Function Documentation

RTC_B_clearInterrupt()

```
void RTC_B_clearInterrupt (
    uint16_t baseAddress,
    uint8_t interruptFlagMask )
```

Clears selected RTC interrupt flags.

This function clears the RTC interrupt flag is cleared, so that it no longer asserts.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>interruptFlagMask</i>	<p>is a bit mask of the interrupt flags to be cleared. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ RTC_B_TIME_EVENT_INTERRUPT - asserts when counter overflows in counter mode or when Calendar event condition defined by <code>defineCalendarEvent()</code> is met. ■ RTC_B_CLOCK_ALARM_INTERRUPT - asserts when alarm condition in Calendar mode is met. ■ RTC_B_CLOCK_READ_READY_INTERRUPT - asserts when Calendar registers are settled. ■ RTC_B_PRESCALE_TIMER0_INTERRUPT - asserts when Prescaler 0 event condition is met. ■ RTC_B_PRESCALE_TIMER1_INTERRUPT - asserts when Prescaler 1 event condition is met. ■ RTC_B_OSCILLATOR_FAULT_INTERRUPT - asserts if there is a problem with the 32kHz oscillator, while the RTC is running.

Returns

None

RTC_B_configureCalendarAlarm()

```
void RTC_B_configureCalendarAlarm (
    uint16_t baseAddress,
    RTC_B_configureCalendarAlarmParam * param )
```

Sets and Enables the desired [Calendar](#) Alarm settings.

This function sets a [Calendar](#) interrupt condition to assert the RTCAIFG interrupt flag. The condition is a logical and of all of the parameters. For example if the minutes and hours alarm is set, then the interrupt will only assert when the minutes AND the hours change to the specified setting. Use the RTC_B_ALARM_OFF for any alarm settings that should not be apart of the alarm condition.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>param</i>	is the pointer to struct for calendar alarm configuration.

Returns

None

References RTC_B_configureCalendarAlarmParam::dayOfMonthAlarm, RTC_B_configureCalendarAlarmParam::dayOfWeekAlarm, RTC_B_configureCalendarAlarmParam::hoursAlarm, and RTC_B_configureCalendarAlarmParam::minutesAlarm.

RTC_B_convertBCDToBinary()

```
uint16_t RTC_B_convertBCDToBinary (
    uint16_t baseAddress,
    uint16_t valueToConvert )
```

Convert the given BCD value to binary format.

This function converts BCD values to binary format. This API uses the hardware registers to perform the conversion rather than a software method.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>valueToConvert</i>	is the raw value in BCD format to convert to Binary. Modified bits are BCD2BIN of BCD2BIN register.

Returns

The binary version of the input parameter

RTC_B_convertBinaryToBCD()

```
uint16_t RTC_B_convertBinaryToBCD (
    uint16_t baseAddress,
    uint16_t valueToConvert )
```

Convert the given binary value to BCD format.

This function converts binary values to BCD format. This API uses the hardware registers to perform the conversion rather than a software method.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>valueToConvert</i>	is the raw value in Binary format to convert to BCD. Modified bits are BIN2BCD of BIN2BCD register.

Returns

The BCD version of the valueToConvert parameter

RTC_B_definePrescaleEvent()

```
void RTC_B_definePrescaleEvent (
    uint16_t baseAddress,
    uint8_t prescaleSelect,
    uint8_t prescaleEventDivider )
```

Sets up an interrupt condition for the selected Prescaler.

This function sets the condition for an interrupt to assert based on the individual prescalers.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>prescaleSelect</i>	is the prescaler to define an interrupt for. Valid values are: <ul style="list-style-type: none"> ■ RTC_B_PRESCALE_0 ■ RTC_B_PRESCALE_1
<i>prescaleEventDivider</i>	is a divider to specify when an interrupt can occur based on the clock source of the selected prescaler. (Does not affect timer of the selected prescaler). Valid values are: <ul style="list-style-type: none"> ■ RTC_B_PSEVENTDIVIDER_2 [Default] ■ RTC_B_PSEVENTDIVIDER_4 ■ RTC_B_PSEVENTDIVIDER_8 ■ RTC_B_PSEVENTDIVIDER_16 ■ RTC_B_PSEVENTDIVIDER_32 ■ RTC_B_PSEVENTDIVIDER_64 ■ RTC_B_PSEVENTDIVIDER_128 ■ RTC_B_PSEVENTDIVIDER_256 Modified bits are RTxIP of RTCPSxCTL register.

Returns

None

RTC_B_disableInterrupt()

```
void RTC_B_disableInterrupt (
    uint16_t baseAddress,
    uint8_t interruptMask )
```

Disables selected RTC interrupt sources.

This function disables the selected RTC interrupt source. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>interruptMask</i>	<p>is a bit mask of the interrupts to disable. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ RTC_B_TIME_EVENT_INTERRUPT - asserts when counter overflows in counter mode or when Calendar event condition defined by <code>defineCalendarEvent()</code> is met. ■ RTC_B_CLOCK_ALARM_INTERRUPT - asserts when alarm condition in Calendar mode is met. ■ RTC_B_CLOCK_READ_READY_INTERRUPT - asserts when Calendar registers are settled. ■ RTC_B_PRESCALE_TIMER0_INTERRUPT - asserts when Prescaler 0 event condition is met. ■ RTC_B_PRESCALE_TIMER1_INTERRUPT - asserts when Prescaler 1 event condition is met. ■ RTC_B_OSCILLATOR_FAULT_INTERRUPT - asserts if there is a problem with the 32kHz oscillator, while the RTC is running.

Returns

None

RTC_B_enableInterrupt()

```
void RTC_B_enableInterrupt (
    uint16_t baseAddress,
    uint8_t interruptMask )
```

Enables selected RTC interrupt sources.

This function enables the selected RTC interrupt source. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor. Does not clear interrupt flags.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
--------------------	--

Parameters

<i>interruptMask</i>	<p>is a bit mask of the interrupts to enable. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ RTC_B_TIME_EVENT_INTERRUPT - asserts when counter overflows in counter mode or when Calendar event condition defined by <code>defineCalendarEvent()</code> is met. ■ RTC_B_CLOCK_ALARM_INTERRUPT - asserts when alarm condition in Calendar mode is met. ■ RTC_B_CLOCK_READ_READY_INTERRUPT - asserts when Calendar registers are settled. ■ RTC_B_PRESCALE_TIMER0_INTERRUPT - asserts when Prescaler 0 event condition is met. ■ RTC_B_PRESCALE_TIMER1_INTERRUPT - asserts when Prescaler 1 event condition is met. ■ RTC_B_OSCILLATOR_FAULT_INTERRUPT - asserts if there is a problem with the 32kHz oscillator, while the RTC is running.
----------------------	---

Returns

None

RTC_B_getCalendarTime()

```
Calendar RTC_B_getCalendarTime (
    uint16_t baseAddress )
```

Returns the [Calendar](#) Time stored in the [Calendar](#) registers of the RTC.

This function returns the current [Calendar](#) time in the form of a [Calendar](#) structure. The RTCRDY polling is used in this function to prevent reading invalid time.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
--------------------	--

Returns

A [Calendar](#) structure containing the current time.

References `Calendar::DayOfMonth`, `Calendar::DayOfWeek`, `Calendar::Hours`, `Calendar::Minutes`, `Calendar::Month`, `Calendar::Seconds`, and `Calendar::Year`.

RTC_B_getInterruptStatus()

```
uint8_t RTC_B_getInterruptStatus (
    uint16_t baseAddress,
```



```
uint8_t interruptFlagMask )
```

Returns the status of the selected interrupts flags.

This function returns the status of the interrupt flag for the selected channel.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>interruptFlagMask</i>	<p>is a bit mask of the interrupt flags to return the status of. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ RTC_B_TIME_EVENT_INTERRUPT - asserts when counter overflows in counter mode or when Calendar event condition defined by <code>defineCalendarEvent()</code> is met. ■ RTC_B_CLOCK_ALARM_INTERRUPT - asserts when alarm condition in Calendar mode is met. ■ RTC_B_CLOCK_READ_READY_INTERRUPT - asserts when Calendar registers are settled. ■ RTC_B_PRESCALE_TIMER0_INTERRUPT - asserts when Prescaler 0 event condition is met. ■ RTC_B_PRESCALE_TIMER1_INTERRUPT - asserts when Prescaler 1 event condition is met. ■ RTC_B_OSCILLATOR_FAULT_INTERRUPT - asserts if there is a problem with the 32kHz oscillator, while the RTC is running.

Returns

Logical OR of any of the following:

- **RTC_B_TIME_EVENT_INTERRUPT** asserts when counter overflows in counter mode or when [Calendar](#) event condition defined by `defineCalendarEvent()` is met.
- **RTC_B_CLOCK_ALARM_INTERRUPT** asserts when alarm condition in [Calendar](#) mode is met.
- **RTC_B_CLOCK_READ_READY_INTERRUPT** asserts when [Calendar](#) registers are settled.
- **RTC_B_PRESCALE_TIMER0_INTERRUPT** asserts when Prescaler 0 event condition is met.
- **RTC_B_PRESCALE_TIMER1_INTERRUPT** asserts when Prescaler 1 event condition is met.
- **RTC_B_OSCILLATOR_FAULT_INTERRUPT** asserts if there is a problem with the 32kHz oscillator, while the RTC is running.
indicating the status of the masked interrupts

RTC_B_getPrescaleValue()

```
uint8_t RTC_B_getPrescaleValue (
    uint16_t baseAddress,
    uint8_t prescaleSelect )
```

Returns the selected prescaler value.

This function returns the value of the selected prescale counter register. Note that the counter value should be held by calling [RTC_B_holdClock\(\)](#) before calling this API.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>prescaleSelect</i>	is the prescaler to obtain the value of. Valid values are: <ul style="list-style-type: none"> ■ RTC_B_PRESCALE_0 ■ RTC_B_PRESCALE_1

Returns

The value of the specified prescaler count register

RTC_B_holdClock()

```
void RTC_B_holdClock (
    uint16_t baseAddress )
```

Holds the RTC.

This function sets the RTC main hold bit to disable RTC functionality.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
--------------------	--

Returns

None

RTC_B_initCalendar()

```
void RTC_B_initCalendar (
    uint16_t baseAddress,
    Calendar * CalendarTime,
    uint16_t formatSelect )
```

Initializes the settings to operate the RTC in calendar mode.

This function initializes the [Calendar](#) mode of the RTC module. To prevent potential erroneous alarm conditions from occurring, the alarm should be disabled by clearing the RTCAIE, RTCAIFG and AE bits with APIs: [RTC_B_disableInterrupt\(\)](#), [RTC_B_clearInterrupt\(\)](#) and [RTC_B_configureCalendarAlarm\(\)](#) before calendar initialization.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
--------------------	--

Parameters

<i>CalendarTime</i>	is the pointer to the structure containing the values for the Calendar to be initialized to. Valid values should be of type pointer to Calendar and should contain the following members and corresponding values: Seconds between 0-59 Minutes between 0-59 Hours between 0-23 DayOfWeek between 0-6 DayOfMonth between 1-31 Month between 1-12 Year between 0-4095 NOTE: Values beyond the ones specified may result in erratic behavior.
<i>formatSelect</i>	is the format for the Calendar registers to use. Valid values are: <ul style="list-style-type: none"> ■ RTC_B_FORMAT_BINARY [Default] ■ RTC_B_FORMAT_BCD Modified bits are RTCBCD of RTCCTL1 register.

Returns

None

References [Calendar::DayOfMonth](#), [Calendar::DayOfWeek](#), [Calendar::Hours](#), [Calendar::Minutes](#), [Calendar::Month](#), [Calendar::Seconds](#), and [Calendar::Year](#).

RTC_B_setCalendarEvent()

```
void RTC_B_setCalendarEvent (
    uint16_t baseAddress,
    uint16_t eventSelect )
```

Sets a single specified [Calendar](#) interrupt condition.

This function sets a specified event to assert the **RTCCTEVIFG** interrupt. This interrupt is independent from the [Calendar](#) alarm interrupt.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>eventSelect</i>	is the condition selected. Valid values are: <ul style="list-style-type: none"> ■ RTC_B_CALENDAREVENT_MINUTECHANGE - assert interrupt on every minute ■ RTC_B_CALENDAREVENT_HOURLCHANGE - assert interrupt on every hour ■ RTC_B_CALENDAREVENT_NOON - assert interrupt when hour is 12 ■ RTC_B_CALENDAREVENT_MIDNIGHT - assert interrupt when hour is 0 Modified bits are RTCCTEV of RTCCTL register.

Returns

None

RTC_B_setCalibrationData()

```
void RTC_B_setCalibrationData (
    uint16_t baseAddress,
    uint8_t  offsetDirection,
    uint8_t  offsetValue )
```

Sets the specified calibration for the RTC.

This function sets the calibration offset to make the RTC as accurate as possible. The *offsetDirection* can be either +4-ppm or -2-ppm, and the *offsetValue* should be from 1-63 and is multiplied by the direction setting (i.e. +4-ppm * 8 (*offsetValue*) = +32-ppm). Please note, when measuring the frequency after setting the calibration, you will only see a change on the 1Hz frequency.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>offsetDirection</i>	is the direction that the calibration offset will go. Valid values are: <ul style="list-style-type: none"> ■ RTC_B_CALIBRATION_DOWN2PPM - calibrate at steps of -2 ■ RTC_B_CALIBRATION_UP4PPM - calibrate at steps of +4 Modified bits are RTCCALS of RTCCTL2 register.
<i>offsetValue</i>	is the value that the offset will be a factor of; a valid value is any integer from 1-63. Modified bits are RTCCAL of RTCCTL2 register.

Returns

None

RTC_B_setCalibrationFrequency()

```
void RTC_B_setCalibrationFrequency (
    uint16_t baseAddress,
    uint16_t frequencySelect )
```

Allows and Sets the frequency output to RTCCLK pin for calibration measurement.

This function sets a frequency to measure at the RTCCLK output pin. After testing the set frequency, the calibration could be set accordingly.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
--------------------	--

Parameters

<i>frequencySelect</i>	<p>is the frequency output to RTCCLK. Valid values are:</p> <ul style="list-style-type: none"> ■ RTC_B_CALIBRATIONFREQ_OFF [Default] - turn off calibration output ■ RTC_B_CALIBRATIONFREQ_512HZ - output signal at 512Hz for calibration ■ RTC_B_CALIBRATIONFREQ_256HZ - output signal at 256Hz for calibration ■ RTC_B_CALIBRATIONFREQ_1HZ - output signal at 1Hz for calibration <p>Modified bits are RTCCALF of RTCCTL3 register.</p>
------------------------	---

Returns

None

RTC_B_setPrescaleValue()

```
void RTC_B_setPrescaleValue (
    uint16_t baseAddress,
    uint8_t prescaleSelect,
    uint8_t prescaleCounterValue )
```

Sets the selected prescaler value.

This function sets the prescale counter value. Before setting the prescale counter, it should be held by calling [RTC_B_holdClock\(\)](#).

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
<i>prescaleSelect</i>	<p>is the prescaler to set the value for. Valid values are:</p> <ul style="list-style-type: none"> ■ RTC_B_PRESCALE_0 ■ RTC_B_PRESCALE_1
<i>prescaleCounterValue</i>	<p>is the specified value to set the prescaler to. Valid values are any integer between 0-255</p> <p>Modified bits are RTxPS of RTxPS register.</p>

Returns

None

RTC_B_startClock()

```
void RTC_B_startClock (
```

```
uint16_t baseAddress )
```

Starts the RTC.

This function clears the RTC main hold bit to allow the RTC to function.

Parameters

<i>baseAddress</i>	is the base address of the RTC_B module.
--------------------	--

Returns

None

22.3 Programming Example

The following example shows how to initialize and use the RTC API to setup Calendar Mode with the current time and various interrupts.

```
//Initialize calendar struct
Calendar currentTime;
currentTime.Seconds    = 0x00;
currentTime.Minutes    = 0x26;
currentTime.Hours      = 0x13;
currentTime.DayOfWeek   = 0x03;
currentTime.DayOfMonth  = 0x20;
currentTime.Month       = 0x07;
currentTime.Year        = 0x2011;

//Initialize alarm struct
RTC_B_configureCalendarAlarmParam alarmParam;
alarmParam.minutesAlarm = 0x00;
alarmParam.hoursAlarm   = 0x17;
alarmParam.dayOfWeekAlarm = RTC_B_ALARMCONDITION_OFF;
alarmParam.dayOfMonthAlarm = 0x05;

//Initialize Calendar Mode of RTC_B
/*
 * Base Address of the RTC_B
 * Pass in current time, initialized above
 * Use BCD as Calendar Register Format
 */
RTC_B_initCalendar(RTC_B_BASE,
                  &currentTime,
                  RTC_B_FORMAT_BCD);

//Setup Calendar Alarm for 5:00pm on the 5th day of the month.
//Note: Does not specify day of the week.
RTC_B_setCalendarAlarm(RTC_B_BASE, &alarmParam);

//Specify an interrupt to assert every minute
RTC_B_setCalendarEvent(RTC_B_BASE,
                      RTC_B_CALENDAREVENT_MINUTECHANGE);

//Enable interrupt for RTC_B Ready Status, which asserts when the RTC_B
//Calendar registers are ready to read.
//Also, enable interrupts for the Calendar alarm and Calendar event.
RTC_B_enableInterrupt(RTC_B_BASE,
                     RTC_B_CLOCK_READ_READY_INTERRUPT +
                     RTC_B_TIME_EVENT_INTERRUPT +
                     RTC_B_CLOCK_ALARM_INTERRUPT);

//Start RTC_B Clock
RTC_B_startClock(RTC_B_BASE);

//Enter LPM3 mode with interrupts enabled
```

```
__bis_SR_register(LPM3_bits + GIE);  
__no_operation();
```

23 SFR Module

Introduction	231
API Functions	231
Programming Example	236

23.1 Introduction

The Special Function Registers API provides a set of functions for using the MSP430Ware SFR module. Functions are provided to enable and disable interrupts and control the \sim RST/NMI pin

The SFR module can enable interrupts to be generated from other peripherals of the device.

23.2 API Functions

Functions

- void [SFR_enableInterrupt](#) (uint8_t interruptMask)
Enables selected SFR interrupt sources.
- void [SFR_disableInterrupt](#) (uint8_t interruptMask)
Disables selected SFR interrupt sources.
- uint8_t [SFR_getInterruptStatus](#) (uint8_t interruptFlagMask)
Returns the status of the selected SFR interrupt flags.
- void [SFR_clearInterrupt](#) (uint8_t interruptFlagMask)
Clears the selected SFR interrupt flags.
- void [SFR_setResetPinPullResistor](#) (uint16_t pullResistorSetup)
Sets the pull-up/down resistor on the \sim RST/NMI pin.
- void [SFR_setNMIEdge](#) (uint16_t edgeDirection)
Sets the edge direction that will assert an NMI from a signal on the \sim RST/NMI pin if NMI function is active.
- void [SFR_setResetNMIPinFunction](#) (uint8_t resetPinFunction)
Sets the function of the \sim RST/NMI pin.

23.2.1 Detailed Description

The SFR API is broken into 2 groups: the SFR interrupts and the SFR \sim RST/NMI pin control

The SFR interrupts are handled by

- [SFR_enableInterrupt\(\)](#)
- [SFR_disableInterrupt\(\)](#)
- [SFR_getInterruptStatus\(\)](#)
- [SFR_clearInterrupt\(\)](#)

The SFR \sim RST/NMI pin is controlled by

- [SFR_setResetPinPullResistor\(\)](#)
- [SFR_setNMIEdge\(\)](#)
- [SFR_setResetNMIPinFunction\(\)](#)

23.2.2 Function Documentation

SFR_clearInterrupt()

```
void SFR_clearInterrupt (
    uint8_t interruptFlagMask )
```

Clears the selected SFR interrupt flags.

This function clears the status of the selected SFR interrupt flags.

Parameters

<i>interruptFlagMask</i>	<p>is the bit mask of interrupt flags that will be cleared. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ SFR_JTAG_OUTBOX_INTERRUPT - JTAG outbox interrupt ■ SFR_JTAG_INBOX_INTERRUPT - JTAG inbox interrupt ■ SFR_NMI_PIN_INTERRUPT - NMI pin interrupt, if NMI function is chosen ■ SFR_VACANT_MEMORY_ACCESS_INTERRUPT - Vacant memory access interrupt ■ SFR_OSCILLATOR_FAULT_INTERRUPT - Oscillator fault interrupt ■ SFR_WATCHDOG_INTERVAL_TIMER_INTERRUPT - Watchdog interval timer interrupt
--------------------------	---

Returns

None

SFR_disableInterrupt()

```
void SFR_disableInterrupt (
    uint8_t interruptMask )
```

Disables selected SFR interrupt sources.

This function disables the selected SFR interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor.

Parameters

<i>interruptMask</i>	<p>is the bit mask of interrupts that will be disabled. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ SFR_JTAG_OUTBOX_INTERRUPT - JTAG outbox interrupt ■ SFR_JTAG_INBOX_INTERRUPT - JTAG inbox interrupt ■ SFR_NMI_PIN_INTERRUPT - NMI pin interrupt, if NMI function is chosen ■ SFR_VACANT_MEMORY_ACCESS_INTERRUPT - Vacant memory access interrupt ■ SFR_OSCILLATOR_FAULT_INTERRUPT - Oscillator fault interrupt ■ SFR_WATCHDOG_INTERVAL_TIMER_INTERRUPT - Watchdog interval timer interrupt
----------------------	---

Returns

None

SFR_enableInterrupt()

```
void SFR_enableInterrupt (
    uint8_t interruptMask )
```

Enables selected SFR interrupt sources.

This function enables the selected SFR interrupt sources. Only the sources that are enabled can be reflected to the processor interrupt; disabled sources have no effect on the processor. Does not clear interrupt flags.

Parameters

<i>interruptMask</i>	<p>is the bit mask of interrupts that will be enabled. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ SFR_JTAG_OUTBOX_INTERRUPT - JTAG outbox interrupt ■ SFR_JTAG_INBOX_INTERRUPT - JTAG inbox interrupt ■ SFR_NMI_PIN_INTERRUPT - NMI pin interrupt, if NMI function is chosen ■ SFR_VACANT_MEMORY_ACCESS_INTERRUPT - Vacant memory access interrupt ■ SFR_OSCILLATOR_FAULT_INTERRUPT - Oscillator fault interrupt ■ SFR_WATCHDOG_INTERVAL_TIMER_INTERRUPT - Watchdog interval timer interrupt
----------------------	--

Returns

None

SFR_getInterruptStatus()

```
uint8_t SFR_getInterruptStatus (
    uint8_t interruptFlagMask )
```

Returns the status of the selected SFR interrupt flags.

This function returns the status of the selected SFR interrupt flags in a bit mask format matching that passed into the interruptFlagMask parameter.

Parameters

<i>interruptFlagMask</i>	<p>is the bit mask of interrupt flags that the status of should be returned. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ SFR_JTAG_OUTBOX_INTERRUPT - JTAG outbox interrupt ■ SFR_JTAG_INBOX_INTERRUPT - JTAG inbox interrupt ■ SFR_NMI_PIN_INTERRUPT - NMI pin interrupt, if NMI function is chosen ■ SFR_VACANT_MEMORY_ACCESS_INTERRUPT - Vacant memory access interrupt ■ SFR_OSCILLATOR_FAULT_INTERRUPT - Oscillator fault interrupt ■ SFR_WATCHDOG_INTERVAL_TIMER_INTERRUPT - Watchdog interval timer interrupt
--------------------------	--

Returns

A bit mask of the status of the selected interrupt flags. Return Logical OR of any of the following:

- **SFR_JTAG_OUTBOX_INTERRUPT** JTAG outbox interrupt
- **SFR_JTAG_INBOX_INTERRUPT** JTAG inbox interrupt
- **SFR_NMI_PIN_INTERRUPT** NMI pin interrupt, if NMI function is chosen
- **SFR_VACANT_MEMORY_ACCESS_INTERRUPT** Vacant memory access interrupt
- **SFR_OSCILLATOR_FAULT_INTERRUPT** Oscillator fault interrupt
- **SFR_WATCHDOG_INTERVAL_TIMER_INTERRUPT** Watchdog interval timer interrupt indicating the status of the masked interrupts

SFR_setNMIEdge()

```
void SFR_setNMIEdge (
    uint16_t edgeDirection )
```

Sets the edge direction that will assert an NMI from a signal on the \sim RST/NMI pin if NMI function is active.

This function sets the edge direction that will assert an NMI from a signal on the \sim RST/NMI pin if the NMI function is active. To activate the NMI function of the \sim RST/NMI use the [SFR_setResetNMIPinFunction\(\)](#) passing SFR_RESETPINFUNC_NMI into the resetPinFunction parameter.

Parameters

<i>edgeDirection</i>	<p>is the direction that the signal on the \simRST/NMI pin should go to signal an interrupt, if enabled. Valid values are:</p> <ul style="list-style-type: none"> ■ SFR_NMI_RISINGEDGE [Default] ■ SFR_NMI_FALLINGEDGE <p>Modified bits are SYSNMIIES of SFRRPCR register.</p>
----------------------	---

Returns

None

SFR_setResetNMIPinFunction()

```
void SFR_setResetNMIPinFunction (
    uint8_t resetPinFunction )
```

Sets the function of the \sim RST/NMI pin.

This function sets the functionality of the \sim RST/NMI pin, whether in reset mode which will assert a reset if a low signal is observed on that pin, or an NMI which will assert an interrupt from an edge of the signal dependent on the setting of the *edgeDirection* parameter in [SFR_setNMIEdge\(\)](#).

Parameters

<i>resetPinFunction</i>	<p>is the function that the \simRST/NMI pin should take on. Valid values are:</p> <ul style="list-style-type: none"> ■ SFR_RESETPINFUNC_RESET [Default] ■ SFR_RESETPINFUNC_NMI <p>Modified bits are SYSNMI of SFRRPCR register.</p>
-------------------------	--

Returns

None

SFR_setResetPinPullResistor()

```
void SFR_setResetPinPullResistor (
    uint16_t pullResistorSetup )
```

Sets the pull-up/down resistor on the \sim RST/NMI pin.

This function sets the pull-up/down resistors on the \sim RST/NMI pin to the settings from the *pullResistorSetup* parameter.

Parameters

<i>pullResistorSetup</i>	<p>is the selection of how the pull-up/down resistor on the \simRST/NMI pin should be setup or disabled. Valid values are:</p> <ul style="list-style-type: none"> ■ SFR_RESISTORDISABLE ■ SFR_RESISTORENABLE_PULLUP [Default] ■ SFR_RESISTORENABLE_PULLDOWN <p>Modified bits are SYSRSTUP and SYSRSTRE of SFRRPCR register.</p>
--------------------------	---

Returns

None

23.3 Programming Example

The following example shows how to initialize and use the SFR API

```
do
{
    // Clear SFR Fault Flag
    SFR_clearInterrupt (SFR_BASE,
                       OFIFG);

    // Test oscillator fault flag
}while (SFR_getInterruptStatus (SFR_BASE, OFIFG));
```

24 System Control Module

Introduction	237
API Functions	237
Programming Example	243

24.1 Introduction

The System Control (SYS) API provides a set of functions for using the MSP430Ware SYS module. Functions are provided to control various SYS controls, setup the BSL, and control the JTAG Mailbox.

24.2 API Functions

Functions

- void [SysCtl_enableDedicatedJTAGPins](#) (void)
Sets the JTAG pins to be exclusively for JTAG until a BOR occurs.
- uint8_t [SysCtl_getBSLEntryIndication](#) (void)
Returns the indication of a BSL entry sequence from the Spy-Bi-Wire.
- void [SysCtl_enablePMMAccessProtect](#) (void)
Enables PMM Access Protection.
- void [SysCtl_enableRAMBasedInterruptVectors](#) (void)
Enables RAM-based Interrupt Vectors.
- void [SysCtl_disableRAMBasedInterruptVectors](#) (void)
Disables RAM-based Interrupt Vectors.
- void [SysCtl_initJTAGMailbox](#) (uint8_t mailboxSizeSelect, uint8_t autoClearInboxFlagSelect)
Initializes JTAG Mailbox with selected properties.
- uint8_t [SysCtl_getJTAGMailboxFlagStatus](#) (uint8_t mailboxFlagMask)
Returns the status of the selected JTAG Mailbox flags.
- void [SysCtl_clearJTAGMailboxFlagStatus](#) (uint8_t mailboxFlagMask)
Clears the status of the selected JTAG Mailbox flags.
- uint16_t [SysCtl_getJTAGInboxMessage16Bit](#) (uint8_t inboxSelect)
Returns the contents of the selected JTAG Inbox in a 16 bit format.
- uint32_t [SysCtl_getJTAGInboxMessage32Bit](#) (void)
Returns the contents of JTAG Inboxes in a 32 bit format.
- void [SysCtl_setJTAGOutgoingMessage16Bit](#) (uint8_t outboxSelect, uint16_t outgoingMessage)
Sets a 16 bit outgoing message in to the selected JTAG Outbox.
- void [SysCtl_setJTAGOutgoingMessage32Bit](#) (uint32_t outgoingMessage)
Sets a 32 bit message in to both JTAG Outboxes.

24.2.1 Detailed Description

The SYS API is broken into 2 groups: the various SYS controls and the JTAG mailbox controls. The various SYS controls are handled by

- `SysCtl_enableDedicatedJTAGPins()`
- `SysCtl_getBSLEntryIndication()`
- `SysCtl_enablePMMAccessProtect()`
- `SysCtl_enableRAMBasedInterruptVectors()`
- `SysCtl_disableRAMBasedInterruptVectors()`

The JTAG Mailbox controls are handled by

- `SysCtl_initJTAGMailbox()`
- `SysCtl_getJTAGMailboxFlagStatus()`
- `SysCtl_getJTAGInboxMessage16Bit()`
- `SysCtl_getJTAGInboxMessage32Bit()`
- `SysCtl_setJTAGOutgoingMessage16Bit()`
- `SysCtl_setJTAGOutgoingMessage32Bit()`
- `SysCtl_clearJTAGMailboxFlagStatus()`

24.2.2 Function Documentation

`SysCtl_clearJTAGMailboxFlagStatus()`

```
void SysCtl_clearJTAGMailboxFlagStatus (
    uint8_t mailboxFlagMask )
```

Clears the status of the selected JTAG Mailbox flags.

This function clears the selected JTAG Mailbox flags.

Parameters

<i>mailboxFlagMask</i>	<p>is the bit mask of JTAG mailbox flags that the status of should be cleared. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ SYSCTL_JTAGOUTBOX_FLAG0 - flag for JTAG outbox 0 ■ SYSCTL_JTAGOUTBOX_FLAG1 - flag for JTAG outbox 1 ■ SYSCTL_JTAGINBOX_FLAG0 - flag for JTAG inbox 0 ■ SYSCTL_JTAGINBOX_FLAG1 - flag for JTAG inbox 1
------------------------	---

Returns

None

`SysCtl_disableRAMBasedInterruptVectors()`

```
void SysCtl_disableRAMBasedInterruptVectors (
    void )
```

Disables RAM-based Interrupt Vectors.

This function disables the interrupt vectors from being generated at the top of the RAM.

Returns

None

SysCtl_enableDedicatedJTAGPins()

```
void SysCtl_enableDedicatedJTAGPins (  
    void )
```

Sets the JTAG pins to be exclusively for JTAG until a BOR occurs.

This function sets the JTAG pins to be exclusively used for the JTAG, and not to be shared with the GPIO pins. This setting can only be cleared when a BOR occurs.

Returns

None

SysCtl_enablePMMAccessProtect()

```
void SysCtl_enablePMMAccessProtect (  
    void )
```

Enables PMM Access Protection.

This function enables the PMM Access Protection, which will lock any changes on the PMM control registers until a BOR occurs.

Returns

None

SysCtl_enableRAMBasedInterruptVectors()

```
void SysCtl_enableRAMBasedInterruptVectors (  
    void )
```

Enables RAM-based Interrupt Vectors.

This function enables RAM-base Interrupt Vectors, which means that interrupt vectors are generated with the end address at the top of RAM, instead of the top of the lower 64kB of flash.

Returns

None

SysCtl_getBSLEntryIndication()

```
uint8_t SysCtl_getBSLEntryIndication (  
    void )
```


Returns the indication of a BSL entry sequence from the Spy-Bi-Wire.

This function returns the indication of a BSL entry sequence from the Spy- Bi-Wire.

Returns

One of the following:

- **SYSCTL_BSENTRY_INDICATED**
 - **SYSCTL_BSENTRY_NOTINDICATED**
- indicating if a BSL entry sequence was detected

SysCtl_getJTAGInboxMessage16Bit()

```
uint16_t SysCtl_getJTAGInboxMessage16Bit (
    uint8_t inboxSelect )
```

Returns the contents of the selected JTAG Inbox in a 16 bit format.

This function returns the message contents of the selected JTAG inbox. If the auto clear settings for the Inbox flags were set, then using this function will automatically clear the corresponding JTAG inbox flag.

Parameters

<i>inboxSelect</i>	<p>is the chosen JTAG inbox that the contents of should be returned Valid values are:</p> <ul style="list-style-type: none"> ■ SYSCTL_JTAGINBOX_0 - return contents of JTAG inbox 0 ■ SYSCTL_JTAGINBOX_1 - return contents of JTAG inbox 1
--------------------	--

Returns

The contents of the selected JTAG inbox in a 16 bit format.

SysCtl_getJTAGInboxMessage32Bit()

```
uint32_t SysCtl_getJTAGInboxMessage32Bit (
    void )
```

Returns the contents of JTAG Inboxes in a 32 bit format.

This function returns the message contents of both JTAG inboxes in a 32 bit format. This function should be used if 32-bit messaging has been set in the SYS_initJTAGMailbox() function. If the auto clear settings for the Inbox flags were set, then using this function will automatically clear both JTAG inbox flags.

Returns

The contents of both JTAG messages in a 32 bit format.

SysCtl_getJTAGMailboxFlagStatus()

```
uint8_t SysCtl_getJTAGMailboxFlagStatus (
    uint8_t mailboxFlagMask )
```

Returns the status of the selected JTAG Mailbox flags.

This function will return the status of the selected JTAG Mailbox flags in bit mask format matching that passed into the mailboxFlagMask parameter.

Parameters

<i>mailboxFlagMask</i>	<p>is the bit mask of JTAG mailbox flags that the status of should be returned. Mask value is the logical OR of any of the following:</p> <ul style="list-style-type: none"> ■ SYSCTL_JTAGOUTBOX_FLAG0 - flag for JTAG outbox 0 ■ SYSCTL_JTAGOUTBOX_FLAG1 - flag for JTAG outbox 1 ■ SYSCTL_JTAGINBOX_FLAG0 - flag for JTAG inbox 0 ■ SYSCTL_JTAGINBOX_FLAG1 - flag for JTAG inbox 1
------------------------	--

Returns

A bit mask of the status of the selected mailbox flags.

SysCtl_initJTAGMailbox()

```
void SysCtl_initJTAGMailbox (
    uint8_t mailboxSizeSelect,
    uint8_t autoClearInboxFlagSelect )
```

Initializes JTAG Mailbox with selected properties.

This function sets the specified settings for the JTAG Mailbox system. The settings that can be set are the size of the JTAG messages, and the auto- clearing of the inbox flags. If the inbox flags are set to auto-clear, then the inbox flags will be cleared upon reading of the inbox message buffer, otherwise they will have to be reset by software using the `SYS_clearJTAGMailboxFlagStatus()` function.

Parameters

<i>mailboxSizeSelect</i>	<p>is the size of the JTAG Mailboxes, whether 16- or 32-bits. Valid values are:</p> <ul style="list-style-type: none"> ■ SYSCTL_JTAGMBSIZE_16BIT [Default] - the JTAG messages will take up only one JTAG mailbox (i. e. an outgoing message will take up only 1 outbox of the JTAG mailboxes) ■ SYSCTL_JTAGMBSIZE_32BIT - the JTAG messages will be contained within both JTAG mailboxes (i. e. an outgoing message will take up both Outboxes of the JTAG mailboxes) Modified bits are JMBMODE of SYSJMBC register.
--------------------------	---

Parameters

<i>autoClearInboxFlagSelect</i>	<p>decides how the JTAG inbox flags should be cleared, whether automatically after the corresponding outbox has been written to, or manually by software. Valid values are:</p> <ul style="list-style-type: none"> ■ SYSCTL_JTAGINBOX0AUTO_JTAGINBOX1AUTO [Default] - both JTAG inbox flags will be reset automatically when the corresponding inbox is read from. ■ SYSCTL_JTAGINBOX0AUTO_JTAGINBOX1SW - only JTAG inbox 0 flag is reset automatically, while JTAG inbox 1 is reset with the ■ SYSCTL_JTAGINBOX0SW_JTAGINBOX1AUTO - only JTAG inbox 1 flag is reset automatically, while JTAG inbox 0 is reset with the ■ SYSCTL_JTAGINBOX0SW_JTAGINBOX1SW - both JTAG inbox flags will need to be reset manually by the Modified bits are JMBCLR0OFF and JMBCLR1OFF of SYSJMBC register.
---------------------------------	---

Returns

None

SysCtl_setJTAGOutgoingMessage16Bit()

```
void SysCtl_setJTAGOutgoingMessage16Bit (
    uint8_t outboxSelect,
    uint16_t outgoingMessage )
```

Sets a 16 bit outgoing message in to the selected JTAG Outbox.

This function sets the outgoing message in the selected JTAG outbox. The corresponding JTAG outbox flag is cleared after this function, and set after the JTAG has read the message.

Parameters

<i>outboxSelect</i>	<p>is the chosen JTAG outbox that the message should be set it. Valid values are:</p> <ul style="list-style-type: none"> ■ SYSCTL_JTAGOUTBOX_0 - set the contents of JTAG outbox 0 ■ SYSCTL_JTAGOUTBOX_1 - set the contents of JTAG outbox 1
<i>outgoingMessage</i>	<p>is the message to send to the JTAG. Modified bits are MSGHI and MSGLO of SYSJMBox register.</p>

Returns

None

SysCtl_setJTAGOutgoingMessage32Bit()

```
void SysCtl_setJTAGOutgoingMessage32Bit (
    uint32_t outgoingMessage )
```

Sets a 32 bit message in to both JTAG Outboxes.

This function sets the 32-bit outgoing message in both JTAG outboxes. The JTAG outbox flags are cleared after this function, and set after the JTAG has read the message.

Parameters

<i>outgoingMessage</i>	is the message to send to the JTAG. Modified bits are MSGHI and MSGLO of SYSJMBOX register.
------------------------	---

Returns

None

24.3 Programming Example

The following example shows how to initialize and use the SYS API

```
SysCtl_enableRAMBasedInterruptVectors();
```

25 16-Bit Timer_A (TIMER_A)

Introduction	244
API Functions	245
Programming Example	260

25.1 Introduction

TIMER_A is a 16-bit timer/counter with multiple capture/compare registers. TIMER_A can support multiple capture/compares, PWM outputs, and interval timing. TIMER_A also has extensive interrupt capabilities. Interrupts may be generated from the counter on overflow conditions and from each of the capture/compare registers.

This peripheral API handles Timer A hardware peripheral.

TIMER_A features include:

- Asynchronous 16-bit timer/counter with four operating modes
- Selectable and configurable clock source
- Up to seven configurable capture/compare registers
- Configurable outputs with pulse width modulation (PWM) capability
- Asynchronous input and output latching
- Interrupt vector register for fast decoding of all Timer interrupts

TIMER_A can operate in 3 modes

- Continuous Mode
- Up Mode
- Down Mode

TIMER_A Interrupts may be generated on counter overflow conditions and during capture compare events.

The TIMER_A may also be used to generate PWM outputs. PWM outputs can be generated by initializing the compare mode with `TIMER_A_initCompare()` and the necessary parameters. The PWM may be customized by selecting a desired timer mode (continuous/up/upDown), duty cycle, output mode, timer period etc. The library also provides a simpler way to generate PWM using `Timer_A_generatePWM()` API. However the level of customization and the kinds of PWM generated are limited in this API. Depending on how complex the PWM is and what level of customization is required, the user can use `Timer_A_generatePWM()` or a combination of `Timer_initCompare()` and timer start APIs

The TIMER_A API provides a set of functions for dealing with the TIMER_A module. Functions are provided to configure and control the timer, along with functions to modify timer/counter values, and to manage interrupt handling for the timer.

Control is also provided over interrupt sources and events. Interrupts can be generated to indicate that an event has been captured.

25.2 API Functions

Functions

- void `Timer_A_startCounter` (uint16_t baseAddress, uint16_t timerMode)
Starts Timer_A counter.
- void `Timer_A_initContinuousMode` (uint16_t baseAddress, `Timer_A_initContinuousModeParam` *param)
Configures Timer_A in continuous mode.
- void `Timer_A_initUpMode` (uint16_t baseAddress, `Timer_A_initUpModeParam` *param)
Configures Timer_A in up mode.
- void `Timer_A_initUpDownMode` (uint16_t baseAddress, `Timer_A_initUpDownModeParam` *param)
Configures Timer_A in up down mode.
- void `Timer_A_initCaptureMode` (uint16_t baseAddress, `Timer_A_initCaptureModeParam` *param)
Initializes Capture Mode.
- void `Timer_A_initCompareMode` (uint16_t baseAddress, `Timer_A_initCompareModeParam` *param)
Initializes Compare Mode.
- void `Timer_A_enableInterrupt` (uint16_t baseAddress)
Enable timer interrupt.
- void `Timer_A_disableInterrupt` (uint16_t baseAddress)
Disable timer interrupt.
- uint32_t `Timer_A_getInterruptStatus` (uint16_t baseAddress)
Get timer interrupt status.
- void `Timer_A_enableCaptureCompareInterrupt` (uint16_t baseAddress, uint16_t captureCompareRegister)
Enable capture compare interrupt.
- void `Timer_A_disableCaptureCompareInterrupt` (uint16_t baseAddress, uint16_t captureCompareRegister)
Disable capture compare interrupt.
- uint32_t `Timer_A_getCaptureCompareInterruptStatus` (uint16_t baseAddress, uint16_t captureCompareRegister, uint16_t mask)
Return capture compare interrupt status.
- void `Timer_A_clear` (uint16_t baseAddress)
Reset/Clear the timer clock divider, count direction, count.
- uint8_t `Timer_A_getSynchronizedCaptureCompareInput` (uint16_t baseAddress, uint16_t captureCompareRegister, uint16_t synchronized)
Get synchronized capturecompare input.
- uint8_t `Timer_A_getOutputForOutputModeOutBitValue` (uint16_t baseAddress, uint16_t captureCompareRegister)
Get output bit for output mode.
- uint16_t `Timer_A_getCaptureCompareCount` (uint16_t baseAddress, uint16_t captureCompareRegister)
Get current capturecompare count.
- void `Timer_A_setOutputForOutputModeOutBitValue` (uint16_t baseAddress, uint16_t captureCompareRegister, uint8_t outputModeOutBitValue)
Set output bit for output mode.
- void `Timer_A_outputPWM` (uint16_t baseAddress, `Timer_A_outputPWMParm` *param)
Generate a PWM with timer running in up mode.
- void `Timer_A_stop` (uint16_t baseAddress)

- Stops the timer.*

 - void `Timer_A_setCompareValue` (uint16_t baseAddress, uint16_t compareRegister, uint16_t compareValue)
- Sets the value of the capture-compare register.*

 - void `Timer_A_setOutputMode` (uint16_t baseAddress, uint16_t compareRegister, uint16_t compareOutputMode)
- Sets the output mode.*

 - void `Timer_A_clearTimerInterrupt` (uint16_t baseAddress)
- Clears the Timer TAIFG interrupt flag.*

 - void `Timer_A_clearCaptureCompareInterrupt` (uint16_t baseAddress, uint16_t captureCompareRegister)
- Clears the capture-compare interrupt flag.*

 - uint16_t `Timer_A_getCounterValue` (uint16_t baseAddress)
- Reads the current timer count value.*

25.2.1 Detailed Description

The TIMER_A API is broken into three groups of functions: those that deal with timer configuration and control, those that deal with timer contents, and those that deal with interrupt handling.

TIMER_A configuration and initialization is handled by

- `Timer_A_startCounter()`
- `Timer_A_initUpMode()`
- `Timer_A_initUpDownMode()`
- `Timer_A_initContinuousMode()`
- `Timer_A_initCaptureMode()`
- `Timer_A_initCompareMode()`
- `Timer_A_clear()`
- `Timer_A_stop()`

TIMER_A outputs are handled by

- `Timer_A_getSynchronizedCaptureCompareInput()`
- `Timer_A_getOutputForOutputModeOutBitValue()`
- `Timer_A_setOutputForOutputModeOutBitValue()`
- `Timer_A_outputPWM()`
- `Timer_A_getCaptureCompareCount()`
- `Timer_A_setCompareValue()`
- `Timer_A_getCounterValue()`

The interrupt handler for the TIMER_A interrupt is managed with

- `Timer_A_enableInterrupt()`
- `Timer_A_disableInterrupt()`
- `Timer_A_getInterruptStatus()`
- `Timer_A_enableCaptureCompareInterrupt()`

- [Timer_A_disableCaptureCompareInterrupt\(\)](#)
- [Timer_A_getCaptureCompareInterruptStatus\(\)](#)
- [Timer_A_clearCaptureCompareInterrupt\(\)](#)
- [Timer_A_clearTimerInterrupt\(\)](#)

25.2.2 Function Documentation

Timer_A_clear()

```
void Timer_A_clear (
    uint16_t baseAddress )
```

Reset/Clear the timer clock divider, count direction, count.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
--------------------	--

Modified bits of **TAxCTL** register.

Returns

None

References [Timer_A_getSynchronizedCaptureCompareInput\(\)](#).

Timer_A_clearCaptureCompareInterrupt()

```
void Timer_A_clearCaptureCompareInterrupt (
    uint16_t baseAddress,
    uint16_t captureCompareRegister )
```

Clears the capture-compare interrupt flag.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>captureCompareRegister</i>	<p>selects the Capture-compare register being used. Valid values are:</p> <ul style="list-style-type: none"> ■ TIMER_A_CAPTURECOMPARE_REGISTER_0 ■ TIMER_A_CAPTURECOMPARE_REGISTER_1 ■ TIMER_A_CAPTURECOMPARE_REGISTER_2 ■ TIMER_A_CAPTURECOMPARE_REGISTER_3 ■ TIMER_A_CAPTURECOMPARE_REGISTER_4 ■ TIMER_A_CAPTURECOMPARE_REGISTER_5 ■ TIMER_A_CAPTURECOMPARE_REGISTER_6

Modified bits are **CCIFG** of **TAxCTLn** register.

Returns

None

Timer_A_clearTimerInterrupt()

```
void Timer_A_clearTimerInterrupt (
    uint16_t baseAddress )
```

Clears the Timer TAIFG interrupt flag.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
--------------------	--

Modified bits are **TAIFG** of **TAxCTL** register.

Returns

None

Timer_A_disableCaptureCompareInterrupt()

```
void Timer_A_disableCaptureCompareInterrupt (
    uint16_t baseAddress,
    uint16_t captureCompareRegister )
```

Disable capture compare interrupt.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>captureCompareRegister</i>	is the selected capture compare register Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_CAPTURECOMPARE_REGISTER_0 ■ TIMER_A_CAPTURECOMPARE_REGISTER_1 ■ TIMER_A_CAPTURECOMPARE_REGISTER_2 ■ TIMER_A_CAPTURECOMPARE_REGISTER_3 ■ TIMER_A_CAPTURECOMPARE_REGISTER_4 ■ TIMER_A_CAPTURECOMPARE_REGISTER_5 ■ TIMER_A_CAPTURECOMPARE_REGISTER_6

Modified bits of **TAxCTLn** register.

Returns

None

Timer_A_disableInterrupt()

```
void Timer_A_disableInterrupt (
    uint16_t baseAddress )
```

Disable timer interrupt.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
--------------------	--

Modified bits of **TAxCTL** register.

Returns

None

Timer_A_enableCaptureCompareInterrupt()

```
void Timer_A_enableCaptureCompareInterrupt (
    uint16_t baseAddress,
    uint16_t captureCompareRegister )
```

Enable capture compare interrupt.

Does not clear interrupt flags

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>captureCompareRegister</i>	is the selected capture compare register Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_CAPTURECOMPARE_REGISTER_0 ■ TIMER_A_CAPTURECOMPARE_REGISTER_1 ■ TIMER_A_CAPTURECOMPARE_REGISTER_2 ■ TIMER_A_CAPTURECOMPARE_REGISTER_3 ■ TIMER_A_CAPTURECOMPARE_REGISTER_4 ■ TIMER_A_CAPTURECOMPARE_REGISTER_5 ■ TIMER_A_CAPTURECOMPARE_REGISTER_6

Modified bits of **TAxCTLn** register.

Returns

None

Timer_A_enableInterrupt()

```
void Timer_A_enableInterrupt (
    uint16_t baseAddress )
```

Enable timer interrupt.

Does not clear interrupt flags

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
--------------------	--

Modified bits of **TAxCTL** register.

Returns

None

Timer_A_getCaptureCompareCount()

```
uint16_t Timer_A_getCaptureCompareCount (
    uint16_t baseAddress,
    uint16_t captureCompareRegister )
```

Get current capturecompare count.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>captureCompareRegister</i>	Valid values are: <ul style="list-style-type: none">■ TIMER_A_CAPTURECOMPARE_REGISTER_0■ TIMER_A_CAPTURECOMPARE_REGISTER_1■ TIMER_A_CAPTURECOMPARE_REGISTER_2■ TIMER_A_CAPTURECOMPARE_REGISTER_3■ TIMER_A_CAPTURECOMPARE_REGISTER_4■ TIMER_A_CAPTURECOMPARE_REGISTER_5■ TIMER_A_CAPTURECOMPARE_REGISTER_6

Returns

Current count as an uint16_t

References Timer_A_setOutputForOutputModeOutBitValue().

Referenced by Timer_A_getOutputForOutputModeOutBitValue().

Timer_A_getCaptureCompareInterruptStatus()

```
uint32_t Timer_A_getCaptureCompareInterruptStatus (
    uint16_t baseAddress,
    uint16_t captureCompareRegister,
    uint16_t mask )
```

Return capture compare interrupt status.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>captureCompareRegister</i>	is the selected capture compare register Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_CAPTURECOMPARE_REGISTER_0 ■ TIMER_A_CAPTURECOMPARE_REGISTER_1 ■ TIMER_A_CAPTURECOMPARE_REGISTER_2 ■ TIMER_A_CAPTURECOMPARE_REGISTER_3 ■ TIMER_A_CAPTURECOMPARE_REGISTER_4 ■ TIMER_A_CAPTURECOMPARE_REGISTER_5 ■ TIMER_A_CAPTURECOMPARE_REGISTER_6
<i>mask</i>	is the mask for the interrupt status Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ TIMER_A_CAPTURE_OVERFLOW ■ TIMER_A_CAPTURECOMPARE_INTERRUPT_FLAG

Returns

Logical OR of any of the following:

- **TIMER_A_CAPTURE_OVERFLOW**
 - **TIMER_A_CAPTURECOMPARE_INTERRUPT_FLAG**
- indicating the status of the masked interrupts

Timer_A_getCounterValue()

```
uint16_t Timer_A_getCounterValue (
    uint16_t baseAddress )
```

Reads the current timer count value.

Reads the current count value of the timer. There is a majority vote system in place to confirm an accurate value is returned. The `TIMER_A_THRESHOLD` #define in the corresponding header file can be modified so that the votes must be closer together for a consensus to occur.

Parameters

<i>baseAddress</i>	is the base address of the <code>TIMER_A</code> module.
--------------------	---

Returns

Majority vote of timer count value

Timer_A_getInterruptStatus()

```
uint32_t Timer_A_getInterruptStatus (
    uint16_t baseAddress )
```

Get timer interrupt status.

Parameters

<i>baseAddress</i>	is the base address of the <code>TIMER_A</code> module.
--------------------	---

Returns

One of the following:

- **TIMER_A_INTERRUPT_NOT_PENDING**
- **TIMER_A_INTERRUPT_PENDING**
indicating the `Timer_A` interrupt status

Timer_A_getOutputForOutputModeOutBitValue()

```
uint8_t Timer_A_getOutputForOutputModeOutBitValue (
    uint16_t baseAddress,
    uint16_t captureCompareRegister )
```

Get output bit for output mode.

Parameters

<i>baseAddress</i>	is the base address of the <code>TIMER_A</code> module.
--------------------	---

Parameters

<i>captureCompareRegister</i>	Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_CAPTURECOMPARE_REGISTER_0 ■ TIMER_A_CAPTURECOMPARE_REGISTER_1 ■ TIMER_A_CAPTURECOMPARE_REGISTER_2 ■ TIMER_A_CAPTURECOMPARE_REGISTER_3 ■ TIMER_A_CAPTURECOMPARE_REGISTER_4 ■ TIMER_A_CAPTURECOMPARE_REGISTER_5 ■ TIMER_A_CAPTURECOMPARE_REGISTER_6
-------------------------------	--

Returns

One of the following:

- **TIMER_A_OUTPUTMODE_OUTBITVALUE_HIGH**
- **TIMER_A_OUTPUTMODE_OUTBITVALUE_LOW**

References `Timer_A_getCaptureCompareCount()`.

Referenced by `Timer_A_getSynchronizedCaptureCompareInput()`.

Timer_A_getSynchronizedCaptureCompareInput()

```
uint8_t Timer_A_getSynchronizedCaptureCompareInput (
    uint16_t baseAddress,
    uint16_t captureCompareRegister,
    uint16_t synchronized )
```

Get synchronized capturecompare input.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
--------------------	--

Parameters

<i>captureCompareRegister</i>	Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_CAPTURECOMPARE_REGISTER_0 ■ TIMER_A_CAPTURECOMPARE_REGISTER_1 ■ TIMER_A_CAPTURECOMPARE_REGISTER_2 ■ TIMER_A_CAPTURECOMPARE_REGISTER_3 ■ TIMER_A_CAPTURECOMPARE_REGISTER_4 ■ TIMER_A_CAPTURECOMPARE_REGISTER_5 ■ TIMER_A_CAPTURECOMPARE_REGISTER_6
<i>synchronized</i>	Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_READ_SYNCHRONIZED_CAPTURECOMPARE_INPUT ■ TIMER_A_READ_CAPTURE_COMPARE_INPUT

Returns

One of the following:

- **TIMER_A_CAPTURECOMPARE_INPUT_HIGH**
- **TIMER_A_CAPTURECOMPARE_INPUT_LOW**

References `Timer_A_getOutputForOutputModeOutBitValue()`.

Referenced by `Timer_A_clear()`.

Timer_A_initCaptureMode()

```
void Timer_A_initCaptureMode (
    uint16_t baseAddress,
    Timer_A_initCaptureModeParam * param )
```

Initializes Capture Mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>param</i>	is the pointer to struct for capture mode initialization.

Modified bits of **TAxCCTLn** register.

Returns

None

References `Timer_A_initCaptureModeParam::captureInputSelect`,
`Timer_A_initCaptureModeParam::captureInterruptEnable`,
`Timer_A_initCaptureModeParam::captureMode`,

Timer_A_initCaptureModeParam::captureOutputMode,
 Timer_A_initCaptureModeParam::captureRegister, and
 Timer_A_initCaptureModeParam::synchronizeCaptureSource.

Timer_A_initCompareMode()

```
void Timer_A_initCompareMode (
    uint16_t baseAddress,
    Timer_A_initCompareModeParam * param )
```

Initializes Compare Mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>param</i>	is the pointer to struct for compare mode initialization.

Modified bits of **TAxCCRn** register and bits of **TAxCTLn** register.

Returns

None

References Timer_A_initCompareModeParam::compareInterruptEnable,
 Timer_A_initCompareModeParam::compareOutputMode,
 Timer_A_initCompareModeParam::compareRegister, and
 Timer_A_initCompareModeParam::compareValue.

Timer_A_initContinuousMode()

```
void Timer_A_initContinuousMode (
    uint16_t baseAddress,
    Timer_A_initContinuousModeParam * param )
```

Configures Timer_A in continuous mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>param</i>	is the pointer to struct for continuous mode initialization.

Modified bits of **TAxCTL** register.

Returns

None

References Timer_A_initContinuousModeParam::clockSource,
 Timer_A_initContinuousModeParam::clockSourceDivider,
 Timer_A_initContinuousModeParam::startTimer, Timer_A_initContinuousModeParam::timerClear,
 and Timer_A_initContinuousModeParam::timerInterruptEnable_TAIE.

Timer_A_initUpDownMode()

```
void Timer_A_initUpDownMode (
    uint16_t baseAddress,
    Timer_A_initUpDownModeParam * param )
```

Configures Timer_A in up down mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>param</i>	is the pointer to struct for up-down mode initialization.

Modified bits of **TAxCTL** register, bits of **TAxCCTL0** register and bits of **TAxCCR0** register.

Returns

None

References Timer_A_initUpDownModeParam::captureCompareInterruptEnable_CCR0_CCIE, Timer_A_initUpDownModeParam::clockSource, Timer_A_initUpDownModeParam::clockSourceDivider, Timer_A_initUpDownModeParam::startTimer, Timer_A_initUpDownModeParam::timerClear, Timer_A_initUpDownModeParam::timerInterruptEnable_TAIE, and Timer_A_initUpDownModeParam::timerPeriod.

Timer_A_initUpMode()

```
void Timer_A_initUpMode (
    uint16_t baseAddress,
    Timer_A_initUpModeParam * param )
```

Configures Timer_A in up mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>param</i>	is the pointer to struct for up mode initialization.

Modified bits of **TAxCTL** register, bits of **TAxCCTL0** register and bits of **TAxCCR0** register.

Returns

None

References Timer_A_initUpModeParam::captureCompareInterruptEnable_CCR0_CCIE, Timer_A_initUpModeParam::clockSource, Timer_A_initUpModeParam::clockSourceDivider, Timer_A_initUpModeParam::startTimer, Timer_A_initUpModeParam::timerClear, Timer_A_initUpModeParam::timerInterruptEnable_TAIE, and Timer_A_initUpModeParam::timerPeriod.

Timer_A_outputPWM()

```
void Timer_A_outputPWM (
    uint16_t baseAddress,
    Timer_A_outputPWMPParam * param )
```

Generate a PWM with timer running in up mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>param</i>	is the pointer to struct for PWM configuration.

Modified bits of **TAxCTL** register, bits of **TAxCCTL0** register, bits of **TAxCCR0** register and bits of **TAxCCTLn** register.

Returns

None

References Timer_A_outputPWMPParam::clockSource, Timer_A_outputPWMPParam::clockSourceDivider, Timer_A_outputPWMPParam::compareOutputMode, Timer_A_outputPWMPParam::compareRegister, Timer_A_outputPWMPParam::dutyCycle, and Timer_A_outputPWMPParam::timerPeriod.

Timer_A_setCompareValue()

```
void Timer_A_setCompareValue (
    uint16_t baseAddress,
    uint16_t compareRegister,
    uint16_t compareValue )
```

Sets the value of the capture-compare register.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>compareRegister</i>	selects the Capture register being used. Refer to datasheet to ensure the device has the capture compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_CAPTURECOMPARE_REGISTER_0 ■ TIMER_A_CAPTURECOMPARE_REGISTER_1 ■ TIMER_A_CAPTURECOMPARE_REGISTER_2 ■ TIMER_A_CAPTURECOMPARE_REGISTER_3 ■ TIMER_A_CAPTURECOMPARE_REGISTER_4 ■ TIMER_A_CAPTURECOMPARE_REGISTER_5 ■ TIMER_A_CAPTURECOMPARE_REGISTER_6
<i>compareValue</i>	is the count to be compared with in compare mode

Modified bits of **TAxCCRn** register.

Returns

None

Timer_A_setOutputForOutputModeOutBitValue()

```
void Timer_A_setOutputForOutputModeOutBitValue (
    uint16_t baseAddress,
    uint16_t captureCompareRegister,
    uint8_t outputModeOutBitValue )
```

Set output bit for output mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>captureCompareRegister</i>	Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_CAPTURECOMPARE_REGISTER_0 ■ TIMER_A_CAPTURECOMPARE_REGISTER_1 ■ TIMER_A_CAPTURECOMPARE_REGISTER_2 ■ TIMER_A_CAPTURECOMPARE_REGISTER_3 ■ TIMER_A_CAPTURECOMPARE_REGISTER_4 ■ TIMER_A_CAPTURECOMPARE_REGISTER_5 ■ TIMER_A_CAPTURECOMPARE_REGISTER_6
<i>outputModeOutBitValue</i>	is the value to be set for out bit Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_OUTPUTMODE_OUTBITVALUE_HIGH ■ TIMER_A_OUTPUTMODE_OUTBITVALUE_LOW

Modified bits of **TAxCTLn** register.

Returns

None

Referenced by Timer_A_getCaptureCompareCount().

Timer_A_setOutputMode()

```
void Timer_A_setOutputMode (
    uint16_t baseAddress,
    uint16_t compareRegister,
    uint16_t compareOutputMode )
```

Sets the output mode.

Sets the output mode for the timer even the timer is already running.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
<i>compareRegister</i>	selects the compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_CAPTURECOMPARE_REGISTER_0 ■ TIMER_A_CAPTURECOMPARE_REGISTER_1 ■ TIMER_A_CAPTURECOMPARE_REGISTER_2 ■ TIMER_A_CAPTURECOMPARE_REGISTER_3 ■ TIMER_A_CAPTURECOMPARE_REGISTER_4 ■ TIMER_A_CAPTURECOMPARE_REGISTER_5 ■ TIMER_A_CAPTURECOMPARE_REGISTER_6
<i>compareOutputMode</i>	specifies the output mode. Valid values are: <ul style="list-style-type: none"> ■ TIMER_A_OUTPUTMODE_OUTBITVALUE [Default] ■ TIMER_A_OUTPUTMODE_SET ■ TIMER_A_OUTPUTMODE_TOGGLE_RESET ■ TIMER_A_OUTPUTMODE_SET_RESET ■ TIMER_A_OUTPUTMODE_TOGGLE ■ TIMER_A_OUTPUTMODE_RESET ■ TIMER_A_OUTPUTMODE_TOGGLE_SET ■ TIMER_A_OUTPUTMODE_RESET_SET

Modified bits are **OUTMOD** of **TAXCCTLn** register.

Returns

None

Timer_A_startCounter()

```
void Timer_A_startCounter (
    uint16_t baseAddress,
    uint16_t timerMode )
```

Starts Timer_A counter.

This function assumes that the timer has been previously configured using `Timer_A_initContinuousMode`, `Timer_A_initUpMode` or `Timer_A_initUpDownMode`.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
--------------------	--

Parameters

<i>timerMode</i>	<p>mode to put the timer in Valid values are:</p> <ul style="list-style-type: none"> ■ TIMER_A_STOP_MODE ■ TIMER_A_UP_MODE ■ TIMER_A_CONTINUOUS_MODE [Default] ■ TIMER_A_UPDOWN_MODE
------------------	--

Modified bits of **TAxCTL** register.

Returns

None

Timer_A_stop()

```
void Timer_A_stop (
    uint16_t baseAddress )
```

Stops the timer.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_A module.
--------------------	---

Modified bits of **TAxCTL** register.

Returns

None

25.3 Programming Example

The following example shows some **TIMER_A** operations using the APIs

```
{ //Start TIMER_A
  Timer_A_initContinuousModeParam initContParam = {0};
  initContParam.clockSource = TIMER_A_CLOCKSOURCE_SMCLK;
  initContParam.clockSourceDivider = TIMER_A_CLOCKSOURCE_DIVIDER_1;
  initContParam.timerInterruptEnable_TAIE = TIMER_A_TAIE_INTERRUPT_DISABLE;
  initContParam.timerClear = TIMER_A_DO_CLEAR;
  initContParam.startTimer = false;
  Timer_A_initContinuousMode(TIMER_A1_BASE, &initContParam);

  //Initiaze compare mode
  Timer_A_clearCaptureCompareInterrupt(TIMER_A1_BASE,
    TIMER_A_CAPTURECOMPARE_REGISTER_0
  );

  Timer_A_initCompareModeParam initCompParam = {0};
  initCompParam.compareRegister = TIMER_A_CAPTURECOMPARE_REGISTER_0;
  initCompParam.compareInterruptEnable = TIMER_A_CAPTURECOMPARE_INTERRUPT_ENABLE;
```

```
initCompParam.compareOutputMode = TIMER_A_OUTPUTMODE_OUTBITVALUE;
initCompParam.compareValue = COMPARE_VALUE;
Timer_A_initCompareMode(TIMER_A1_BASE, &initCompParam);

Timer_A_startCounter( TIMER_A1_BASE,
                      TIMER_A_CONTINUOUS_MODE
                      );

//Enter LPM0
__bis_SR_register(LPM0_bits);

//For debugger
__no_operation();
}
```

26 16-Bit Timer_B (TIMER_B)

Introduction	262
API Functions	263
Programming Example	281

26.1 Introduction

TIMER_B is a 16-bit timer/counter with multiple capture/compare registers. TIMER_B can support multiple capture/compares, PWM outputs, and interval timing. TIMER_B also has extensive interrupt capabilities. Interrupts may be generated from the counter on overflow conditions and from each of the capture/compare registers.

This peripheral API handles Timer B hardware peripheral.

TIMER_B features include:

- Asynchronous 16-bit timer/counter with four operating modes
- Selectable and configurable clock source
- Up to seven configurable capture/compare registers
- Configurable outputs with pulse width modulation (PWM) capability
- Asynchronous input and output latching
- Interrupt vector register for fast decoding of all Timer_B interrupts

Differences From Timer_A Timer_B is identical to Timer_A with the following exceptions:

- The length of Timer_B is programmable to be 8, 10, 12, or 16 bits
- Timer_B TBxCCRn registers are double-buffered and can be grouped
- All Timer_B outputs can be put into a high-impedance state
- The SCCI bit function is not implemented in Timer_B

TIMER_B can operate in 3 modes

- Continuous Mode
- Up Mode
- Down Mode

TIMER_B Interrupts may be generated on counter overflow conditions and during capture compare events.

The TIMER_B may also be used to generate PWM outputs. PWM outputs can be generated by initializing the compare mode with `TIMER_B_initCompare()` and the necessary parameters. The PWM may be customized by selecting a desired timer mode (continuous/up/upDown), duty cycle, output mode, timer period etc. The library also provides a simpler way to generate PWM using `TIMER_B_generatePWM()` API. However the level of customization and the kinds of PWM generated are limited in this API. Depending on how complex the PWM is and what level of customization is required, the user can use `TIMER_B_generatePWM()` or a combination of `Timer_initCompare()` and timer start APIs

The TIMER_B API provides a set of functions for dealing with the TIMER_B module. Functions are provided to configure and control the timer, along with functions to modify timer/counter values, and to manage interrupt handling for the timer.

Control is also provided over interrupt sources and events. Interrupts can be generated to indicate that an event has been captured.

26.2 API Functions

Functions

- void [Timer_B_startCounter](#) (uint16_t baseAddress, uint16_t timerMode)
Starts Timer_B counter.
- void [Timer_B_initContinuousMode](#) (uint16_t baseAddress, [Timer_B_initContinuousModeParam](#) *param)
Configures Timer_B in continuous mode.
- void [Timer_B_initUpMode](#) (uint16_t baseAddress, [Timer_B_initUpModeParam](#) *param)
Configures Timer_B in up mode.
- void [Timer_B_initUpDownMode](#) (uint16_t baseAddress, [Timer_B_initUpDownModeParam](#) *param)
Configures Timer_B in up down mode.
- void [Timer_B_initCaptureMode](#) (uint16_t baseAddress, [Timer_B_initCaptureModeParam](#) *param)
Initializes Capture Mode.
- void [Timer_B_initCompareMode](#) (uint16_t baseAddress, [Timer_B_initCompareModeParam](#) *param)
Initializes Compare Mode.
- void [Timer_B_enableInterrupt](#) (uint16_t baseAddress)
Enable Timer_B interrupt.
- void [Timer_B_disableInterrupt](#) (uint16_t baseAddress)
Disable Timer_B interrupt.
- uint32_t [Timer_B_getInterruptStatus](#) (uint16_t baseAddress)
Get Timer_B interrupt status.
- void [Timer_B_enableCaptureCompareInterrupt](#) (uint16_t baseAddress, uint16_t captureCompareRegister)
Enable capture compare interrupt.
- void [Timer_B_disableCaptureCompareInterrupt](#) (uint16_t baseAddress, uint16_t captureCompareRegister)
Disable capture compare interrupt.
- uint32_t [Timer_B_getCaptureCompareInterruptStatus](#) (uint16_t baseAddress, uint16_t captureCompareRegister, uint16_t mask)
Return capture compare interrupt status.
- void [Timer_B_clear](#) (uint16_t baseAddress)
Reset/Clear the Timer_B clock divider, count direction, count.
- uint8_t [Timer_B_getSynchronizedCaptureCompareInput](#) (uint16_t baseAddress, uint16_t captureCompareRegister, uint16_t synchronized)
Get synchronized capturecompare input.
- uint8_t [Timer_B_getOutputForOutputModeOutBitValue](#) (uint16_t baseAddress, uint16_t captureCompareRegister)
Get output bit for output mode.

- uint16_t [Timer_B_getCaptureCompareCount](#) (uint16_t baseAddress, uint16_t captureCompareRegister)
Get current capturecompare count.
- void [Timer_B_setOutputForOutputModeOutBitValue](#) (uint16_t baseAddress, uint16_t captureCompareRegister, uint16_t outputModeOutBitValue)
Set output bit for output mode.
- void [Timer_B_outputPWM](#) (uint16_t baseAddress, [Timer_B_outputPWMParam](#) *param)
Generate a PWM with Timer_B running in up mode.
- void [Timer_B_stop](#) (uint16_t baseAddress)
Stops the Timer_B.
- void [Timer_B_setCompareValue](#) (uint16_t baseAddress, uint16_t compareRegister, uint16_t compareValue)
Sets the value of the capture-compare register.
- void [Timer_B_clearTimerInterrupt](#) (uint16_t baseAddress)
Clears the Timer_B TBIFG interrupt flag.
- void [Timer_B_clearCaptureCompareInterrupt](#) (uint16_t baseAddress, uint16_t captureCompareRegister)
Clears the capture-compare interrupt flag.
- void [Timer_B_selectCounterLength](#) (uint16_t baseAddress, uint16_t counterLength)
Selects Timer_B counter length.
- void [Timer_B_selectLatchingGroup](#) (uint16_t baseAddress, uint16_t groupLatch)
Selects Timer_B Latching Group.
- void [Timer_B_initCompareLatchLoadEvent](#) (uint16_t baseAddress, uint16_t compareRegister, uint16_t compareLatchLoadEvent)
Selects Compare Latch Load Event.
- uint16_t [Timer_B_getCounterValue](#) (uint16_t baseAddress)
Reads the current timer count value.
- void [Timer_B_setOutputMode](#) (uint16_t baseAddress, uint16_t compareRegister, uint16_t compareOutputMode)
Sets the output mode.

26.2.1 Detailed Description

The TIMER_B API is broken into three groups of functions: those that deal with timer configuration and control, those that deal with timer contents, and those that deal with interrupt handling.

TIMER_B configuration and initialization is handled by

- [Timer_B_startCounter\(\)](#)
- [Timer_B_initUpMode\(\)](#)
- [Timer_B_initUpDownMode\(\)](#)
- [Timer_B_initContinuousMode\(\)](#)
- [Timer_B_initCapture\(\)](#)
- [Timer_B_initCompare\(\)](#)
- [Timer_B_clear\(\)](#)
- [Timer_B_stop\(\)](#)
- [Timer_B_initCompareLatchLoadEvent\(\)](#)
- [Timer_B_selectLatchingGroup\(\)](#)
- [Timer_B_selectCounterLength\(\)](#)

TIMER_B outputs are handled by

- `Timer_B_getSynchronizedCaptureCompareInput()`
- `Timer_B_getOutputForOutputModeOutBitValue()`
- `Timer_B_setOutputForOutputModeOutBitValue()`
- `Timer_B_generatePWM()`
- `Timer_B_getCaptureCompareCount()`
- `Timer_B_setCompareValue()`
- `Timer_B_getCounterValue()`

The interrupt handler for the TIMER_B interrupt is managed with

- `Timer_B_enableInterrupt()`
- `Timer_B_disableInterrupt()`
- `Timer_B_getInterruptStatus()`
- `Timer_B_enableCaptureCompareInterrupt()`
- `Timer_B_disableCaptureCompareInterrupt()`
- `Timer_B_getCaptureCompareInterruptStatus()`
- `Timer_B_clearCaptureCompareInterrupt()`
- `Timer_B_clearTimerInterrupt()`

26.2.2 Function Documentation

Timer_B_clear()

```
void Timer_B_clear (
    uint16_t baseAddress )
```

Reset/Clear the Timer_B clock divider, count direction, count.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
--------------------	--

Modified bits of **TBxCTL** register.

Returns

None

References `Timer_B_getSynchronizedCaptureCompareInput()`.

Timer_B_clearCaptureCompareInterrupt()

```
void Timer_B_clearCaptureCompareInterrupt (
    uint16_t baseAddress,
    uint16_t captureCompareRegister )
```

Clears the capture-compare interrupt flag.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>captureCompareRegister</i>	selects the capture compare register being used. Refer to datasheet to ensure the device has the capture compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6

Modified bits are **CCIFG** of **TBxCCTLn** register.

Returns

None

Timer_B_clearTimerInterrupt()

```
void Timer_B_clearTimerInterrupt (
    uint16_t baseAddress )
```

Clears the Timer_B TBIFG interrupt flag.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
--------------------	--

Modified bits are **TBIFG** of **TBxCTL** register.

Returns

None

Timer_B_disableCaptureCompareInterrupt()

```
void Timer_B_disableCaptureCompareInterrupt (
    uint16_t baseAddress,
    uint16_t captureCompareRegister )
```

Disable capture compare interrupt.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>captureCompareRegister</i>	selects the capture compare register being used. Refer to datasheet to ensure the device has the capture compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6

Modified bits of **TBxCCTLn** register.

Returns

None

Timer_B_disableInterrupt()

```
void Timer_B_disableInterrupt (
    uint16_t baseAddress )
```

Disable Timer_B interrupt.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
--------------------	--

Modified bits of **TBxCTL** register.

Returns

None

Timer_B_enableCaptureCompareInterrupt()

```
void Timer_B_enableCaptureCompareInterrupt (
    uint16_t baseAddress,
    uint16_t captureCompareRegister )
```

Enable capture compare interrupt.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>captureCompareRegister</i>	selects the capture compare register being used. Refer to datasheet to ensure the device has the capture compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6

Modified bits of **TBxCCTLn** register.

Returns

None

Timer_B_enableInterrupt()

```
void Timer_B_enableInterrupt (
    uint16_t baseAddress )
```

Enable Timer_B interrupt.

Enables Timer_B interrupt. Does not clear interrupt flags.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
--------------------	--

Modified bits of **TBxCTL** register.

Returns

None

Timer_B_getCaptureCompareCount()

```
uint16_t Timer_B_getCaptureCompareCount (
    uint16_t baseAddress,
    uint16_t captureCompareRegister )
```

Get current capturecompare count.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>captureCompareRegister</i>	selects the capture compare register being used. Refer to datasheet to ensure the device has the capture compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6

Returns

Current count as uint16_t

References Timer_B_setOutputForOutputModeOutBitValue().

Referenced by Timer_B_getOutputForOutputModeOutBitValue().

Timer_B_getCaptureCompareInterruptStatus()

```
uint32_t Timer_B_getCaptureCompareInterruptStatus (
    uint16_t baseAddress,
    uint16_t captureCompareRegister,
    uint16_t mask )
```

Return capture compare interrupt status.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>captureCompareRegister</i>	selects the capture compare register being used. Refer to datasheet to ensure the device has the capture compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6

Parameters

<i>mask</i>	is the mask for the interrupt status Mask value is the logical OR of any of the following: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURE_OVERFLOW ■ TIMER_B_CAPTURECOMPARE_INTERRUPT_FLAG
-------------	--

Returns

Logical OR of any of the following:

- **TIMER_B_CAPTURE_OVERFLOW**
 - **TIMER_B_CAPTURECOMPARE_INTERRUPT_FLAG**
- indicating the status of the masked interrupts

Timer_B_getCounterValue()

```
uint16_t Timer_B_getCounterValue (
    uint16_t baseAddress )
```

Reads the current timer count value.

Reads the current count value of the timer. There is a majority vote system in place to confirm an accurate value is returned. The `TIMER_B_THRESHOLD` #define in the associated header file can be modified so that the votes must be closer together for a consensus to occur.

Parameters

<i>baseAddress</i>	is the base address of the Timer module.
--------------------	--

Returns

Majority vote of timer count value

Timer_B_getInterruptStatus()

```
uint32_t Timer_B_getInterruptStatus (
    uint16_t baseAddress )
```

Get Timer_B interrupt status.

Parameters

<i>baseAddress</i>	is the base address of the <code>TIMER_B</code> module.
--------------------	---

Returns

One of the following:

- **TIMER_B_INTERRUPT_NOT_PENDING**
- **TIMER_B_INTERRUPT_PENDING**
indicating the status of the Timer_B interrupt

Timer_B_getOutputForOutputModeOutBitValue()

```
uint8_t Timer_B_getOutputForOutputModeOutBitValue (
    uint16_t baseAddress,
    uint16_t captureCompareRegister )
```

Get output bit for output mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>captureCompareRegister</i>	selects the capture compare register being used. Refer to datasheet to ensure the device has the capture compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6

Returns

One of the following:

- **TIMER_B_OUTPUTMODE_OUTBITVALUE_HIGH**
- **TIMER_B_OUTPUTMODE_OUTBITVALUE_LOW**

References Timer_B_getCaptureCompareCount().

Referenced by Timer_B_getSynchronizedCaptureCompareInput().

Timer_B_getSynchronizedCaptureCompareInput()

```
uint8_t Timer_B_getSynchronizedCaptureCompareInput (
    uint16_t baseAddress,
    uint16_t captureCompareRegister,
    uint16_t synchronized )
```

Get synchronized capturecompare input.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>captureCompareRegister</i>	selects the capture compare register being used. Refer to datasheet to ensure the device has the capture compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6
<i>synchronized</i>	selects the type of capture compare input Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_READ_SYNCHRONIZED_CAPTURECOMPARE_INPUT ■ TIMER_B_READ_CAPTURE_COMPARE_INPUT

Returns

One of the following:

- **TIMER_B_CAPTURECOMPARE_INPUT_HIGH**
- **TIMER_B_CAPTURECOMPARE_INPUT_LOW**

References Timer_B_getOutputForOutputModeOutBitValue().

Referenced by Timer_B_clear().

Timer_B_initCaptureMode()

```
void Timer_B_initCaptureMode (
    uint16_t baseAddress,
    Timer_B_initCaptureModeParam * param )
```

Initializes Capture Mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>param</i>	is the pointer to struct for capture mode initialization.

Modified bits of **TBxCCTLn** register.

Returns

None

References Timer_B_initCaptureModeParam::captureInputSelect, Timer_B_initCaptureModeParam::captureInterruptEnable, Timer_B_initCaptureModeParam::captureMode, Timer_B_initCaptureModeParam::captureOutputMode, Timer_B_initCaptureModeParam::captureRegister, and Timer_B_initCaptureModeParam::synchronizeCaptureSource.

Timer_B_initCompareLatchLoadEvent()

```
void Timer_B_initCompareLatchLoadEvent (
    uint16_t baseAddress,
    uint16_t compareRegister,
    uint16_t compareLatchLoadEvent )
```

Selects Compare Latch Load Event.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>compareRegister</i>	<p>selects the compare register being used. Refer to datasheet to ensure the device has the compare register being used. Valid values are:</p> <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6
<i>compareLatchLoadEvent</i>	<p>selects the latch load event Valid values are:</p> <ul style="list-style-type: none"> ■ TIMER_B_LATCH_ON_WRITE_TO_TBxCCRn_COMPARE_REGISTER [Default] ■ TIMER_B_LATCH_WHEN_COUNTER_COUNTS_TO_0_IN_UP_OR_CONT_MODE ■ TIMER_B_LATCH_WHEN_COUNTER_COUNTS_TO_0_IN_UPDOWN_MODE ■ TIMER_B_LATCH_WHEN_COUNTER_COUNTS_TO_CURRENT_COMPARE_LATCH_VALUE

Modified bits are **CLLD** of **TBxCCTLn** register.

Returns

None

Timer_B_initCompareMode()

```
void Timer_B_initCompareMode (
    uint16_t baseAddress,
    Timer_B_initCompareModeParam * param )
```

Initializes Compare Mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>param</i>	is the pointer to struct for compare mode initialization.

Modified bits of **TBxCCTLn** register and bits of **TBxCCRn** register.**Returns**

None

References Timer_B_initCompareModeParam::compareInterruptEnable,
 Timer_B_initCompareModeParam::compareOutputMode,
 Timer_B_initCompareModeParam::compareRegister, and
 Timer_B_initCompareModeParam::compareValue.

Timer_B_initContinuousMode()

```
void Timer_B_initContinuousMode (
    uint16_t baseAddress,
    Timer_B_initContinuousModeParam * param )
```

Configures Timer_B in continuous mode.

This API does not start the timer. Timer needs to be started when required using the
 Timer_B_startCounter API.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>param</i>	is the pointer to struct for continuous mode initialization.

Modified bits of **TBxCTL** register.**Returns**

None

References Timer_B_initContinuousModeParam::clockSource,
 Timer_B_initContinuousModeParam::clockSourceDivider,

Timer_B_initContinuousModeParam::startTimer, Timer_B_initContinuousModeParam::timerClear, and Timer_B_initContinuousModeParam::timerInterruptEnable_TBIE.

Timer_B_initUpDownMode()

```
void Timer_B_initUpDownMode (
    uint16_t baseAddress,
    Timer_B_initUpDownModeParam * param )
```

Configures Timer_B in up down mode.

This API does not start the timer. Timer needs to be started when required using the Timer_B_startCounter API.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>param</i>	is the pointer to struct for up-down mode initialization.

Modified bits of **TBxCTL** register, bits of **TBxCCTL0** register and bits of **TBxCCR0** register.

Returns

None

References Timer_B_initUpDownModeParam::captureCompareInterruptEnable_CCR0_CCIE, Timer_B_initUpDownModeParam::clockSource, Timer_B_initUpDownModeParam::clockSourceDivider, Timer_B_initUpDownModeParam::startTimer, Timer_B_initUpDownModeParam::timerClear, Timer_B_initUpDownModeParam::timerInterruptEnable_TBIE, and Timer_B_initUpDownModeParam::timerPeriod.

Timer_B_initUpMode()

```
void Timer_B_initUpMode (
    uint16_t baseAddress,
    Timer_B_initUpModeParam * param )
```

Configures Timer_B in up mode.

This API does not start the timer. Timer needs to be started when required using the Timer_B_startCounter API.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>param</i>	is the pointer to struct for up mode initialization.

Modified bits of **TBxCTL** register, bits of **TBxCCTL0** register and bits of **TBxCCR0** register.

Returns

None

References Timer_B_initUpModeParam::captureCompareInterruptEnable_CCR0_CCIE, Timer_B_initUpModeParam::clockSource, Timer_B_initUpModeParam::clockSourceDivider, Timer_B_initUpModeParam::startTimer, Timer_B_initUpModeParam::timerClear, Timer_B_initUpModeParam::timerInterruptEnable_TBIE, and Timer_B_initUpModeParam::timerPeriod.

Timer_B_outputPWM()

```
void Timer_B_outputPWM (
    uint16_t baseAddress,
    Timer_B_outputPWMPParam * param )
```

Generate a PWM with Timer_B running in up mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>param</i>	is the pointer to struct for PWM configuration.

Modified bits of **TBxCCTLn** register, bits of **TBxCTL** register, bits of **TBxCCTL0** register and bits of **TBxCCR0** register.

Returns

None

References Timer_B_outputPWMPParam::clockSource, Timer_B_outputPWMPParam::clockSourceDivider, Timer_B_outputPWMPParam::compareOutputMode, Timer_B_outputPWMPParam::compareRegister, Timer_B_outputPWMPParam::dutyCycle, and Timer_B_outputPWMPParam::timerPeriod.

Timer_B_selectCounterLength()

```
void Timer_B_selectCounterLength (
    uint16_t baseAddress,
    uint16_t counterLength )
```

Selects Timer_B counter length.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
--------------------	--

Parameters

<i>counterLength</i>	selects the value of counter length. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_COUNTER_16BIT [Default] ■ TIMER_B_COUNTER_12BIT ■ TIMER_B_COUNTER_10BIT ■ TIMER_B_COUNTER_8BIT
----------------------	--

Modified bits are **CNTL** of **TBxCTL** register.

Returns

None

Timer_B_selectLatchingGroup()

```
void Timer_B_selectLatchingGroup (
    uint16_t baseAddress,
    uint16_t groupLatch )
```

Selects Timer_B Latching Group.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>groupLatch</i>	selects the latching group. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_GROUP_NONE [Default] ■ TIMER_B_GROUP_CL12_CL23_CL56 ■ TIMER_B_GROUP_CL123_CL456 ■ TIMER_B_GROUP_ALL

Modified bits are **TBCLGRP** of **TBxCTL** register.

Returns

None

Timer_B_setCompareValue()

```
void Timer_B_setCompareValue (
    uint16_t baseAddress,
    uint16_t compareRegister,
    uint16_t compareValue )
```

Sets the value of the capture-compare register.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>compareRegister</i>	selects the compare register being used. Refer to datasheet to ensure the device has the compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6
<i>compareValue</i>	is the count to be compared with in compare mode

Modified bits of **TBxCCRn** register.

Returns

None

Timer_B_setOutputForOutputModeOutBitValue()

```
void Timer_B_setOutputForOutputModeOutBitValue (
    uint16_t baseAddress,
    uint16_t captureCompareRegister,
    uint16_t outputModeOutBitValue )
```

Set output bit for output mode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>captureCompareRegister</i>	selects the capture compare register being used. Refer to datasheet to ensure the device has the capture compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6

Parameters

<i>outputModeOutBitValue</i>	the value to be set for out bit Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_OUTPUTMODE_OUTBITVALUE_HIGH ■ TIMER_B_OUTPUTMODE_OUTBITVALUE_LOW
------------------------------	---

Modified bits of **TBxCCTLn** register.

Returns

None

Referenced by Timer_B_getCaptureCompareCount().

Timer_B_setOutputMode()

```
void Timer_B_setOutputMode (
    uint16_t baseAddress,
    uint16_t compareRegister,
    uint16_t compareOutputMode )
```

Sets the output mode.

Sets the output mode for the timer even the timer is already running.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>compareRegister</i>	selects the compare register being used. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_CAPTURECOMPARE_REGISTER_0 ■ TIMER_B_CAPTURECOMPARE_REGISTER_1 ■ TIMER_B_CAPTURECOMPARE_REGISTER_2 ■ TIMER_B_CAPTURECOMPARE_REGISTER_3 ■ TIMER_B_CAPTURECOMPARE_REGISTER_4 ■ TIMER_B_CAPTURECOMPARE_REGISTER_5 ■ TIMER_B_CAPTURECOMPARE_REGISTER_6
<i>compareOutputMode</i>	specifies the output mode. Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_OUTPUTMODE_OUTBITVALUE [Default] ■ TIMER_B_OUTPUTMODE_SET ■ TIMER_B_OUTPUTMODE_TOGGLE_RESET ■ TIMER_B_OUTPUTMODE_SET_RESET ■ TIMER_B_OUTPUTMODE_TOGGLE ■ TIMER_B_OUTPUTMODE_RESET ■ TIMER_B_OUTPUTMODE_TOGGLE_SET ■ TIMER_B_OUTPUTMODE_RESET_SET

Modified bits are **OUTMOD** of **TBxCCTLn** register.

Returns

None

Timer_B_startCounter()

```
void Timer_B_startCounter (
    uint16_t baseAddress,
    uint16_t timerMode )
```

Starts Timer_B counter.

This function assumes that the timer has been previously configured using Timer_B_initContinuousMode, Timer_B_initUpMode or Timer_B_initUpDownMode.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
<i>timerMode</i>	selects the mode of the timer Valid values are: <ul style="list-style-type: none"> ■ TIMER_B_STOP_MODE ■ TIMER_B_UP_MODE ■ TIMER_B_CONTINUOUS_MODE [Default] ■ TIMER_B_UPDOWN_MODE

Modified bits of **TBxCTL** register.

Returns

None

Timer_B_stop()

```
void Timer_B_stop (
    uint16_t baseAddress )
```

Stops the Timer_B.

Parameters

<i>baseAddress</i>	is the base address of the TIMER_B module.
--------------------	--

Modified bits of **TBxCTL** register.

Returns

None

26.3 Programming Example

The following example shows some TIMER_B operations using the APIs

```
{ //Start timer in continuous mode sourced by SMCLK
  Timer_B_initContinuousModeParam initContParam = {0};
  initContParam.clockSource = TIMER_B_CLOCKSOURCE_SMCLK;
  initContParam.clockSourceDivider = TIMER_B_CLOCKSOURCE_DIVIDER_1;
  initContParam.timerInterruptEnable_TBIE = TIMER_B_TBIE_INTERRUPT_DISABLE;
  initContParam.timerClear = TIMER_B_DO_CLEAR;
  initContParam.startTimer = false;
  Timer_B_initContinuousMode(TIMER_B0_BASE, &initContParam);

  //Initiaze compare mode
  Timer_B_clearCaptureCompareInterrupt(TIMER_B0_BASE,
    TIMER_B_CAPTURECOMPARE_REGISTER_0);

  Timer_B_initCompareModeParam initCompParam = {0};
  initCompParam.compareRegister = TIMER_B_CAPTURECOMPARE_REGISTER_0;
  initCompParam.compareInterruptEnable = TIMER_B_CAPTURECOMPARE_INTERRUPT_ENABLE;
  initCompParam.compareOutputMode = TIMER_B_OUTPUTMODE_OUTBITVALUE;
  initCompParam.compareValue = COMPARE_VALUE;
  Timer_B_initCompareMode(TIMER_B0_BASE, &initCompParam);

  Timer_B_startCounter( TIMER_B0_BASE,
    TIMER_B_CONTINUOUS_MODE
  );
}
```

27 Tag Length Value

Introduction	282
API Functions	282
Programming Example	289

27.1 Introduction

The TLV structure is a table stored in flash memory that contains device-specific information. This table is read-only and is write-protected. It contains important information for using and calibrating the device. A list of the contents of the TLV is available in the device-specific data sheet (in the Device Descriptors section), and an explanation on its functionality is available in the MSP430x5xx/MSP430x6xx Family User's Guide

27.2 API Functions

Functions

- void [TLV_getInfo](#) (uint8_t tag, uint8_t instance, uint8_t *length, uint16_t **data_address)
Gets TLV Info.
- uint16_t [TLV_getDeviceType](#) ()
Retrieves the unique device ID from the TLV structure.
- uint16_t [TLV_getMemory](#) (uint8_t instance)
Gets memory information.
- uint16_t [TLV_getPeripheral](#) (uint8_t tag, uint8_t instance)
Gets peripheral information from the TLV.
- uint8_t [TLV_getInterrupt](#) (uint8_t tag)
Get interrupt information from the TLV.

27.2.1 Detailed Description

The APIs that help in querying the information in the TLV structure are listed

- [TLV_getInfo\(\)](#) This function retrieves the value of a tag and the length of the tag.
- [TLV_getDeviceType\(\)](#) This function retrieves the unique device ID from the TLV structure.
- [TLV_getMemory\(\)](#) The returned value is zero if the end of the memory list is reached.
- [TLV_getPeripheral\(\)](#) The returned value is zero if the specified tag value (peripheral) is not available in the device.
- [TLV_getInterrupt\(\)](#) The returned value is zero if the specified interrupt vector is not defined.

27.2.2 Function Documentation

TLV_getDeviceType()

```
uint16_t TLV_getDeviceType (
    void )
```

Retrieves the unique device ID from the TLV structure.

Returns

The device ID is returned as type uint16_t.

TLV_getInfo()

```
void TLV_getInfo (
    uint8_t tag,
    uint8_t instance,
    uint8_t * length,
    uint16_t ** data_address )
```

Gets TLV Info.

The TLV structure uses a tag or base address to identify segments of the table where information is stored. Some examples of TLV tags are Peripheral Descriptor, Interrupts, Info Block and Die Record. This function retrieves the value of a tag and the length of the tag.

Parameters

<i>tag</i>	<p>represents the tag for which the information needs to be retrieved. Valid values are:</p> <ul style="list-style-type: none"> ■ TLV_TAG_LD TAG ■ TLV_TAG_PD TAG ■ TLV_TAG_Reserved3 ■ TLV_TAG_Reserved4 ■ TLV_TAG_BLANK ■ TLV_TAG_Reserved6 ■ TLV_TAG_Reserved7 ■ TLV_TAG_TAGEND ■ TLV_TAG_TAGEXT ■ TLV_TAG_TIMER_D_CAL ■ TLV_DEVICE_ID_0 ■ TLV_DEVICE_ID_1 ■ TLV_TAG_DIERECORD ■ TLV_TAG_ADCCAL ■ TLV_TAG_ADC12CAL ■ TLV_TAG_ADC10CAL ■ TLV_TAG_REFCAL ■ TLV_TAG_CTSD16CAL
<i>instance</i>	In some cases a specific tag may have more than one instance. For example there may be multiple instances of timer calibration data present under a single Timer Cal tag. This variable specifies the instance for which information is to be retrieved (0, 1, etc.). When only one instance exists; 0 is passed.
<i>length</i>	Acts as a return through indirect reference. The function retrieves the value of the TLV tag length. This value is pointed to by *length and can be used by the application level once the function is called. If the specified tag is not found then the pointer is null 0.
<i>data_address</i>	acts as a return through indirect reference. Once the function is called data_address points to the pointer that holds the value retrieved from the specified TLV tag. If the specified tag is not found then the pointer is null 0.

Returns

None

Referenced by TLV_getInterrupt(), TLV_getMemory(), and TLV_getPeripheral().

TLV_getInterrupt()

```
uint8_t TLV_getInterrupt (
```

```
uint8_t tag )
```

Get interrupt information from the TLV.

This function is used to retrieve information on available interrupt vectors. It allows the user to check if a specific interrupt vector is defined in a given device.

Parameters

<i>tag</i>	represents the tag for the interrupt vector. Interrupt vector tags number from 0 to N depending on the number of available interrupts. Refer to the device datasheet for a list of available interrupts.
------------	--

Returns

The returned value is zero if the specified interrupt vector is not defined.

References TLV_getInfo(), and TLV_getMemory().

TLV_getMemory()

```
uint16_t TLV_getMemory (
    uint8_t instance )
```

Gets memory information.

The Peripheral Descriptor tag is split into two portions a list of the available flash memory blocks followed by a list of available peripherals. This function is used to parse through the first portion and calculate the total flash memory available in a device. The typical usage is to call the TLV_getMemory which returns a non-zero value until the entire memory list has been parsed. When a zero is returned, it indicates that all the memory blocks have been counted and the next address holds the beginning of the device peripheral list.

Parameters

<i>instance</i>	In some cases a specific tag may have more than one instance. This variable specifies the instance for which information is to be retrieved (0, 1 etc). When only one instance exists; 0 is passed.
-----------------	---

Returns

The returned value is zero if the end of the memory list is reached.

References TLV_getInfo().

Referenced by TLV_getInterrupt(), and TLV_getPeripheral().

TLV_getPeripheral()

```
uint16_t TLV_getPeripheral (
    uint8_t tag,
    uint8_t instance )
```

Gets peripheral information from the TLV.

The Peripheral Descriptor tag is split into two portions a list of the available flash memory blocks followed by a list of available peripherals. This function is used to parse through the second portion and can be used to check if a specific peripheral is present in a device. The function calls [TLV_getPeripheral\(\)](#) recursively until the end of the memory list and consequently the beginning of the peripheral list is reached. <

Parameters

Parameters

<i>tag</i>	<p>represents represents the tag for a specific peripheral for which the information needs to be retrieved. In the header file tlv. h specific peripheral tags are pre-defined, for example USCIA_B and TA0 are defined as TLV_PID_USCI_AB and TLV_PID_TA2 respectively. Valid values are:</p> <ul style="list-style-type: none"> ■ TLV_PID_NO_MODULE - No Module ■ TLV_PID_PORTMAPPING - Port Mapping ■ TLV_PID_MSP430CPUXV2 - MSP430CPUXV2 ■ TLV_PID_JTAG - JTAG ■ TLV_PID_SBW - SBW ■ TLV_PID_EEM_XS - EEM X-Small ■ TLV_PID_EEM_S - EEM Small ■ TLV_PID_EEM_M - EEM Medium ■ TLV_PID_EEM_L - EEM Large ■ TLV_PID_PMM - PMM ■ TLV_PID_PMM_FR - PMM FRAM ■ TLV_PID_FCTL - Flash ■ TLV_PID_CRC16 - CRC16 ■ TLV_PID_CRC16_RB - CRC16 Reverse ■ TLV_PID_WDT_A - WDT_A ■ TLV_PID_SFR - SFR ■ TLV_PID_SYS - SYS ■ TLV_PID_RAMCTL - RAMCTL ■ TLV_PID_DMA_1 - DMA 1 ■ TLV_PID_DMA_3 - DMA 3 ■ TLV_PID_UCS - UCS ■ TLV_PID_DMA_6 - DMA 6 ■ TLV_PID_DMA_2 - DMA 2 ■ TLV_PID_PORT1_2 - Port 1 + 2 / A ■ TLV_PID_PORT3_4 - Port 3 + 4 / B ■ TLV_PID_PORT5_6 - Port 5 + 6 / C ■ TLV_PID_PORT7_8 - Port 7 + 8 / D ■ TLV_PID_PORT9_10 - Port 9 + 10 / E ■ TLV_PID_PORT11_12 - Port 11 + 12 / F ■ TLV_PID_PORTU - Port U ■ TLV_PID_PORTJ - Port J ■ TLV_PID_TA2 - Timer A2 ■ TLV_PID_TA3 - Timer A1 ■ TLV_PID_TA5 - Timer A5 ■ TLV_PID_TA7 - Timer A7 ■ TLV_PID_TB3 - Timer B3 ■ TLV_PID_TB5 - Timer B5 ■ TLV_PID_TB7 - Timer B7 ■ TLV_PID_RTC - RTC
------------	---

Parameters

<i>instance</i>	In some cases a specific tag may have more than one instance. For example a device may have more than a single USCI module, each of which is defined by an instance number 0, 1, 2, etc. When only one instance exists; 0 is passed.
-----------------	--

Returns

The returned value is zero if the specified tag value (peripheral) is not available in the device.

References TLV_getInfo(), and TLV_getMemory().

27.3 Programming Example

The following example shows some tlv operations using the APIs

```
struct s_TLV_Die_Record * pDIEREC;  
unsigned char bDieRecord_bytes;  
  
TLV_getInfo(TLV_TAG_DIERECORD,  
            0,  
            &bDieRecord_bytes,  
            (unsigned int **)&pDIEREC  
            );
```

28 WatchDog Timer (WDT_A)

Introduction	290
API Functions	290
Programming Example	294

28.1 Introduction

The Watchdog Timer (WDT_A) API provides a set of functions for using the MSP430Ware WDT_A modules. Functions are provided to initialize the Watchdog in either timer interval mode, or watchdog mode, with selectable clock sources and dividers to define the timer interval.

The WDT_A module can generate only 1 kind of interrupt in timer interval mode. If in watchdog mode, then the WDT_A module will assert a reset once the timer has finished.

28.2 API Functions

Functions

- void [WDT_A_hold](#) (uint16_t baseAddress)
Holds the Watchdog Timer.
- void [WDT_A_start](#) (uint16_t baseAddress)
Starts the Watchdog Timer.
- void [WDT_A_resetTimer](#) (uint16_t baseAddress)
Resets the timer counter of the Watchdog Timer.
- void [WDT_A_initWatchdogTimer](#) (uint16_t baseAddress, uint8_t clockSelect, uint8_t clockDivider)
Sets the clock source for the Watchdog Timer in watchdog mode.
- void [WDT_A_initIntervalTimer](#) (uint16_t baseAddress, uint8_t clockSelect, uint8_t clockDivider)
Sets the clock source for the Watchdog Timer in timer interval mode.

28.2.1 Detailed Description

The WDT_A API is one group that controls the WDT_A module.

- [WDT_A_hold\(\)](#)
- [WDT_A_start\(\)](#)
- [WDT_A_clearCounter\(\)](#)
- [WDT_A_initWatchdogTimer\(\)](#)
- [WDT_A_initIntervalTimer\(\)](#)

28.2.2 Function Documentation

WDT_A_hold()

```
void WDT_A_hold (
    uint16_t baseAddress )
```

Holds the Watchdog Timer.

This function stops the watchdog timer from running, that way no interrupt or PUC is asserted.

Parameters

<i>baseAddress</i>	is the base address of the WDT_A module.
--------------------	--

Returns

None

WDT_A_initIntervalTimer()

```
void WDT_A_initIntervalTimer (
    uint16_t baseAddress,
    uint8_t clockSelect,
    uint8_t clockDivider )
```

Sets the clock source for the Watchdog Timer in timer interval mode.

This function sets the watchdog timer as timer interval mode, which will assert an interrupt without causing a PUC.

Parameters

<i>baseAddress</i>	is the base address of the WDT_A module.
<i>clockSelect</i>	is the clock source that the watchdog timer will use. Valid values are: <ul style="list-style-type: none"> ■ WDT_A_CLOCKSOURCE_SMCLK [Default] ■ WDT_A_CLOCKSOURCE_ACLK ■ WDT_A_CLOCKSOURCE_VLOCLK ■ WDT_A_CLOCKSOURCE_XCLK Modified bits are WDTSEL of WDTCTL register.

Parameters

<i>clockDivider</i>	<p>is the divider of the clock source, in turn setting the watchdog timer interval. Valid values are:</p> <ul style="list-style-type: none"> ■ WDT_A_CLOCKDIVIDER_2G ■ WDT_A_CLOCKDIVIDER_128M ■ WDT_A_CLOCKDIVIDER_8192K ■ WDT_A_CLOCKDIVIDER_512K ■ WDT_A_CLOCKDIVIDER_32K [Default] ■ WDT_A_CLOCKDIVIDER_8192 ■ WDT_A_CLOCKDIVIDER_512 ■ WDT_A_CLOCKDIVIDER_64 <p>Modified bits are WDTIS and WDTHOLD of WDTCTL register.</p>
---------------------	---

Returns

None

WDT_A_initWatchdogTimer()

```
void WDT_A_initWatchdogTimer (
    uint16_t baseAddress,
    uint8_t clockSelect,
    uint8_t clockDivider )
```

Sets the clock source for the Watchdog Timer in watchdog mode.

This function sets the watchdog timer in watchdog mode, which will cause a PUC when the timer overflows. When in the mode, a PUC can be avoided with a call to [WDT_A_resetTimer\(\)](#) before the timer runs out.

Parameters

<i>baseAddress</i>	is the base address of the WDT_A module.
<i>clockSelect</i>	<p>is the clock source that the watchdog timer will use. Valid values are:</p> <ul style="list-style-type: none"> ■ WDT_A_CLOCKSOURCE_SMCLK [Default] ■ WDT_A_CLOCKSOURCE_ACLK ■ WDT_A_CLOCKSOURCE_VLOCLK ■ WDT_A_CLOCKSOURCE_XCLK <p>Modified bits are WDTSEL of WDTCTL register.</p>

Parameters

<i>clockDivider</i>	<p>is the divider of the clock source, in turn setting the watchdog timer interval. Valid values are:</p> <ul style="list-style-type: none"> ■ WDT_A_CLOCKDIVIDER_2G ■ WDT_A_CLOCKDIVIDER_128M ■ WDT_A_CLOCKDIVIDER_8192K ■ WDT_A_CLOCKDIVIDER_512K ■ WDT_A_CLOCKDIVIDER_32K [Default] ■ WDT_A_CLOCKDIVIDER_8192 ■ WDT_A_CLOCKDIVIDER_512 ■ WDT_A_CLOCKDIVIDER_64 <p>Modified bits are WDTIS and WDTHOLD of WDTCTL register.</p>
---------------------	---

Returns

None

WDT_A_resetTimer()

```
void WDT_A_resetTimer (
    uint16_t baseAddress )
```

Resets the timer counter of the Watchdog Timer.

This function resets the watchdog timer to 0x0000h.

Parameters

<i>baseAddress</i>	is the base address of the WDT_A module.
--------------------	--

Returns

None

WDT_A_start()

```
void WDT_A_start (
    uint16_t baseAddress )
```

Starts the Watchdog Timer.

This function starts the watchdog timer functionality to start counting again.

Parameters

<i>baseAddress</i>	is the base address of the WDT_A module.
--------------------	--

Returns

None

28.3 Programming Example

The following example shows how to initialize and use the WDT_A API to interrupt about every 32 ms, toggling the LED in the ISR.

```
//Initialize WDT_A module in timer interval mode,  
//with SMCLK as source at an interval of 32 ms.  
WDT_A_initIntervalTimer(WDT_A_BASE,  
    WDT_A_CLOCKSOURCE_SMCLK,  
    WDT_A_CLOCKDIVIDER_32K);  
  
//Enable Watchdog Interrupt  
SFR_enableInterrupt(SFR_WATCHDOG_INTERVAL_TIMER_INTERRUPT);  
  
//Set P1.0 to output direction  
GPIO_setAsOutputPin(  
    GPIO_PORT_P1,  
    GPIO_PIN0  
);  
  
//Enter LPM0, enable interrupts  
__bis_SR_register(LPM0_bits + GIE);  
//For debugger  
__no_operation();
```

29 Data Structure Documentation

29.1 Data Structures

Here are the data structures with brief descriptions:

Calendar	
Used in the RTC_B_initCalendar() function as the CalendarTime parameter	335
Comp_D_initParam	
Used in the Comp_D_init() function as the param parameter	298
DMA_initParam	
Used in the DMA_init() function as the param parameter	332
EUSCI_A_SPI_changeMasterClockParam	
Used in the EUSCI_A_SPI_changeMasterClock() function as the param parameter	321
EUSCI_A_SPI_initMasterParam	
Used in the EUSCI_A_SPI_initMaster() function as the param parameter	326
EUSCI_A_SPI_initSlaveParam	
Used in the EUSCI_A_SPI_initSlave() function as the param parameter	338
EUSCI_A_UART_initParam	
Used in the EUSCI_A_UART_init() function as the param parameter	315
EUSCI_B_I2C_initMasterParam	
Used in the EUSCI_B_I2C_initMaster() function as the param parameter	320
EUSCI_B_I2C_initSlaveParam	
Used in the EUSCI_B_I2C_initSlave() function as the param parameter	310
EUSCI_B_SPI_changeMasterClockParam	
Used in the EUSCI_B_SPI_changeMasterClock() function as the param parameter	306
EUSCI_B_SPI_initMasterParam	
Used in the EUSCI_B_SPI_initMaster() function as the param parameter	330
EUSCI_B_SPI_initSlaveParam	
Used in the EUSCI_B_SPI_initSlave() function as the param parameter	303
MPU_initThreeSegmentsParam	
Used in the MPU_initThreeSegments() function as the param parameter	314
RTC_B_configureCalendarAlarmParam	
Used in the RTC_B_configureCalendarAlarm() function as the param parameter	339
s_Peripheral_Memory_Data	??
s_TLV_ADC_Cal_Data	??
s_TLV_Die_Record	??
s_TLV_REF_Cal_Data	??
s_TLV_Timer_D_Cal_Data	??
Timer_A_initCaptureModeParam	
Used in the Timer_A_initCaptureMode() function as the param parameter	311
Timer_A_initCompareModeParam	
Used in the Timer_A_initCompareMode() function as the param parameter	304
Timer_A_initContinuousModeParam	
Used in the Timer_A_initContinuousMode() function as the param parameter	308
Timer_A_initUpDownModeParam	
Used in the Timer_A_initUpDownMode() function as the param parameter	335
Timer_A_initUpModeParam	
Used in the Timer_A_initUpMode() function as the param parameter	300
Timer_A_outputPWMPParam	
Used in the Timer_A_outputPWM() function as the param parameter	341

Timer_B_initCaptureModeParam	
Used in the Timer_B_initCaptureMode() function as the param parameter	328
Timer_B_initCompareModeParam	
Used in the Timer_B_initCompareMode() function as the param parameter	324
Timer_B_initContinuousModeParam	
Used in the Timer_B_initContinuousMode() function as the param parameter	296
Timer_B_initUpDownModeParam	
Used in the Timer_B_initUpDownMode() function as the param parameter	306
Timer_B_initUpModeParam	
Used in the Timer_B_initUpMode() function as the param parameter	322
Timer_B_outputPWMPParam	
Used in the Timer_B_outputPWM() function as the param parameter	318

29.2 Timer_B_initContinuousModeParam Struct Reference

Used in the [Timer_B_initContinuousMode\(\)](#) function as the param parameter.

```
#include <timer_b.h>
```

Data Fields

- `uint16_t` [clockSource](#)
 - `uint16_t` [clockSourceDivider](#)
 - `uint16_t` [timerInterruptEnable_TBIE](#)
 - `uint16_t` [timerClear](#)
 - `bool` [startTimer](#)
- Whether to start the timer immediately.*

29.2.1 Detailed Description

Used in the [Timer_B_initContinuousMode\(\)](#) function as the param parameter.

29.2.2 Field Documentation

clockSource

```
uint16_t Timer_B_initContinuousModeParam::clockSource
```

Selects the clock source

Valid values are:

- **TIMER_B_CLOCKSOURCE_EXTERNAL_TXCLK** [Default]
- **TIMER_B_CLOCKSOURCE_ACLK**
- **TIMER_B_CLOCKSOURCE_SMCLK**

■ **TIMER_B_CLOCKSOURCE_INVERTED_EXTERNAL_TXCLK**

Referenced by `Timer_B_initContinuousMode()`.

clockSourceDivider

```
uint16_t Timer_B_initContinuousModeParam::clockSourceDivider
```

Is the divider for Clock source.

Valid values are:

- **TIMER_B_CLOCKSOURCE_DIVIDER_1** [Default]
- **TIMER_B_CLOCKSOURCE_DIVIDER_2**
- **TIMER_B_CLOCKSOURCE_DIVIDER_3**
- **TIMER_B_CLOCKSOURCE_DIVIDER_4**
- **TIMER_B_CLOCKSOURCE_DIVIDER_5**
- **TIMER_B_CLOCKSOURCE_DIVIDER_6**
- **TIMER_B_CLOCKSOURCE_DIVIDER_7**
- **TIMER_B_CLOCKSOURCE_DIVIDER_8**
- **TIMER_B_CLOCKSOURCE_DIVIDER_10**
- **TIMER_B_CLOCKSOURCE_DIVIDER_12**
- **TIMER_B_CLOCKSOURCE_DIVIDER_14**
- **TIMER_B_CLOCKSOURCE_DIVIDER_16**
- **TIMER_B_CLOCKSOURCE_DIVIDER_20**
- **TIMER_B_CLOCKSOURCE_DIVIDER_24**
- **TIMER_B_CLOCKSOURCE_DIVIDER_28**
- **TIMER_B_CLOCKSOURCE_DIVIDER_32**
- **TIMER_B_CLOCKSOURCE_DIVIDER_40**
- **TIMER_B_CLOCKSOURCE_DIVIDER_48**
- **TIMER_B_CLOCKSOURCE_DIVIDER_56**
- **TIMER_B_CLOCKSOURCE_DIVIDER_64**

Referenced by `Timer_B_initContinuousMode()`.

timerClear

```
uint16_t Timer_B_initContinuousModeParam::timerClear
```

Decides if `Timer_B` clock divider, count direction, count need to be reset.

Valid values are:

- **TIMER_B_DO_CLEAR**
- **TIMER_B_SKIP_CLEAR** [Default]

Referenced by `Timer_B_initContinuousMode()`.

timerInterruptEnable_TBIE

```
uint16_t Timer_B_initContinuousModeParam::timerInterruptEnable_TBIE
```

Is to enable or disable Timer_B interrupt

Valid values are:

- **TIMER_B_TBIE_INTERRUPT_ENABLE**
- **TIMER_B_TBIE_INTERRUPT_DISABLE** [Default]

Referenced by Timer_B_initContinuousMode().

The documentation for this struct was generated from the following file:

- timer_b.h

29.3 Comp_D_initParam Struct Reference

Used in the [Comp_D_init\(\)](#) function as the param parameter.

```
#include <comp_d.h>
```

Data Fields

- uint8_t [positiveTerminalInput](#)
- uint8_t [negativeTerminalInput](#)
- uint8_t [outputFilterEnableAndDelayLevel](#)
- uint16_t [invertedOutputPolarity](#)

29.3.1 Detailed Description

Used in the [Comp_D_init\(\)](#) function as the param parameter.

29.3.2 Field Documentation

invertedOutputPolarity

```
uint16_t Comp_D_initParam::invertedOutputPolarity
```

Controls if the output will be inverted or not

Valid values are:

- **COMP_D_NORMALOUTPUTPOLARITY** [Default]
- **COMP_D_INVERTEDOUTPUTPOLARITY**

Referenced by Comp_D_init().

negativeTerminalInput

`uint8_t Comp_D_initParam::negativeTerminalInput`

Selects the input to the negative terminal.

Valid values are:

- **COMP_D_INPUT0** [Default]
- **COMP_D_INPUT1**
- **COMP_D_INPUT2**
- **COMP_D_INPUT3**
- **COMP_D_INPUT4**
- **COMP_D_INPUT5**
- **COMP_D_INPUT6**
- **COMP_D_INPUT7**
- **COMP_D_INPUT8**
- **COMP_D_INPUT9**
- **COMP_D_INPUT10**
- **COMP_D_INPUT11**
- **COMP_D_INPUT12**
- **COMP_D_INPUT13**
- **COMP_D_INPUT14**
- **COMP_D_INPUT15**
- **COMP_D_VREF**

Referenced by `Comp_D_init()`.

outputFilterEnableAndDelayLevel

`uint8_t Comp_D_initParam::outputFilterEnableAndDelayLevel`

Controls the output filter delay state, which is either off or enabled with a specified delay level. This parameter is device specific and delay levels should be found in the device's datasheet.

Valid values are:

- **COMP_D_FILTEROUTPUT_OFF** [Default]
- **COMP_D_FILTEROUTPUT_DLYLVL1**
- **COMP_D_FILTEROUTPUT_DLYLVL2**
- **COMP_D_FILTEROUTPUT_DLYLVL3**
- **COMP_D_FILTEROUTPUT_DLYLVL4**

Referenced by `Comp_D_init()`.

positiveTerminalInput

```
uint8_t Comp_D_initParam::positiveTerminalInput
```

Selects the input to the positive terminal.

Valid values are:

- **COMP_D_INPUT0** [Default]
- **COMP_D_INPUT1**
- **COMP_D_INPUT2**
- **COMP_D_INPUT3**
- **COMP_D_INPUT4**
- **COMP_D_INPUT5**
- **COMP_D_INPUT6**
- **COMP_D_INPUT7**
- **COMP_D_INPUT8**
- **COMP_D_INPUT9**
- **COMP_D_INPUT10**
- **COMP_D_INPUT11**
- **COMP_D_INPUT12**
- **COMP_D_INPUT13**
- **COMP_D_INPUT14**
- **COMP_D_INPUT15**
- **COMP_D_VREF**

Referenced by `Comp_D_init()`.

The documentation for this struct was generated from the following file:

- `comp_d.h`

29.4 Timer_A_initUpModeParam Struct Reference

Used in the [Timer_A_initUpMode\(\)](#) function as the param parameter.

```
#include <timer_a.h>
```

Data Fields

- `uint16_t` [clockSource](#)
- `uint16_t` [clockSourceDivider](#)
- `uint16_t` [timerPeriod](#)
- `uint16_t` [timerInterruptEnable_TAIE](#)
- `uint16_t` [captureCompareInterruptEnable_CCR0_CCIE](#)
- `uint16_t` [timerClear](#)
- `bool` [startTimer](#)

Whether to start the timer immediately.

29.4.1 Detailed Description

Used in the [Timer_A_initUpMode\(\)](#) function as the param parameter.

29.4.2 Field Documentation

captureCompareInterruptEnable_CCR0_CCIE

```
uint16_t Timer_A_initUpModeParam::captureCompareInterruptEnable_CCR0_CCIE
```

Is to enable or disable Timer_A CCR0 captureCompare interrupt.
Valid values are:

- **TIMER_A_CCIE_CCR0_INTERRUPT_ENABLE**
- **TIMER_A_CCIE_CCR0_INTERRUPT_DISABLE** [Default]

Referenced by [Timer_A_initUpMode\(\)](#).

clockSource

```
uint16_t Timer_A_initUpModeParam::clockSource
```

Selects Clock source.
Valid values are:

- **TIMER_A_CLOCKSOURCE_EXTERNAL_TXCLK** [Default]
- **TIMER_A_CLOCKSOURCE_ACLK**
- **TIMER_A_CLOCKSOURCE_SMCLK**
- **TIMER_A_CLOCKSOURCE_INVERTED_EXTERNAL_TXCLK**

Referenced by [Timer_A_initUpMode\(\)](#).

clockSourceDivider

```
uint16_t Timer_A_initUpModeParam::clockSourceDivider
```

Is the desired divider for the clock source
Valid values are:

- **TIMER_A_CLOCKSOURCE_DIVIDER_1** [Default]
- **TIMER_A_CLOCKSOURCE_DIVIDER_2**
- **TIMER_A_CLOCKSOURCE_DIVIDER_3**
- **TIMER_A_CLOCKSOURCE_DIVIDER_4**
- **TIMER_A_CLOCKSOURCE_DIVIDER_5**
- **TIMER_A_CLOCKSOURCE_DIVIDER_6**
- **TIMER_A_CLOCKSOURCE_DIVIDER_7**
- **TIMER_A_CLOCKSOURCE_DIVIDER_8**

- **TIMER_A_CLOCKSOURCE_DIVIDER_10**
- **TIMER_A_CLOCKSOURCE_DIVIDER_12**
- **TIMER_A_CLOCKSOURCE_DIVIDER_14**
- **TIMER_A_CLOCKSOURCE_DIVIDER_16**
- **TIMER_A_CLOCKSOURCE_DIVIDER_20**
- **TIMER_A_CLOCKSOURCE_DIVIDER_24**
- **TIMER_A_CLOCKSOURCE_DIVIDER_28**
- **TIMER_A_CLOCKSOURCE_DIVIDER_32**
- **TIMER_A_CLOCKSOURCE_DIVIDER_40**
- **TIMER_A_CLOCKSOURCE_DIVIDER_48**
- **TIMER_A_CLOCKSOURCE_DIVIDER_56**
- **TIMER_A_CLOCKSOURCE_DIVIDER_64**

Referenced by `Timer_A_initUpMode()`.

timerClear

```
uint16_t Timer_A_initUpModeParam::timerClear
```

Decides if `Timer_A` clock divider, count direction, count need to be reset.
Valid values are:

- **TIMER_A_DO_CLEAR**
- **TIMER_A_SKIP_CLEAR** [Default]

Referenced by `Timer_A_initUpMode()`.

timerInterruptEnable_TAIE

```
uint16_t Timer_A_initUpModeParam::timerInterruptEnable_TAIE
```

Is to enable or disable `Timer_A` interrupt
Valid values are:

- **TIMER_A_TAIE_INTERRUPT_ENABLE**
- **TIMER_A_TAIE_INTERRUPT_DISABLE** [Default]

Referenced by `Timer_A_initUpMode()`.

timerPeriod

```
uint16_t Timer_A_initUpModeParam::timerPeriod
```

Is the specified `Timer_A` period. This is the value that gets written into the `CCR0`. Limited to 16 bits[`uint16_t`]

Referenced by `Timer_A_initUpMode()`.

The documentation for this struct was generated from the following file:

- `timer_a.h`

29.5 EUSCI_B_SPI_initSlaveParam Struct Reference

Used in the [EUSCI_B_SPI_initSlave\(\)](#) function as the param parameter.

```
#include <eusci_b_spi.h>
```

Data Fields

- `uint16_t` [msbFirst](#)
- `uint16_t` [clockPhase](#)
- `uint16_t` [clockPolarity](#)
- `uint16_t` [spiMode](#)

29.5.1 Detailed Description

Used in the [EUSCI_B_SPI_initSlave\(\)](#) function as the param parameter.

29.5.2 Field Documentation

clockPhase

```
uint16_t EUSCI_B_SPI_initSlaveParam::clockPhase
```

Is clock phase select.

Valid values are:

- **EUSCI_B_SPI_PHASE_DATA_CHANGED_ONFIRST_CAPTURED_ON_NEXT** [Default]
- **EUSCI_B_SPI_PHASE_DATA_CAPTURED_ONFIRST_CHANGED_ON_NEXT**

Referenced by [EUSCI_B_SPI_initSlave\(\)](#).

clockPolarity

```
uint16_t EUSCI_B_SPI_initSlaveParam::clockPolarity
```

Is clock polarity select

Valid values are:

- **EUSCI_B_SPI_CLOCKPOLARITY_INACTIVITY_HIGH**
- **EUSCI_B_SPI_CLOCKPOLARITY_INACTIVITY_LOW** [Default]

Referenced by [EUSCI_B_SPI_initSlave\(\)](#).

msbFirst

```
uint16_t EUSCI_B_SPI_initSlaveParam::msbFirst
```


Controls the direction of the receive and transmit shift register.
Valid values are:

- **EUSCI_B_SPI_MSB_FIRST**
- **EUSCI_B_SPI_LSB_FIRST** [Default]

Referenced by `EUSCI_B_SPI_initSlave()`.

spiMode

```
uint16_t EUSCI_B_SPI_initSlaveParam::spiMode
```

Is SPI mode select
Valid values are:

- **EUSCI_B_SPI_3PIN**
- **EUSCI_B_SPI_4PIN_UCxSTE_ACTIVE_HIGH**
- **EUSCI_B_SPI_4PIN_UCxSTE_ACTIVE_LOW**

Referenced by `EUSCI_B_SPI_initSlave()`.

The documentation for this struct was generated from the following file:

- `eusci_b_spi.h`

29.6 Timer_A_initCompareModeParam Struct Reference

Used in the [Timer_A_initCompareMode\(\)](#) function as the param parameter.

```
#include <timer_a.h>
```

Data Fields

- `uint16_t compareRegister`
- `uint16_t compareInterruptEnable`
- `uint16_t compareOutputMode`
- `uint16_t compareValue`
Is the count to be compared with in compare mode.

29.6.1 Detailed Description

Used in the [Timer_A_initCompareMode\(\)](#) function as the param parameter.

29.6.2 Field Documentation

compareInterruptEnable

```
uint16_t Timer_A_initCompareModeParam::compareInterruptEnable
```

Is to enable or disable timer captureCompare interrupt.
Valid values are:

- **TIMER_A_CAPTURECOMPARE_INTERRUPT_DISABLE** [Default]
- **TIMER_A_CAPTURECOMPARE_INTERRUPT_ENABLE**

Referenced by Timer_A_initCompareMode().

compareOutputMode

```
uint16_t Timer_A_initCompareModeParam::compareOutputMode
```

Specifies the output mode.
Valid values are:

- **TIMER_A_OUTPUTMODE_OUTBITVALUE** [Default]
- **TIMER_A_OUTPUTMODE_SET**
- **TIMER_A_OUTPUTMODE_TOGGLE_RESET**
- **TIMER_A_OUTPUTMODE_SET_RESET**
- **TIMER_A_OUTPUTMODE_TOGGLE**
- **TIMER_A_OUTPUTMODE_RESET**
- **TIMER_A_OUTPUTMODE_TOGGLE_SET**
- **TIMER_A_OUTPUTMODE_RESET_SET**

Referenced by Timer_A_initCompareMode().

compareRegister

```
uint16_t Timer_A_initCompareModeParam::compareRegister
```

Selects the Capture register being used. Refer to datasheet to ensure the device has the capture compare register being used.
Valid values are:

- **TIMER_A_CAPTURECOMPARE_REGISTER_0**
- **TIMER_A_CAPTURECOMPARE_REGISTER_1**
- **TIMER_A_CAPTURECOMPARE_REGISTER_2**
- **TIMER_A_CAPTURECOMPARE_REGISTER_3**
- **TIMER_A_CAPTURECOMPARE_REGISTER_4**
- **TIMER_A_CAPTURECOMPARE_REGISTER_5**
- **TIMER_A_CAPTURECOMPARE_REGISTER_6**

Referenced by `Timer_A_initCompareMode()`.

The documentation for this struct was generated from the following file:

- `timer_a.h`

29.7 EUSCI_B_SPI_changeMasterClockParam Struct Reference

Used in the `EUSCI_B_SPI_changeMasterClock()` function as the param parameter.

```
#include <eusci_b_spi.h>
```

Data Fields

- `uint32_t clockSourceFrequency`
Is the frequency of the selected clock source in Hz.
- `uint32_t desiredSpiClock`
Is the desired clock rate in Hz for SPI communication.

29.7.1 Detailed Description

Used in the `EUSCI_B_SPI_changeMasterClock()` function as the param parameter.

The documentation for this struct was generated from the following file:

- `eusci_b_spi.h`

29.8 Timer_B_initUpDownModeParam Struct Reference

Used in the `Timer_B_initUpDownMode()` function as the param parameter.

```
#include <timer_b.h>
```

Data Fields

- `uint16_t clockSource`
- `uint16_t clockSourceDivider`
- `uint16_t timerPeriod`
Is the specified Timer_B period.
- `uint16_t timerInterruptEnable_TBIE`
- `uint16_t captureCompareInterruptEnable_CCR0_CCIE`
- `uint16_t timerClear`
- `bool startTimer`
Whether to start the timer immediately.

29.8.1 Detailed Description

Used in the `Timer_B_initUpDownMode()` function as the param parameter.

29.8.2 Field Documentation

captureCompareInterruptEnable_CCR0_CCIE

```
uint16_t Timer_B_initUpDownModeParam::captureCompareInterruptEnable_CCR0_CCIE
```

Is to enable or disable Timer_B CCR0 capture compare interrupt.

Valid values are:

- **TIMER_B_CCIE_CCR0_INTERRUPT_ENABLE**
- **TIMER_B_CCIE_CCR0_INTERRUPT_DISABLE** [Default]

Referenced by `Timer_B_initUpDownMode()`.

clockSource

```
uint16_t Timer_B_initUpDownModeParam::clockSource
```

Selects the clock source

Valid values are:

- **TIMER_B_CLOCKSOURCE_EXTERNAL_TXCLK** [Default]
- **TIMER_B_CLOCKSOURCE_ACLK**
- **TIMER_B_CLOCKSOURCE_SMCLK**
- **TIMER_B_CLOCKSOURCE_INVERTED_EXTERNAL_TXCLK**

Referenced by `Timer_B_initUpDownMode()`.

clockSourceDivider

```
uint16_t Timer_B_initUpDownModeParam::clockSourceDivider
```

Is the divider for Clock source.

Valid values are:

- **TIMER_B_CLOCKSOURCE_DIVIDER_1** [Default]
- **TIMER_B_CLOCKSOURCE_DIVIDER_2**
- **TIMER_B_CLOCKSOURCE_DIVIDER_3**
- **TIMER_B_CLOCKSOURCE_DIVIDER_4**
- **TIMER_B_CLOCKSOURCE_DIVIDER_5**
- **TIMER_B_CLOCKSOURCE_DIVIDER_6**
- **TIMER_B_CLOCKSOURCE_DIVIDER_7**
- **TIMER_B_CLOCKSOURCE_DIVIDER_8**

- **TIMER_B_CLOCKSOURCE_DIVIDER_10**
- **TIMER_B_CLOCKSOURCE_DIVIDER_12**
- **TIMER_B_CLOCKSOURCE_DIVIDER_14**
- **TIMER_B_CLOCKSOURCE_DIVIDER_16**
- **TIMER_B_CLOCKSOURCE_DIVIDER_20**
- **TIMER_B_CLOCKSOURCE_DIVIDER_24**
- **TIMER_B_CLOCKSOURCE_DIVIDER_28**
- **TIMER_B_CLOCKSOURCE_DIVIDER_32**
- **TIMER_B_CLOCKSOURCE_DIVIDER_40**
- **TIMER_B_CLOCKSOURCE_DIVIDER_48**
- **TIMER_B_CLOCKSOURCE_DIVIDER_56**
- **TIMER_B_CLOCKSOURCE_DIVIDER_64**

Referenced by `Timer_B_initUpDownMode()`.

timerClear

```
uint16_t Timer_B_initUpDownModeParam::timerClear
```

Decides if Timer_B clock divider, count direction, count need to be reset.
Valid values are:

- **TIMER_B_DO_CLEAR**
- **TIMER_B_SKIP_CLEAR** [Default]

Referenced by `Timer_B_initUpDownMode()`.

timerInterruptEnable_TBIE

```
uint16_t Timer_B_initUpDownModeParam::timerInterruptEnable_TBIE
```

Is to enable or disable Timer_B interrupt
Valid values are:

- **TIMER_B_TBIE_INTERRUPT_ENABLE**
- **TIMER_B_TBIE_INTERRUPT_DISABLE** [Default]

Referenced by `Timer_B_initUpDownMode()`.

The documentation for this struct was generated from the following file:

- `timer_b.h`

29.9 Timer_A_initContinuousModeParam Struct Reference

Used in the [Timer_A_initContinuousMode\(\)](#) function as the param parameter.

```
#include <timer_a.h>
```

Data Fields

- uint16_t [clockSource](#)
- uint16_t [clockSourceDivider](#)
- uint16_t [timerInterruptEnable_TAIE](#)
- uint16_t [timerClear](#)
- bool [startTimer](#)

Whether to start the timer immediately.

29.9.1 Detailed Description

Used in the [Timer_A_initContinuousMode\(\)](#) function as the param parameter.

29.9.2 Field Documentation

clockSource

```
uint16_t Timer_A_initContinuousModeParam::clockSource
```

Selects Clock source.

Valid values are:

- **TIMER_A_CLOCKSOURCE_EXTERNAL_TXCLK** [Default]
- **TIMER_A_CLOCKSOURCE_ACLK**
- **TIMER_A_CLOCKSOURCE_SMCLK**
- **TIMER_A_CLOCKSOURCE_INVERTED_EXTERNAL_TXCLK**

Referenced by [Timer_A_initContinuousMode\(\)](#).

clockSourceDivider

```
uint16_t Timer_A_initContinuousModeParam::clockSourceDivider
```

Is the desired divider for the clock source

Valid values are:

- **TIMER_A_CLOCKSOURCE_DIVIDER_1** [Default]
- **TIMER_A_CLOCKSOURCE_DIVIDER_2**
- **TIMER_A_CLOCKSOURCE_DIVIDER_3**
- **TIMER_A_CLOCKSOURCE_DIVIDER_4**
- **TIMER_A_CLOCKSOURCE_DIVIDER_5**
- **TIMER_A_CLOCKSOURCE_DIVIDER_6**
- **TIMER_A_CLOCKSOURCE_DIVIDER_7**

- **TIMER_A_CLOCKSOURCE_DIVIDER_8**
- **TIMER_A_CLOCKSOURCE_DIVIDER_10**
- **TIMER_A_CLOCKSOURCE_DIVIDER_12**
- **TIMER_A_CLOCKSOURCE_DIVIDER_14**
- **TIMER_A_CLOCKSOURCE_DIVIDER_16**
- **TIMER_A_CLOCKSOURCE_DIVIDER_20**
- **TIMER_A_CLOCKSOURCE_DIVIDER_24**
- **TIMER_A_CLOCKSOURCE_DIVIDER_28**
- **TIMER_A_CLOCKSOURCE_DIVIDER_32**
- **TIMER_A_CLOCKSOURCE_DIVIDER_40**
- **TIMER_A_CLOCKSOURCE_DIVIDER_48**
- **TIMER_A_CLOCKSOURCE_DIVIDER_56**
- **TIMER_A_CLOCKSOURCE_DIVIDER_64**

Referenced by `Timer_A_initContinuousMode()`.

timerClear

```
uint16_t Timer_A_initContinuousModeParam::timerClear
```

Decides if Timer_A clock divider, count direction, count need to be reset.
Valid values are:

- **TIMER_A_DO_CLEAR**
- **TIMER_A_SKIP_CLEAR** [Default]

Referenced by `Timer_A_initContinuousMode()`.

timerInterruptEnable_TAIE

```
uint16_t Timer_A_initContinuousModeParam::timerInterruptEnable_TAIE
```

Is to enable or disable Timer_A interrupt
Valid values are:

- **TIMER_A_TAIE_INTERRUPT_ENABLE**
- **TIMER_A_TAIE_INTERRUPT_DISABLE** [Default]

Referenced by `Timer_A_initContinuousMode()`.

The documentation for this struct was generated from the following file:

- `timer_a.h`

29.10 EUSCI_B_I2C_initSlaveParam Struct Reference

Used in the [EUSCI_B_I2C_initSlave\(\)](#) function as the param parameter.

```
#include <eusci_b_i2c.h>
```

Data Fields

- `uint8_t slaveAddress`
7-bit slave address
- `uint8_t slaveAddressOffset`
- `uint32_t slaveOwnAddressEnable`

29.10.1 Detailed Description

Used in the `EUSCI_B_I2C_initSlave()` function as the param parameter.

29.10.2 Field Documentation

slaveAddressOffset

```
uint8_t EUSCI_B_I2C_initSlaveParam::slaveAddressOffset
```

Own address Offset referred to- 'x' value of UCBxI2COAx.

Valid values are:

- `EUSCI_B_I2C_OWN_ADDRESS_OFFSET0`
- `EUSCI_B_I2C_OWN_ADDRESS_OFFSET1`
- `EUSCI_B_I2C_OWN_ADDRESS_OFFSET2`
- `EUSCI_B_I2C_OWN_ADDRESS_OFFSET3`

Referenced by `EUSCI_B_I2C_initSlave()`.

slaveOwnAddressEnable

```
uint32_t EUSCI_B_I2C_initSlaveParam::slaveOwnAddressEnable
```

Selects if the specified address is enabled or disabled.

Valid values are:

- `EUSCI_B_I2C_OWN_ADDRESS_DISABLE`
- `EUSCI_B_I2C_OWN_ADDRESS_ENABLE`

Referenced by `EUSCI_B_I2C_initSlave()`.

The documentation for this struct was generated from the following file:

- `eusci_b_i2c.h`

29.11 Timer_A_initCaptureModeParam Struct Reference

Used in the `Timer_A_initCaptureMode()` function as the param parameter.

```
#include <timer_a.h>
```


Data Fields

- uint16_t [captureRegister](#)
- uint16_t [captureMode](#)
- uint16_t [captureInputSelect](#)
- uint16_t [synchronizeCaptureSource](#)
- uint16_t [captureInterruptEnable](#)
- uint16_t [captureOutputMode](#)

29.11.1 Detailed Description

Used in the [Timer_A_initCaptureMode\(\)](#) function as the param parameter.

29.11.2 Field Documentation

captureInputSelect

```
uint16_t Timer_A_initCaptureModeParam::captureInputSelect
```

Decides the Input Select

Valid values are:

- **TIMER_A_CAPTURE_INPUTSELECT_CC1xA**
- **TIMER_A_CAPTURE_INPUTSELECT_CC1xB**
- **TIMER_A_CAPTURE_INPUTSELECT_GND**
- **TIMER_A_CAPTURE_INPUTSELECT_Vcc**

Referenced by [Timer_A_initCaptureMode\(\)](#).

captureInterruptEnable

```
uint16_t Timer_A_initCaptureModeParam::captureInterruptEnable
```

Is to enable or disable timer captureCompare interrupt.

Valid values are:

- **TIMER_A_CAPTURECOMPARE_INTERRUPT_DISABLE** [Default]
- **TIMER_A_CAPTURECOMPARE_INTERRUPT_ENABLE**

Referenced by [Timer_A_initCaptureMode\(\)](#).

captureMode

```
uint16_t Timer_A_initCaptureModeParam::captureMode
```

Is the capture mode selected.

Valid values are:

- **TIMER_A_CAPTUREMODE_NO_CAPTURE** [Default]

- **TIMER_A_CAPTUREMODE_RISING_EDGE**
- **TIMER_A_CAPTUREMODE_FALLING_EDGE**
- **TIMER_A_CAPTUREMODE_RISING_AND_FALLING_EDGE**

Referenced by `Timer_A_initCaptureMode()`.

captureOutputMode

```
uint16_t Timer_A_initCaptureModeParam::captureOutputMode
```

Specifies the output mode.

Valid values are:

- **TIMER_A_OUTPUTMODE_OUTBITVALUE** [Default]
- **TIMER_A_OUTPUTMODE_SET**
- **TIMER_A_OUTPUTMODE_TOGGLE_RESET**
- **TIMER_A_OUTPUTMODE_SET_RESET**
- **TIMER_A_OUTPUTMODE_TOGGLE**
- **TIMER_A_OUTPUTMODE_RESET**
- **TIMER_A_OUTPUTMODE_TOGGLE_SET**
- **TIMER_A_OUTPUTMODE_RESET_SET**

Referenced by `Timer_A_initCaptureMode()`.

captureRegister

```
uint16_t Timer_A_initCaptureModeParam::captureRegister
```

Selects the Capture register being used. Refer to datasheet to ensure the device has the capture compare register being used.

Valid values are:

- **TIMER_A_CAPTURECOMPARE_REGISTER_0**
- **TIMER_A_CAPTURECOMPARE_REGISTER_1**
- **TIMER_A_CAPTURECOMPARE_REGISTER_2**
- **TIMER_A_CAPTURECOMPARE_REGISTER_3**
- **TIMER_A_CAPTURECOMPARE_REGISTER_4**
- **TIMER_A_CAPTURECOMPARE_REGISTER_5**
- **TIMER_A_CAPTURECOMPARE_REGISTER_6**

Referenced by `Timer_A_initCaptureMode()`.

synchronizeCaptureSource

```
uint16_t Timer_A_initCaptureModeParam::synchronizeCaptureSource
```

Decides if capture source should be synchronized with timer clock

Valid values are:

- **TIMER_A_CAPTURE_ASYNCHRONOUS** [Default]
- **TIMER_A_CAPTURE_SYNCHRONOUS**

Referenced by `Timer_A_initCaptureMode()`.

The documentation for this struct was generated from the following file:

- `timer_a.h`

29.12 MPU_initThreeSegmentsParam Struct Reference

Used in the [MPU_initThreeSegments\(\)](#) function as the param parameter.

```
#include <mpu.h>
```

Data Fields

- `uint16_t` [seg1boundary](#)
Valid values can be found in the Family User's Guide.
- `uint16_t` [seg2boundary](#)
Valid values can be found in the Family User's Guide.
- `uint8_t` [seg1accmask](#)
- `uint8_t` [seg2accmask](#)
- `uint8_t` [seg3accmask](#)

29.12.1 Detailed Description

Used in the [MPU_initThreeSegments\(\)](#) function as the param parameter.

29.12.2 Field Documentation

seg1accmask

```
uint8_t MPU_initThreeSegmentsParam::seg1accmask
```

Is the bit mask of access right for memory segment 1.

Logical OR of any of the following:

- **MPU_READ** - Read rights
- **MPU_WRITE** - Write rights
- **MPU_EXEC** - Execute rights
- **MPU_NO_READ_WRITE_EXEC** - no read/write/execute rights

Referenced by `MPU_initThreeSegments()`.

seg2accmask

```
uint8_t MPU_initThreeSegmentsParam::seg2accmask
```

Is the bit mask of access right for memory segment 2.

Logical OR of any of the following:

- **MPU_READ** - Read rights
- **MPU_WRITE** - Write rights
- **MPU_EXEC** - Execute rights
- **MPU_NO_READ_WRITE_EXEC** - no read/write/execute rights

Referenced by MPU_initThreeSegments().

seg3accmask

```
uint8_t MPU_initThreeSegmentsParam::seg3accmask
```

Is the bit mask of access right for memory segment 3.

Logical OR of any of the following:

- **MPU_READ** - Read rights
- **MPU_WRITE** - Write rights
- **MPU_EXEC** - Execute rights
- **MPU_NO_READ_WRITE_EXEC** - no read/write/execute rights

Referenced by MPU_initThreeSegments().

The documentation for this struct was generated from the following file:

- mpu.h

29.13 EUSCI_A_UART_initParam Struct Reference

Used in the [EUSCI_A_UART_init\(\)](#) function as the param parameter.

```
#include <eusci_a_uart.h>
```

Data Fields

- uint8_t [selectClockSource](#)
- uint16_t [clockPrescaler](#)
- Is the value to be written into UCBRx bits.*
- uint8_t [firstModReg](#)
- uint8_t [secondModReg](#)
- uint8_t [parity](#)
- uint16_t [msborLsbFirst](#)
- uint16_t [numberOfStopBits](#)
- uint16_t [uartMode](#)
- uint8_t [overSampling](#)

29.13.1 Detailed Description

Used in the `EUSCI_A_UART_init()` function as the param parameter.

29.13.2 Field Documentation

firstModReg

```
uint8_t EUSCI_A_UART_initParam::firstModReg
```

Is First modulation stage register setting. This value is a pre- calculated value which can be obtained from the Device Users Guide. This value is written into UCBRFx bits of UCAXMCTLW.

Referenced by `EUSCI_A_UART_init()`.

msborLsbFirst

```
uint16_t EUSCI_A_UART_initParam::msborLsbFirst
```

Controls direction of receive and transmit shift register.

Valid values are:

- **EUSCI_A_UART_MSB_FIRST**
- **EUSCI_A_UART_LSB_FIRST** [Default]

Referenced by `EUSCI_A_UART_init()`.

numberOfStopBits

```
uint16_t EUSCI_A_UART_initParam::numberOfStopBits
```

Indicates one/two STOP bits

Valid values are:

- **EUSCI_A_UART_ONE_STOP_BIT** [Default]
- **EUSCI_A_UART_TWO_STOP_BITS**

Referenced by `EUSCI_A_UART_init()`.

overSampling

```
uint8_t EUSCI_A_UART_initParam::overSampling
```

Indicates low frequency or oversampling baud generation

Valid values are:

- **EUSCI_A_UART_OVERSAMPLING_BAUDRATE_GENERATION**
- **EUSCI_A_UART_LOW_FREQUENCY_BAUDRATE_GENERATION**

Referenced by `EUSCI_A_UART_init()`.

parity

```
uint8_t EUSCI_A_UART_initParam::parity
```

Is the desired parity.

Valid values are:

- **EUSCI_A_UART_NO_PARITY** [Default]
- **EUSCI_A_UART_ODD_PARITY**
- **EUSCI_A_UART_EVEN_PARITY**

Referenced by EUSCI_A_UART_init().

secondModReg

```
uint8_t EUSCI_A_UART_initParam::secondModReg
```

Is Second modulation stage register setting. This value is a pre- calculated value which can be obtained from the Device Users Guide. This value is written into UCBRSx bits of UCAXMCTLW.

Referenced by EUSCI_A_UART_init().

selectClockSource

```
uint8_t EUSCI_A_UART_initParam::selectClockSource
```

Selects Clock source. Refer to device specific datasheet for available options.

Valid values are:

- **EUSCI_A_UART_CLOCKSOURCE_SMCLK**
- **EUSCI_A_UART_CLOCKSOURCE_ACLK**

Referenced by EUSCI_A_UART_init().

uartMode

```
uint16_t EUSCI_A_UART_initParam::uartMode
```

Selects the mode of operation

Valid values are:

- **EUSCI_A_UART_MODE** [Default]
- **EUSCI_A_UART_IDLE_LINE_MULTI_PROCESSOR_MODE**
- **EUSCI_A_UART_ADDRESS_BIT_MULTI_PROCESSOR_MODE**
- **EUSCI_A_UART_AUTOMATIC_BAUDRATE_DETECTION_MODE**

Referenced by EUSCI_A_UART_init().

The documentation for this struct was generated from the following file:

- eusci_a_uart.h

29.14 Timer_B_outputPWMPParam Struct Reference

Used in the [Timer_B_outputPWM\(\)](#) function as the param parameter.

```
#include <timer_b.h>
```

Data Fields

- uint16_t [clockSource](#)
- uint16_t [clockSourceDivider](#)
- uint16_t [timerPeriod](#)
Selects the desired Timer_B period.
- uint16_t [compareRegister](#)
- uint16_t [compareOutputMode](#)
- uint16_t [dutyCycle](#)
Specifies the dutycycle for the generated waveform.

29.14.1 Detailed Description

Used in the [Timer_B_outputPWM\(\)](#) function as the param parameter.

29.14.2 Field Documentation

clockSource

```
uint16_t Timer_B_outputPWMPParam::clockSource
```

Selects the clock source

Valid values are:

- **TIMER_B_CLOCKSOURCE_EXTERNAL_TXCLK** [Default]
- **TIMER_B_CLOCKSOURCE_ACLK**
- **TIMER_B_CLOCKSOURCE_SMCLK**
- **TIMER_B_CLOCKSOURCE_INVERTED_EXTERNAL_TXCLK**

Referenced by [Timer_B_outputPWM\(\)](#).

clockSourceDivider

```
uint16_t Timer_B_outputPWMPParam::clockSourceDivider
```

Is the divider for Clock source.

Valid values are:

- **TIMER_B_CLOCKSOURCE_DIVIDER_1** [Default]
- **TIMER_B_CLOCKSOURCE_DIVIDER_2**
- **TIMER_B_CLOCKSOURCE_DIVIDER_3**

- **TIMER_B_CLOCKSOURCE_DIVIDER_4**
- **TIMER_B_CLOCKSOURCE_DIVIDER_5**
- **TIMER_B_CLOCKSOURCE_DIVIDER_6**
- **TIMER_B_CLOCKSOURCE_DIVIDER_7**
- **TIMER_B_CLOCKSOURCE_DIVIDER_8**
- **TIMER_B_CLOCKSOURCE_DIVIDER_10**
- **TIMER_B_CLOCKSOURCE_DIVIDER_12**
- **TIMER_B_CLOCKSOURCE_DIVIDER_14**
- **TIMER_B_CLOCKSOURCE_DIVIDER_16**
- **TIMER_B_CLOCKSOURCE_DIVIDER_20**
- **TIMER_B_CLOCKSOURCE_DIVIDER_24**
- **TIMER_B_CLOCKSOURCE_DIVIDER_28**
- **TIMER_B_CLOCKSOURCE_DIVIDER_32**
- **TIMER_B_CLOCKSOURCE_DIVIDER_40**
- **TIMER_B_CLOCKSOURCE_DIVIDER_48**
- **TIMER_B_CLOCKSOURCE_DIVIDER_56**
- **TIMER_B_CLOCKSOURCE_DIVIDER_64**

Referenced by `Timer_B_outputPWM()`.

compareOutputMode

```
uint16_t Timer_B_outputPWMPParam::compareOutputMode
```

Specifies the output mode.

Valid values are:

- **TIMER_B_OUTPUTMODE_OUTBITVALUE** [Default]
- **TIMER_B_OUTPUTMODE_SET**
- **TIMER_B_OUTPUTMODE_TOGGLE_RESET**
- **TIMER_B_OUTPUTMODE_SET_RESET**
- **TIMER_B_OUTPUTMODE_TOGGLE**
- **TIMER_B_OUTPUTMODE_RESET**
- **TIMER_B_OUTPUTMODE_TOGGLE_SET**
- **TIMER_B_OUTPUTMODE_RESET_SET**

Referenced by `Timer_B_outputPWM()`.

compareRegister

```
uint16_t Timer_B_outputPWMPParam::compareRegister
```

Selects the compare register being used. Refer to datasheet to ensure the device has the compare register being used.

Valid values are:

- **TIMER_B_CAPTURECOMPARE_REGISTER_0**
- **TIMER_B_CAPTURECOMPARE_REGISTER_1**
- **TIMER_B_CAPTURECOMPARE_REGISTER_2**
- **TIMER_B_CAPTURECOMPARE_REGISTER_3**
- **TIMER_B_CAPTURECOMPARE_REGISTER_4**
- **TIMER_B_CAPTURECOMPARE_REGISTER_5**
- **TIMER_B_CAPTURECOMPARE_REGISTER_6**

Referenced by `Timer_B_outputPWM()`.

The documentation for this struct was generated from the following file:

- `timer_b.h`

29.15 EUSCI_B_I2C_initMasterParam Struct Reference

Used in the `EUSCI_B_I2C_initMaster()` function as the param parameter.

```
#include <eusci_b_i2c.h>
```

Data Fields

- `uint8_t` [selectClockSource](#)
- `uint32_t` [i2cClk](#)
- `uint32_t` [dataRate](#)
- `uint8_t` [byteCounterThreshold](#)
Sets threshold for automatic STOP or UCSTPIFG.
- `uint8_t` [autoSTOPGeneration](#)

29.15.1 Detailed Description

Used in the `EUSCI_B_I2C_initMaster()` function as the param parameter.

29.15.2 Field Documentation

autoSTOPGeneration

```
uint8_t EUSCI_B_I2C_initMasterParam::autoSTOPGeneration
```

Sets up the STOP condition generation.

Valid values are:

- **EUSCI_B_I2C_NO_AUTO_STOP**
- **EUSCI_B_I2C_SET_BYTECOUNT_THRESHOLD_FLAG**
- **EUSCI_B_I2C_SEND_STOP_AUTOMATICALLY_ON_BYTECOUNT_THRESHOLD**

Referenced by `EUSCI_B_I2C_initMaster()`.

dataRate

```
uint32_t EUSCI_B_I2C_initMasterParam::dataRate
```

Setup for selecting data transfer rate.

Valid values are:

- **EUSCI_B_I2C_SET_DATA_RATE_400KBPS**
- **EUSCI_B_I2C_SET_DATA_RATE_100KBPS**

Referenced by `EUSCI_B_I2C_initMaster()`.

i2cClk

```
uint32_t EUSCI_B_I2C_initMasterParam::i2cClk
```

Is the rate of the clock supplied to the I2C module (the frequency in Hz of the clock source specified in `selectClockSource`).

Referenced by `EUSCI_B_I2C_initMaster()`.

selectClockSource

```
uint8_t EUSCI_B_I2C_initMasterParam::selectClockSource
```

Selects the clocksource. Refer to device specific datasheet for available options.

Valid values are:

- **EUSCI_B_I2C_CLOCKSOURCE_ACLK**
- **EUSCI_B_I2C_CLOCKSOURCE_SMCLK**

Referenced by `EUSCI_B_I2C_initMaster()`.

The documentation for this struct was generated from the following file:

- `eusci_b_i2c.h`

29.16 EUSCI_A_SPI_changeMasterClockParam Struct Reference

Used in the [EUSCI_A_SPI_changeMasterClock\(\)](#) function as the param parameter.

```
#include <eusci_a_spi.h>
```

Data Fields

- `uint32_t` [clockSourceFrequency](#)
Is the frequency of the selected clock source in Hz.
- `uint32_t` [desiredSpiClock](#)
Is the desired clock rate in Hz for SPI communication.

29.16.1 Detailed Description

Used in the [EUSCI_A_SPI_changeMasterClock\(\)](#) function as the param parameter.

The documentation for this struct was generated from the following file:

- [eusci_a_spi.h](#)

29.17 Timer_B_initUpModeParam Struct Reference

Used in the [Timer_B_initUpMode\(\)](#) function as the param parameter.

```
#include <timer_b.h>
```

Data Fields

- [uint16_t clockSource](#)
- [uint16_t clockSourceDivider](#)
- [uint16_t timerPeriod](#)
- [uint16_t timerInterruptEnable_TBIE](#)
- [uint16_t captureCompareInterruptEnable_CCR0_CCIE](#)
- [uint16_t timerClear](#)
- [bool startTimer](#)

Whether to start the timer immediately.

29.17.1 Detailed Description

Used in the [Timer_B_initUpMode\(\)](#) function as the param parameter.

29.17.2 Field Documentation

captureCompareInterruptEnable_CCR0_CCIE

```
uint16_t Timer_B_initUpModeParam::captureCompareInterruptEnable_CCR0_CCIE
```

Is to enable or disable Timer_B CCR0 capture compare interrupt.

Valid values are:

- **TIMER_B_CCIE_CCR0_INTERRUPT_ENABLE**
- **TIMER_B_CCIE_CCR0_INTERRUPT_DISABLE** [Default]

Referenced by [Timer_B_initUpMode\(\)](#).

clockSource

```
uint16_t Timer_B_initUpModeParam::clockSource
```

Selects the clock source
Valid values are:

- **TIMER_B_CLOCKSOURCE_EXTERNAL_TXCLK** [Default]
- **TIMER_B_CLOCKSOURCE_ACLK**
- **TIMER_B_CLOCKSOURCE_SMCLK**
- **TIMER_B_CLOCKSOURCE_INVERTED_EXTERNAL_TXCLK**

Referenced by `Timer_B_initUpMode()`.

clockSourceDivider

```
uint16_t Timer_B_initUpModeParam::clockSourceDivider
```

Is the divider for Clock source.
Valid values are:

- **TIMER_B_CLOCKSOURCE_DIVIDER_1** [Default]
- **TIMER_B_CLOCKSOURCE_DIVIDER_2**
- **TIMER_B_CLOCKSOURCE_DIVIDER_3**
- **TIMER_B_CLOCKSOURCE_DIVIDER_4**
- **TIMER_B_CLOCKSOURCE_DIVIDER_5**
- **TIMER_B_CLOCKSOURCE_DIVIDER_6**
- **TIMER_B_CLOCKSOURCE_DIVIDER_7**
- **TIMER_B_CLOCKSOURCE_DIVIDER_8**
- **TIMER_B_CLOCKSOURCE_DIVIDER_10**
- **TIMER_B_CLOCKSOURCE_DIVIDER_12**
- **TIMER_B_CLOCKSOURCE_DIVIDER_14**
- **TIMER_B_CLOCKSOURCE_DIVIDER_16**
- **TIMER_B_CLOCKSOURCE_DIVIDER_20**
- **TIMER_B_CLOCKSOURCE_DIVIDER_24**
- **TIMER_B_CLOCKSOURCE_DIVIDER_28**
- **TIMER_B_CLOCKSOURCE_DIVIDER_32**
- **TIMER_B_CLOCKSOURCE_DIVIDER_40**
- **TIMER_B_CLOCKSOURCE_DIVIDER_48**
- **TIMER_B_CLOCKSOURCE_DIVIDER_56**
- **TIMER_B_CLOCKSOURCE_DIVIDER_64**

Referenced by `Timer_B_initUpMode()`.

timerClear

```
uint16_t Timer_B_initUpModeParam::timerClear
```

Decides if Timer_B clock divider, count direction, count need to be reset.

Valid values are:

- **TIMER_B_DO_CLEAR**
- **TIMER_B_SKIP_CLEAR** [Default]

Referenced by Timer_B_initUpMode().

timerInterruptEnable_TBIE

```
uint16_t Timer_B_initUpModeParam::timerInterruptEnable_TBIE
```

Is to enable or disable Timer_B interrupt

Valid values are:

- **TIMER_B_TBIE_INTERRUPT_ENABLE**
- **TIMER_B_TBIE_INTERRUPT_DISABLE** [Default]

Referenced by Timer_B_initUpMode().

timerPeriod

```
uint16_t Timer_B_initUpModeParam::timerPeriod
```

Is the specified Timer_B period. This is the value that gets written into the CCR0. Limited to 16 bits[uint16_t]

Referenced by Timer_B_initUpMode().

The documentation for this struct was generated from the following file:

- timer_b.h

29.18 Timer_B_initCompareModeParam Struct Reference

Used in the [Timer_B_initCompareMode\(\)](#) function as the param parameter.

```
#include <timer_b.h>
```

Data Fields

- uint16_t [compareRegister](#)
- uint16_t [compareInterruptEnable](#)
- uint16_t [compareOutputMode](#)
- uint16_t [compareValue](#)

Is the count to be compared with in compare mode.

29.18.1 Detailed Description

Used in the `Timer_B_initCompareMode()` function as the param parameter.

29.18.2 Field Documentation

compareInterruptEnable

```
uint16_t Timer_B_initCompareModeParam::compareInterruptEnable
```

Is to enable or disable Timer_B capture compare interrupt.

Valid values are:

- **TIMER_B_CAPTURECOMPARE_INTERRUPT_DISABLE** [Default]
- **TIMER_B_CAPTURECOMPARE_INTERRUPT_ENABLE**

Referenced by `Timer_B_initCompareMode()`.

compareOutputMode

```
uint16_t Timer_B_initCompareModeParam::compareOutputMode
```

Specifies the output mode.

Valid values are:

- **TIMER_B_OUTPUTMODE_OUTBITVALUE** [Default]
- **TIMER_B_OUTPUTMODE_SET**
- **TIMER_B_OUTPUTMODE_TOGGLE_RESET**
- **TIMER_B_OUTPUTMODE_SET_RESET**
- **TIMER_B_OUTPUTMODE_TOGGLE**
- **TIMER_B_OUTPUTMODE_RESET**
- **TIMER_B_OUTPUTMODE_TOGGLE_SET**
- **TIMER_B_OUTPUTMODE_RESET_SET**

Referenced by `Timer_B_initCompareMode()`.

compareRegister

```
uint16_t Timer_B_initCompareModeParam::compareRegister
```

Selects the compare register being used. Refer to datasheet to ensure the device has the compare register being used.

Valid values are:

- **TIMER_B_CAPTURECOMPARE_REGISTER_0**
- **TIMER_B_CAPTURECOMPARE_REGISTER_1**
- **TIMER_B_CAPTURECOMPARE_REGISTER_2**

- **TIMER_B_CAPTURECOMPARE_REGISTER_3**
- **TIMER_B_CAPTURECOMPARE_REGISTER_4**
- **TIMER_B_CAPTURECOMPARE_REGISTER_5**
- **TIMER_B_CAPTURECOMPARE_REGISTER_6**

Referenced by `Timer_B_initCompareMode()`.

The documentation for this struct was generated from the following file:

- `timer_b.h`

29.19 EUSCI_A_SPI_initMasterParam Struct Reference

Used in the `EUSCI_A_SPI_initMaster()` function as the param parameter.

```
#include <eusci_a_spi.h>
```

Data Fields

- `uint8_t` [selectClockSource](#)
- `uint32_t` [clockSourceFrequency](#)
Is the frequency of the selected clock source in Hz.
- `uint32_t` [desiredSpiClock](#)
Is the desired clock rate in Hz for SPI communication.
- `uint16_t` [msbFirst](#)
- `uint16_t` [clockPhase](#)
- `uint16_t` [clockPolarity](#)
- `uint16_t` [spiMode](#)

29.19.1 Detailed Description

Used in the `EUSCI_A_SPI_initMaster()` function as the param parameter.

29.19.2 Field Documentation

clockPhase

```
uint16_t EUSCI_A_SPI_initMasterParam::clockPhase
```

Is clock phase select.

Valid values are:

- **EUSCI_A_SPI_PHASE_DATA_CHANGED_ONFIRST_CAPTURED_ON_NEXT** [Default]
- **EUSCI_A_SPI_PHASE_DATA_CAPTURED_ONFIRST_CHANGED_ON_NEXT**

Referenced by `EUSCI_A_SPI_initMaster()`.

clockPolarity

```
uint16_t EUSCI_A_SPI_initMasterParam::clockPolarity
```

Is clock polarity select

Valid values are:

- **EUSCI_A_SPI_CLOCKPOLARITY_INACTIVITY_HIGH**
- **EUSCI_A_SPI_CLOCKPOLARITY_INACTIVITY_LOW** [Default]

Referenced by EUSCI_A_SPI_initMaster().

msbFirst

```
uint16_t EUSCI_A_SPI_initMasterParam::msbFirst
```

Controls the direction of the receive and transmit shift register.

Valid values are:

- **EUSCI_A_SPI_MSB_FIRST**
- **EUSCI_A_SPI_LSB_FIRST** [Default]

Referenced by EUSCI_A_SPI_initMaster().

selectClockSource

```
uint8_t EUSCI_A_SPI_initMasterParam::selectClockSource
```

Selects Clock source. Refer to device specific datasheet for available options.

Valid values are:

- **EUSCI_A_SPI_CLOCKSOURCE_ACLK**
- **EUSCI_A_SPI_CLOCKSOURCE_SMCLK**

Referenced by EUSCI_A_SPI_initMaster().

spiMode

```
uint16_t EUSCI_A_SPI_initMasterParam::spiMode
```

Is SPI mode select

Valid values are:

- **EUSCI_A_SPI_3PIN**
- **EUSCI_A_SPI_4PIN_UCxSTE_ACTIVE_HIGH**
- **EUSCI_A_SPI_4PIN_UCxSTE_ACTIVE_LOW**

Referenced by EUSCI_A_SPI_initMaster().

The documentation for this struct was generated from the following file:

- eusci_a_spi.h

29.20 Timer_B_initCaptureModeParam Struct Reference

Used in the [Timer_B_initCaptureMode\(\)](#) function as the param parameter.

```
#include <timer_b.h>
```

Data Fields

- uint16_t [captureRegister](#)
- uint16_t [captureMode](#)
- uint16_t [captureInputSelect](#)
- uint16_t [synchronizeCaptureSource](#)
- uint16_t [captureInterruptEnable](#)
- uint16_t [captureOutputMode](#)

29.20.1 Detailed Description

Used in the [Timer_B_initCaptureMode\(\)](#) function as the param parameter.

29.20.2 Field Documentation

captureInputSelect

```
uint16_t Timer_B_initCaptureModeParam::captureInputSelect
```

Decides the Input Select

Valid values are:

- **TIMER_B_CAPTURE_INPUTSELECT_CC1xA** [Default]
- **TIMER_B_CAPTURE_INPUTSELECT_CC1xB**
- **TIMER_B_CAPTURE_INPUTSELECT_GND**
- **TIMER_B_CAPTURE_INPUTSELECT_Vcc**

Referenced by [Timer_B_initCaptureMode\(\)](#).

captureInterruptEnable

```
uint16_t Timer_B_initCaptureModeParam::captureInterruptEnable
```

Is to enable or disable Timer_B capture compare interrupt.

Valid values are:

- **TIMER_B_CAPTURECOMPARE_INTERRUPT_DISABLE** [Default]
- **TIMER_B_CAPTURECOMPARE_INTERRUPT_ENABLE**

Referenced by [Timer_B_initCaptureMode\(\)](#).

captureMode

```
uint16_t Timer_B_initCaptureModeParam::captureMode
```

Is the capture mode selected.

Valid values are:

- **TIMER_B_CAPTUREMODE_NO_CAPTURE** [Default]
- **TIMER_B_CAPTUREMODE_RISING_EDGE**
- **TIMER_B_CAPTUREMODE_FALLING_EDGE**
- **TIMER_B_CAPTUREMODE_RISING_AND_FALLING_EDGE**

Referenced by Timer_B_initCaptureMode().

captureOutputMode

```
uint16_t Timer_B_initCaptureModeParam::captureOutputMode
```

Specifies the output mode.

Valid values are:

- **TIMER_B_OUTPUTMODE_OUTBITVALUE** [Default]
- **TIMER_B_OUTPUTMODE_SET**
- **TIMER_B_OUTPUTMODE_TOGGLE_RESET**
- **TIMER_B_OUTPUTMODE_SET_RESET**
- **TIMER_B_OUTPUTMODE_TOGGLE**
- **TIMER_B_OUTPUTMODE_RESET**
- **TIMER_B_OUTPUTMODE_TOGGLE_SET**
- **TIMER_B_OUTPUTMODE_RESET_SET**

Referenced by Timer_B_initCaptureMode().

captureRegister

```
uint16_t Timer_B_initCaptureModeParam::captureRegister
```

Selects the capture register being used. Refer to datasheet to ensure the device has the capture register being used.

Valid values are:

- **TIMER_B_CAPTURECOMPARE_REGISTER_0**
- **TIMER_B_CAPTURECOMPARE_REGISTER_1**
- **TIMER_B_CAPTURECOMPARE_REGISTER_2**
- **TIMER_B_CAPTURECOMPARE_REGISTER_3**
- **TIMER_B_CAPTURECOMPARE_REGISTER_4**
- **TIMER_B_CAPTURECOMPARE_REGISTER_5**
- **TIMER_B_CAPTURECOMPARE_REGISTER_6**

Referenced by Timer_B_initCaptureMode().

synchronizeCaptureSource

```
uint16_t Timer_B_initCaptureModeParam::synchronizeCaptureSource
```

Decides if capture source should be synchronized with Timer_B clock

Valid values are:

- **TIMER_B_CAPTURE_ASYNCHRONOUS** [Default]
- **TIMER_B_CAPTURE_SYNCHRONOUS**

Referenced by Timer_B_initCaptureMode().

The documentation for this struct was generated from the following file:

- timer_b.h

29.21 EUSCI_B_SPI_initMasterParam Struct Reference

Used in the [EUSCI_B_SPI_initMaster\(\)](#) function as the param parameter.

```
#include <eusci_b_spi.h>
```

Data Fields

- uint8_t [selectClockSource](#)
- uint32_t [clockSourceFrequency](#)
Is the frequency of the selected clock source in Hz.
- uint32_t [desiredSpiClock](#)
Is the desired clock rate in Hz for SPI communication.
- uint16_t [msbFirst](#)
- uint16_t [clockPhase](#)
- uint16_t [clockPolarity](#)
- uint16_t [spiMode](#)

29.21.1 Detailed Description

Used in the [EUSCI_B_SPI_initMaster\(\)](#) function as the param parameter.

29.21.2 Field Documentation

clockPhase

```
uint16_t EUSCI_B_SPI_initMasterParam::clockPhase
```

Is clock phase select.

Valid values are:

- **EUSCI_B_SPI_PHASE_DATA_CHANGED_ONFIRST_CAPTURED_ON_NEXT** [Default]

■ EUSCI_B_SPI_PHASE_DATA_CAPTURED_ONFIRST_CHANGED_ON_NEXT

Referenced by EUSCI_B_SPI_initMaster().

clockPolarity

```
uint16_t EUSCI_B_SPI_initMasterParam::clockPolarity
```

Is clock polarity select

Valid values are:

- **EUSCI_B_SPI_CLOCKPOLARITY_INACTIVITY_HIGH**
- **EUSCI_B_SPI_CLOCKPOLARITY_INACTIVITY_LOW** [Default]

Referenced by EUSCI_B_SPI_initMaster().

msbFirst

```
uint16_t EUSCI_B_SPI_initMasterParam::msbFirst
```

Controls the direction of the receive and transmit shift register.

Valid values are:

- **EUSCI_B_SPI_MSB_FIRST**
- **EUSCI_B_SPI_LSB_FIRST** [Default]

Referenced by EUSCI_B_SPI_initMaster().

selectClockSource

```
uint8_t EUSCI_B_SPI_initMasterParam::selectClockSource
```

Selects Clock source. Refer to device specific datasheet for available options.

Valid values are:

- **EUSCI_B_SPI_CLOCKSOURCE_ACLK**
- **EUSCI_B_SPI_CLOCKSOURCE_SMCLK**

Referenced by EUSCI_B_SPI_initMaster().

spiMode

```
uint16_t EUSCI_B_SPI_initMasterParam::spiMode
```

Is SPI mode select

Valid values are:

- **EUSCI_B_SPI_3PIN**
- **EUSCI_B_SPI_4PIN_UCxSTE_ACTIVE_HIGH**
- **EUSCI_B_SPI_4PIN_UCxSTE_ACTIVE_LOW**

Referenced by `EUSCI_B_SPI_initMaster()`.

The documentation for this struct was generated from the following file:

- `eusci_b_spi.h`

29.22 DMA_initParam Struct Reference

Used in the `DMA_init()` function as the param parameter.

```
#include <dma.h>
```

Data Fields

- `uint8_t channelSelect`
- `uint16_t transferModeSelect`
- `uint16_t transferSize`
- `uint8_t triggerSourceSelect`
- `uint8_t transferUnitSelect`
- `uint8_t triggerTypeSelect`

29.22.1 Detailed Description

Used in the `DMA_init()` function as the param parameter.

29.22.2 Field Documentation

channelSelect

```
uint8_t DMA_initParam::channelSelect
```

Is the specified channel to initialize.

Valid values are:

- `DMA_CHANNEL_0`
- `DMA_CHANNEL_1`
- `DMA_CHANNEL_2`
- `DMA_CHANNEL_3`
- `DMA_CHANNEL_4`
- `DMA_CHANNEL_5`
- `DMA_CHANNEL_6`
- `DMA_CHANNEL_7`

Referenced by `DMA_init()`.

transferModeSelect

```
uint16_t DMA_initParam::transferModeSelect
```

Is the transfer mode of the selected channel.

Valid values are:

- **DMA_TRANSFER_SINGLE** [Default] - Single transfer, transfers disabled after transferAmount of transfers.
- **DMA_TRANSFER_BLOCK** - Multiple transfers of transferAmount, transfers disabled once finished.
- **DMA_TRANSFER_BURSTBLOCK** - Multiple transfers of transferAmount interleaved with CPU activity, transfers disabled once finished.
- **DMA_TRANSFER_REPEATED_SINGLE** - Repeated single transfer by trigger.
- **DMA_TRANSFER_REPEATED_BLOCK** - Multiple transfers of transferAmount by trigger.
- **DMA_TRANSFER_REPEATED_BURSTBLOCK** - Multiple transfers of transferAmount by trigger interleaved with CPU activity.

Referenced by DMA_init().

transferSize

```
uint16_t DMA_initParam::transferSize
```

Is the amount of transfers to complete in a block transfer mode, as well as how many transfers to complete before the interrupt flag is set. Valid value is between 1-65535, if 0, no transfers will occur.

Referenced by DMA_init().

transferUnitSelect

```
uint8_t DMA_initParam::transferUnitSelect
```

Is the specified size of transfers.

Valid values are:

- **DMA_SIZE_SRCWORD_DSTWORD** [Default]
- **DMA_SIZE_SRCBYTE_DSTWORD**
- **DMA_SIZE_SRCWORD_DSTBYTE**
- **DMA_SIZE_SRCBYTE_DSTBYTE**

Referenced by DMA_init().

triggerSourceSelect

```
uint8_t DMA_initParam::triggerSourceSelect
```

Is the source that will trigger the start of each transfer, note that the sources are device specific.

Valid values are:

- **DMA_TRIGGERSOURCE_0** [Default]
- **DMA_TRIGGERSOURCE_1**
- **DMA_TRIGGERSOURCE_2**
- **DMA_TRIGGERSOURCE_3**
- **DMA_TRIGGERSOURCE_4**
- **DMA_TRIGGERSOURCE_5**
- **DMA_TRIGGERSOURCE_6**
- **DMA_TRIGGERSOURCE_7**
- **DMA_TRIGGERSOURCE_8**
- **DMA_TRIGGERSOURCE_9**
- **DMA_TRIGGERSOURCE_10**
- **DMA_TRIGGERSOURCE_11**
- **DMA_TRIGGERSOURCE_12**
- **DMA_TRIGGERSOURCE_13**
- **DMA_TRIGGERSOURCE_14**
- **DMA_TRIGGERSOURCE_15**
- **DMA_TRIGGERSOURCE_16**
- **DMA_TRIGGERSOURCE_17**
- **DMA_TRIGGERSOURCE_18**
- **DMA_TRIGGERSOURCE_19**
- **DMA_TRIGGERSOURCE_20**
- **DMA_TRIGGERSOURCE_21**
- **DMA_TRIGGERSOURCE_22**
- **DMA_TRIGGERSOURCE_23**
- **DMA_TRIGGERSOURCE_24**
- **DMA_TRIGGERSOURCE_25**
- **DMA_TRIGGERSOURCE_26**
- **DMA_TRIGGERSOURCE_27**
- **DMA_TRIGGERSOURCE_28**
- **DMA_TRIGGERSOURCE_29**
- **DMA_TRIGGERSOURCE_30**
- **DMA_TRIGGERSOURCE_31**

Referenced by DMA_init().

triggerTypeSelect

```
uint8_t DMA_initParam::triggerTypeSelect
```

Is the type of trigger that the trigger signal needs to be to start a transfer.
Valid values are:

- **DMA_TRIGGER_RISINGEDGE** [Default]

- **DMA_TRIGGER_HIGH** - A trigger would be a high signal from the trigger source, to be held high through the length of the transfer(s).

Referenced by DMA_init().

The documentation for this struct was generated from the following file:

- dma.h

29.23 Calendar Struct Reference

Used in the [RTC_B_initCalendar\(\)](#) function as the CalendarTime parameter.

```
#include <rtc_b.h>
```

Data Fields

- uint8_t [Seconds](#)
Seconds of minute between 0-59.
- uint8_t [Minutes](#)
Minutes of hour between 0-59.
- uint8_t [Hours](#)
Hour of day between 0-23.
- uint8_t [DayOfWeek](#)
Day of week between 0-6.
- uint8_t [DayOfMonth](#)
Day of month between 1-31.
- uint8_t [Month](#)
Month between 1-12.
- uint16_t [Year](#)
Year between 0-4095.

29.23.1 Detailed Description

Used in the [RTC_B_initCalendar\(\)](#) function as the CalendarTime parameter.

The documentation for this struct was generated from the following file:

- rtc_b.h

29.24 Timer_A_initUpDownModeParam Struct Reference

Used in the [Timer_A_initUpDownMode\(\)](#) function as the param parameter.

```
#include <timer_a.h>
```


Data Fields

- uint16_t [clockSource](#)
- uint16_t [clockSourceDivider](#)
- uint16_t [timerPeriod](#)
Is the specified Timer_A period.
- uint16_t [timerInterruptEnable_TAIE](#)
- uint16_t [captureCompareInterruptEnable_CCR0_CCIE](#)
- uint16_t [timerClear](#)
- bool [startTimer](#)
Whether to start the timer immediately.

29.24.1 Detailed Description

Used in the [Timer_A_initUpDownMode\(\)](#) function as the param parameter.

29.24.2 Field Documentation

captureCompareInterruptEnable_CCR0_CCIE

```
uint16_t Timer_A_initUpDownModeParam::captureCompareInterruptEnable_CCR0_CCIE
```

Is to enable or disable Timer_A CCR0 captureComapre interrupt.
Valid values are:

- **TIMER_A_CCIE_CCR0_INTERRUPT_ENABLE**
- **TIMER_A_CCIE_CCR0_INTERRUPT_DISABLE** [Default]

Referenced by [Timer_A_initUpDownMode\(\)](#).

clockSource

```
uint16_t Timer_A_initUpDownModeParam::clockSource
```

Selects Clock source.
Valid values are:

- **TIMER_A_CLOCKSOURCE_EXTERNAL_TXCLK** [Default]
- **TIMER_A_CLOCKSOURCE_ACLK**
- **TIMER_A_CLOCKSOURCE_SMCLK**
- **TIMER_A_CLOCKSOURCE_INVERTED_EXTERNAL_TXCLK**

Referenced by [Timer_A_initUpDownMode\(\)](#).

clockSourceDivider

```
uint16_t Timer_A_initUpDownModeParam::clockSourceDivider
```

Is the desired divider for the clock source
Valid values are:

- **TIMER_A_CLOCKSOURCE_DIVIDER_1** [Default]
- **TIMER_A_CLOCKSOURCE_DIVIDER_2**
- **TIMER_A_CLOCKSOURCE_DIVIDER_3**
- **TIMER_A_CLOCKSOURCE_DIVIDER_4**
- **TIMER_A_CLOCKSOURCE_DIVIDER_5**
- **TIMER_A_CLOCKSOURCE_DIVIDER_6**
- **TIMER_A_CLOCKSOURCE_DIVIDER_7**
- **TIMER_A_CLOCKSOURCE_DIVIDER_8**
- **TIMER_A_CLOCKSOURCE_DIVIDER_10**
- **TIMER_A_CLOCKSOURCE_DIVIDER_12**
- **TIMER_A_CLOCKSOURCE_DIVIDER_14**
- **TIMER_A_CLOCKSOURCE_DIVIDER_16**
- **TIMER_A_CLOCKSOURCE_DIVIDER_20**
- **TIMER_A_CLOCKSOURCE_DIVIDER_24**
- **TIMER_A_CLOCKSOURCE_DIVIDER_28**
- **TIMER_A_CLOCKSOURCE_DIVIDER_32**
- **TIMER_A_CLOCKSOURCE_DIVIDER_40**
- **TIMER_A_CLOCKSOURCE_DIVIDER_48**
- **TIMER_A_CLOCKSOURCE_DIVIDER_56**
- **TIMER_A_CLOCKSOURCE_DIVIDER_64**

Referenced by `Timer_A_initUpDownMode()`.

timerClear

```
uint16_t Timer_A_initUpDownModeParam::timerClear
```

Decides if `Timer_A` clock divider, count direction, count need to be reset.
Valid values are:

- **TIMER_A_DO_CLEAR**
- **TIMER_A_SKIP_CLEAR** [Default]

Referenced by `Timer_A_initUpDownMode()`.

timerInterruptEnable_TAIE

```
uint16_t Timer_A_initUpDownModeParam::timerInterruptEnable_TAIE
```

Is to enable or disable `Timer_A` interrupt
Valid values are:

- **TIMER_A_TAIE_INTERRUPT_ENABLE**

- **TIMER_A_TAIE_INTERRUPT_DISABLE** [Default]

Referenced by `Timer_A_initUpDownMode()`.

The documentation for this struct was generated from the following file:

- `timer_a.h`

29.25 EUSCI_A_SPI_initSlaveParam Struct Reference

Used in the `EUSCI_A_SPI_initSlave()` function as the param parameter.

```
#include <eusci_a_spi.h>
```

Data Fields

- `uint16_t` [msbFirst](#)
- `uint16_t` [clockPhase](#)
- `uint16_t` [clockPolarity](#)
- `uint16_t` [spiMode](#)

29.25.1 Detailed Description

Used in the `EUSCI_A_SPI_initSlave()` function as the param parameter.

29.25.2 Field Documentation

clockPhase

```
uint16_t EUSCI_A_SPI_initSlaveParam::clockPhase
```

Is clock phase select.

Valid values are:

- **EUSCI_A_SPI_PHASE_DATA_CHANGED_ONFIRST_CAPTURED_ON_NEXT** [Default]
- **EUSCI_A_SPI_PHASE_DATA_CAPTURED_ONFIRST_CHANGED_ON_NEXT**

Referenced by `EUSCI_A_SPI_initSlave()`.

clockPolarity

```
uint16_t EUSCI_A_SPI_initSlaveParam::clockPolarity
```

Is clock polarity select

Valid values are:

- **EUSCI_A_SPI_CLOCKPOLARITY_INACTIVITY_HIGH**

- **EUSCI_A_SPI_CLOCKPOLARITY_INACTIVITY_LOW** [Default]

Referenced by `EUSCI_A_SPI_initSlave()`.

msbFirst

```
uint16_t EUSCI_A_SPI_initSlaveParam::msbFirst
```

Controls the direction of the receive and transmit shift register.
Valid values are:

- **EUSCI_A_SPI_MSB_FIRST**
- **EUSCI_A_SPI_LSB_FIRST** [Default]

Referenced by `EUSCI_A_SPI_initSlave()`.

spiMode

```
uint16_t EUSCI_A_SPI_initSlaveParam::spiMode
```

Is SPI mode select
Valid values are:

- **EUSCI_A_SPI_3PIN**
- **EUSCI_A_SPI_4PIN_UCxSTE_ACTIVE_HIGH**
- **EUSCI_A_SPI_4PIN_UCxSTE_ACTIVE_LOW**

Referenced by `EUSCI_A_SPI_initSlave()`.

The documentation for this struct was generated from the following file:

- `eusci_a_spi.h`

29.26 RTC_B_configureCalendarAlarmParam Struct Reference

Used in the [RTC_B_configureCalendarAlarm\(\)](#) function as the param parameter.

```
#include <rtc_b.h>
```

Data Fields

- `uint8_t minutesAlarm`
- `uint8_t hoursAlarm`
- `uint8_t dayOfWeekAlarm`
- `uint8_t dayOfMonthAlarm`

29.26.1 Detailed Description

Used in the [RTC_B_configureCalendarAlarm\(\)](#) function as the param parameter.

29.26.2 Field Documentation

dayOfMonthAlarm

```
uint8_t RTC_B_configureCalendarAlarmParam::dayOfMonthAlarm
```

Is the alarm condition for the day of the month.

Valid values are:

- **RTC_B_ALARMCONDITION_OFF** [Default]

Referenced by [RTC_B_configureCalendarAlarm\(\)](#).

dayOfWeekAlarm

```
uint8_t RTC_B_configureCalendarAlarmParam::dayOfWeekAlarm
```

Is the alarm condition for the day of week.

Valid values are:

- **RTC_B_ALARMCONDITION_OFF** [Default]

Referenced by [RTC_B_configureCalendarAlarm\(\)](#).

hoursAlarm

```
uint8_t RTC_B_configureCalendarAlarmParam::hoursAlarm
```

Is the alarm condition for the hours.

Valid values are:

- **RTC_B_ALARMCONDITION_OFF** [Default]

Referenced by [RTC_B_configureCalendarAlarm\(\)](#).

minutesAlarm

```
uint8_t RTC_B_configureCalendarAlarmParam::minutesAlarm
```

Is the alarm condition for the minutes.

Valid values are:

- **RTC_B_ALARMCONDITION_OFF** [Default]

Referenced by [RTC_B_configureCalendarAlarm\(\)](#).

The documentation for this struct was generated from the following file:

- `rtc_b.h`

29.27 Timer_A_outputPWMPParam Struct Reference

Used in the `Timer_A_outputPWM()` function as the param parameter.

```
#include <timer_a.h>
```

Data Fields

- `uint16_t clockSource`
- `uint16_t clockSourceDivider`
- `uint16_t timerPeriod`
Selects the desired timer period.
- `uint16_t compareRegister`
- `uint16_t compareOutputMode`
- `uint16_t dutyCycle`
Specifies the dutycycle for the generated waveform.

29.27.1 Detailed Description

Used in the `Timer_A_outputPWM()` function as the param parameter.

29.27.2 Field Documentation

clockSource

```
uint16_t Timer_A_outputPWMPParam::clockSource
```

Selects Clock source.

Valid values are:

- `TIMER_A_CLOCKSOURCE_EXTERNAL_TXCLK` [Default]
- `TIMER_A_CLOCKSOURCE_ACLK`
- `TIMER_A_CLOCKSOURCE_SMCLK`
- `TIMER_A_CLOCKSOURCE_INVERTED_EXTERNAL_TXCLK`

Referenced by `Timer_A_outputPWM()`.

clockSourceDivider

```
uint16_t Timer_A_outputPWMPParam::clockSourceDivider
```

Is the desired divider for the clock source

Valid values are:

- **TIMER_A_CLOCKSOURCE_DIVIDER_1** [Default]
- **TIMER_A_CLOCKSOURCE_DIVIDER_2**
- **TIMER_A_CLOCKSOURCE_DIVIDER_3**
- **TIMER_A_CLOCKSOURCE_DIVIDER_4**
- **TIMER_A_CLOCKSOURCE_DIVIDER_5**
- **TIMER_A_CLOCKSOURCE_DIVIDER_6**
- **TIMER_A_CLOCKSOURCE_DIVIDER_7**
- **TIMER_A_CLOCKSOURCE_DIVIDER_8**
- **TIMER_A_CLOCKSOURCE_DIVIDER_10**
- **TIMER_A_CLOCKSOURCE_DIVIDER_12**
- **TIMER_A_CLOCKSOURCE_DIVIDER_14**
- **TIMER_A_CLOCKSOURCE_DIVIDER_16**
- **TIMER_A_CLOCKSOURCE_DIVIDER_20**
- **TIMER_A_CLOCKSOURCE_DIVIDER_24**
- **TIMER_A_CLOCKSOURCE_DIVIDER_28**
- **TIMER_A_CLOCKSOURCE_DIVIDER_32**
- **TIMER_A_CLOCKSOURCE_DIVIDER_40**
- **TIMER_A_CLOCKSOURCE_DIVIDER_48**
- **TIMER_A_CLOCKSOURCE_DIVIDER_56**
- **TIMER_A_CLOCKSOURCE_DIVIDER_64**

Referenced by `Timer_A_outputPWM()`.

compareOutputMode

```
uint16_t Timer_A_outputPWMParm::compareOutputMode
```

Specifies the output mode.

Valid values are:

- **TIMER_A_OUTPUTMODE_OUTBITVALUE** [Default]
- **TIMER_A_OUTPUTMODE_SET**
- **TIMER_A_OUTPUTMODE_TOGGLE_RESET**
- **TIMER_A_OUTPUTMODE_SET_RESET**
- **TIMER_A_OUTPUTMODE_TOGGLE**
- **TIMER_A_OUTPUTMODE_RESET**
- **TIMER_A_OUTPUTMODE_TOGGLE_SET**
- **TIMER_A_OUTPUTMODE_RESET_SET**

Referenced by `Timer_A_outputPWM()`.

compareRegister

```
uint16_t Timer_A_outputPWMParam::compareRegister
```

Selects the compare register being used. Refer to datasheet to ensure the device has the capture compare register being used.

Valid values are:

- **TIMER_A_CAPTURECOMPARE_REGISTER_0**
- **TIMER_A_CAPTURECOMPARE_REGISTER_1**
- **TIMER_A_CAPTURECOMPARE_REGISTER_2**
- **TIMER_A_CAPTURECOMPARE_REGISTER_3**
- **TIMER_A_CAPTURECOMPARE_REGISTER_4**
- **TIMER_A_CAPTURECOMPARE_REGISTER_5**
- **TIMER_A_CAPTURECOMPARE_REGISTER_6**

Referenced by Timer_A_outputPWM().

The documentation for this struct was generated from the following file:

- timer_a.h

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2019, Texas Instruments Incorporated