

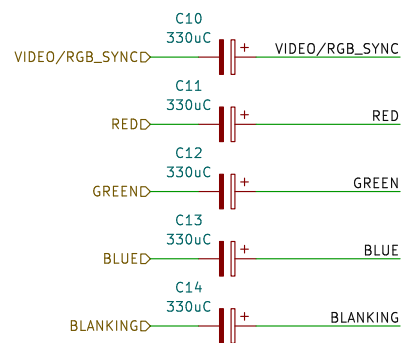


The signals FNC_IN1 and FNC_IN2 are input to the level conversion circuit of the SCART function selection control to generate the appropriate signal levels.
 When the voltage levels of both the first input terminal FNC_IN1 and the second input terminal FNC_IN2 are 3.3V, the output voltage of the output terminal FUNCTION is 0V.
 When the voltage level of the first input terminal FNC_IN1 is 0V and the voltage level of the second input terminal FNC_IN2 is 3.3V, the output voltage of the output terminal FUNCTION is 7.0V.
 When the voltage levels of both the first input terminal FNC_IN1 and the second input terminal FNC_IN2 are 0V, the output voltage of the output terminal FUNCTION is 12V.

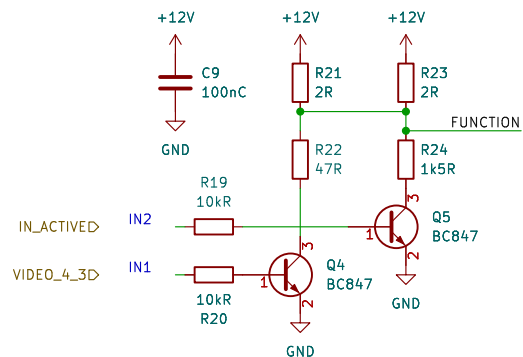

AUDIO_LEFTD AUDIO_LEFT
 AUDIO_RIGHTD AUDIO_RIGHT

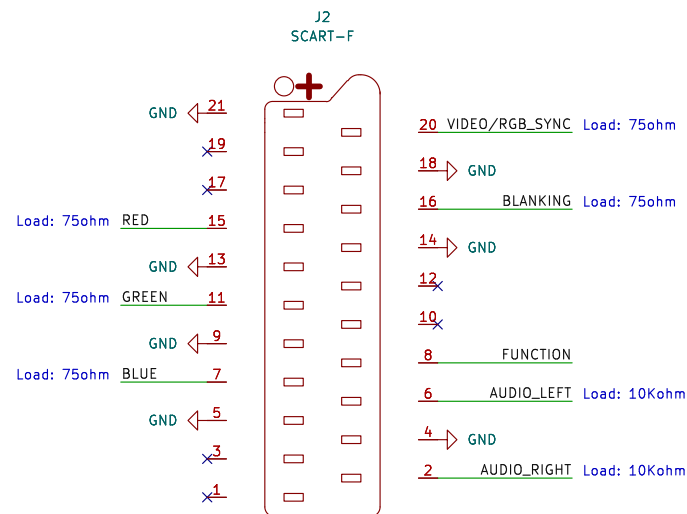

Sheet: /SCART output/
 File: SCART_output.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. kicad 7.0.7

Rev:


Id: 3/13

<http://bibl.ica.jku.at/dc/build/html/basiccircuits/basiccircuits.html>

IN1_ACTIVED
IN2_ACTIVED
IN3_ACTIVED
IN4_ACTIVED
IN5_ACTIVED
IN6_ACTIVED
IN7_ACTIVED
IN8_ACTIVED
IN9_ACTIVED
IN10_ACTIVED

Priority encoder of the input video sources

Dead time delay to allow for break
before make input video selection.

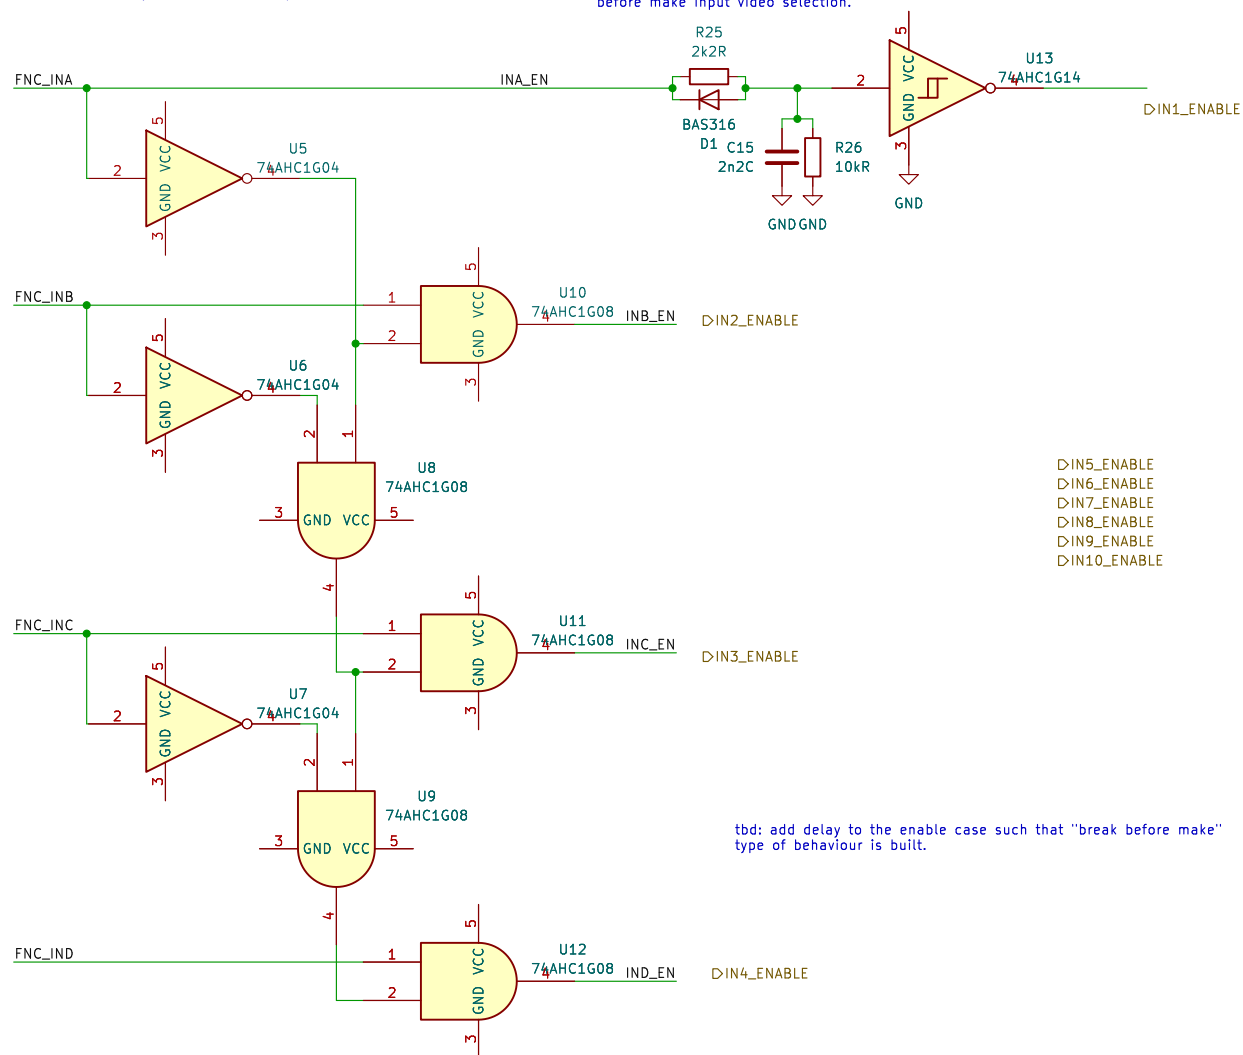

Sheet: /Priority Encoder/
File: priority_encoder.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. kicad 7.0.7

Rev:

Id: 4/13

