


Sheet: /		
File: Mathboard.kicad_sch		
Title: Mathboard		
Size: A4	Date: 2025-01-16	Rev: 1.5
KiCad E.D.A. 8.0.4		Id: 1/3

All switches are Do Not Place. They must be populated by hand.

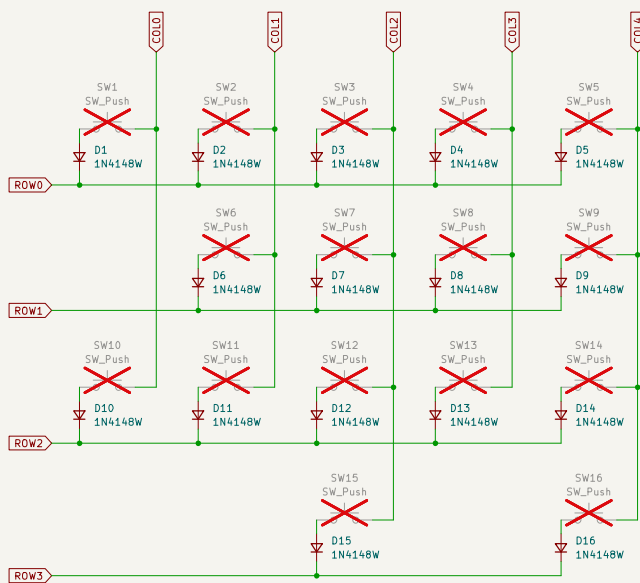

Sheet: /Switch Matrix/
File: switch_matrix.kicad_sch

Title: Mathboard

Size: A4 Date: 2025-01-16

KiCad E.D.A. 8.0.4

Rev: 1.5

Id: 2/3

[illegible]

The schematic diagram illustrates the Mode key backlight circuit. It features two LEDs connected to a P50F0201SAY driver (U5). The first LED's anode is connected to RGB_DIN+ via a 47k resistor (R9), and its cathode is connected to GND through a 100nF capacitor (C1). The second LED's anode is connected to +3V3 through a series combination of resistors R10 (10k) and R15 (10k), and its cathode is connected to GND through a diode D18.

Sheet: /Microcontroleur/ File: microcontroller.kicad_sch		D
Title: Mathboard		
Size: A4	Date: 2025-01-16	Rev: 1.5
KiCad E.D.A. 8.0.4		Id: 3/3