



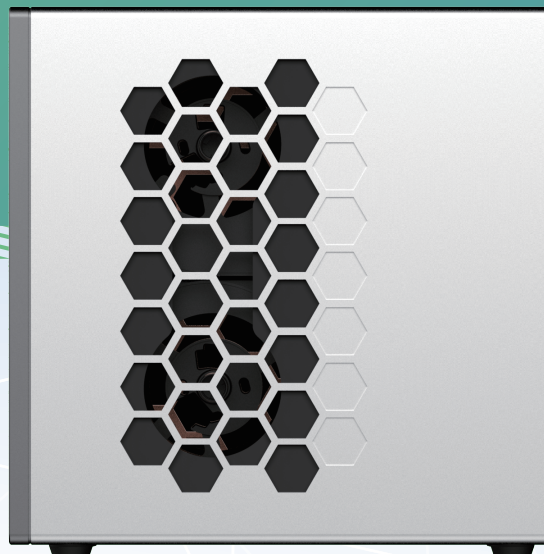

SHENZHEN MAGIC CHIP TECHNOLOGY CO.,LTD

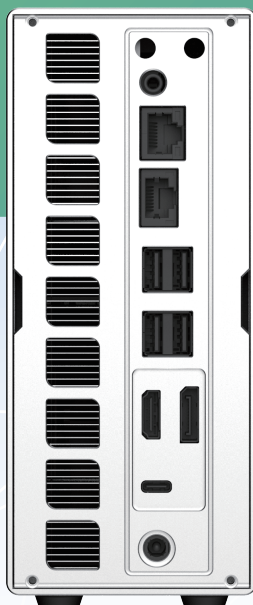

Model:MCAIPC1

Platform	AMD Ryzen™ AI Max+ 395, TDP up to 140W
Video	1x HDMI 2.1, 1x DP 2.1, 2x USB4 (Supports Quad Display)
RAM	LPDDR5x 8533MT/s, 256-bit, up to 128GB
USB	2x USB4, 6x USB3.0 (2x Front 10Gbps, 4x Rear via HUB)
Power	1x 8Pin ATX, 1x 19V DC-IN, 1x Type-C PD3.1 28V
NIC	1x 2.5GLAN RJ45 (Intel I226), 1x 10GLAN RJ45 (AQC113)
Storage	4x M.2 2280 PCIe4.0 SSD, 4x SATA
BIOS	Flash ROM: SPI Flash BIOS Code: AMI
Expansion	4x M.2 2280 PCIe4.0 SSD, 4x SATA for HDD M.2 2230 PCIe Module (supports WiFi / Bluetooth)
Feature	MS/S4/S5(Only support S0/MS/S4/S5, Not support S3) MS Wake Up by USB,PXE function, RTC Power On, Wake Up by LAN,Power On by Alarm
Size	220×220×83mm
System	Windows 10 / 11 / Linux

Front I/O connector	1x USB4, 2x USB3.0 (10Gbps) 1x SD Cardreader 1x Combo Audio Jack 1x Power Button, 1x Clear CMOS, 1x CPU PWR (High/Med/Low)
Rear I/O connector	1x HDMI 2.1 1x DP 2.1 1x USB4 (PD3.1 28V) 4x USB3.0 1x 2.5GLAN RJ45, 1x 10GLAN RJ45 1x Audio Jack
Internal I/O connector	2x FAN (1x CPU FAN, 1x System FAN) 1x Speak Header (2W*2) 1x ARGB Header (5V) 1 x FG Header (Fingerprint Module) 1x 8Pin ATX power supply



mail:
Contact@szmagicchip.com



web:
www.szmagicchip.com



office:
5E, JinDa City, Central Road,
Xinqiao Street, Baoan District,
Shenzhen City, China 518125