

UNIPACKAUTO INDIA PVT. LTD

Manufacturer, Importer and Exporter

Service

- A - Operation & Maintenance Contracts Man Power Supply.
- B - Annual Service Agreements with spares / without spares
- C - Call / Visit Based Services.
- D - All Types of Spare Parts.
- E - Contract Packaging inclusive all packaging related products.
- F - All types of Packaging Machinery Repair & Services.
- G - Any make of Packaging Machines.



Sales and Service Channel Partner

FROMM | PACKAGING SYSTEMS

sepack
Beyond Packaging

sevana



www.unipackauto.in



unipackauto@gmail.com



9991226074, 9215521314



sales@unipackauto.in

ABOUT US

Established in the year 2014 at Bhiwadi, Rajasthan



We, Unipackauto India Private Limited started in the years 2014 are one of the foremost Manufacturer, Importer, Exporter, and Supplier an extensive array of Packaging Machine. Our offered range consists of best grade Sealer Machine, Strapping Machine, Wrapping Machine, Strapping Rolls, Shrink Packaging Films, Chamber Machine, Tunnel Machine, Vacuum Packaging Machine, Battery Operated Tools, and consumables etc. We are associated with world- renowned manufacturers for sourcing the raw material necessary for manufacturing above-mentioned products. The business operations are handled by experienced management led by Mr. Sanjay Kumar and Mr. Sunil Sharma, and Mr. Naveen Sharma who has with them extensive experience in the field of industrial packaging machines. His visionary guidance as well as consistent support provided to the processes has helped our team to precision handle the involved operations and deliver optimum end solutions in the field of packaging machines.

Service and Spares Parts

All Unipackauto Strapping machines are supported by a nationwide team of skilled mobile Service Engineers who provide a local Maintenance and Repair service to our customers. Our engineers carry most spare parts in their vehicles giving them the flexibility to quickly provide the necessary repair service directly on site. We also hold a comprehensive stock of standard parts at our head office in Bhiwadi (Raj) and Panipat (Haryana), many of which can be available overnight. View our national coverage:-Unipackauto Strapping engineers are fully trained on all of our equipment. We offer support from installation and commissioning right the way through to ongoing maintenance for our complete range of strapping, wrapping and hooding machines.





STRAPPING MACHINES



UPA-HD10

Power Supply	AC 220 V (50/60 Hz)
Weight (kg)	97kg
Machine Tension	15-50 kgs
Packaging Size	Any Size
Power (kW)	400 W
Power Supply (V)	AC 220 V 50/60hz
Strapping Tension	15-50 kgs
Strapping Speed (per min.)	1.5 sec per strap
Sealing Method	Heat Sealing



UPA-HDC-201

Voltage (V/Hz)	AC 220/50
Power (W)	320
Max. Strapping Size(L×H) (mm)	Not stipulated (mm)
Strapping Speed(sec/cycle)	2.5
Strapping Force(V/Hz) (N)	10-450(Adjustable)
Height of Table (mm)	750
Width of strap used(mm)	plastic strap 6-15 Adjustable
External Dimensions (L×W×H)	900×580×750(mm)
Net Weight (kg)	100



UPA-LDC-301



Power	Not Stipulated
Size	60 x 30
Pipe Material	1.5
Machine Speed	6-15 adjustable
Warranty	450
Height	750
Voltage	220/50, % HP
	900 x 580 X 750
Weight	85-90 (kg)



AUTOMATIC

STRAPPING MACHINES



UPA-PW-01

Power supply	Not Stipulated
Strap width	60 x 30
Tension adjustment	1.5
Speed	6-15 adjustable
Max. package size	450
Power consumption	750
Min. package size (LxWxH)	220/50, % HP
Dimension (LxWxH)	900 x 580 X 750
Net weight	90
Gross Weight	



Control Panel

UPA-CH-02

Working Voltage	380V/50Hz
Strapping width require	9-15mm
Strapping Thickness require	0.55-1.00mm
Working Table Height	750mm
Working Noise	≤80dB(A)
Frame Inner Size	W800mm × H600mm(Customized)
Minimum Package Size	W100m × H80mm
Machine Size	L1420×W620×H1475 (mm)

Application Area : Suitable for all kinds of transport packaging, such as textiles, furniture, newspapers, cartons, roof tiles, glass bottles.



UPA-TP-601

Capacity	Up to 29 cycles/minute
Strap Width	8 mm, 9 mm, or 12 mm
Tension Range	7 - 45 kg*up to 70 kg on request
Maximum Package Weight	100 kg
Table Height	810 mm
Weight	220 kg
Electrical Requirements	110V, 220V, 230V, 240V 50/60Hz PH220V, 380V, 400V, 415V 50/60Hz 3PH

Eliable and robust strapping head | Electronic tension control
Auto strap feeding | Auto strap ejector | Short feed sensor
Auto strap refeed Strap end ejector



CARTON SEALING MACHINES

STANDARD CARTON SEALING MACHINE



UPA-CH-101

Power & Voltage	1P 220V 50 HZ European Plug
Carton Dimension	L (130- ∞)x W (70 – 400)x H (100-400) mm
Covey Speed	20Meter/Per Min
Tape Size	35 mm (Tape length on 2 sides 30 mm)
Carton Weight	Capacity 40 Kg
Table height	650 mm
Weight	40 kgs

Features : Auto cut off Box counting Applicable for automobile industry, springs, cosmetics, Electronic appliances



UPA-CH-201

Power supply	1P 110V/220V 50Hz/60Hz 400W, Ac Motor
Machine dimensions	L 1154xW 1000x H (table height + 840 mm)
Machine weight	240 kg
Table height	530mm~750mm (adjustable)
Convey speed	19M/min
Carton dimensions	L(150- ∞mm) W(120-480mm) H(120-450mm)
Adhesive tape spec	48~72mm
Air Pressure	5 kgf/cm ²

Features : S Automatic adjustment for different cartonwidth & heightApplicable for variable production



UPA-CH-301

Power supply	1P 110V/220V 50Hz/60Hz 400W
Machine dimensions	L 1650 x W 980 x H (Table height + 890)mm
Machine weight	300 Kg
Table height	550mm~750mm (adjustable)
Convey speed	19M/min
Carton dimensions	L (200-550), W (150-480), H (120-480) mm
Adhesive tape spec	48~72mm
Air Pressure	4-6 kg F/cm

Features : Automatically folds carton top flaps Manual adjustment for different carton widthand heightApplicable for batch production



STRAPPING MACHINES

Online Strapping System



UPA-FACH-701

Features : PLC control, stable performance Automatic detection, automatic packaging, automatic transmission, high efficiency work. It can be used alone or be connected with unmanned packing line Power Rollers chrome Plated Auto Strap Feeding Auto reset in case of strap blockage

Power 3 Phase	440 V ,AC motor
Strap Width	9, 12, 15 mm
Strapping Tension	0-70 Kg (Adjustable)
Strapping Speed	2.4 sec/strap
Box Size	L 200- ∞ W(≤750)H(≤500) mm
Top Thickness	3 mm Stainless Steel
Box Weight	capacity 100 Kg max
Machine Size	L1580×W620×H1420mm
Machine weight	NW-280 Kg
Arch 1. Standard Size	Width 800mm
X Height	600mm (inner size)
Material	aluminium alloy frame(customization)

COMBO STRAPPING WITH CARTON TAPPING



UPA--FACH-707TAP

Power Supply	1 Phase 110V/220V/240V
Packing Size Max	L 500 x W500 x H500 mm
Min	L150 x W135 x H130 mm
Tape Width	50 mm (2") or 76 mm (3")
Working Table Height	570~770 mm (Adjustable)
Sealing Capacity	20 Cartons per minute (Carton: L500 mm, Power: 60 HZ)
Dimensions	L1373 x W900 x H1375 mm

Features : This single phase Carton Sealer With Automatic Strapping Machine Combo requires 110v to 240v voltage range to function. It can apply sealing tap having 50 mm to 76 mm width range. This high speed machine can seal 20 cartons (of 500 mm size) in every minute. Offered Carton Sealer With Automatic Strapping Machine Combo is accessible in 1373 x 900x1375 mm dimension. Strapping and sealing mechanism of this equipment can be controlled simultaneously without wasting production duration. Managed by PLC, this system is equipped with imported quality sensor to maintain accuracy in operation. High performance, low noise generation, independent operation and low operating cost are the key aspects of this machine



Battery' Operated Strapping tool



UPA 190

Material	Plastic
Size	375(W) * 130(H) * 140(L)mm
Automation Grade	Semi Automatic
Weight	3.9 kg
Packaging Type	Box
Power	1.5 kW
Tension	Electrically (Push Button) 400-2000N
Battery Life	200 Strap

STRAPPING TOOLS



UPA -180

Model	XT-200
Battery	Up to 200 cycles with one battery charge
Type of Seal	Friction Weld
Tension	40-200 kg
Size (L x W x H)	375 x 130 x 140 mm
Weight	3.9 kg
Strap Thickness	0.5-1.0 mm
Strap Width	13-16 mm adj



ZP 93/97

Strap Width	12-19 mm
Thickness	0.65/PET
Strap Application	PP/PET
Motor	Brushless 24vdc motor technology
Tension range	2500N (250 kg)
Battery	Bosch 18v
Tool Weight	3.4 kg



P328

Strapping Dimensions	12.0 – 16.0 mm / ½ - " thickness 0.40 – 1.05 mm / .016 – .041"
Weight	incl. 4.0 Ah battery 4.3 kg / 9.6 lbs
Tool size	with 4.0 Ah battery L351 x W134 x H143 mm / 13.8 x 5.3 x 5.6"
Battery	Bosch 18v
Tool Weight	3.4 kg



Pneumatic Strapping Pet Tool



UPA-LD-11

Strap Material	Polyester
Air Pressure	Polyester
Model	AQD-19
Max strap tension	Max. 2744 N
Tool weight	3.8 Kg
Overall Length	275 mm
Tool width	115 mm
Tool height	130 mm

STRAPPING TOOLS



UPA-HD-12

Strap Width	12-19 mm
Thickness	0.65/PET
Strap Application	PP/PET
Motor	Brushless 24vdc motor technology
Tension range	2500N (250 kg)
Battery	Bosch 18v
Tool Weight	3.4 kg

Pneumatic Steel Strapping Tool



UPA 19/32

Suitable Strapping Straps	Steel
Strap Width	19-32 mm
Strap Thickness	upto 1.27 mm
Air pressure	0.4-0.6 mpa
Tension	9.8 kn
Weight	7kg
Application	All Products
Level	Heavy Duty




UPA 12/16/19

Strap Width	12/16/19 mm
Thickness	0.38-0.65 mm
Tension range	4500N
Weight	4.8 kgs
Air pressure	6 bar pressure
	Tension, sealing and cutting in on tool
	Single notch tool
	Light application



STRETCH WRAPPING MACHINES

Pallet Stretch Wrapping Machine

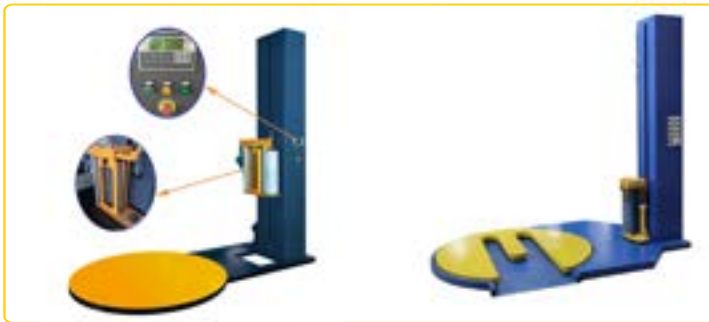

UPA-FG2000A/B/BW

Voltage	220/ 230 V
Frequency	50-60 Hz
Turntable Speed	15 rpm
Weight	2400 kgs
Color	Multi
Height	1350 mm
Minimum Order Quantity	1



MH-FG800B

Thickness	Film: 17-25 Micron
Brand Name	Sumi Sepack Sevana
Width	100-500 mm
Pressure	Air Pressure: 4 Kg/cm2 2-6 Kg/cm2
Air Composition	0.7 m3/hr
Item Weight	80 Kg
Height	Wrapping: 500-650 mm

PRE STRETCH WRAPPING



MH-FG-2000 B




MH-FG-800 B

Power	230V/50Hz/1KW
Machine Weight	0 kg
Available Programs	Up and down/with topsheet/manual
Film feeder	Powered prestretch, ratio: 240%
Max Load	2000kg
Pax Pallet size	1200 x 1200 mm
Turntable diameter	1650 mm
Max wrapping height	2400 mm

Power	240V/0.75 kw/50 Hz.
Air	5-7 kg/sq.cm, 0.7cbm/hr
Turn Plate speed	20 rotations / min
Product wt	< 80 kg
Wrap Height	300 - 820 mm
Product spec.	Diagonal upto 1000 mm
Film	12"-16" (W)X17-25 mic (T)
Core dia outside	Upto 250 mm





ONLINE PACKAGING SYSTEMS

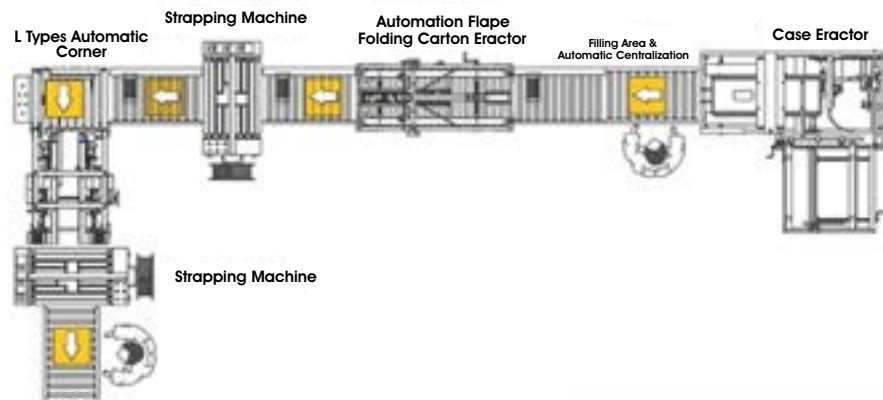


**Sealing and Strapping Machine
Solution I**

**Automatic Flaps Folding Sealing
Strapping Machine
Solution II**

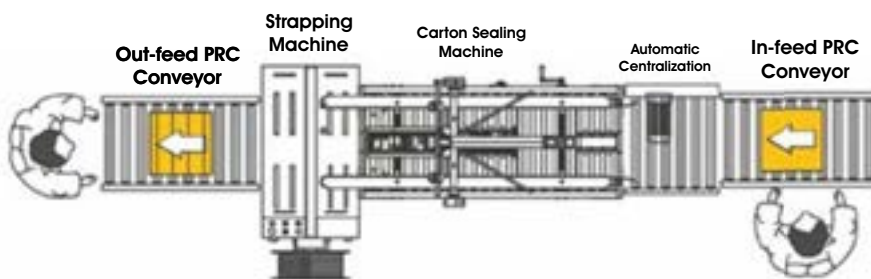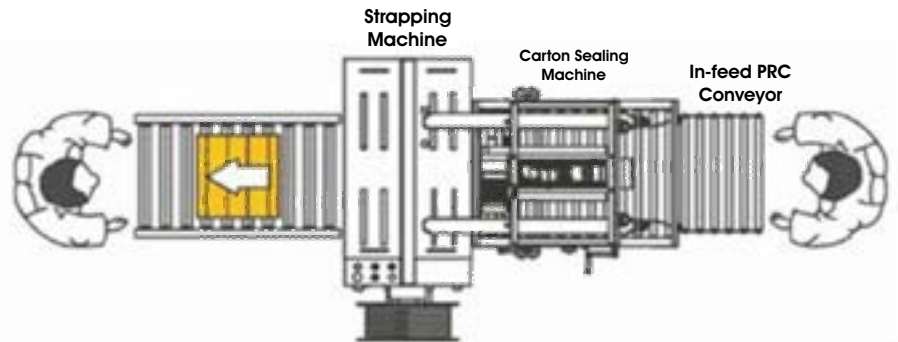

Solution III

Solution IV

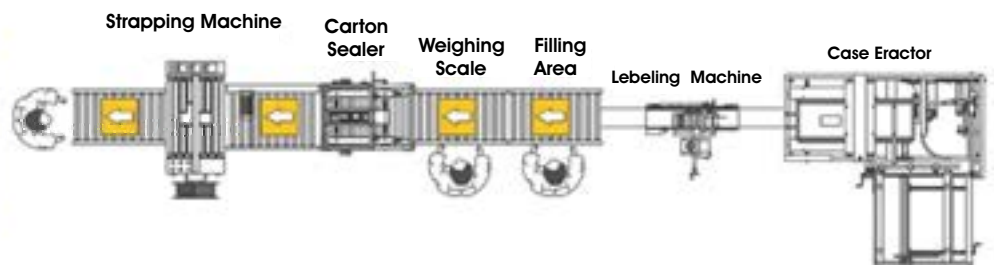



Manual Strapping Tools (PET/PP Hand Tools)



Tensioner P330



Sealer C5004/C5015 (off-set type)



C 3014 / C 3015 / C 3016

Manual Strapping Tools (Steel Strapping Hand Tools)



SI 200 - Taiwan



Tensioner 290



Tensioner 249



Sealer C3160/C3180



Sealer C3104/C3105/C3106



Cutter H300

PACKAGING ACCESSORIES



Strapping Dispenser



Stretch Film Dispenser



Bopp Tape Dispenser




Metal Clips





CONSUMABLES



PET Strap




PP Strap

Elongation	9-12%
Elastic Returns	7%
Strap Color	Green*
Surface Finish	Embossed / Plain
Core Size	203 mm / 406 mm
Variation	0 to -7.5% in length

Elongation	Upto 25%
Elastic Returns	-
Strap Color	White
Surface Finish	Embossed
Core Size	203 mm ID/ 188 L mm
Variation	0 to -7.5% in length



Bopp Tape



Stretch Film

Size	12 mm to 72 mm
Thickness	45 /50micron
Length	65 /650meters
Type	Brown / Transparent

Type	Wrap
Standard width	150 mm to 1000 mm
Core Size	3 inch
Stretchability	130-150%



Edge Board

Angle Edge Board is a multi-layered craft paper formed in a rigid angle. It is the most economical packaging units. It is used as a packaging medium to protect edges /corners of products.



VACCUUM PACKAGING MACHINE



Model	QS300XPVIV2
Material	Stainless Steel

Nitrogen Flushing and Sealing M/C

Sensor based system for accuracy
Microprocessor based
Digital display
Four preset programs
Cycle counter
See-through lid
Stainless steel contact parts
Emergency stop button



Model	QS500VSGV4
Voltage	415/50

Economical vacuum

Increased productivity
Sensor based system for accuracy
Microprocessor based
Digital display
Four preset programs
Cycle counter
Dome type lid
Sturdy and heavy gauge design



Chamber dimensions	(L1xW1xH1) (mm2) 720x525x140
Seal width (mm)	10

Dome Type



Model	QS200FFR
Material	MS

Fill Sealers

Sensor based system for accuracy
Microprocessor based
Digital display
Four preset programs
Cycle counter
See-through lid
Stainless steel contact parts
Emergency stop button



Model	QS780V
Voltage	415 V

Long Chamber

Sealing possible at different angles
Ideal for sealing heavy plastic bags, mattresses, machinery etc.
Used for laminated pouches / materials



Model	QS400T
Brand	Sevana

Tong Sealer



SHIRNK TUNNEL AND SEALER

Tunnel type shrink wrapping machine

Thermally insulated, energy efficient design
Consumes less space
Microprocessor based
Variable speed conveyor
Suitable for POF, PVC
Adjustable chamber height



Model	QS4020ESTV
Maximum packet size	500 x 350 x 180 (mm)

Economical Shrink

Thermally insulated, energy efficient design

Microprocessor based
Variable conveyor speed
Suitable for POF, PVC
Customized versions available
Can be integrated with automatic packaging lines
Used for pilfer-evident high visibility Packaging



Model	QS3520STVL
Chamber length (mm)	900

Shrink Tunnel

Rotating product fixture

Microprocessor based
Variable conveyor speed
Digital display
Four preset programs
One-touch shut down
Sturdy and heavy guage design
Caster wheel mounted



Model	QS2032STVR
Maximum Loading	15 kg

Rotary Cup Shrink

Pneumatic product pushing, product holding and sealing

Sealing and cutting
Digital temperature controller
Emergency stop button
Variable speed conveyor
Mesh type conveyor
Speed Upto 6-10 cycles per minute
Suitable for bottles, cartons and boxes singly or in batches



Model	QS5540STVLI
Sealing length (mm)	650

Sleeve Wrapper

L-Sealing

Adjustable timer
Product take away (PTA)
Motorised belt conveyor
Magnetic hold-down
These sealers can be used in combination with Sevana's shrink tunnels
Microprocessor based controls



Model	QS5545LPTA
Machine dimensions	(LxWxH) (mm) 1610x757x1040

Semi Automatic L Sealer

Fully automatic

L-sealing
Microprocessor based
Preset programs
Digital display
Pre-settable product counters Error display Waste film take-up friction conveyor



Model	QS5545LA
Brand	Sevana

Automatic I Sealer



SEALING MACHINES

Operational Mode Horizontal/vertical
Material Available in MS, SS and FSS
Usage/Application Pouch Sealing
Type Horizontal
Power Consumption 750 W



Conveyor Load	3kg
Sealing Width	10 - 12 mm

SCS 3H

Operational Mode Vertical/HORIZONTAL
Power -240 VAC/50 Hz./1600W
Conveyor Height -250 mm
Conveyor Width (Max) -250 mm
Belt width 215 mm
Pouch ht. 140 mm - 780 mm



Power	240 VAC/50 Hz./1600W
Conveyor Height	250 mm

SCS 15V

Adjustable Temperature
Variable speed conveyor
Vertical/Horizontal mountable models
(H-Horizontal model I V-Vertical model)
CSSmart ($\pm 1^{\circ}\text{C}$ Temperature variation)
Micro-Controller based sealer for
accurate sealing
(suitable for wide spectrum of materials)



Conveyor load	30 kg08 to 10
SealingWidth (mm)	Vertical Smart900

SCS 30V

Sealing Width(mm)- 10
Temperature Range - ()0-300
Conveyor Table Size(L×W)(mm)
840×153Max. Conveyor Loading
for Single Package(kg)≤1Overall
Conveyor Loading(kg)≤3External
Dimensions (L×W×H)(mm)840×380×320
Net Weight(kg)23



Sealing Power (W)	300x2
Sealing Speed	0-12 (0-16) (m/min)

UPA 3H

Sealing speed - 0-12m/min
Sealing width - 6-12mm
Max sealing height - 600mm
Min sealing height - 80mm
Temp range - 0-300 printing way
Conveyor belt width - 20cm
Conveyor length - 123cm
Weight - 45kg



Voltage	110/220V 50/60HZ
Power	1355W

UPA 15H

filling Capacity - 1 kg x 3
Sealing - 0-12 m/min
Power - 500 W
Dimensions - 620X680X1050mm
Sealing width - 12 mm
Temperature - 0-300
degree celsius
Minimum Order Quantity - 1



Filling Capacity	1kg x 3
Power	500w

CS SERIES WITH GAS FLUSHING



CODER/FILLER/INDUCTION M/C



Semi- Automatic
Accuracy $\pm 1\%$
adjustment for volume
Simple and compact structure
SS construction, easy to wash
Filling volumes 100 ml — 1000 ml
SS storage hopper. Manual and auto modes



Weight	26 KG
Power	180 W

Filling Volumes	100 ml - 1000 ml
Speed	10 - 15 Dozes /min

DRY INK CODER

PASTE/LIQUID FILLER

Weight 3.5 Kg
Automation Grade Semi-Automatic
Sealing Diameter -20 mm to 80 mm
Widely used in Pharma, Chemical, lubricant, cosmetic and food industries
Makes the bottles leak proof, pilfer evident, Offers extended shelf life



Weight - 72 kgs
Bottle Height 40 - 300 mm
Automation Grade - Semi-Automatic
Voltage 240 VAC
Material - Stainless Steel
Orientation - Vertical
Sealing Speed - 0 ~12 m/min



Voltage	240 VAC
Power	500W

Power	1.5 kW 240 V 50Hz
Conveyor Speed	0 - 12 Mts./Min

INDUCTION SEALER IS 80P

INDUCTION SEALER IS130C

Weight - 38Kg
Sealing Speed - upto 20 Bottle/min
Conveyor Speed 0-10 Mts./Min
Bottle Dia - 20-50mm
Bottle Height - 40-200mm
Dimension - 1170x490x640mm
Induction sealers are used for hermetically sealing the plastic & glass bottle caps with aluminum foils.



Weight - 72 kgs
Bottle Height 40 - 300 mm
Bottle Diameter 30 - 130 mm
We are offering Gravimetric Weigh Dispenser is well known for its accuracy and optimum performance. We offer these products at competitive prices as per the need of the customers



Size	1150 x 480 x 400 mm
Power	1.5 kW 240 V 50Hz

Power	1.5 kW 240 V 50Hz
Conveyor Speed	0 - 12 Mts./Min

INDUCTION SEALER IS 50C

GRAVIMETRIC WEIGH DISPENSER GW 10





Hand operated sealing machines

Ideal for sealing heat sealable poly pouches | Hand operated Impulse (Instant) sealing | Hot bar sealers for laminated pouches | Adjustable electronic timer | Audio visual sealing indicators | Suitable for packing solids, granules and powders | Round element option for simultaneous sealing and cutting

Technical specifications

Model	Seal (mm)		Power		Dimension (mm)			Weight Kg.
	Length	Width	V	VA	L	B	H	
Impulse Sealers								
125D	122	16/1.6	240	200	240	85	155	1.7
190HP	190	1.6 x 2	240	545	305	85	155	2.75
190HW	190	3	240	545	305	85	155	2.75
2000v2	200	1.6	240	215	305	85	155	2.5
2000H	200	1.6	240	245	305	85	155	2.7
250D	250	1.6	240	320	350	85	155	2.85
300D	300	1.6	240	340	405	85	155	3.2
300H	300	1.6	240	390	405	85	155	4.3
300HW	300	3	240	500	405	85	155	4.4
400D	400	1.6	240	525	535	85	155	4.6
400H	400	1.6	240	565	535	85	155	4.7
400HW	400	3	240	600	535	85	155	5
500H	500	1.6	240	545	630	85	155	5.6
600H	600	1.6	240	710	720	85	155	6.5
Hot bar Sealers								
200HH	200	11	240	180	340	85	155	2.6
300HH	300	11	240	260	410	85	155	3.0

*Indicated dimensions are without sealing

Foot operated sealing machines

Adjustable electronic timer
Tiltable sealing jaw
Adjustable bag rest
Ease of operation
High productivity
Visual indication during sealing
Audio indication at the end of sealing
Hot bar sealer with energy regulator for sealing laminated pouches



Technical specifications

Model	Seal (mm)		Power		Dimensions (mm)			Weight (kg)
	Length	Width	V	VA	L	B	H	
Impulse Sealers								
Q5-200 F	200	1.6	240	245	660	620	1050	17
Q5-200 FE	200	5	240	470	660	620	1050	18
Q5-200 FP	200	3x2	240	750	660	620	1050	22
Q5-300 F	300	1.6	240	400	660	620	1050	19
Q5-300 FE	300	5	240	600	660	620	1050	22
Q5-300 FP	300	3x2	240	800	660	620	1050	24
Q5-400 F	400	1.6	240	470	660	620	1050	20
Q5-400 FE	400	5	240	720	660	620	1050	23
Q5-500 F	500	1.6	240	560	660	620	1050	20
Q5-500 FE	500	5	240	750	660	620	1050	23
Q5-600 F	600	1.6	240	650	700	620	1050	23
Q5-600 FE	600	5	240	920	700	620	1050	26
Q5-900 F	900	1.6	240	950	1000	620	1050	30
Q5-900 FE	900	5	240	1200	1000	620	1050	35
Model	Seal (mm)		Power		Dimensions (mm)			Weight (kg)
	Length	Width	V	W	L	B	H	
Hot bar Sealers								
200 FHM	200	12	240	340	660	620	1050	
300 FHM	300	12	240	500	660	620	1050	
400 FHM	400	12	240	650	660	620	1050	

Delta series (Economy)

No tilting facility; F D- Standard model, FE D- 5mm sealing Width, FP D- Two parallel 3mm wide seals, FHE D- Hot bar sealers



Technical specifications

Model	Seal (mm)		Power		Dimensions (mm)			Weight (kg)
	Length	Width	V	VA	L	B	H	
Impulse sealers								
300 F D	300	1.6	240	400	500	500	1000	17
300 FE D	300	5	240	600	500	500	1000	18
300 FP D	300	3x2	240	800	500	500	1000	19
400 F D	400	1.6	240	470	500	500	1000	22
400 FE D	400	5	240	720	500	500	1000	24
Model	Seal (mm)		Power		Dimensions (mm)			Weight (kg)
	Length	Width	V	W	L	B	H	
Hot bar sealers								
200 FHE D	200	12	240	180	500	530	930	14
300 FHE D	300	12	240	260	500	530	930	17
400 FHE D	400	12	240	340	500	530	930	20



Mobile sealer

- For packing heavy bags
- Ideal for tea sacks, chemicals, spices etc.
- A mobile machine can reach to the filled bag
- Height adjustability 0.3 to 1.3m

Technical specifications

Model	Dimension (mm)			Sealing length		Weight (kg)	Power		Rating
	L	B	H	Length	Width		V	W	
900MSL	1250	335	1180	900	5	56	240	1040	
900MSL SS 0349P	1250	335	1180	900	5	56	240	1040	

*For SS model MSL only extra parts except for (Caster wheel), Reverse Bend & Flange holder are fitted and in SS 304 grade.

Photo shown may vary from actual products



Bed sealer

- can seal up to a length of six feet 5mm sealing width
- Reverse bend rocker arm for uniform- sealing from one end to the other
- Equipped with bearing mounted lever to achieve maximum pressure during sealing

Technical specifications

Model	Seal		Power	
	Length	Width	V	VA
1800 IM	1800 mm	5	240	2700
1200 IM	1200 mm	5	240	1500

Foil sealers

- For pillar evident and leak proof sealing of aluminum foils on cups, cans, bottles, plastic containers and trays
- Height adjustability and provision for heat control
- Strong cups, cans and bottles can be sealed without extra attachments. Flimsy Cups and trays require extra support at the bottom of the neck, otherwise the cup/neck may be crushed during sealing operation.
- The support has to be matched with the shape of the cup to be sealed. (Provide dimensional sketches or samples for design of appropriate support)

Technical specifications

Model	Heal adjusting range from base	Sealing Dia (mm)	Power Watt	Voltage	L B H (mm)			Weight Kg
					L	B	H	
FS 1045	70 to 300mm	80mm	200	AC 240	560	250	650	8.5
FS 1545	70 to 300mm	140mm	300	AC 240	560	250	650	11
FS 2045	70 to 300mm	190mm	450	AC 240	560	250	650	13.5
FSO 1045	50 to 150 mm	80mm	200	AC 240	400	175	250	4
FSO 1545	50 to 150 mm	140mm	300	AC 240	400	175	250	4.5



Foil Sealer (FS)



Foil Sealer Delta



Hot air gun

The Stylish Hot Air Gun from Sepack is generally used for shrink wrapping of objects like bottles, containers, tray, hardware items & spare parts. Shrink wrapping provides an attractive pillar proof shape hugging protection.

Technical specifications

Air flow	250/500 LPM
Temp	400°C/550°C
Voltage	240V/50Hz
Power	1800W



Carton sealer

A hand held tool for dispensing BOPP adhesive tapes over boxes, containers etc.



SERVICES :

We make tailor made offers as suitable to customer for service contract and new machine .

At UPA our standard hours for service and aftercare support are 24*7 in a week. We also provide complementary technical support service during our standard hours which allows service contract holders to obtain advice and support through a telephone consultation with one of our skilled engineers. We are able to service and repair on most makes of strapping machinery. We cover most of the India or can offer a return to base repair service where we can provide an estimate for repairs prior to any work being carried out.



Our Channel Partners



Our Network

Haryana | Rajasthan | Gujrat | Mumbai | Himachal Pradesh | Delhi
Uttarakhand | Punjab | Chandigarh | Kerala

Our Clients

Kajaria

CK BIRLA GROUP
HIL

HONDA

hero

Whirlpool

INTEXGROUP

Cipla




ASHOK LEYLAND

 **LG**




AJANTA

KUNDAN CAB
WIRING CABLES

UNIPACKAUTO INDIA PVT. LTD

Experts In Packaging & Servicing

Bhiwadi Branch

Office No. 2, Behind of shiv shakti oil meal,
Thada - Trehan Road, Alwar Road, Village-
Thada, City- Bhiwadi Distt- Alwar -301018

Panipat Branch

C/O Pooja Electronics, Mahadev Colony,
City- Panipat, State- Haryana , 132103



9991226074, 9215521314, 7232001235, 9785377675



unipackauto@gmail.com, unipackautoindia@gmail.com



www.unipackauto.in