


TRITON SPACE TECHNOLOGIES SOLENOID VALVE PRODUCT LINE



Valve	Valve Type	Direct Acting Solenoid Valves				Direct Acting Latching Solenoid Valves			Pilot-Actuated Solenoid Valves				
		In-Line 2-Way Normally Closed	In-Line 3-Way Normally Closed	2-Way Normally Closed	2-Way Normally Closed	In-Line 2-Way Normally Closed	2-Way Normally Closed	2-Way Normally Closed	2-Way Normally Closed	2-Way Normally Closed	In-Line 2-Way Normally Closed	In-Line 2-Way Normally Closed	In-Line 2-Way Normally Closed
	Valve Model	TS-SD02B3000-1000	TS-SD02B3000-1007	TS-SD04B3000-0000	TS-SDC04B6000-1400	TS-SDL04A600-1506	TS-SDL04B3000-0006	TS-SDLC04B6000-1406	TS-SP06B8000-3210	TS-SP08B2000-0210	TS-SP16A2000-0200	TS-SP16A3000-7000	TS-SPC20F250-1410
Pressure	Valve Body	0-3,000 psia	0-3,000 psia	0-3,000 psia	0-6,000 psia	0-600 psia	0-3,000 psia	0-6,000 psia	100-8,000 psia	100-2,000 psia	50-2,000 psia	100-3,000 psia	0-250 psia
	Body Proof	4,500 psia	4,500 psia	4,500 psia	9,000 psia	900 psia	4,500 psia	9,000 psia	12,000 psia	3,000 psia	3,000 psia	4,500 psia	375 psia
	Body Burst	> 7,500 psia	> 7,500 psia	> 7,500 psia	> 15,000 psia	> 1,500 psia	> 7,500 psia	> 15,000 psia	> 20,000 psia	> 5,000 psia	> 5,000 psia	> 7,500 psia	> 625 psia
Connectors (Inlet/Outlet)		AS5202-02	AS5202-02	AS5202-04	AS5202-04	AS1098-04 "KC Ring Seal"	AS5202-04	AS5202-04	AS5202-06 O-Ring Boss Port	AS5202-08 O-Ring Boss Port	1.0" AN-16 Male 37° Flare	1.0" AN-16 Male 37° Flare	AS1895/15-125
Flow	Liquid Flow Coefficient (Cv)	0.011	0.011	0.180	0.30	0.28	0.180	0.30	1.5	2.5	21	21	39
	ESEOD (C _d = 0.6)	0.025 in	0.025 in	0.1 in	0.13 in	0.125 in	0.1 in	0.13 in	0.29 in	0.375 in	1.08 in	1.08 in	1.47 in
Actuation Time	OPEN	< 100 milliseconds	< 100 milliseconds	< 100 milliseconds	< 100 milliseconds	< 50 ms	< 100 milliseconds	< 100 milliseconds	< 200 milliseconds	< 200 milliseconds	< 250 milliseconds	< 50 milliseconds	< 500 milliseconds
	CLOSED	< 100 milliseconds	< 100 milliseconds	< 100 milliseconds	< 100 milliseconds	-			< 500 seconds	< 500 seconds	< 2.0 seconds	< 150 milliseconds	< 2.0 seconds
	DELATCH	-				< 50 ms	< 100 milliseconds	< 100 milliseconds	-				
Materials	Wetted Materials	316 SS, Magnetic Iron, Ceramic, Polyamide-Imide, Viton	316 SS, Magnetic Iron, Ceramic, Polyamide-Imide, Viton	7050-T7451 Al, 7075-T6 Al, Viton	316 SS, PTFE, SS-Filled PTFE	430FR SS, 316 SS, SS-Filled PTFE	7050-T7451 Al, 7075-T6 Al, Viton	316SS, SS-Filled PTFE	A286 SS, PTFE, PEEK	7075 Al, 7050 Al, 316 SS, Fluorosilicone, PEEK	7050 Al, 316 SS, PEEK, Fluorosilicone, PTFE	17-4PH SS, PEEK, Viton, PTFE	316 SS, Nitronic 60, Elgiloy, PTFE
	Main Seal Material	Polyamide-Imide	Polyamide-Imide	Viton (90 Durometer)	SS-Filled PTFE	SS-Filled PTFE	Viton (90 Durometer)	SS-Filled PTFE	PEEK	PEEK	PEEK	PEEK	PTFE
	Seal Materials	Viton (90 Durometer)	Viton (90 Durometer)	Viton (90 Durometer)	PTFE - Spring Energized Seals	Chemrez 537 FFKM	Viton (90 Durometer)	PTFE - Spring Energized Seals	PTFE - Spring Energized Seals	Fluorosilicone (70 Durometer)	Fluorosilicone (70 Durometer), PTFE	Viton (90 Durometer), PTFE	PTFE - Spring Energized Seals
Leakage	Internal at RT	1 x 10 ⁻³ sccs He	1 x 10 ⁻³ sccs He	1 x 10 ⁻³ sccs He	1 x 10 ⁻² sccs He	1 X 10 ⁻³ SCCS He	1 x 10 ⁻³ sccs He	1 x 10 ⁻² sccs He	1 x 10 ⁻² sccs He	1 x 10 ⁻² sccs He	< 1 x 10 ⁻² sccs He	< 1 x 10 ⁻² sccs He	1 x 10 ⁻² sccs He
	External at RT	1 x 10 ⁻³ sccs He	1 x 10 ⁻³ sccs He	1 x 10 ⁻³ sccs He	1 x 10 ⁻¹ sccs He	1 X 10 ⁻⁴ SCCS He	1 x 10 ⁻³ sccs He	1 x 10 ⁻¹ sccs He	1 x 10 ⁻³ sccs He	1 x 10 ⁻³ sccs He	< 1 x 10 ⁻³ sccs He	< 1 x 10 ⁻³ sccs He	1 x 10 ⁻³ sccs He
Electrical	Nominal Voltage	28 VDC	28 VDC	28 VDC	28 VDC	28 VDC	28 VDC	28 VDC	28 VDC	28 VDC	28 VDC	28 VDC	28 VDC
	Operating Range	23 - 32 VDC				23 - 32 VDC			18 - 36 VDC	18 - 36 VDC	18 - 36 VDC	23 - 32 VDC	18 - 36 VDC
	Current Draw at 28 VDC	0.7 A	0.7 A	0.8 A	0.85 A	1.8 A	0.8 A	0.85 A	0.28 A	0.28 A	0.28 A	1.4 A	0.28 A
	Electrical Connector	MIL-DTL-38999/25YA98PN	MIL-DTL-38999/25YA98PN	MIL-DTL-38999/25YA98PN	MIL-DTL-38999/25YA98PN	MIL-DTL-38999/21YA98PN	MIL-DTL-38999/25YA98PN	MIL-DTL-38999/25YA98PN	MIL-DTL-38999/25YA98PN	MIL-DTL-38999/25YA98PN	MIL-DTL-38999/25YA98PN	MIL-DTL-38999/25YA98PN	MIL-DTL-38999/25YA98PN
Dimensions L X W X H		1.31" X 1.31" X 2.95"	1.31" X 1.31" X 2.95"	2.13" X 1.8" X 4.04"	2.13" X 2.13" X 4.24"	3.7" X 1.73" X 2.76"	2.13" X 1.8" X 4.04"	2.13" X 2.13" X 4.24"	2.86" X 1.56" X 8.65"	2.98" X 1.43" X 7.88"	5.32" X 2.68" X 5.16"	5.32" X 2.68" X 5.51"	5.5" X 3.5" X 6.3"
Operating Temperature		-10 °F to 150 °F	-10 °F to 150 °F	-10 °F to 150 °F	-150 °F to 150 °F	-10 °F to 150 °F	-20 °F to 150 °F	-150 °F to 150 °F	-65 °F to 150 °F	-65 °F to 150 °F	-20 °F to 150 °F	-20 °F to 150 °F	-320 °F to 150 °F
Weight		0.55 lbs	0.55 lbs	0.83 lbs	1.8 lbs	1.1 lbs	0.88 lbs	1.85 lbs	3.0 lbs	1.1 lbs	2.1 lbs	3.6 lbs	4.68 lbs

TRITON SPACE TECHNOLOGIES SOLENOID VALVE PRODUCT LINE

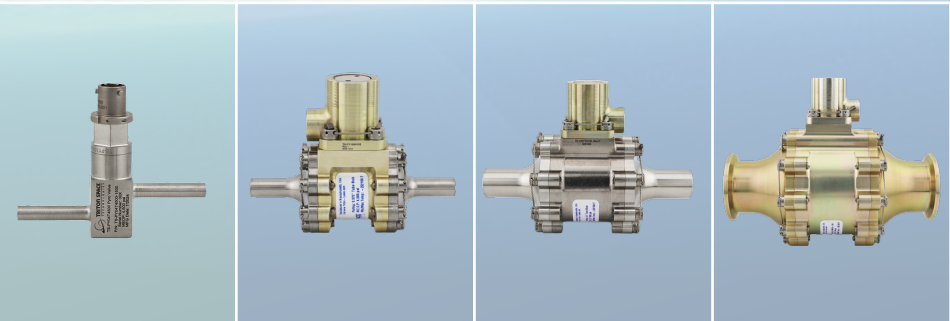

Valve	Valve Type	Replaceable Pyro Cartridge	Resettable Pin-Puller Poppet Valves		
	Valve Model	TS-PY04T4500-1500	TS-PY06T4500-0000	TS-PY12T500-2400	TS-PY24F500-0400
Pressure	Valve Body	0-4,500 psia	0-4500 psia	0-500 psia	0-500 psia
	Body Proof	6,750 psia	6,750 psia	750 psia	750 psia
	Body Burst	> 11,250 psia	> 11,250 psia	> 1,250 psia	> 1,250 psia
Connectors (Inlet/Outlet)		1/4" Tube Stubs	1/2" Tube Stubs	1/2" Tube Stubs	AS1895/15-150
Flow	Liquid Flow Coefficient (Cv)	0.013	1.66	16.2	150
	ESEOD (C _d = 0.6)	0.027 in	0.30 in	0.95 in	2.9 in
Actuation Time (OPEN)		< 50 milliseconds	< 100 milliseconds	< 100 milliseconds	< 100 milliseconds
Materials	Wetted Materials	316 SS, Nitronic 60 SS, Viton	7050 Al, Titanium 6AL4V, Polyamide-Imide, Viton	Titanium 6AL4V, PTFE	7050-T6 Al, 7075-T6, PTFE
	Main Seal Material	Frangible Nitronic 60 Membrane	Polyamide-Imide	PTFE	PTFE
	Seal Materials	Viton (90 Durometer)	Viton (90 Durometer)	PTFE – Spring Energized Seal	PTFE – Spring Energized Seal
Leakage	Internal at RT	1 x 10 ⁻³ sccs He	1 x 10 ⁻² sccs He	1 x 10 ⁻² sccs He	1 x 10 ⁻² sccs He
	External at RT	1 x 10 ⁻³ sccs He	1 x 10 ⁻³ sccs He	1 x 10 ⁻³ sccs He	1 x 10 ⁻¹ sccs He
Pyrotech nic	Pyrotechnic Actuator	NASA Standard Initiator (or commercial equivalent)	NASA Standard Initiator (or commercial equivalent)	NASA Standard Initiator (or commercial equivalent)	NASA Standard Initiator (or commercial equivalent)
	Pyrotechnic Device Interface	AS5202-03 O-Ring Boss Port	AS5202-03 O-Ring Boss Port	AS5202-03 O-Ring Boss Port	AS5202-03 O-Ring Boss Port
	Pyro Actuation Mechanism	Frangible SS Disk	Pin Puller	Pin Puller	Pin Puller
	Pyro Electrical Connector	MS3112E8-2P (NSI)	MS3112E8-2P (NSI)	MS3112E8-2P (NSI)	MS3112E8-2P (NSI)
Dimensions L X W X H		3.20" X 0.70" X 1.93"	5.15" X 2.34" X 3.72"	5.15" X 2.34" X 3.72"	6.04" X 3.5" X 4.85"
Operating Temperature		-20 °F to 150 °F	-20 °F to 150 °F	-20 °F to 150 °F	-20 °F to 150 °F
Weight		0.24 lbs	0.57 lbs	1.46 lbs	1.9 lbs