

Tool Use via Inverse Kinematics

Adam Cantor, Jonathan Martin, Leo Keselman, Stewart Butler

Abstract—This report details an approach to known object interaction with a Schunk Arm. A motion planning theorem is applied with a focus on workspace control. The implementation of this system was done in the GRIP/DART simulation environment designed/used by the Golems Lab at Georgia Tech.

I. INTRODUCTION

The purpose of this work is to create a methodology for interacting with known objects in a loosely defined workspace. This goal is directly in line with the DARPA robotics challenge to apply humanoid robots to search and rescue applications by using tools and exploration algorithms.

No single robot can be equipped to deal with all environments equally well. A general purpose robot, given a concrete goal for which it is not configured correctly, must be able to use objects from its environment to reach its goals. In an anthropocentric environment this means that correctly wielding tools designed for human use gives a robot a degree of operational flexibility that would be otherwise impossible.

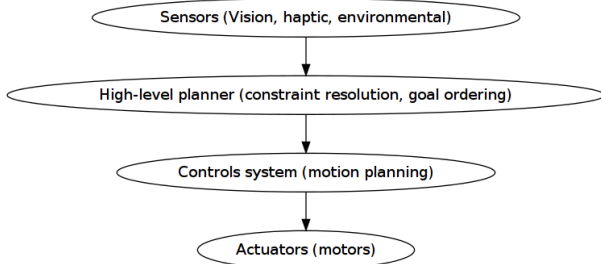


Fig. 1: Layer model of robot control systems.

Using human-configured tools requires multiple layers of control and planning, as shown in figure 1.

- 1) Sensors - The robot must be capable of discerning its environment, discovering what constraints that environment will impose upon it, and constructing sub-goals in order to accomplish its target task. In an un-augmented anthropocentric environment, this means having a sufficiently sophisticated computer vision system (visual, radar, lidar, etc) to map the environment, recognize objects in the environment, and classify them as a given tool. It also means using haptic feedback (if possible) and torque feedback from the actuators during manipulation tasks as part of a control loop to ensure that the manipulated objects are behaving according to plan.
- 2) Planner - The robot needs a high level planner in order to take a goal state, break it into sub goals, match those sub goals with tasks it is able to handle, resolve

any dependency conflicts, and order those goals into as efficient a plan as possible.

- 3) The control system is responsible for implementing each of the tasks necessary to accomplish a given sub-goal. This involves things like the lower-level motion planning necessary for manipulation, including workspace control.
- 4) Actuators - The robot must be capable of using its actuators to accomplish commands sent to them from the control system. Physically, one must be able to manipulate the tool in question. General purpose manipulators are not generally well suited for using tools designed for humanoid hands, and most commonly available humanoid hands have issues with grip strength, digit control, haptic sensing, and friction.

This document describes an effort to explore the challenges associated with general purpose tool usage from within a simulated environment. To reduce the scope of an otherwise unmanageable problem, the goal was simplified to be the control system for a single simulated Schunk LWA-4 arm, a 7-degree-of-freedom arm with an attachable manipulator. A screwdriver was chosen as the target tool, since it is the simplest tool that could be easily manipulated by a Schunk arm and still require a complex set of actions. In order to remove the necessity for a complicated sensor system, the work was done using the GRIP/DART simulation environment used by the Humanoid Robotics laboratory at Georgia Tech.

Complications arose during the work which prevented all our goals from being reached. The implementation of the vital control elements of the proposed system was unusable due to bugs in the implemented workspace control. These were fixed to a usable point, but there was not enough time remaining to integrate the high level planner into the decision loop. As such, the robot is capable of all the physical manipulation tasks needed to reach its goal state, but those states must be manually traversed by a human in order for the simulation to work. These issues will be further discussed in later sections.

II. RELATED WORK

Tool manipulation in workspace is very common in both research and industry. However, most of this tool manipulation is with specialized tools that are not designed for human manipulation, and the robots are generally used in environments where the state space is largely deterministic – the planner for the robot can safely assume that a part will enter the assembly line at a certain time, reach a certain location in a certain orientation, and if there are any deviations from this expected behavior it will simply stop and alert a human of a problem.

What made our planned approach unique is that we account both for the motion planning for the robot as well as the constraints of the tool. For example, when driving the screw into the target block, we must follow the screw with the driver (held in the manipulator) as it threads into the target block by matching ‘downward’ translation with the rotation of the screw driver, then back the tool out and repeat until the screw is settled into the block. It also took into account the set of actions required to set up the environment – finding the screw, placing it in the correct location for tool use, finding the tool, and finally driving the screw into the target block.

[Tucker] [general grasp]

III. METHODS

A. Simulation Software

In the current experiments, there are three interactive objects and one robot arm. The interactive objects are a screwdriver, a bolt, and a goal block, all located within the arm’s range of movement.

Our system then follows the following set of actions to generate a plan.

B. High Level Planning

1) *Locate screw*: After the screw is inserted into the world file, it is passed to the robot as a motion goal point. The robot queries the world to find the object and obtains the transform of the current tool position in the world’s coordinate reference frame. The 4x4 affine matrix representing the rotation and translation of the screw is then converted into a 6x1 vector:

$$q = \begin{bmatrix} a \\ w \end{bmatrix} \quad (1)$$

Here, a is a three dimensional translation vector and w is a roll, pitch, and yaw vector relative the world origin which define the origin of the screw.

2) *Grasp the screw*: Jacobian workspace control is used to align the robot’s manipulator with the coordinate frame of the screw. After matching rotation and position with the target, the robot grabs the screw. Subsequently, the screw is manipulated as though it were an additional link in the arm.

3) *Locate goal*:

1) Move the bolt to alignment with the goal.

4) *Release bolt*:

5) *Grasping tool*: Grasp the screwdriver; updating the end effector after each interaction.

6) *Move tool to screw*: After moving the screwdriver into the bolt, update the arm to include the bolt as well

7) *Drive screw into goal point*: Moving it into the goal position.

8) *Release bolt*: Release the bolt

9) *Release tool*: Replace the screwdriver back to its original position.

C. Low Level (Motion) Planning

1) *Resolved Rate Trajectory Planning* [*Pseudo-Inverse Jacobian Control*]: Resolved rate trajectory planning, or pseudo-inverse jacobian control, was used to move the manipulator from a current world configuration $x_i = (x_i y_i z_i R_i P_i Y_i)$ to a target goal configuration $x_f = (x_f y_f z_f R_f P_f Y_f)$.

IV. EXPERIMENTS

V. ANALYSIS

VI. DISCUSSION