The BIND Software

BIND

❑ BIND
- the Berkeley Internet Name Domain system

❑ Three main versions
- BIND4
  - ➢ Announced in 1980s
  - ➢ Based on RFC 1034, 1035
- BIND8
  - ➢ Released in 1997
  - ➢ Improvements including:
    - – efficiency, robustness and security
- BIND9
  - ➢ Released in 2000
  - ➢ Enhancements including:
    - – multiprocessor support, DNSSEC, IPv6 support, etc

❑ BIND 10 is currently under development by ISC

BIND
– components

❑ Four major components

- named
  - ➢ Daemon that answers the DNS query
  - ➢ Perform Zone transfer
- Library routines
  - ➢ Routines that used to resolve host by contacting the servers of DNS distributed database
    - – Ex: res_query, res_search, ...etc.
- Command-line interfaces to DNS
  - ➢ Ex: nslookup, dig, hosts
- rndc
  - ➢ A program to remotely control named

named in FreeBSD

❑ Startup

- Edit /etc/rc.conf
  - ➢ named_enable="YES"
- Manual utility command
  - ➢ % rndc {stop | reload | flush ...}
    - – In old version of BIND, use ndc command

❑ See your BIND version

- % dig @127.0.0.1 version.bin txt chaos
  - ➢ version.bind.   0   CH   TXT   "9.3.3"

BIND
– Configuration files

❑ The complete configuration of named consists of

- The config file
  - ➢ /etc/namedb/named.conf
- Zone data file
  - ➢ Address mappings for each host
  - ➢ Collections of individual DNS data records
- The root name server hints

BIND Configuration
– named.conf

❑ /etc/namedb/named.conf

- Roles of this host for each zone it serves
  - ➢ Master, slave, stub, or caching-only
- Options
  - ➢ Global options
    - – The overall operation of named and server
  - ➢ Zone specific options

❑ named.conf is composed of following statements:

- include, options, server, key, acl, zone,
  view, controls, logging, trusted-keys, masters

Examples of named configuration

```
// isc.org TLD name server

options {
    directory "/var/named";
    datasize 1000M;
    listen-on { 204.152.184.64; };
    listen-on-v6 { 2001:4f8:0:2::13; };
    recursion no;
    transfer-source 204.152.184.64;
    transfer-source-v6 2001:4f8:0:2::13;
};

zone "isc.org" {
    type master;
    file "master/isc.org";
    allow-update { none; };
    allow-transfer { none; };
};

zone "vix.com" {
    type slave;
    file "secondary/vix.com";
    masters { 204.152.188.234; };
};
```

```
$TTL 57600
$ORIGIN atrust.com.
@                    SOA   ns1.atrust.com. trent.atrust.com. (
                             2010030400 10800 1200 3600000 3600 )
                     NS    NS1.atrust.com.
                     NS    NS2.atrust.com.
                     MX    10 mailserver.atrust.com.
                     A     66.77.122.161
ns1.atrust.com.      A     206.168.198.209
ns2.atrust.com.      A     66.77.122.161
www                  A     66.77.122.161
mailserver           A     206.168.198.209
secure               A     66.77.122.161

; reverse maps
exterior1            A     206.168.198.209
209.198.168.206      PTR   exterior1.atrust.com.
exterior2            A     206.168.198.213
213.198.168.206      PTR   exterior2.atrust.com.
```

DNS Database
– Zone data

The DNS Database

❑ A set of text files such that

- Maintained and stored on the domain's master name server
- Often called zone files
- Two types of entries
  - ➢ Resource Records (RR)
    - The real part of DNS database
  - ➢ Parser commands
    - Just provide some shorthand ways to enter records
    - Influence the way that the parser interprets sequence orders or expand into multiple DNS records themselves

The DNS Database
– Parser Commands

❑ Commands must start in first column and be on a line by themselves

❑ $ORIGIN domain-name
  - Used to append to un-fully-qualified name

❑ $INCLUDE file-name
  - Separate logical pieces of a zone file
  - Keep cryptographic keys with restricted permissions

❑ $TTL default-ttl
  - Default value for time-to-live filed of records

❑ $GENERATE start-stop/[step] lhs type rhs
  - Be fond only in BIND
  - Used to generate a series of similar records
  - Can be used in only CNAME, PTR, NS record types

```
google.com.        300     IN   A    209.85.171.100
google.com.        345600  IN   NS   ns1.google.com.
ns1.google.com.    345600  IN   A    216.239.32.10
```

The DNS Database
– Resource Record (1)

❑ Basic format

- [name] [ttl] [class] type data
  - ➢ name: the entity that the RR describes
    - – Can be relative or absolute
  - ➢ ttl: time in second of this RR's validity in cache
  - ➢ class: network type
    - – IN for Internet
    - – CH for ChaosNet
    - – HS for Hesiod
- Special characters
  - ➢ ;   (comment)
  - ➢ @   (The current domain name)
  - ➢ ()   (allow data to span lines)
  - ➢ *   (wild card character, *name* filed only)

The DNS Database
– Resource Record (2)

❏ Type of resource record discussed later

- Zone records: **identify domains and name servers**
  - ➢ **SOA**
  - ➢ **NS**
- Basic records: **map names to addresses and route mail**
  - ➢ **A**
  - ➢ **PTR**
  - ➢ **MX**
- Optional records: **extra information to host or domain**
  - ➢ **CNAME**
  - ➢ **TXT**
  - ➢ **SRV**

The DNS Database
– Resource Record (3)

	Type	Name	Function
Zone	SOA	Start Of Authority	Defines a DNS zone
	NS	Name Server	Identifies servers, delegates subdomains
Basic	A	IPv4 Address	Name-to-address translation
	AAAA	IPv6 Address	Name-to-IPv6-address translation
	PTR	Pointer	Address-to-name translation
	MX	Mail Exchanger	Controls email routing
Security and DNSSEC	DS	Delegation Signer	Hash of signed child zone's key-signing key
	DNSKEY	Public Key	Public key for a DNS name
	NSEC	Next Secure	Used with DNSSEC for negative answers
	NSEC3[a]	Next Secure v3	Used with DNSSEC for negative answers
	RRSIG	Signature	Signed, authenticated resource record set
	DLV	Lookaside	Nonroot trust anchor for DNSSEC
	SSHFP	SSH Fingerprint	SSH host key, allows verification via DNS
	SPF	Sender Policy	Identifies mail servers, inhibits forging
	DKIM	Domain Keys	Verify email sender and message integrity
Optional	CNAME	Canonical Name	Nicknames or aliases for a host
	SRV	Services	Gives locations of well-known services
	TXT	Text	Comments or untyped information[b]

The DNS Database – Resource Record (4)

❑ SOA: Start Of Authority

- Defines a DNS zone of authority, each zone has exactly one SOA record.
- Specify the name of the zone, the technical contact and various timeout information
- Format:
  - ➢ **[zone] IN SOA [server-name] [administrator's mail] (serial, refresh, retry, expire, ttl)**
- Ex:

;	means comments
@	means current domain name
( )	allow data to span lines
*	Wild card character

```
$TTL 3600;
$ORIGIN cs.nctu.edu.tw.
@        IN       SOA      csns.cs.nctu.edu.tw.      root.cs.nctu.edu.tw.     (
                           2012050802               ; serial number
                           1D                       ; refresh time for slave server
                           30M                      ; retry
                           1W                       ; expire
                           2H          )            ; minimum
```

s

The DNS Database – Resource Record (5)

a

Computer Center, CS, NCTU

❑ NS: Name Server

- Format
  - ➢ zone [ttl] [IN] NS hostname
- Usually follow the SOA record
- Goal
  - ➢ Identify the authoritative server for a zone
  - ➢ Delegate subdomains to other organizations

```
$TTL 3600;
$ORIGIN cs.nctu.edu.tw.
@         IN      SOA     dns.cs.nctu.edu.tw.      root.cs.nctu.edu.tw.    (
                          2012050802              ; serial number
                          1D                      ; refresh time for slave server
                          30M                     ; retry
                          1W                      ; expire
                          2H          )           ; minimum
          IN      NS      dns.cs.nctu.edu.tw.
          IN      NS      dns2.cs.nctu.edu.tw.
test      IN      NS      dns.test.cs.nctu.edu.tw.
```

The DNS Database
– Resource Record (6)

❑ A record: Address

- Format

  ➢ hostname [ttl] [IN] A ipaddr

- Provide mapping from hostname to IP address

- Load balance

- Ex:

```
$ORIGIN cs.nctu.edu.tw.
@         IN        NS         dns.cs.nctu.edu.tw.
          IN        NS         dns2.cs.nctu.edu.tw.
dns       IN        A          140.113.235.107
dns2      IN        A          140.113.235.103

www       IN        A          140.113.235.111
```

The DNS Database
– Resource Record (7)

❑ PTR: Pointer

- Perform the reverse mapping from IP address to hostname
- Special top-level domain: in-addr.arpa
  - ➢ Used to create a naming tree from IP address to hostnames
- Format
  - ➢ addr [ttl] [IN] PTR hostname

```
$TTL 259200;
$ORIGIN 235.113.140.in-addr.arpa.
@         IN       SOA       csns.cs.nctu.edu.tw. root.cs.nctu.edu.tw.     (
                             2007052102                ; serial
                             1D                        ; refresh time for secondary server
                             30M                       ; retry
                             1W                        ; expire
                             2H)                       ; minimum
          IN       NS        dns.cs.nctu.edu.tw.
          IN       NS        dns2.cs.nctu.edu.tw.
$ORIGIN in-addr.arpa.
103.235.113.140           IN PTR csmailgate.cs.nctu.edu.tw.
107.235.113.140           IN PTR csns.cs.nctu.edu.tw.
```

The DNS Database
– Resource Record (8)
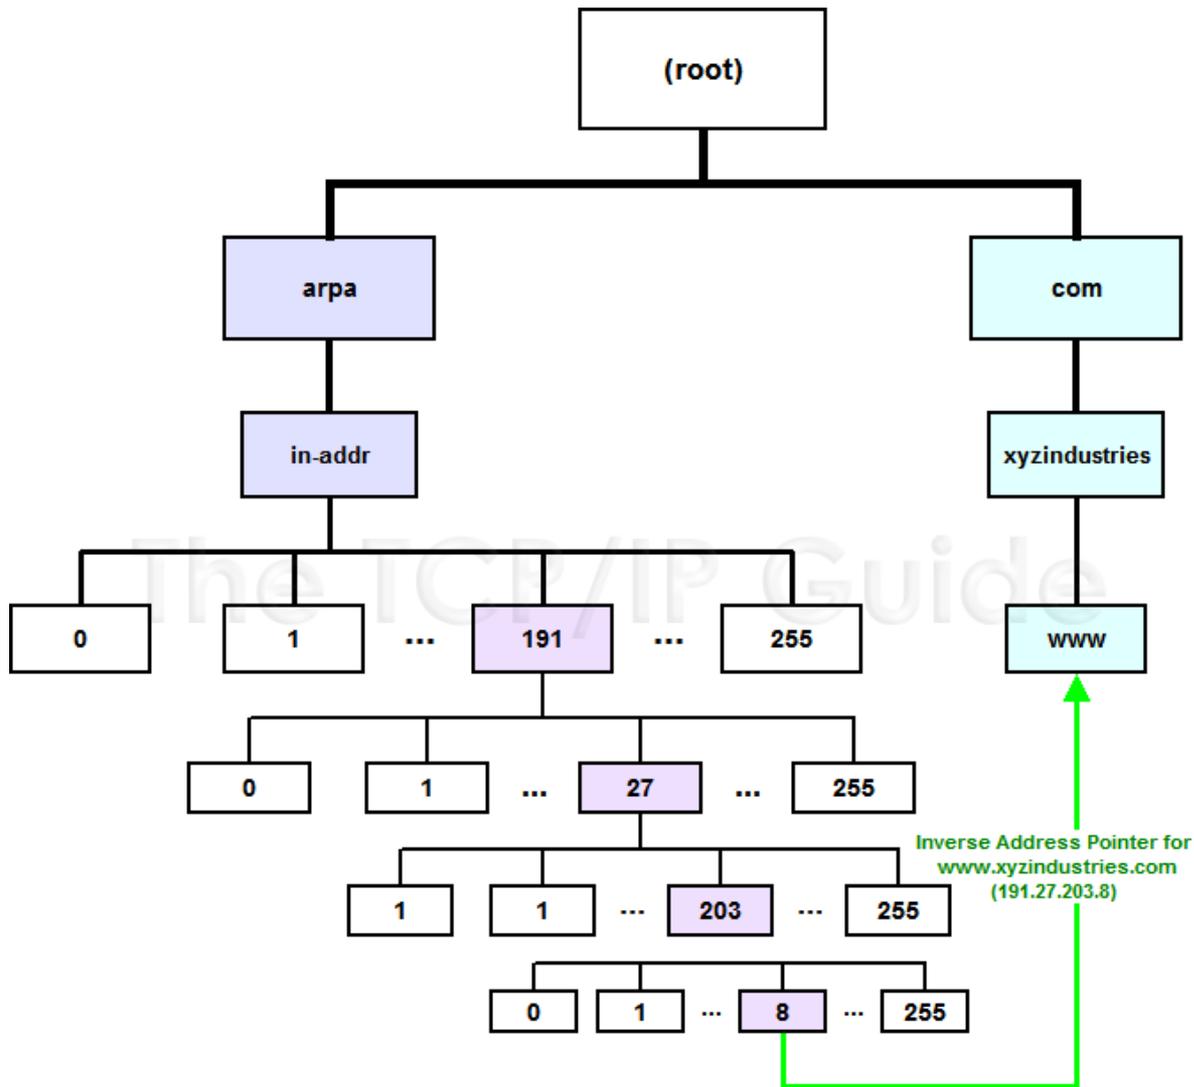
The DNS Database
– Resource Record (9)

❑ MX: Mail exchanger

- Direct mail to a mail hub rather than the recipient's own workstation
- Format
  - ➤ host [ttl] [IN] MX preference host
- Ex:

```
$TTL 3600;
$ORIGIN cs.nctu.edu.tw.
@     IN     SOA     csns.cs.nctu.edu.tw.   root.cs.nctu.edu.tw.   (
              2007052102     ; serial number
              1D                      ; refresh time for slave server
              30M                 ; retry
              1W                  ; expire
              2H      )          ; minimum
      IN    NS     dns.cs.nctu.edu.tw.
      IN    NS     dns2.cs.nctu.edu.tw.
      7200  IN   MX  1 csmx1.cs.nctu.edu.tw.
      7200  IN   MX  5 csmx2.cs.nctu.edu.tw.

csmx1  IN    A      140.113.235.104
csmx2  IN    A      140.113.235.105
```

The DNS Database
– Resource Record (10)

❑ CNAME: Canonical name

- nikename [ttl] IN CNAME hostname
- Add additional names to a host
  - ➤ To associate a function or to shorten a hostname
- CNAME record can nest eight deep in BIND
- Other records must refer to its real hostname
- Not for load balance
- Ex:

www	IN	A	140.113.209.63
	IN	A	140.113.209.77
penghu-club	IN	CNAME	www
King	IN	CNAME	www
R21601	IN	A	140.113.214.31
superman	IN	CNAME	r21601

The DNS Database – Resource Record (11)

❑ TXT: Text

- Add arbitrary text to a host's DNS records
- Format
  - ➢ Name [ttl] [IN] TXT info
  - ➢ All info items should be quoted
- They are sometime used to test prospective new types of DNS records
  - ➢ SPF records

```
$TTL 3600;
$ORIGIN cs.nctu.edu.tw.
@        IN       SOA     csns.cs.nctu.edu.tw.    root.cs.nctu.edu.tw.    (
                          2007052102       ; serial number
                          1D                               ; refresh time for slave server
                          30M                              ; retry
                          1W                               ; expire
                          2H        )                      ; minimum
         IN       NS      dns.cs.nctu.edu.tw.
         IN       NS      dns2.cs.nctu.edu.tw.

         IN       TXT     "Department of Computer Science"
```

The DNS Database
– Resource Record (12)

❑ SRV: Service

- Specify the location of services within a domain

- Format:
  - ➢ _service._proto.name [ttl] IN SRV pri weight port target

- Ex:

```
; don't allow finger
_finger._tcp          SRV        0          0          79          .
; 1/4 of the connections to old, 3/4 to the new
_ssh. _tcp            SRV        0          1          22          old.cs.colorado.edu.
_ssh. _tcp            SRV        0          3          22          new.cs.colorado.edu.
; www server
_http. _tcp           SRV        0          0          80          www.cs.colorado.edu.
                      SRV        10         0          8000        new.cs.colorado.edu
; block all other services
*. _tcp               SRV        0          0          0           .
*. _udp               SRV        0          0          0           .
```

IPv6 Resource Records

❑ IPv6 forward records

- Format
  - ➢ Hostname [ttl] [IN] AAAA ipaddr
- Example
  - ➢ bsd1[~] -chiahung- dig f.root-servers.net AAAA

    ;; ANSWER SECTION:
    f.root-servers.net.   604795 IN   AAAA   2001:500:2f::f

❑ IPv6 reverse records

- IPv6 PTR records are in the ip6.arpa top-level domain
- Example
  - ➢ f.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.f.2.0.0.0.0.5.0.1.0.0.2.ip6.arpa.
    PTR f.root-servers.net.

Glue Record (1/2)

❑ Glue record – Link between zones
- DNS referrals occur only from parent domains to child domains
- The servers of a parent domain must know the IP of the name servers for all of its subdomains
  - ➢ Parent zone needs to contain the NS records for each delegated zone
  - ➢ Making a normal DNS query
  - ➢ Having copies of the appropriate A records
  - ➢ The foreign A records are called glue records

```
; subdomain information

booklab                 IN  NS  ns1.atrust.com.
                        IN  NS  ubuntu.booklab.atrust.com.
                        IN  NS  ns.cs.colorado.edu.
testlab                 IN  NS  ns1.atrust.com.
                        IN  NS  ns.testlab.atrust.com.

; glue records

ubuntu.booklab          IN  A   63.173.189.194
ns.testlab              IN  A   63.173.189.17
```

Glue Record (2/2)

❑ There are two ways to link between zones

- By including the necessary records directly
- By using stub zones

❑ Lame delegation

- DNS subdomain administration has delegate to you and you never use the domain or parent domain's glue record is not updated
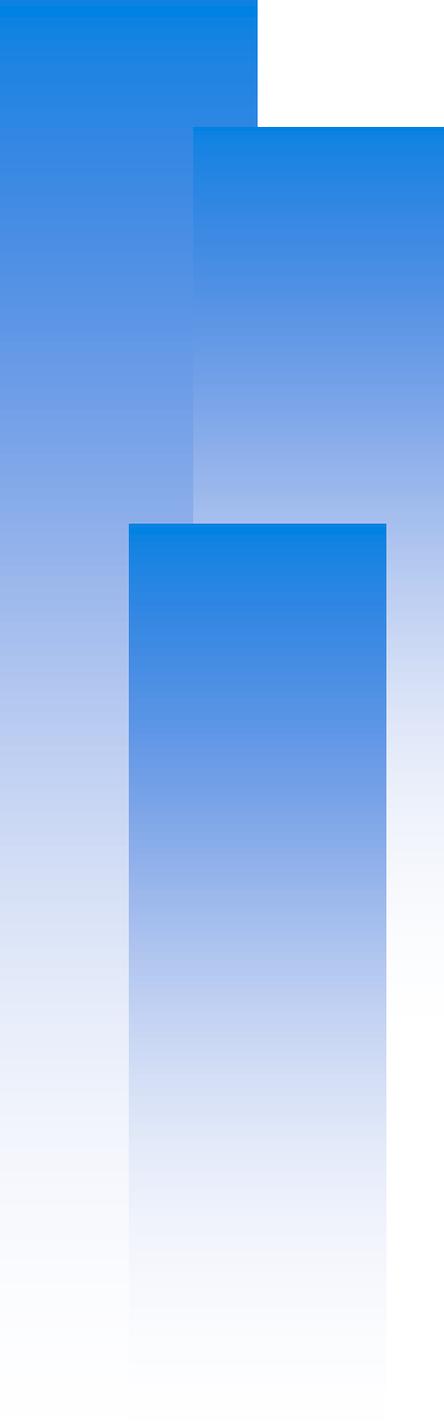
Statements of named.conf

Examples of named configuration

```
// isc.org TLD name server

options {
    directory "/var/named";
    datasize 1000M;
    listen-on { 204.152.184.64; };
    listen-on-v6 { 2001:4f8:0:2::13; };
    recursion no;
    transfer-source 204.152.184.64;
    transfer-source-v6 2001:4f8:0:2::13;
};
zone "isc.org" {
    type master;
    file "master/isc.org";
    allow-update { none; };
    allow-transfer { none; };
};

zone "vix.com" {
    type slave;
    file "secondary/vix.com";
    masters { 204.152.188.234; };
};
```

```
$TTL 57600
$ORIGIN atrust.com.
@                  SOA   ns1.atrust.com. trent.atrust.com. (
                            2010030400 10800 1200 3600000 3600 )
                   NS    NS1.atrust.com.
                   NS    NS2.atrust.com.
                   MX    10 mailserver.atrust.com.
                   A     66.77.122.161
ns1.atrust.com.    A     206.168.198.209
ns2.atrust.com.    A     66.77.122.161
www                A     66.77.122.161
mailserver         A     206.168.198.209
secure             A     66.77.122.161

; reverse maps
exterior1          A     206.168.198.209
209.198.168.206    PTR   exterior1.atrust.com.
exterior2          A     206.168.198.213
213.198.168.206    PTR   exterior2.atrust.com.
```

BIND Configuration
– named.conf address match list

❑ Address Match List

- A generalization of an IP address that can include:
  - ➢ An IP address
    - – Ex. 140.113.17.1
  - ➢ An IP network with CIDR netmask
    - – Ex. 140.113/16
  - ➢ The ! character to do negate
  - ➢ The name of a previously defined ACL

  - ➢ A cryptographic authentication key
- First match
- Example:
  - ➢ {!1.2.3.4; 1.2.3/24;};
  - ➢ {128.138/16; 198.11.16/24; 204.228.69/24; 127.0.0.1;};

BIND Configuration
– named.conf acl

❑ The "acl" statement
- Define a class of access control
- Define before they are used
- Syntax
  acl acl_name {
      address_match_list
  };
- Predefined acl classes
  - ➢ any, localnets, localhost, none
- Example
  acl CSnets {
      140.113.235/24; 140.113.17/24; 140.113.209/24; 140.113.24/24;
  };
  acl NCTUnets {
      140.113/16; 10.113/16; 140.126.237/24;
  };

  allow-transfer {localhost; CSnets; NCTUnets};

BIND Configuration
– named.conf key

❑ The "key" statement

- Define a encryption key used for authentication with a particular server
- Syntax

  ```
  key key-id {
      algorithm string;
      secret string;
  }
  ```

- Example:

  ```
  key serv1-serv2 {
          algorithm hmac-md5;
          secret "ibkAlUA0XXAXDxWRTGeY+d4CGbOgOIr7n63eizJFHQo="
  }
  ```

- This key is used to
  - ➢ Sign DNS request before sending to target
  - ➢ Validate DNS response after receiving from target

BIND Configuration
– named.conf include

❑ The "include" statement

- Used to separate large configuration file
- Another usage is used to separate cryptographic keys into a restricted permission file
- Ex:

  include "/etc/namedb/rndc.key";

  -rw-r--r-- 1 root wheel 4947 Mar 3 2006 named.conf
  -rw-r----- 1 bind wheel   92 Aug 15 2005 rndc.key

- If the path is relative
  ➢ Relative to the directory option

BIND Configuration
– named.conf option (1/3)

❑ The "option" statement
- Specify global options
- Some options may be overridden later for specific zone or server
- Syntax:

  options {

      option;

      option;

  };

❑ There are more than 150 options in BIND9
- version "There is no version.";   [real version num]
  - version.bind.   0   CH   TXT   "9.3.3"
  - version.bind.   0   CH   TXT   "There is no version."
- directory "/etc/namedb/db";
  - Base directory for relative path and path to put zone data files

BIND Configuration
– named.conf option (2/3)

- **notify** yes | no   [yes]
  - ➢ Whether notify slave sever when relative zone data is changed

- **also-notify** {140.113.235.101;};   [empty]
  - ➢ Also notify this non-advertised NS server

- **recursion** yes | no   [yes]
  - ➢ Recursive name server
  - ➢ Open resolver

- **allow-recursion** {address_match_list };   [all]
  - ➢ Finer granularity recursion setting

- **recursive-clients number;**   [1000]
- **max-cache-size number;**   [unlimited]
  - ➢ Limited memory

BIND Configuration
– named.conf option (3/3)

- query-source address ip_addr port ip_port;   [random]
  - ➢ NIC and port to send DNS query
  - ➢ DO NOT use port
- use-v4-udp-ports { range beg end; };   [range 1024 65535]
- avoid-v6-udp-ports { port_list };   [empty]

- forwarders {in_addr; …};   [empty]
  - ➢ Often used in cache name server
  - ➢ Forward DNS query if there is no answer in cache
- forward only | first;   [first]
  - ➢ If forwarder does not response, queries for forward only server will fail

- allow-query { address_match_list };   [all]
  - ➢ Specify who can send DNS query to you
- allow-transfer address_match_list;   [all]
  - ➢ Specify who can request zone transfer of your zone data
- allow-update address_match_list;   [none]
- blackhole address_match_list;   [empty]
  - ➢ Reject queries and would never ask them for answers

BIND Configuration
– named.conf zone (1/5)

❑ The "zone" statement

- Heart of the named.conf that tells named about the zones that it is authoritative

- zone statement format varies depending on roles of named
  - ➢ master, slave, hint, forward, stub

- The zone file is just a collection of DNS resource records

- Basically

  Syntax:
  ```
  zone "domain_name" {
          type master | slave| stub;
          file "path";
          masters {ip_addr; ip_addr;};
          allow-query {address_match_list};        [all]
          allow-transfer { address_match_list};     [all]
          allow-update {address_match_list};        [empty]
  };
  ```

  allow-update cannot be used for a slave zone

BIND Configuration
– named.conf zone (2/5)

❑ Master server zone configuration

```
zone "cs.nctu.edu.tw" IN {
    type master;
    file "named.hosts";
    allow-query { any; };
    allow-transfer { localhost; CS-DNS-Servers; };
    allow-update { none; };
};
```

❑ Slave server zone configuration

```
zone "cs.nctu.edu.tw" IN {
    type slave;
    file "cs.hosts";
    masters { 140.113.235.107; };
    allow-query { any; };
    allow-transfer { localhost; CS-DNS-Servers; };
};
```

BIND Configuration
– named.conf zone (3/5)

❑ Forward zone and reverse zone

```
zone "cs.nctu.edu.tw" IN {
    type master;
    file "named.hosts";
    allow-query { any; };
    allow-transfer { localhost; CS-DNS-Servers; };
    allow-update { none; };
};


 zone "235.113.140.in-addr.arpa" IN {
    type master;
    file "named.235.rev";
    allow-query { any; };
    allow-transfer { localhost; CS-DNS-Servers; };
    allow-update { none; };
};
```

BIND Configuration – named.conf zone (4/5)

❑ Example

- In named.hosts, there are plenty of A or CNAME records

```
...
bsd1            IN      A       140.113.235.131
csbsd1          IN      CNAME   bsd1
bsd2            IN      A       140.113.235.132
bsd3            IN      A       140.113.235.133
bsd4            IN      A       140.113.235.134
bsd5            IN      A       140.113.235.135
...
```

- In named.235.rev, there are plenty of PTR records

```
...
131.235.113.140    IN    PTR    bsd1.cs.nctu.edu.tw.
132.235.113.140    IN    PTR    bsd2.cs.nctu.edu.tw.
133.235.113.140    IN    PTR    bsd3.cs.nctu.edu.tw.
134.235.113.140    IN    PTR    bsd4.cs.nctu.edu.tw.
135.235.113.140    IN    PTR    bsd5.cs.nctu.edu.tw.
...
```

BIND Configuration
– named.conf zone (5/5)

❑ Setting up root hint

- A cache of where are the DNS root servers

```
zone "." IN {
    type hint;
    file "named.root";
};
```

❑ Setting up forwarding zone

- Forward DNS query to specific name server, bypassing the standard query path

```
zone "nctu.edu.tw" IN {
    type forward;
    forward first;
    forwarders { 140.113.250.135; 140.113.1.1; };
};

zone "113.140.in-addr.arpa" IN {
    type forward;
    forward first;
    forwarders { 140.113.250.135; 140.113.1.1; };
};
```

BIND Configuration
– named.conf server

❑ The "server" statement
- Tell named about the characteristics of its remote peers
- Syntax

  ```
  server ip_addr {
      bogus no|yes;
      provide-ixfr yes|no;    (for master)
      request-ixfr yes|no;    (for slave)
      transfer-format many-answers|one-answer;
      keys { key-id; key-id};
  };
  ```

- ixfr
  - ➢ Incremental zone transfer
- transfers
  - ➢ Limit of number of concurrent inbound zone transfers from that server
  - ➢ Server-specific transfers-in
- keys
  - ➢ Any request sent to the remote server is signed with this key

BIND Configuration – named.conf view (1/2)

❑ The "view" statement

- Create a different view of DNS naming hierarchy for internal machines
  - ➢ Restrict the external view to few well-known servers
  - ➢ Supply additional records to internal users
- Also called "split DNS"
- In-order processing
  - ➢ Put the most restrictive view first
- All-or-nothing
  - ➢ All zone statements in your named.conf file must appear in the content of view

BIND Configuration
– named.conf view (2/2)

- Syntax

  view view-name {

  　　match_clients {address_match_list};

  　　view_options;

  　　zone_statement;

  };

- Example

```
view "internal" {
      match-clients {our_nets;};
      recursion yes;
      zone "cs.nctu.edu.tw" {
           type master;
           file "named-internal-cs";
      };
};
view "external" {
 match-clients {any;};
      recursion no;
      zone "cs.nctu.edu.tw" {
           type master;
           file "named-external-cs";
      };
};
```

BIND Configuration
– named.conf controls

❑ The "controls" statement

- Limit the interaction between the running named process and rndc

- Syntax

    controls {

        inet ip_addr port ip-port **allow** {address_match_list} **keys** {key-id};

    };

- Example:

```
key "rndc_key" {
    algorithm        hmac-md5;
    secret "GKnELuie/G99NpOC2/AXwA==";
};
```

    include "/etc/named/rndc.key";

    controls {

        inet 127.0.0.1 allow {127.0.0.1;} keys {rndc_key;};

    }

BIND Configuration
– rndc

❑ RNDC – remote name daemon control

- reload, restart, status, dumpdb, …..

- rndc-confgen –b 256

```
# Start of rndc.conf
key "rndc-key" {
        algorithm hmac-md5;
        secret "qOfQFtH1nvdRmTn6gLXldm61qRJBEDbeK43R8Om7wlg=";
};

options {
        default-key "rndc-key";
        default-server 127.0.0.1;
        default-port 953;
};
# End of rndc.conf
```

```
SYNOPSIS
    rndc [-c config-file] [-k key-file] [-s server] [-p port] [-V]
        [-y key_id] {command}
```

Updating zone files

❑ Master

- Edit zone files
  - ➢ Serial number
  - ➢ Forward and reverse zone files for single IP
- Do "rndc reload"
  - ➢ "notify" is on, slave will be notify about the change
  - ➢ "notify" is off, refresh timeout, or do "rndc reload" in slave

❑ Zone transfer

- DNS zone data synchronization between master and slave servers
- AXFR (all zone data are transferred at once, before BIND8.2)
- IXFR (incremental updates zone transfer)
  - ➢ provide-ixfr
  - ➢ request-ixfr
- TCP port 53

Dynamic Updates

❑ The mappings of name-to-address are relatively stable
❑ DHCP will dynamically assign IP addresses to the hosts
  • Hostname-based logging or security measures become very difficulty

```
dhcp-host1.domain          IN        A         192.168.0.1
dhcp-host2.domain          IN        A         192.168.0.2
```

❑ Dynamic updates
  • RFC 2136
  • BIND allows the DHCP daemon to notify the updating RR contents
  • Nsupdate

```
$ nsupdate
> update add newhost.cs.colorado.edu 86400 A 128.138.243.16
>
> prereq nxdomain gypsy.cs.colorado.edu
> update add gypsy.cs.colorado.edu CNAME evi-laptop.cs.colorado.edu
```

  • Using allow-update, or allow-policy
    ➢ rndc frozen zone, rndc thaw zone
    ➢ allow-policy (grant | deny) identity nametype name [types]

Non-byte boundary (1/5)

❑ In normal reverse configuration:

- named.conf will define a zone statement for each reverse subnet zone and
- Your reverse db will contains lots of PTR records
- Example:

```
zone "1.168.192.in-addr.arpa." {
    type master;
    file "named.rev.1";
    allow-query {any;};
    allow-update {none;};
    allow-transfer {localhost;};
};
```

```
$TTL     3600
$ORIGIN 1.168.192.in-addr.arpa.
@        IN      SOA     chwong.csie.net chwong.chwong.csie.net.   (
                         2007050401      ; Serial
                         3600            ; Refresh
                         900             ; Retry
                         7D              ; Expire
                         2H )            ; Minimum
         IN      NS      ns.chwong.csie.net.
254      IN      PTR     ns.chwong.csie.net.
1        IN      PTR     www.chwong.csie.net.
2        IN      PTR     ftp.chwong.csie.net.
...
```

Non-byte boundary (2/5)

❑ What if you want to delegate 192.168.2.0 to another sub-domain

- Parent
    - ➢ **Remove** forward db about 192.168.2.0/24 network
        - Ex:

            pc1.chwong.csie.net.   IN   A   192.168.2.35

            pc2.chwong.csie.net.   IN   A   192.168.2.222

            …
    - ➢ **Remove** reverse db about 2.168.192.in-addr.arpa
        - Ex:

            35.2.168.192.in-addr.arpa.   IN   PTR   pc1.chwong.csie.net.

            222.2.168.192.in-addr.arpa.   IN   PTR   pc2.chwong.csie.net.

            …
    - ➢ Add glue records about the name servers of sub-domain
        - Ex: in zone db of "chwong.csie.net"

            sub1   IN   NS   ns.sub1.chwong.csie.net.

            ns.sub1   IN   A   192.168.2.1
        - Ex: in zone db of "168.192.in-addr.arpa."

            2   IN   NS   ns.sub1.chwong.csie.net.

            1.2   IN   PTR   ns.sub1.chwong.csie.net

Non-byte boundary (3/5)

❑ What if you want to delegate 192.168.3.0 to four sub-domains (a /26 network)
  • 192.168.3.0 ~ 192.168.3.63
    ➢ ns.sub1.chwong.csie.net.
  • 192.168.3.64 ~ 192.168.3.127
    ➢ ns.sub2.chwong.csie.net.
  • 192.168.3.128 ~ 192.168.3.191
    ➢ ns.sub3.chwong.csie.net.
  • 192.168.3.192 ~ 192.168.3.255
    ➢ ns.sub4.chwong.csie.net.

❑ It is easy for forward setting
  • In zone db of chwong.csie.net
    ➢ sub1   IN   NS   ns.sub1.chwong.csie.net.
    ➢ ns.sub1   IN   A   1921.68.3.1
    ➢ sub2   IN   NS   ns.sub2.chwong.csie.net.
    ➢ ns.sub2   IN   A   192.168.3.65
    ➢ ...

Non-byte boundary (4/5)

❑ Non-byte boundary reverse setting

- Method1

```
$GENERATE 0-63      $.3.168.192.in-addr.arpa.        IN   NS      ns.sub1.chwong.csie.net.
$GENERATE 64-127    $.3.168.192.in-addr.arpa.        IN   NS      ns.sub2.chwong.csie.net.
$GENERATE 128-191   $.3.168.192.in-addr.arpa.        IN   NS      ns.sub3.chwong.csie.net.
$GENERATE 192-255   $.3.168.192.in-addr.arpa.        IN   NS      ns.sub4.chwong.csie.net.

And

zone "1.3.168.192.in-addr.arpa." {
    type master;
    file "named.rev.192.168.3.1";
};

; named.rev.192.168.3.1
@   IN   SOA     sub1.chwong.csie.net. root.sub1.chwong.csie.net. (1;3h;1h;1w;1h)
    IN   NS      ns.sub1.chwong.csie.net.
```

Non-byte boundary (5/5)

- Method2

$ORIGIN 3.168.192.in-addr.arpa.

$GENERATE 1-63	$	IN CNAME	$.0-63.3.168.192.in-addr.arpa.
0-63.3.168.192.in-addr.arpa.		IN NS	ns.sub1.chwong.csie.net.
$GENERATE 65-127	$	IN CNAME	$.64-127.3.168.192.in-addr.arpa.
64-127.3.168.192.in-addr.arpa.		IN NS	ns.sub2.chwong.csie.net.
$GENERATE 129-191	$	IN CNAME	$.128-191.3.168.192.in-addr.arpa.
128-191.3.168.192.in-addr.arpa.		IN NS	ns.sub3.chwong.csie.net.
$GENERATE 193-255	$	IN CNAME	$.192-255.3.168.192.in-addr.arpa.
192-255.3.168.192.in-addr.arpa.		IN NS	ns.sub4.chwong.csie.net.

```
zone "0-63.3.168.192.in-addr.arpa." {
    type master;
    file "named.rev.192.168.3.0-63";
};
```

```
        ; named.rev.192.168.3.0-63
        @   IN   SOA   sub1.chwong.csie.net. root.sub1.chwong.csie.net. (1;3h;1h;1w;1h)
            IN   NS    ns.sub1.chwong.csie.net.
1    IN   PTR  www.sub1.chwong.csie.net.
2    IN   PTR  abc.sub1.chwong.csie.net.
…
```
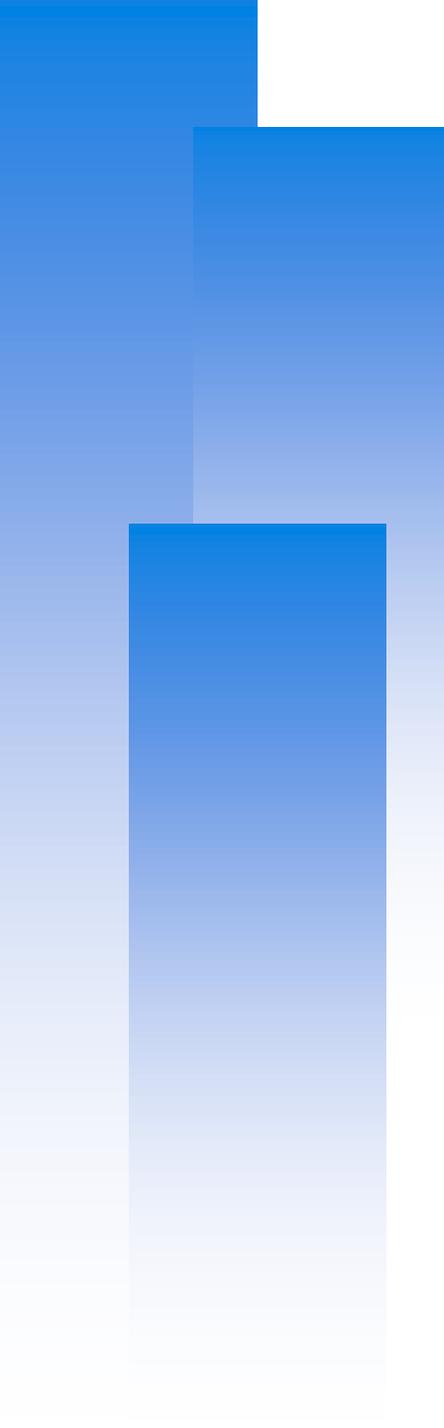
BIND Security

Security
– named.conf security configuration

❑ Security configuration

Feature	Config. Statement	comment
allow-query	options, zone	Who can query
allow-transfer	options, zone	Who can request zone transfer
allow-update	zone	Who can make dynamic updates
blackhole	options	Which server to completely ignore
bogus	server	Which servers should never be queried

```
acl bogusnet {
        0.0.0.0/8 ; // Default, wild card addresses
        1.0.0.0/8 ; // Reserved addresses
        2.0.0.0/8 ; // Reserved addresses
        169.254.0.0/16 ; // Link-local delegated addresses
        192.0.2.0/24 ; // Sample addresses, like example.com
        224.0.0.0/3 ; // Multicast address space
        10.0.0.0/8 ; // Private address space (RFC1918)25
        172.16.0.0/12 ; // Private address space (RFC1918)
        192.168.0.0/16 ; // Private address space (RFC1918)

};
```

```
allow-recursion {ournets; };
blackhole { bogusnet; };

allow-transfer { myslaves; };
```

Security
– With TSIG (1)

❑ TSIG (Transaction SIGnature)

- Developed by IETF (RFC2845)

- Symmetric encryption scheme to sign and validate DNS requests and responses between servers

- Algorithm in BIND9
  - ➤ HMAC-MD5, DH (Diffie Hellman)

- Usage
  - ➤ Prepare the shared key with dnssec-keygen
  - ➤ Edit "key" statement
  - ➤ Edit "server" statement to use that key
  - ➤ Edit "zone" statement to use that key with:
    - – allow-query
    - – allow-transfer
    - – allow-update

Security
– With TSIG (2)

❑ **TSIG example (dns1 with dns2)**

1. **% dnssec-keygen –a HMAC-MD5 –b 128 –n HOST cs**

```
% dnssec-keygen -a HMAC-MD5 -b 128 -n HOST cs
Kcs.+157+35993
% cat Kcs.+157+35993.key
cs.  IN KEY 512 3 157 oQRab/QqXHVhkyXi9uu8hg==
```

```
% cat Kcs.+157+35993.private
Private-key-format: v1.2
Algorithm: 157 (HMAC_MD5)
Key: oQRab/QqXHVhkyXi9uu8hg==
```

2. **Edit /etc/named/dns1-dns2.key**

```
key dns1-dns2 {
    algorithm hmac-md5;
    secret "oQRab/QqXHVhkyXi9uu8hg=="
};
```

3. **Edit both named.conf of dns1 and dns2**

   – Suppose   dns1 = 140.113.235.107   dns2 = 140.113.235.103

```
include "dns1-dns2.key"
server 140.113.235.103 {
    keys {dns1-dns2;};
};
```

```
include "dns1-dns2.key"
server 140.113.235.107 {
    keys {dns1-dns2;};
};
```
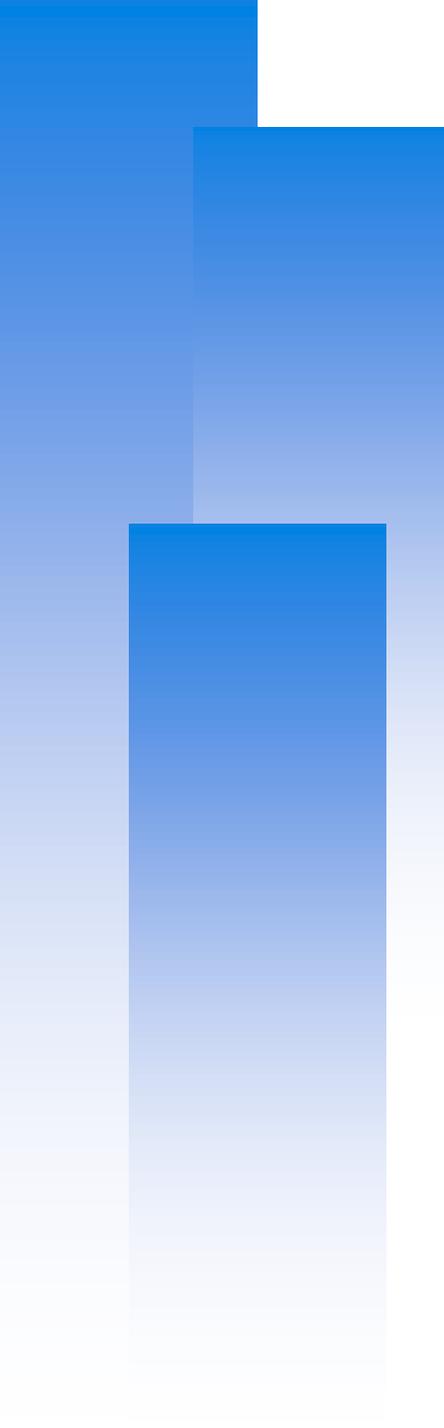
BIND Debugging and Logging

Logging (1)

❑ Logging configuration
- Using a *logging* statement
- Define what are the channels
- Specify where each message category should go

❑ Terms
- Channel
  - ➢ A place where messages can go
  - ➢ Ex: syslog, file or /dev/null
- Category
  - ➢ A class of messages that named can generate
  - ➢ Ex: answering queries or dynamic updates
- Module
  - ➢ The name of the source module that generates the message
- Facility
  - ➢ syslog facility name
- Severity
  - ➢ Priority in syslog

❑ When a message is generated
- It is assigned a "category", a "module", a "severity"
- It is distributed to all channels associated with its category

Logging (2)

❑ Channels

- Either "file" or "syslog" in channel sub-statement
  - ➢ size:
    - – ex: 2048, 100k, 20m, 15g, unlimited, default
  - ➢ facility:
    - – Daemon and local0 ~ local7 are reasonable choices
  - ➢ severity:
    - – critical, error, warning, notice, info, debug (with an optional numeric level), dynamic
    - – Dynamic is recognized and matches the server's current debug level

```
logging {
    channel_def;
    channel_def;
    …
    category category_name {
        channel_name;
            channel_name;
        …
    };
};
```

```
channel channel_name {
    file path [versions num|unlimited] [size siznum];
    syslog facility;

    severity severity;
    print-category yes|no;
    print-severity yes|no;
    print-time yes|no;
};
```

Logging (3)

❑ Predefined channels

default_syslog	Sends severity info and higher to syslog with facility daemon
default_debug	Logs to file "named.run", severity set to dynamic
default_stderr	Sends messages to stderr or named, severity info
null	Discards all messages

❑ Available categories

default	Categories with no explicit channel assignment
general	Unclassified messages
config	Configuration file parsing and processing
queries/client	A short log message for every query the server receives
dnssec	DNSSEC messages
update	Messages about dynamic updates
xfer-in/xfer-out	zone transfers that the server is receiving/sending
db/database	Messages about database operations
notify	Messages about the "zone changed" notification protocol
security	Approved/unapproved requests
resolver	Recursive lookups for clients

Logging (4)

❑ Example of logging statement

```
logging {
    channel security-log {
        file "/var/named/security.log" versions 5 size 10m;
        severity info;
        print-severity yes;
        print-time yes;
    };
    channel query-log {
        file "/var/named/query.log" versions 20 size 50m;
        severity info;
        print-severity yes;
        print-time yes;
    };
    category default          { default_syslog; default_debug; };
    category general          { default_syslog; };
    category security         { security-log; };
    category client           { query-log; };
    category queries          { query-log; };
    category dnssec           { security-log; };
};
```

Debug

❑ Named debug level

- From 0 (debugging off) ~ 11 (most verbose output)
- % named –d2   (start named at level 2)
- % rndc trace   (increase debugging level by 1)
- % rndc trace 3   (change debugging level to 3)
- % rndc notrace   (turn off debugging)

❑ Debug with "logging" statement

- Define a channel that include a severity with "debug" keyword
  - ➢ Ex: severity debug 3
  - ➢ All debugging messages up to level 3 will be sent to that particular channel
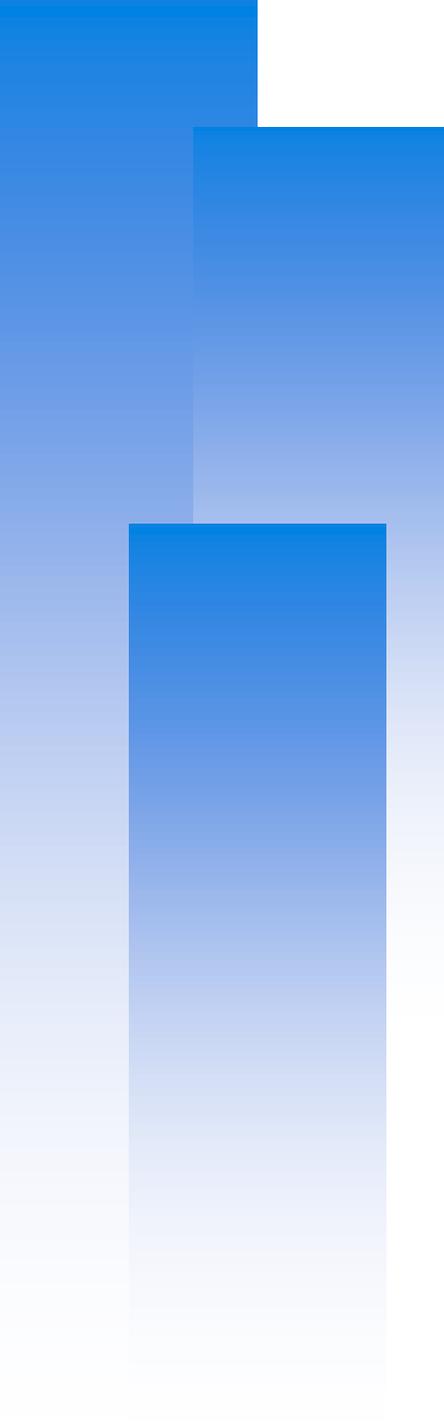
Tools

Tools
– nslookup

❑ Interactive and Non-interactive

- Non-Interactive
  - ➤ % nslookup cs.nctu.edu.tw.
  - ➤ % nslookup –type=mx cs.nctu.edu.tw.
  - ➤ % nslookup –type=ns cs.nctu.edu.tw. 140.113.1.1

- Interactive
  - ➤ % nslookup
  - ➤ > set all
  - ➤ > set type=any
  - ➤ > server host
  - ➤ > lserver host
  - ➤ > set debug
  - ➤ > set d2

```
csduty [/u/dcs/94/9455832] -chwong- nslookup
> set all
Default server: 140.113.235.107
Address: 140.113.235.107#53
Default server: 140.113.235.103
Address: 140.113.235.103#53

Set options:
  novc                      nodebug          nod2
  search                    recurse
  timeout = 0               retry = 3        port = 53
  querytype = A             class = IN
  srchlist = cs.nctu.edu.tw/csie.nctu.edu.tw
>
```

Tools
– dig

❑ Usage

- % dig cs.nctu.edu.tw

- % dig cs.nctu.edu.tw mx

- % dig @ns.nctu.edu.tw cs.nctu.edu.tw mx

- % dig -x 140.113.209.3
  - ➢ Reverse query

❑ Find out the root servers

- % dig @a.root-servers.net . ns

Tools
– host

❑ host command

- % host cs.nctu.edu.tw.

- % host –t mx cs.nctu.edu.tw.

- % host 140.113.1.1

- % host –v 140.113.1.1