

INFORMATION AND ENTERTAINMENT SYSTEM - VEHICLES WITH: INCONTROL TOUCH PRO


AUDIO AMPLIFIER MODULE (G2133310)

REMOVAL AND INSTALLATION

86.50.67	AUDIO UNIT AMPLIFIER - RENEW	ALL DERIVATIVES	0.70	USED WITHINS	
87.01.15	AUDIO AMPLIFIER MODULE (AAM) - RENEW	ALL DERIVATIVES	0.60	USED WITHINS	
87.02.15	AUDIO AMPLIFIER MODULE (AAM) - RENEW	ALL DERIVATIVES	0.60	USED WITHINS	

REMOVAL

1.

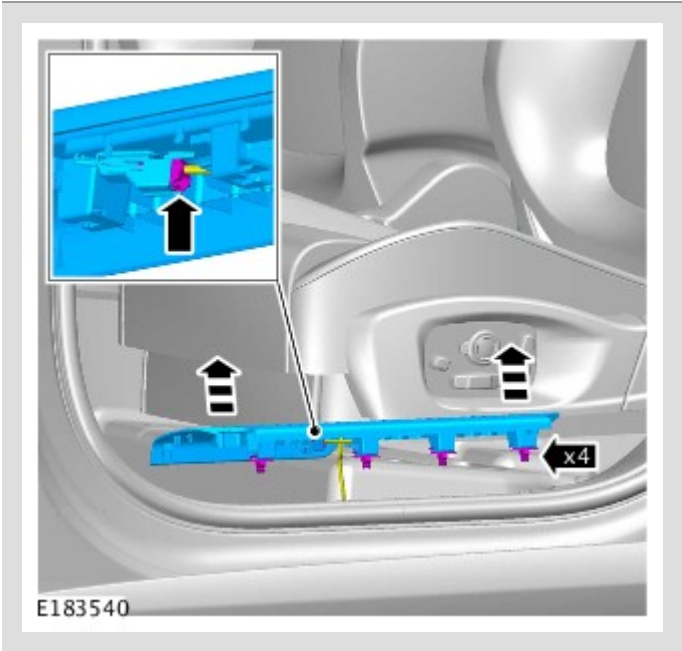

Remove the front tread plate trim panel.

2.

Remove the front left seat.

Refer to: Front Row Seat (501-10 Seating, Removal and Installation).

3.

Disconnect the startup battery ground cable.


Refer to: Startup Battery Disconnect and Connect (414-01 Battery, Mounting and Cables, General Procedures).

4.




Position the front carpet to one side.

5.

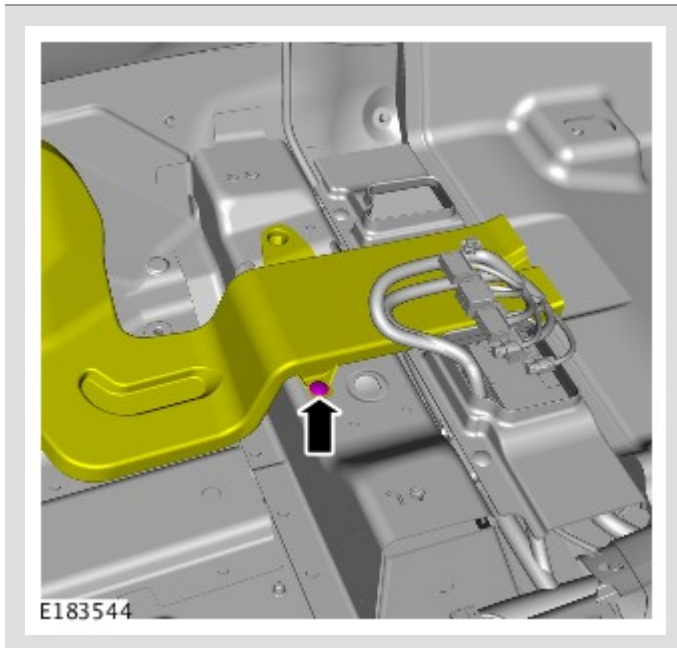


Position the air vent to one side.

6.

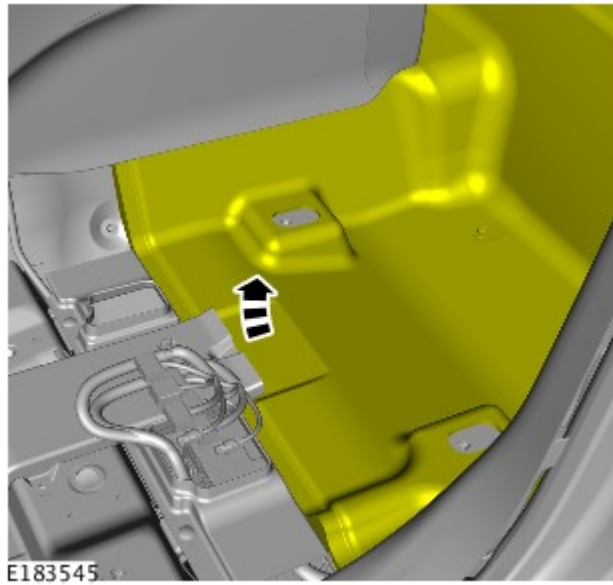


Position the rear carpet to one side.

7.

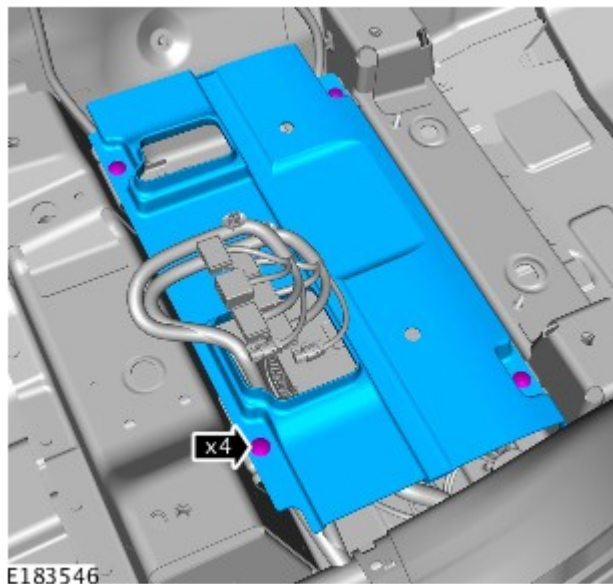

Remove the audio amplifier module cover trim panel.

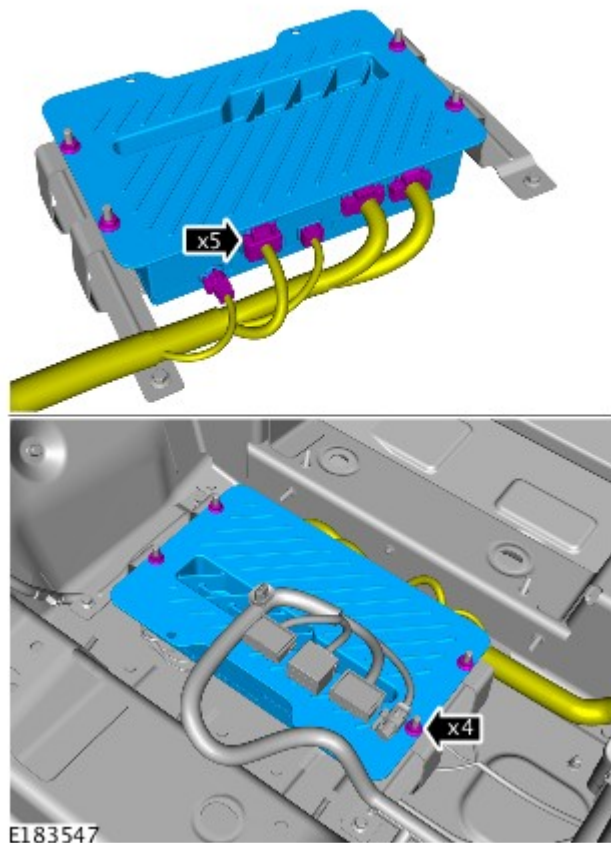

Remove the audio amplifier module.

Torque: **9 Nm**

INSTALLATION

1.

To install, reverse the removal procedure.