

INFORMATION AND ENTERTAINMENT SYSTEM - VEHICLES WITH: INCONTROL TOUCH

AUDIO HEAD UNIT (G2020210)

REMOVAL AND INSTALLATION

87.02.40	AUDIO HEAD UNIT (AHU) - RENEW	ALL DERIVATIVES	0.70	USED WITHINS	
----------	--	--------------------	------	--------------	--

GENERAL EQUIPMENT

EQUIPMENT NAME
Jaguar diagnostic equipment

PART(S)

STEP	PART NAME	QUANTITY
Installation Step 10	Treadplate clips	4

REMOVAL




NOTE:

Removal steps in this procedure may contain installation details.

1.

 NOTE:

Install new retaining clips.

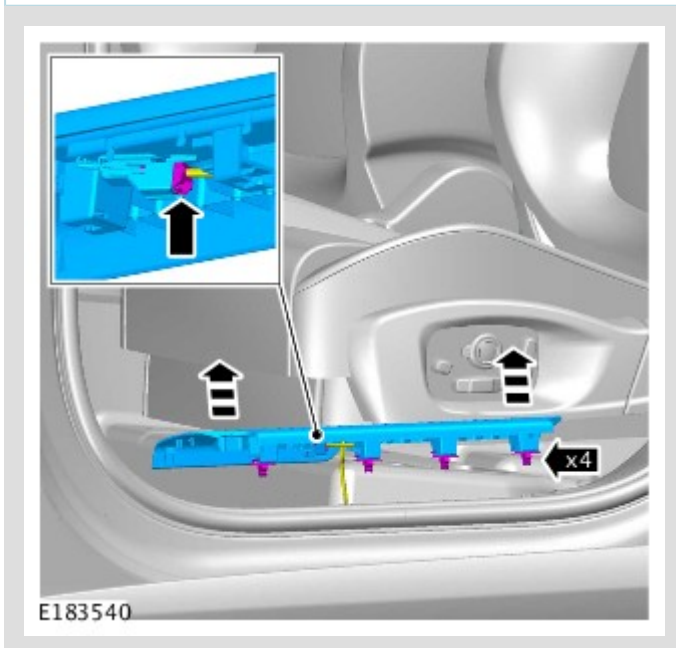

Remove the tread plate trim panel.

2.

Remove the front left seat.

Refer to: Front Row Seat (501-10 Seating, Removal and Installation).

3.

Disconnect the startup battery ground cable.

Refer to: Startup Battery Disconnect and Connect (414-01 Battery, Mounting and Cables, General Procedures).

4.




Position the front carpet to one side.

5.


⚠ CAUTION:

Take extra care not to damage the component.

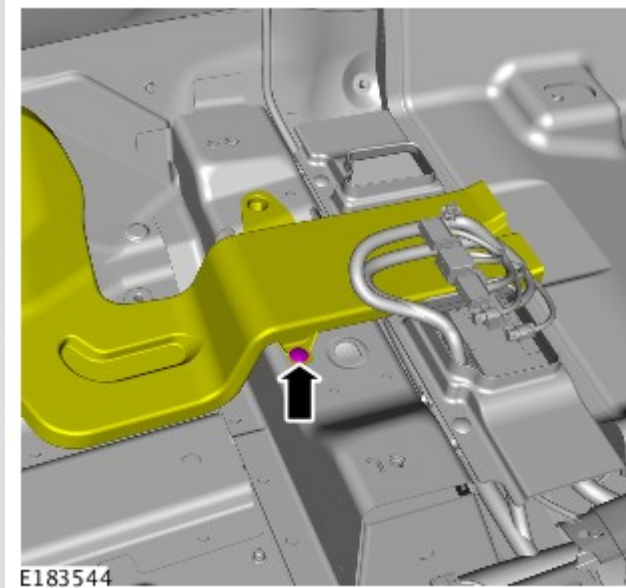


Position the air duct to one side.

6.

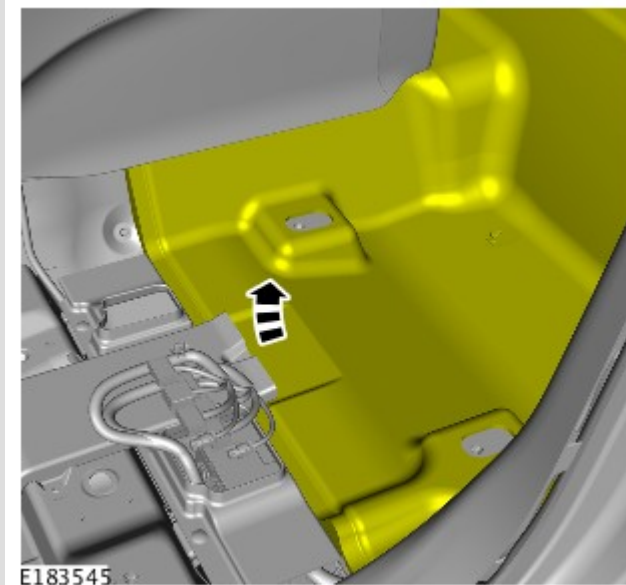


Position the rear carpet to one side.

7.

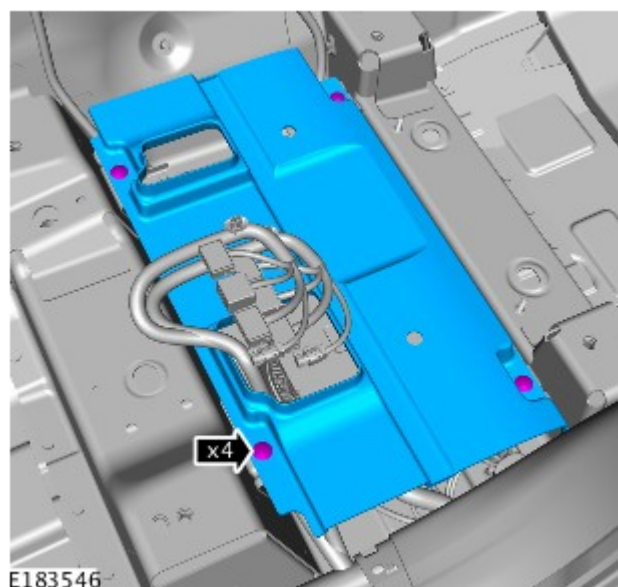


Remove the audio amplifier trim cover.

8.

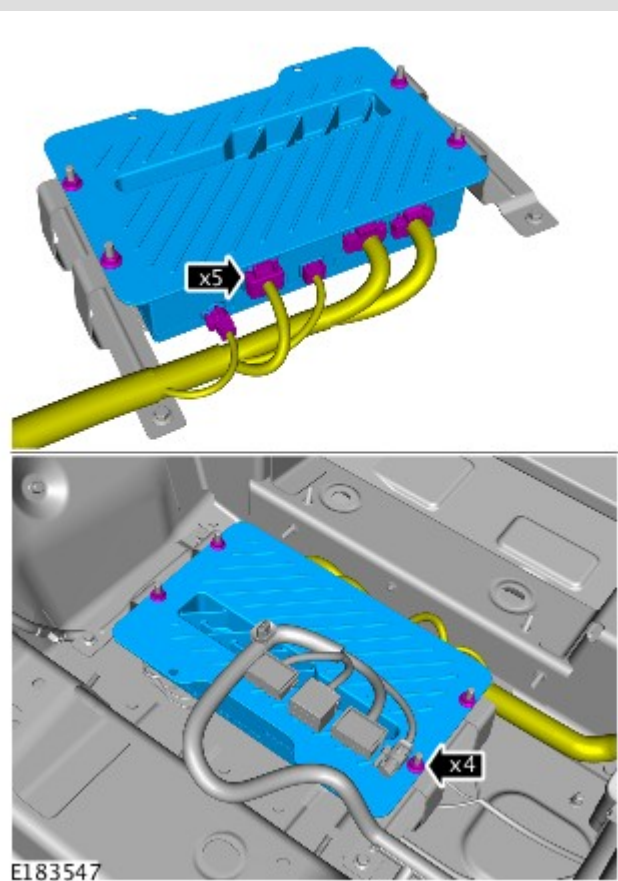


Remove the audio amplifier.

9.

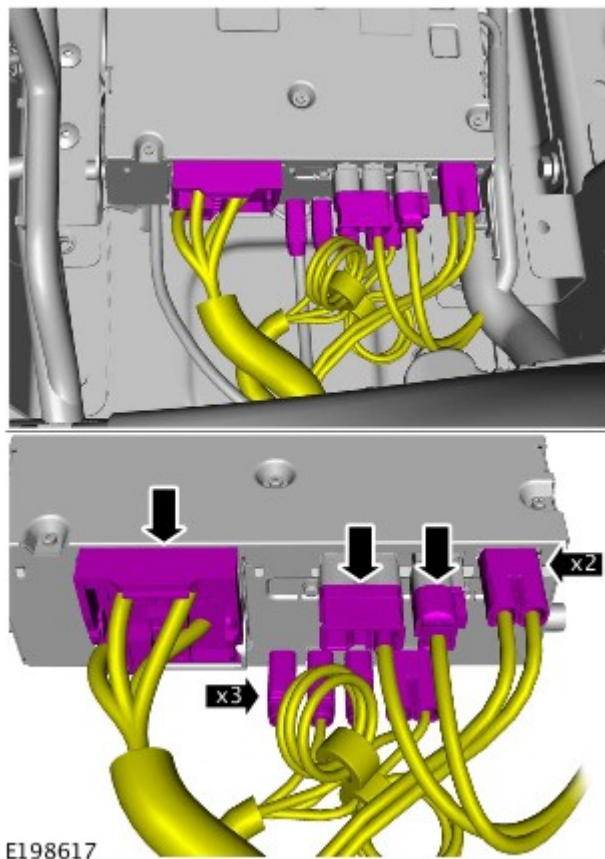

Disconnect the audio head unit connectors.

10.

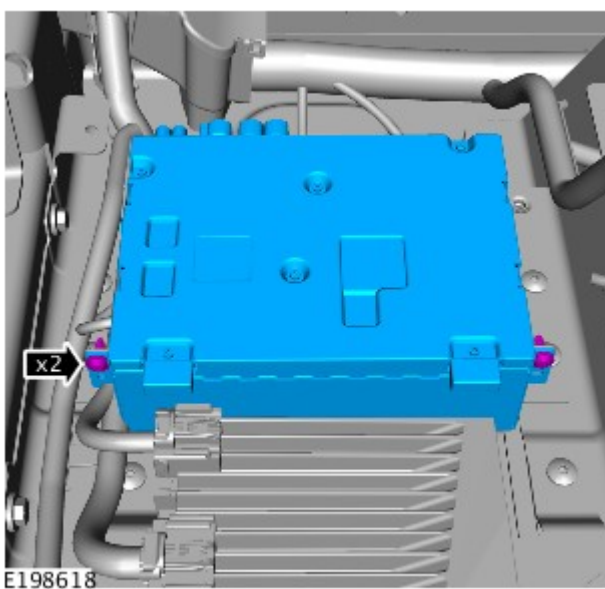

Remove the audio head unit.

INSTALLATION

1.

Install the audio head unit.

Torque: **3.5 Nm**

2.

Connect the audio head unit connectors.

3.

Install the audio amplifier.

Torque: 9 Nm

4.

Install the audio amplifier trim cover.

5.

Install the rear carpet.

6.

Install the air duct.

7.

Install the front carpet.

8.

Connect the startup battery ground cable.

Refer to: Startup Battery Disconnect and Connect (414-01 Battery, Mounting and Cables, General Procedures).

9.

Install the front left seat.

Refer to: Front Row Seat (501-10 Seating, Removal and Installation).

10.

 CAUTION:

Make sure that the component is correctly located on the locating dowels.

 NOTE:

Install new retaining clips.

Install the tread plate trim panel.

Renew Part: [Treadplate clips](#) Quantity: 4 .

11.

Using the approved Jaguar diagnostic equipment, calibrate the audio head unit.

General Equipment: [Jaguar diagnostic equipment](#)

