

FRONT DISC BRAKE

BRAKE PADS - INGENIUM I4 2.0L DIESEL (G1822046)

REMOVAL AND INSTALLATION

70.40.02	FRONT BRAKE PADS - RENEW	ALL DERIVATIVES	0.70	USED WITHINS	
70.40.03	REAR BRAKE PADS - RENEW	ALL DERIVATIVES	0.90	USED WITHINS	

REMOVAL



WARNINGS:

- Brake pads must be renewed in axle sets only. Failure to follow this instruction may result in braking efficiency being impaired.
- If the brake pad wear warning light has been activated, a new brake pad wear sensor must be installed.

1.



WARNING:

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

2.

Remove the front wheels and tires.

Refer to: Wheel and Tire (204-04 Wheels and Tires, Removal and Installation).


3.

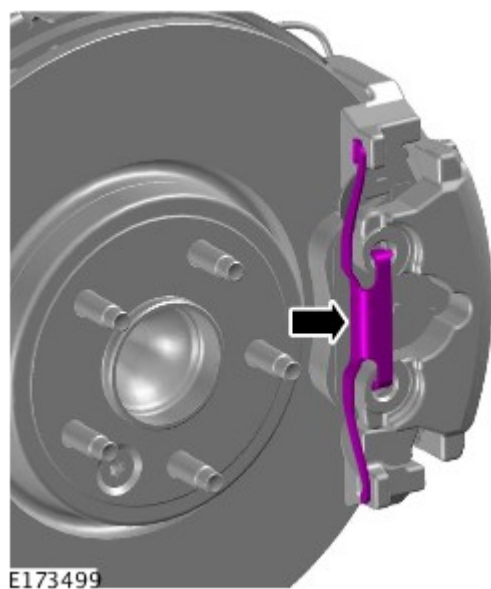

4.

 NOTE:

The brake pad wear indicator sensor is easily damaged. Do not use a lever to remove the sensor. Use fingers only.

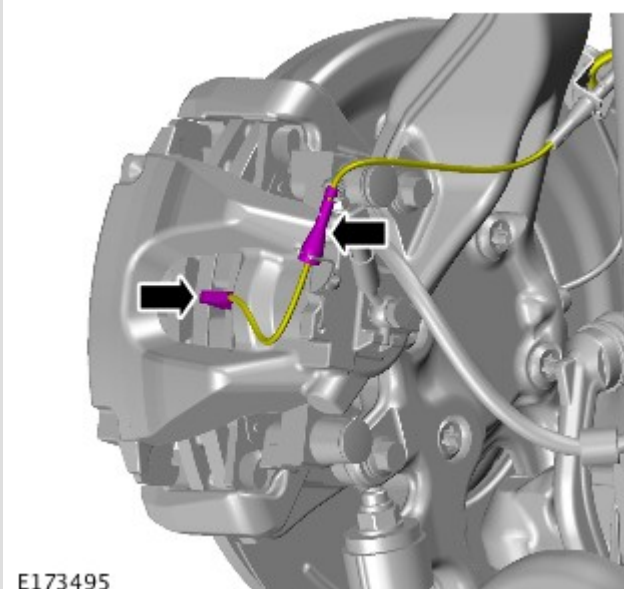


Inspect the brake pad wear sensor for signs of wear or damage. Install a new sensor if necessary.

5.


⚠ CAUTION:

Do not allow the brake caliper to hang on the brake hose.

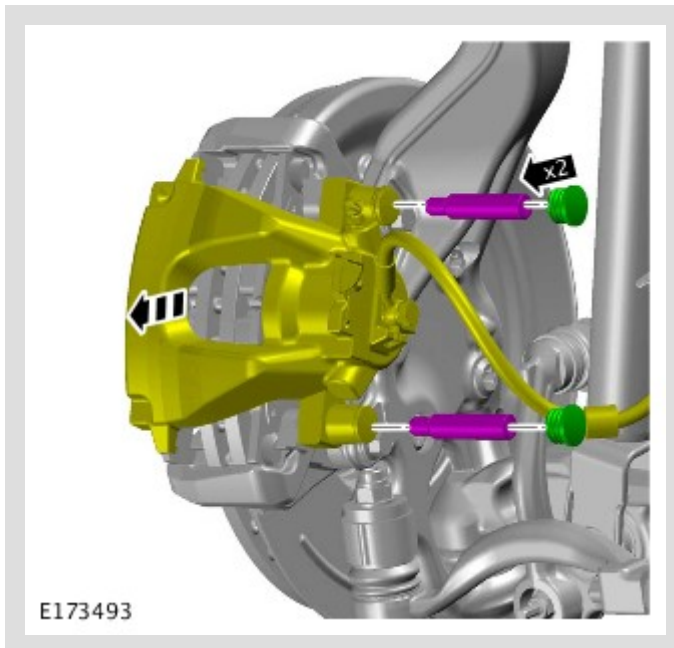

Tie aside.

6.

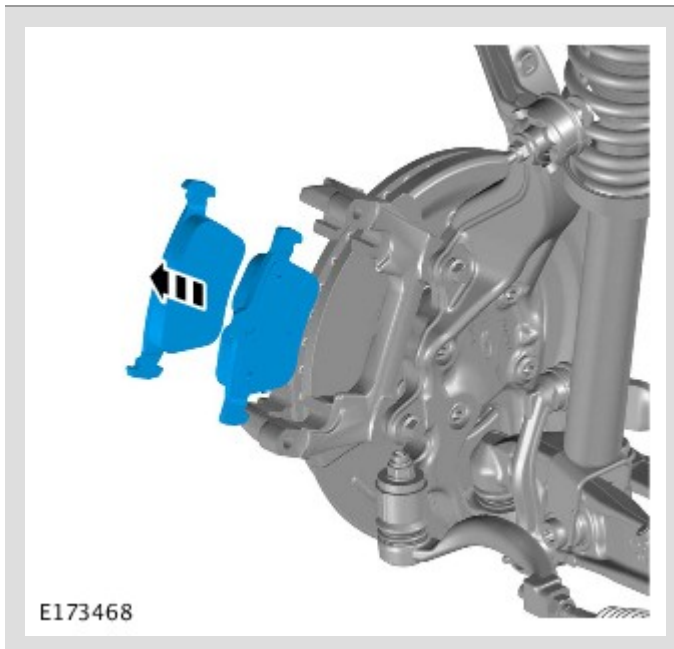


**WARNING:**


Do not use compressed air to clean brake components. Dust from friction materials can be harmful if inhaled.

**CAUTION:**

Make sure that the mating faces are clean and free of foreign material and that no grease is applied to the brake pad guides.

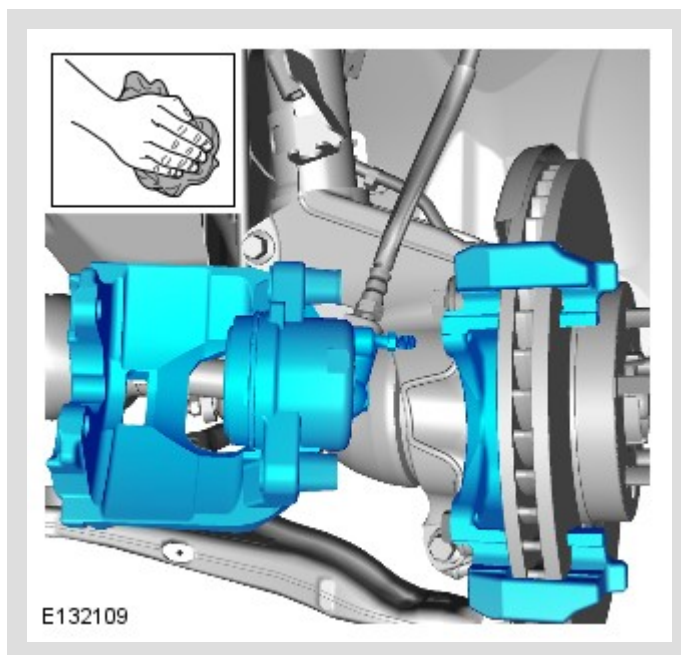


Clean the brake caliper housing and anchor plate using brake cleaning fluid.

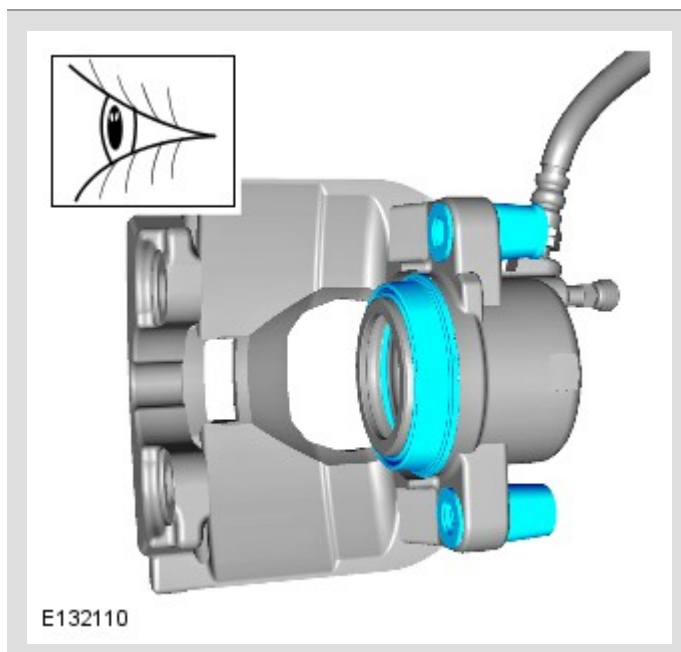


Inspect the caliper piston and slide pin seals for damage.

3.

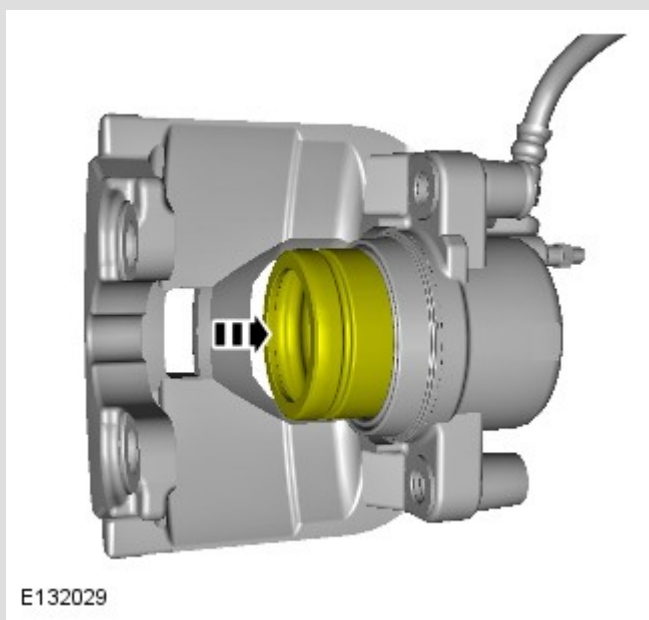


4.

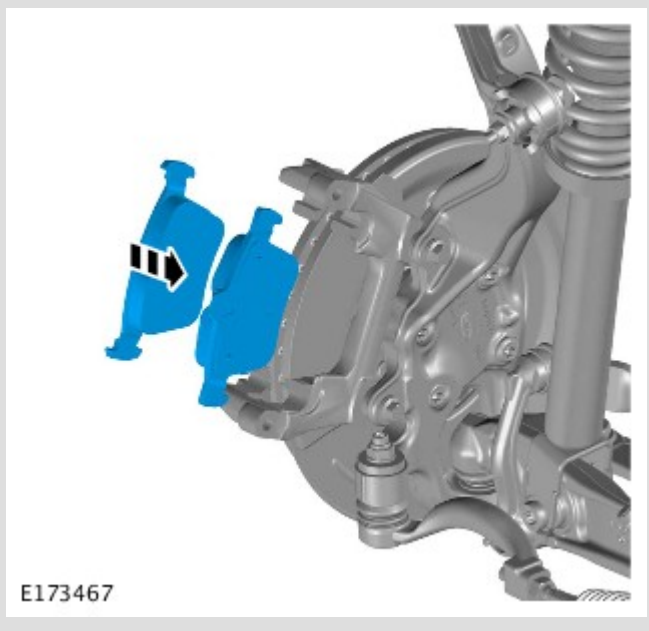


ⓘ CAUTION:


Make sure that the brake hose is not twisted and is correctly located.

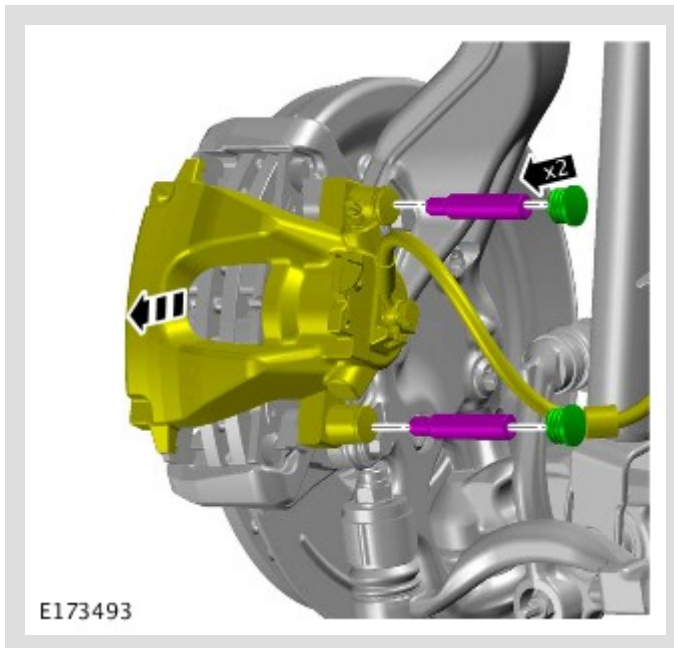

Torque: 33 Nm

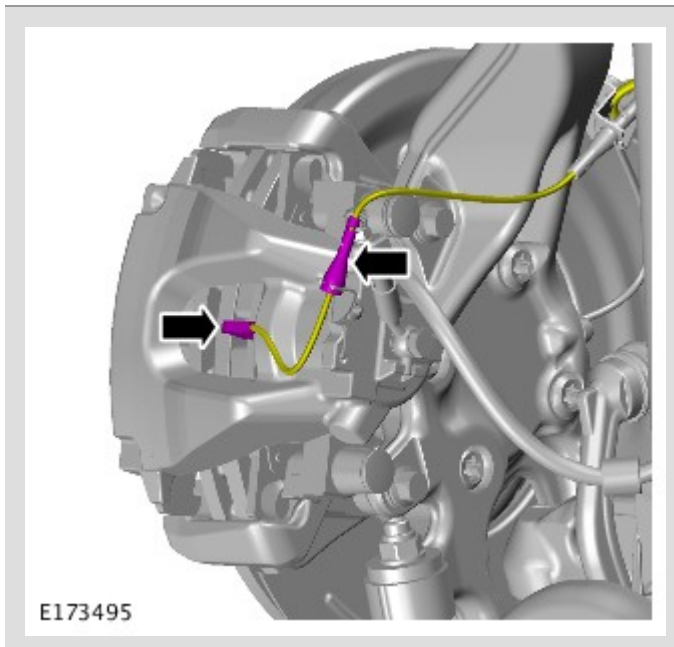

7.

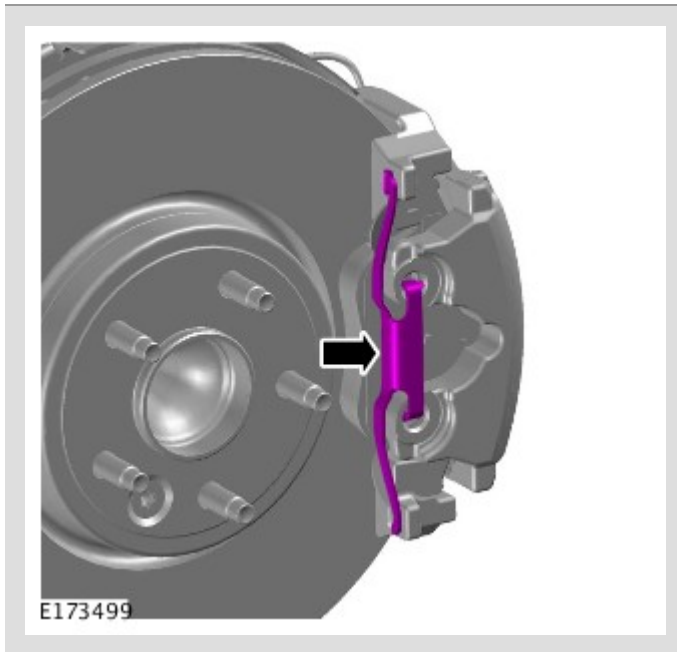

8.

Repeat the above procedure for the other side.

9.

Install the wheels and tires.

Refer to: Wheel and Tire (204-04 Wheels and Tires, Removal and Installation).

10.

Depress the brake pedal several times, check the fluid level in the brake fluid reservoir and top-up with brake fluid if necessary.