

BUMPERS

FRONT BUMPER (G1899748)

REMOVAL AND INSTALLATION

76.22.08	FRONT ARMATURE - RENEW	ALL DERIVATIVES	1.60	USED WITHINS	
76.22.78	FRONT BUMPER - RENEW	ALL DERIVATIVES	2.20	USED WITHINS	

REMOVAL

1.



WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.


2.

Refer to: Fender Splash Shield (501-02, Removal and Installation).

3.




4.

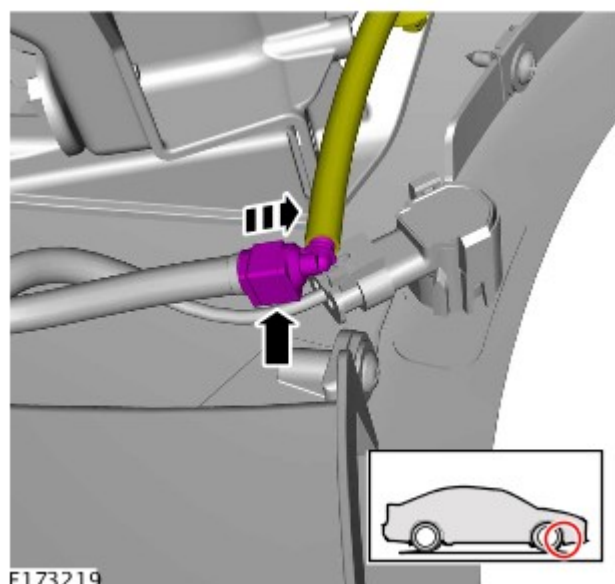


 NOTE:

Repeat the step for the other side

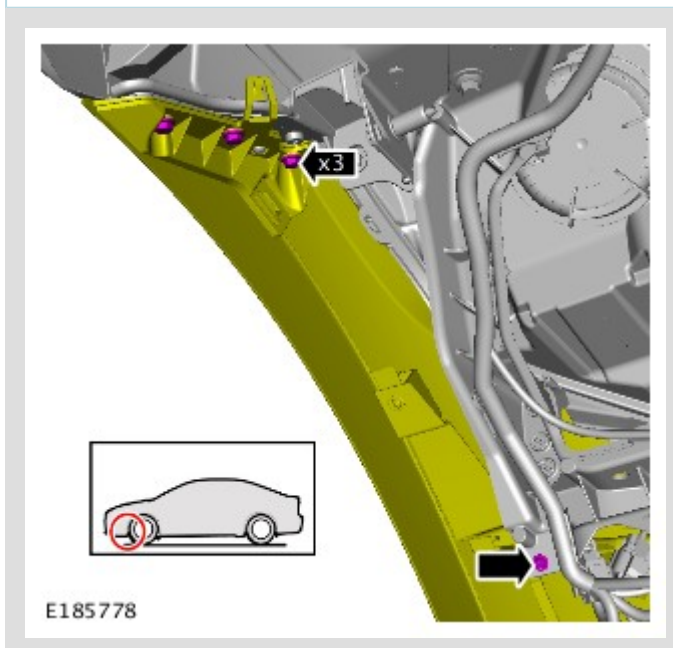


Torque: 2.5 Nm

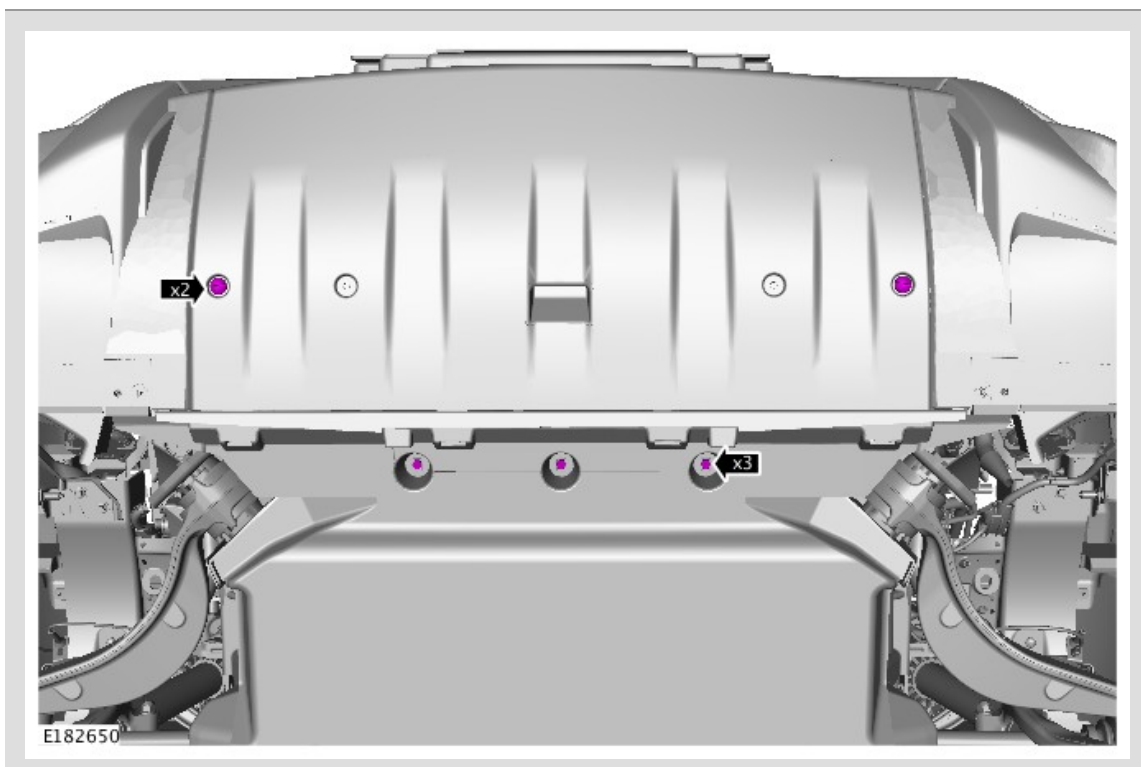

Torque: 7 Nm


7.

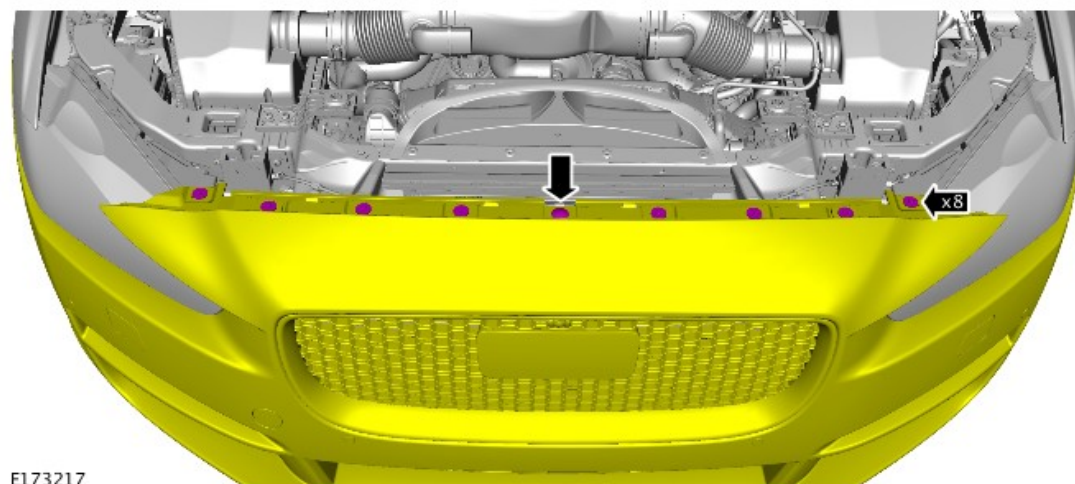

8.

 NOTE:

Take extra care when releasing the clips.


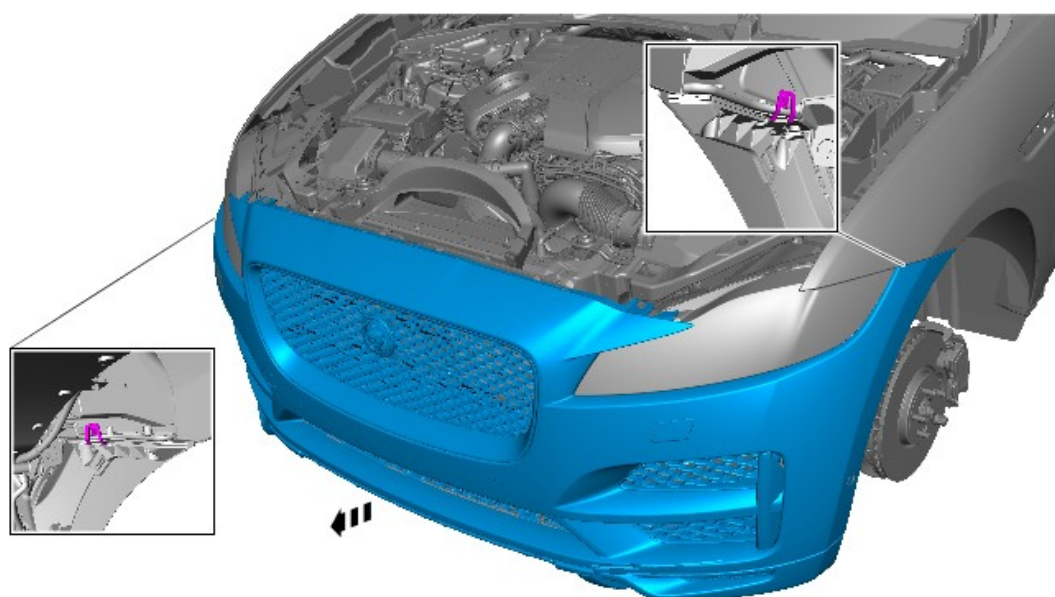


⚠ CAUTION:


Take extra care not to damage the wiring harnesses.

△ NOTE:

Do not disassemble further if the component is removed for access only.

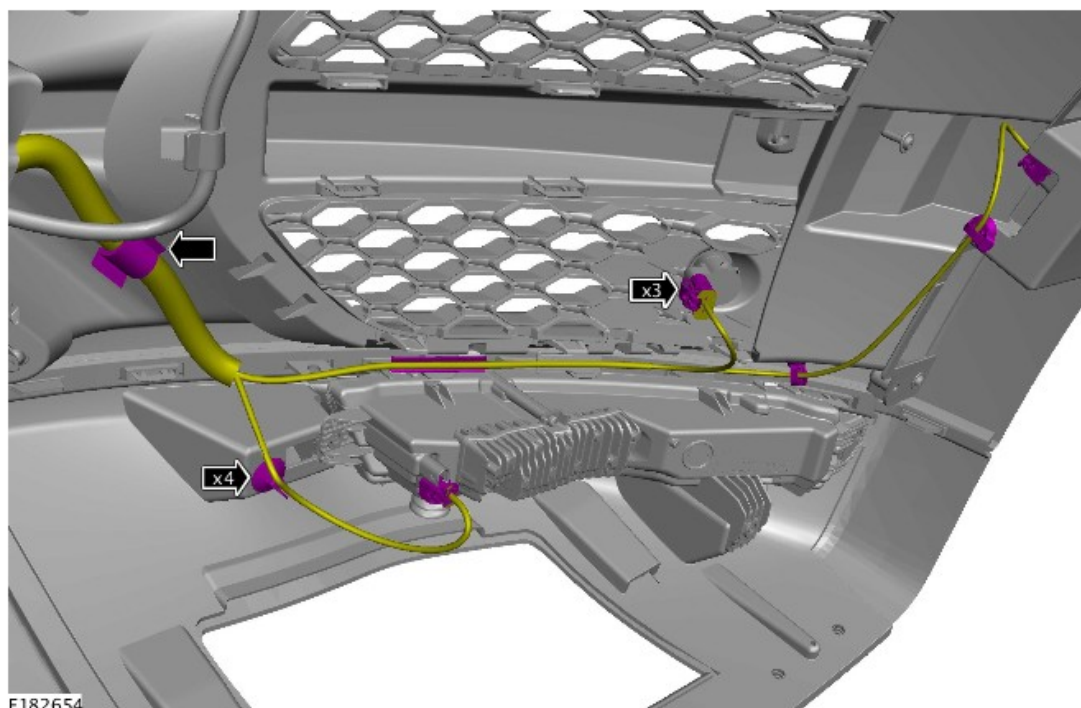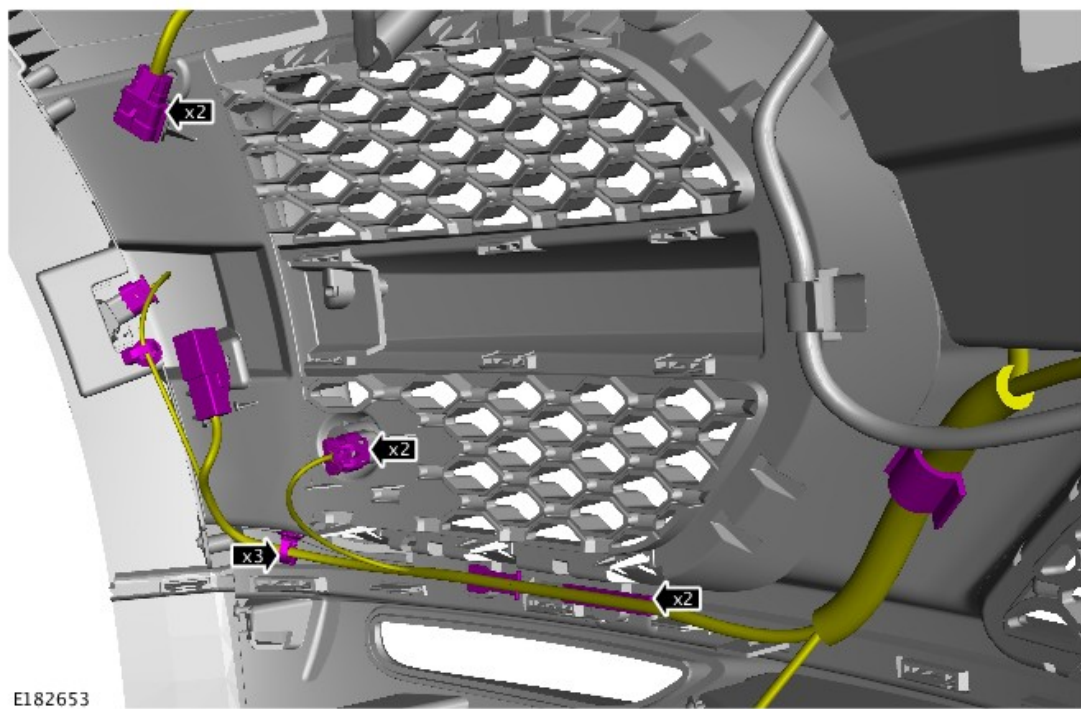


11.

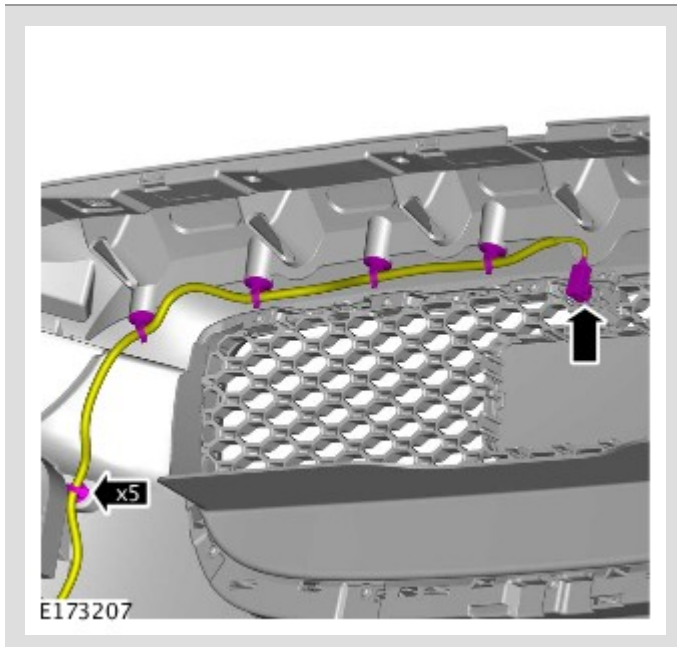

12.



13.


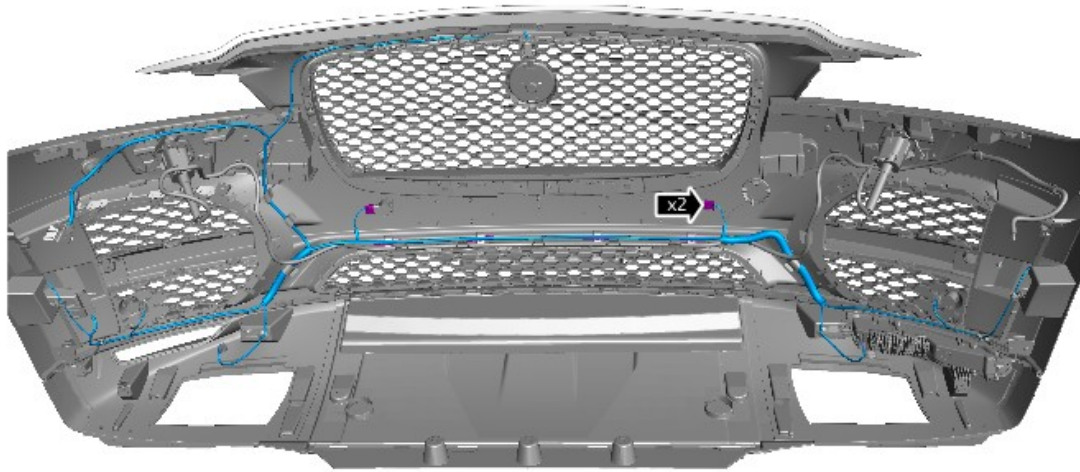


E182657

14.

 NOTE:

Repeat the step for the other side.

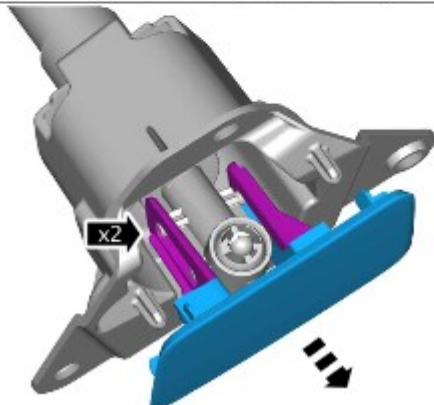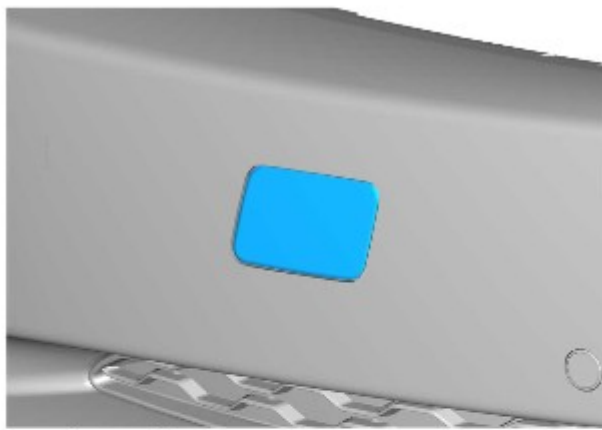


E173208

15.




16.

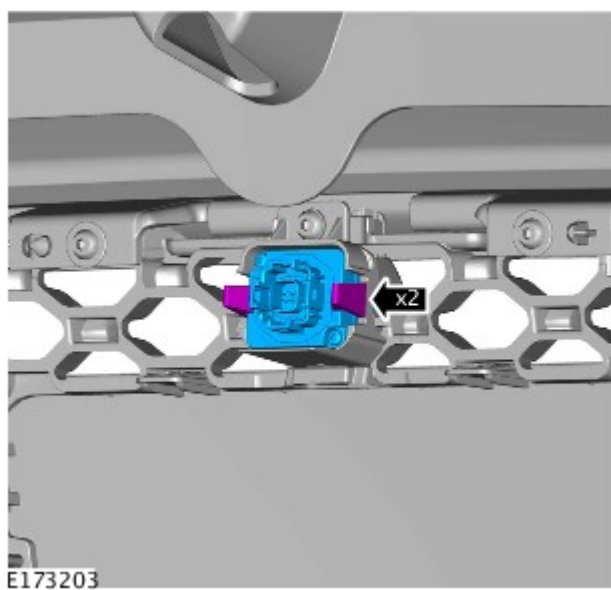


△ NOTE:



Repeat the step for the other side.

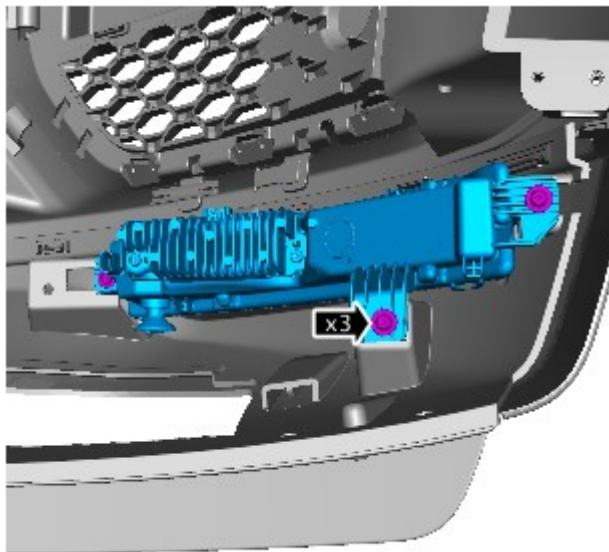


E182660

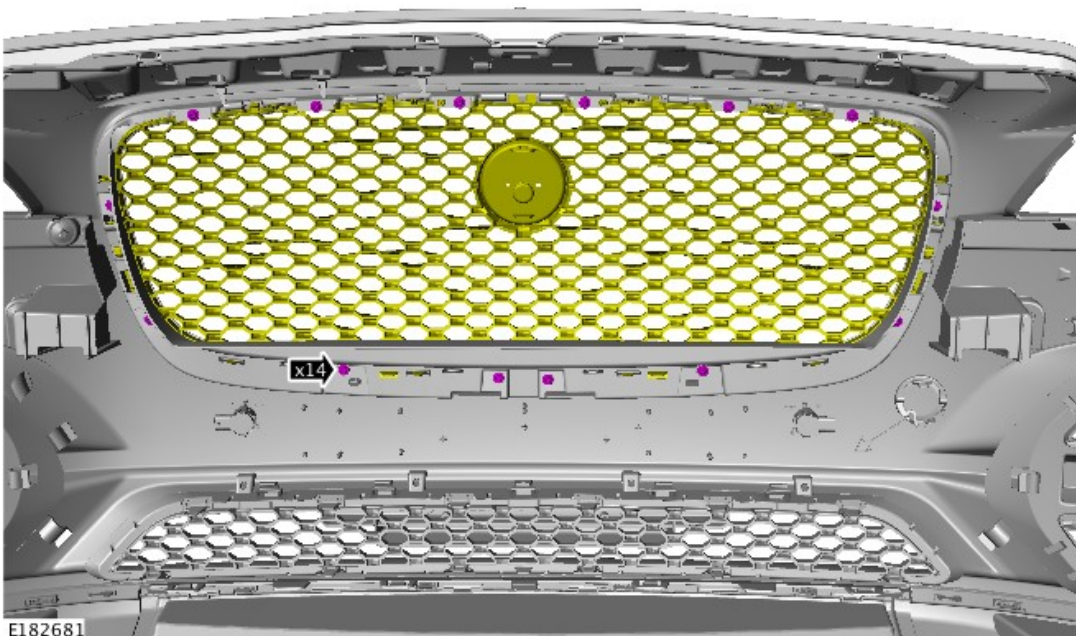

E182681

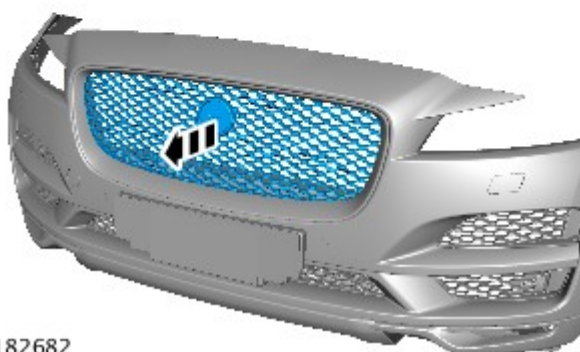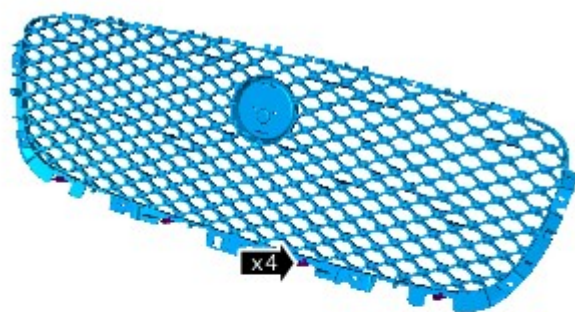


E182682

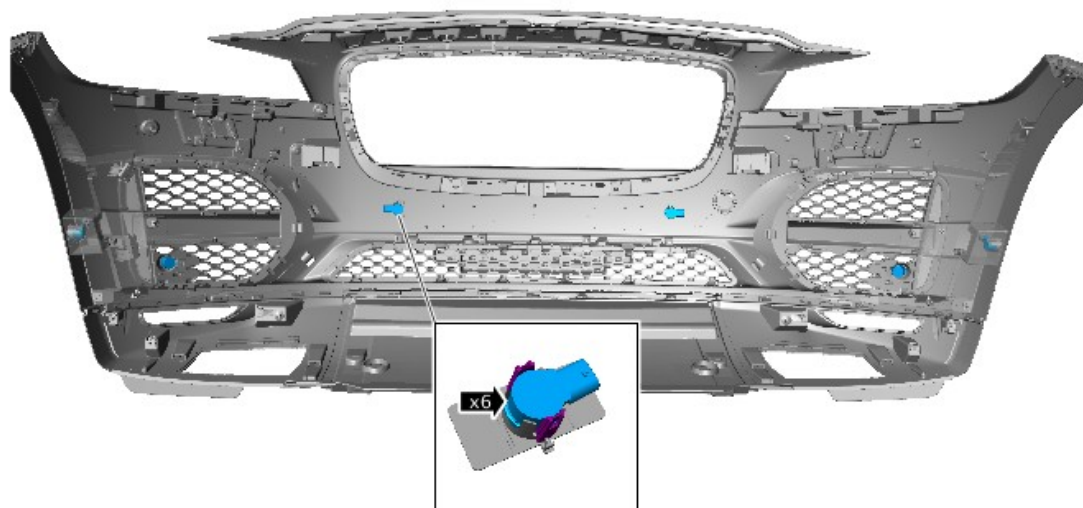

E182684


△ NOTE:


Repeat the step for the other side.

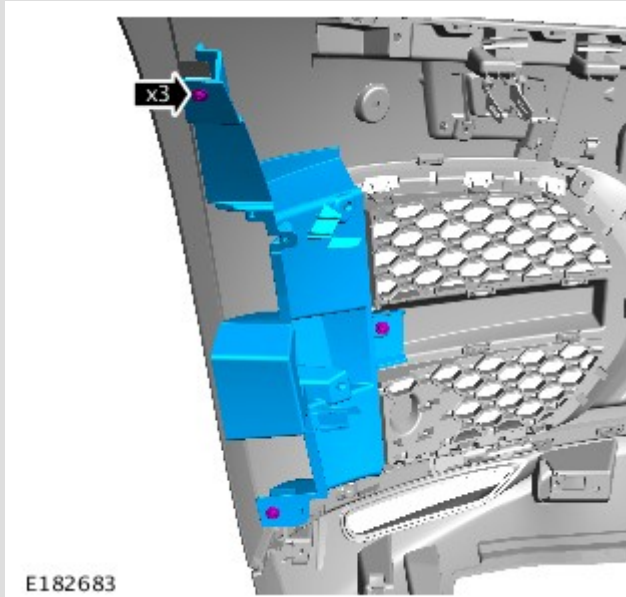

△ NOTE:

Repeat the step for the other side.

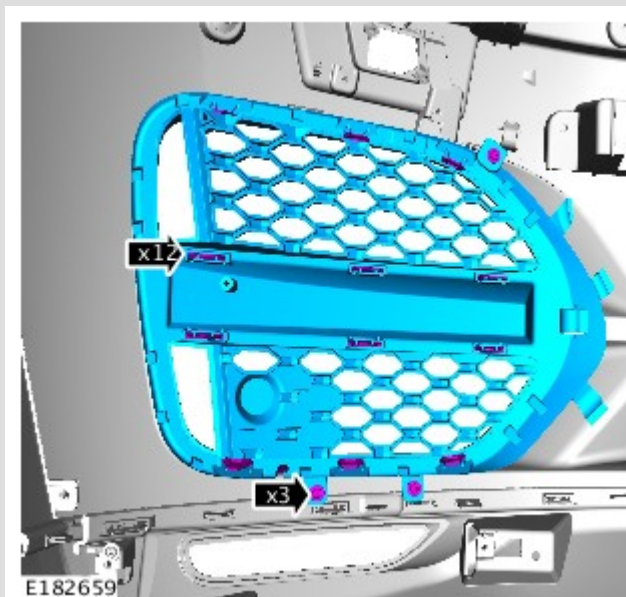

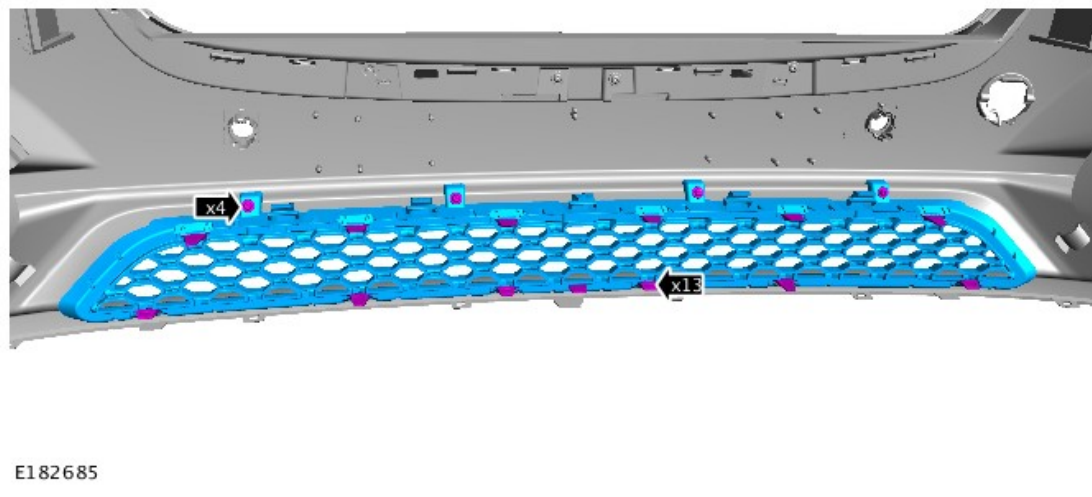

INSTALLATION

1.

To install reverse the removal procedure.