

BODY CLOSURES

FRONT DOOR (G1826489)

REMOVAL AND INSTALLATION

REMOVAL



CAUTION:

Make sure to protect the paintwork.



NOTES:

- If a new door is installed a weatherstrip must be installed.
- Some variation in the illustrations may occur, but the essential information is always correct.
- Some components shown removed for clarity.
- Removal steps in this procedure may contain installation details.

1.

If the door is to be removed for access, carry out Steps 7 to 10 only.

2.

Refer to: Supplementary Restraint System Health and Safety Precautions (100-00, Description and Operation).

3.

Refer to: Front Door Speaker (415-01, Removal and Installation).

4.

Refer to: Front Door Window Regulator and Motor (501-11, Removal and Installation).

5.

Refer to: Front Door Latch (501-14, Removal and Installation).


6.

Refer to: Exterior Mirror (501-09, Removal and Installation).

7.


Refer to: Battery Disconnect and Connect (414-01, General Procedures).

8.

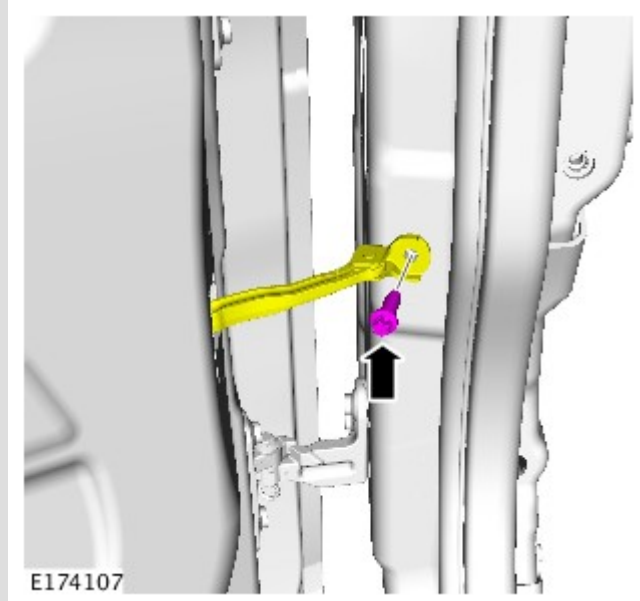


Torque: 24 Nm

9.

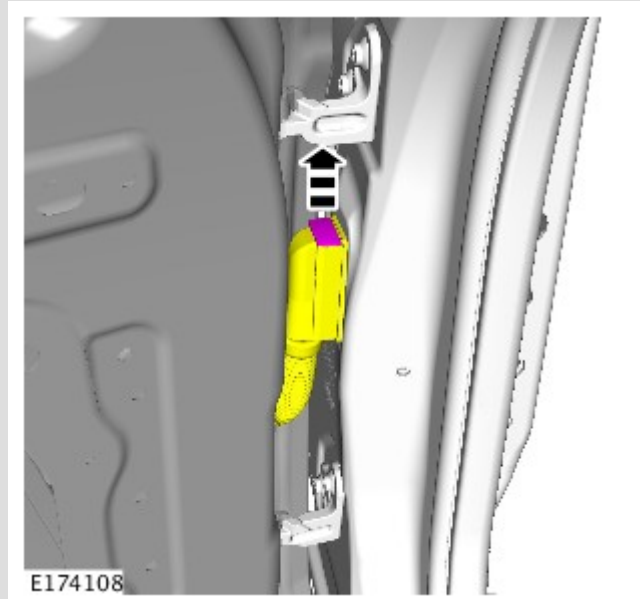


**WARNING:**


The component(s) may be heavy. Take extra care when handling.

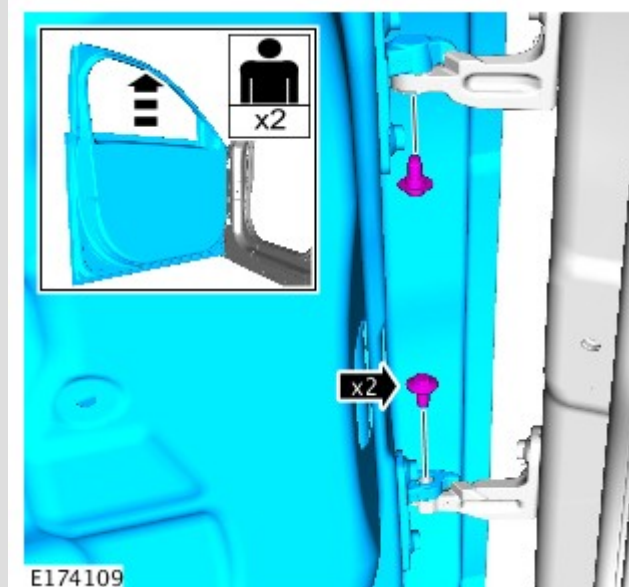


Torque: 13 Nm

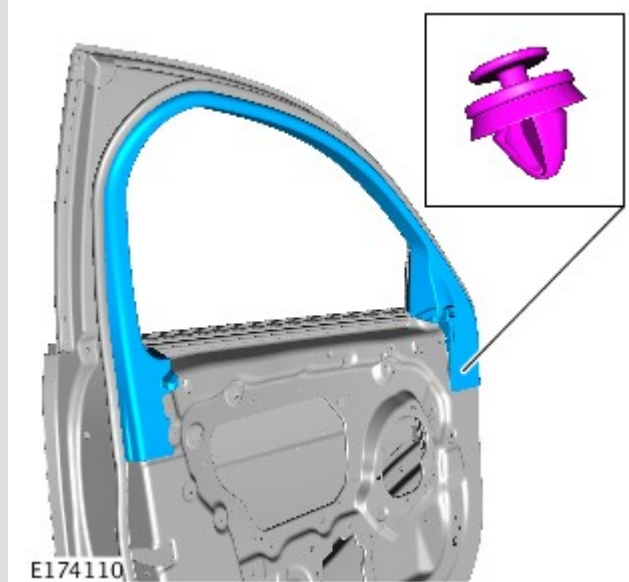

12.

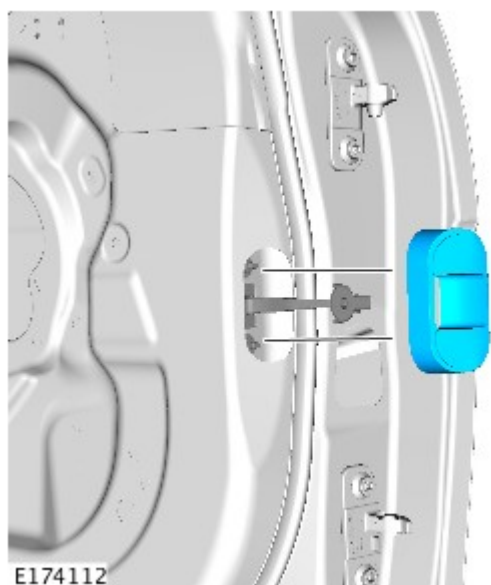


13.

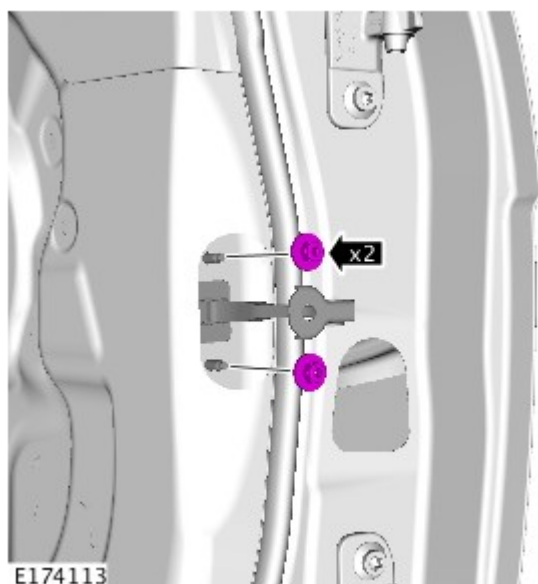


Torque: 10 Nm

14.

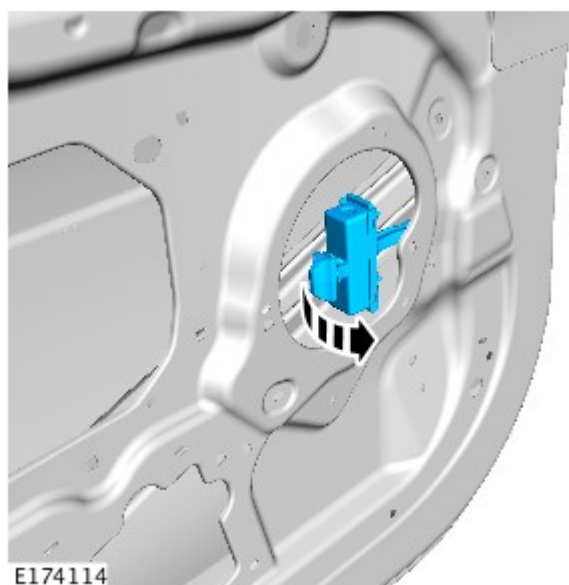


15.

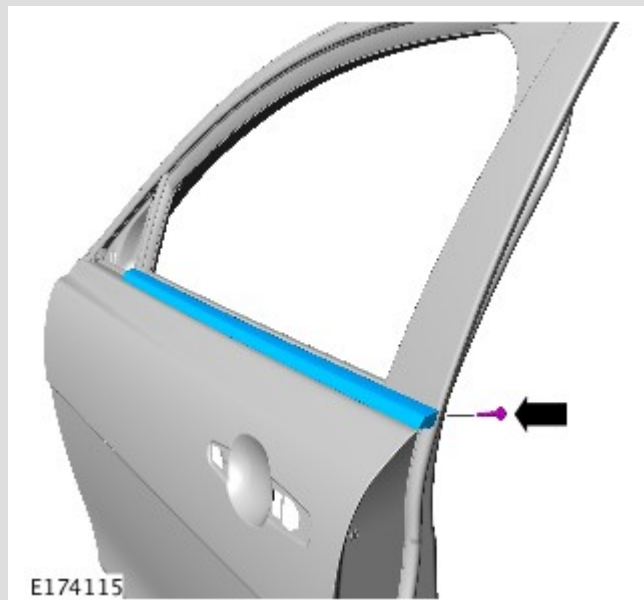


16.




17.

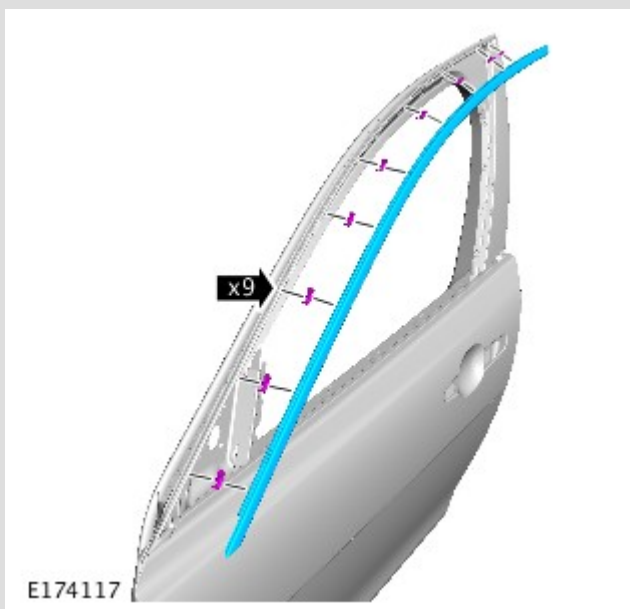


18.

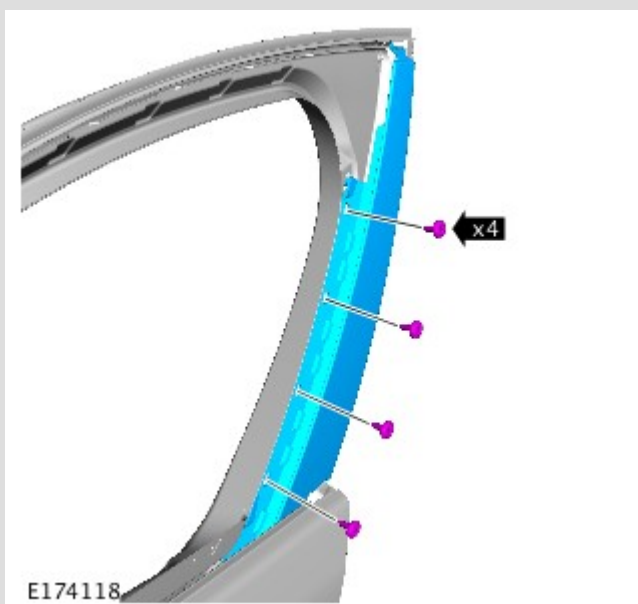


19.

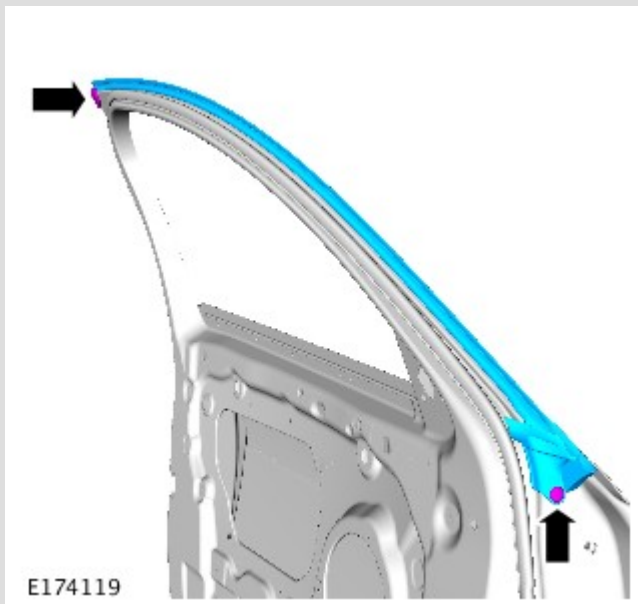


20.

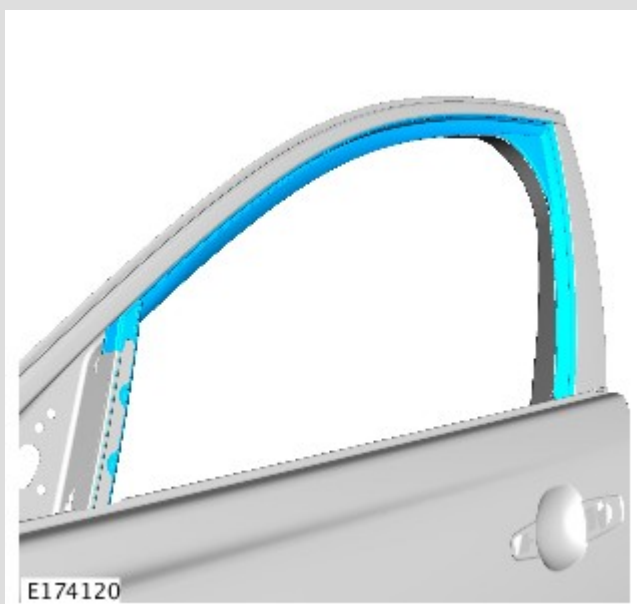

21.

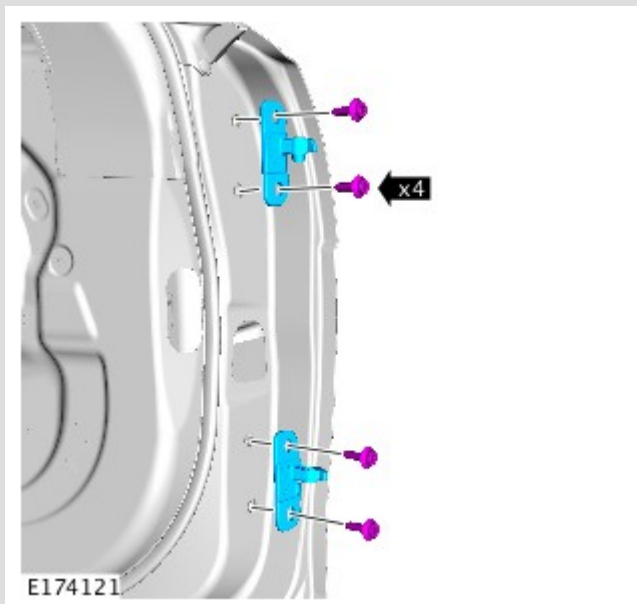

Torque: 35 Nm

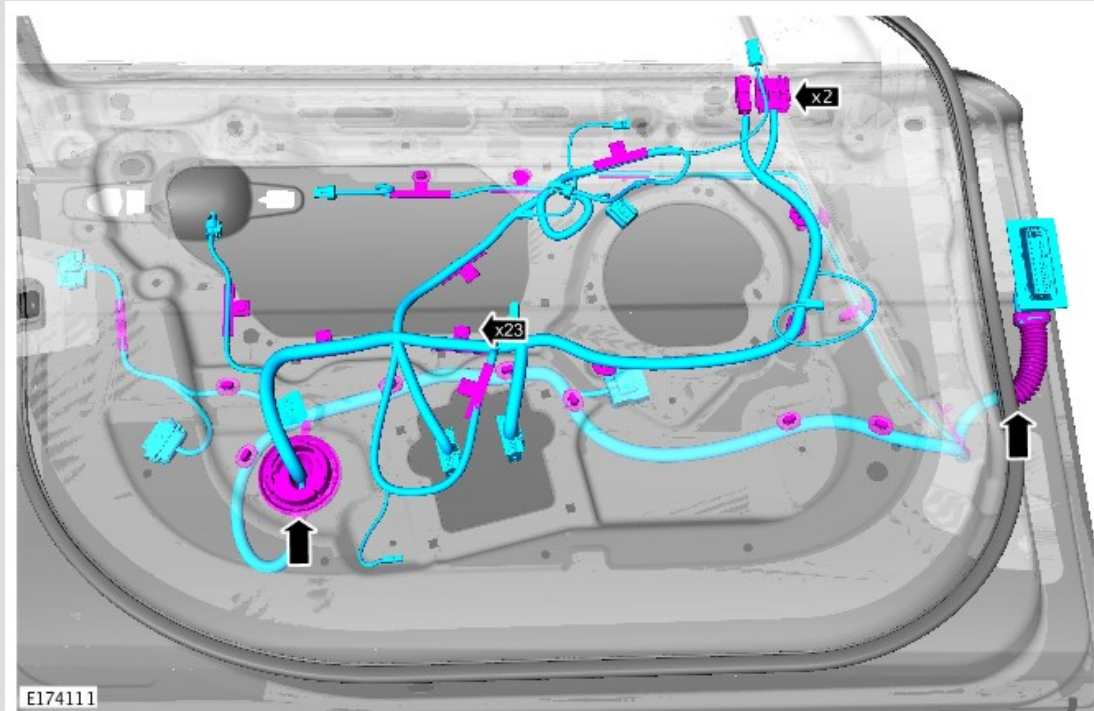

INSTALLATION

1.

To install, reverse the removal procedure.

2.

NOTE:

Check the gap and profiles of the door are correct.

Refer to: Body and Frame (501-26, Description and Operation).