

INFORMATION AND ENTERTAINMENT SYSTEM - VEHICLES WITH: INCONTROL TOUCH PRO

REAR DOOR TWEETER SPEAKER (G2133251)

REMOVAL AND INSTALLATION

87.01.04	REAR DOOR TWEETER SPEAKER - RENEW	ALL DERIVATIVES	0.50	USED WITHINS	
87.02.04	REAR DOOR TWEETER SPEAKER - RENEW	ALL DERIVATIVES	0.50	USED WITHINS	

REMOVAL

NOTES:


- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.

Remove the rear door trim panel for access only.

Refer to: Rear Door Trim Panel (501-05, Removal and Installation).

2.

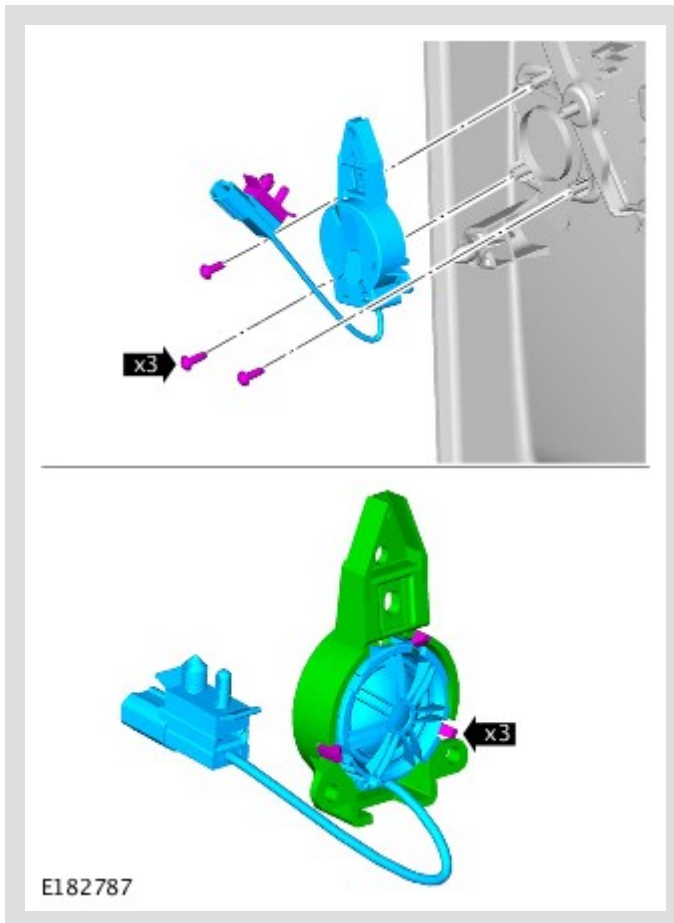

- Release the connector retaining clip and remove the 3 screws.
- Remove the speaker and bracket assembly.
- Release the 3 securing clips and remove the speaker.

INSTALLATION

1.

- Install the speaker into the bracket.
- Install the speaker and bracket assembly and tighten the 3 screws to the correct torque.
Torque: 1 Nm
- Install the connector retaining clip.

2.

Install the rear door trim panel.

Refer to: Rear Door Trim Panel (501-05, Removal and Installation).