

INFORMATION AND ENTERTAINMENT SYSTEM - VEHICLES WITH: INCONTROL TOUCH PRO

SUBWOOFER SPEAKER (G1904221)

REMOVAL AND INSTALLATION

86.51.05	REAR SUB WOOFER SPEAKER - RENEW	ALL DERIVATIVES	0.50	USED WITHINS	
87.01.32	SUBWOOFER SPEAKER - RENEW	ALL DERIVATIVES	0.50	USED WITHINS	
87.02.32	SUBWOOFER SPEAKER - RENEW	ALL DERIVATIVES	0.50	USED WITHINS	

REMOVAL



NOTE:

Removal steps in this procedure may contain installation details.


1.

Raise and support the vehicle on a suitable 2 or 4 post lift.
Refer to: Lifting (100-02, Description and Operation).

2.


Remove the left rear wheel and tire.
Refer to: Wheel and Tire (204-04 Wheels and Tires, Removal and Installation).

3.

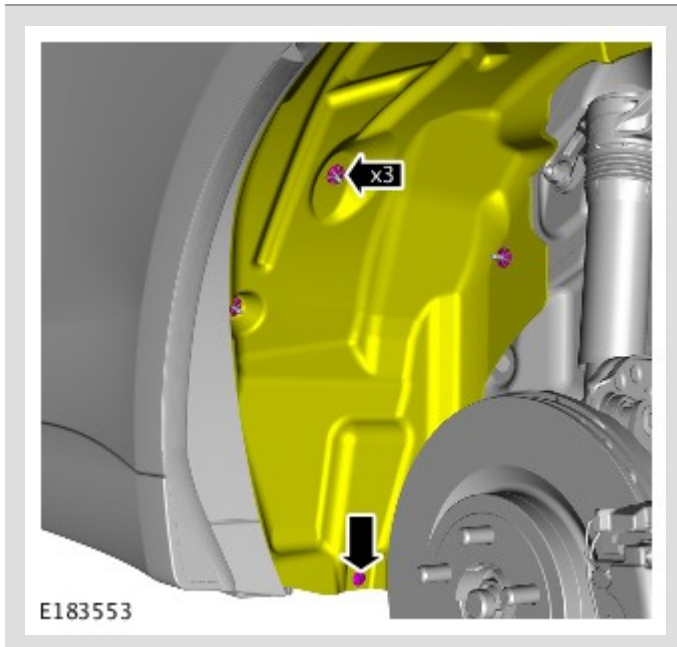


Position the wheel arch liner to one side.

4.

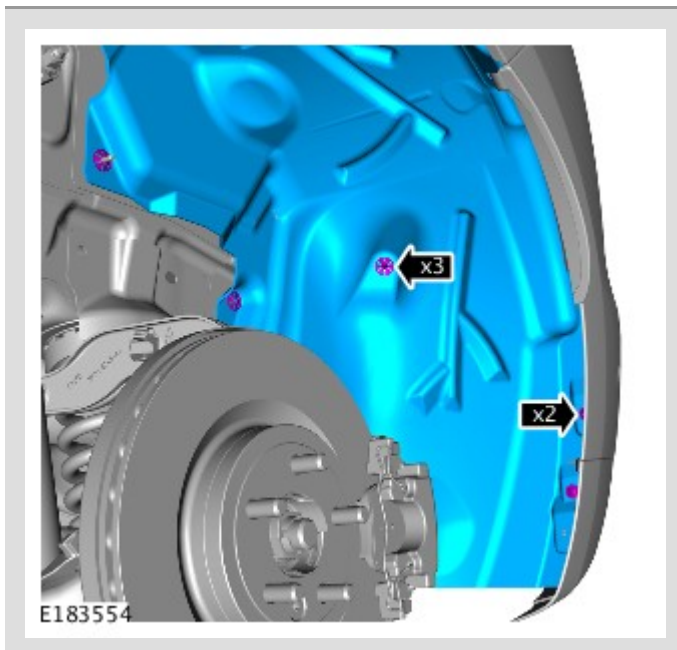


Remove the rear section of the rear wheel arch liner.

5.

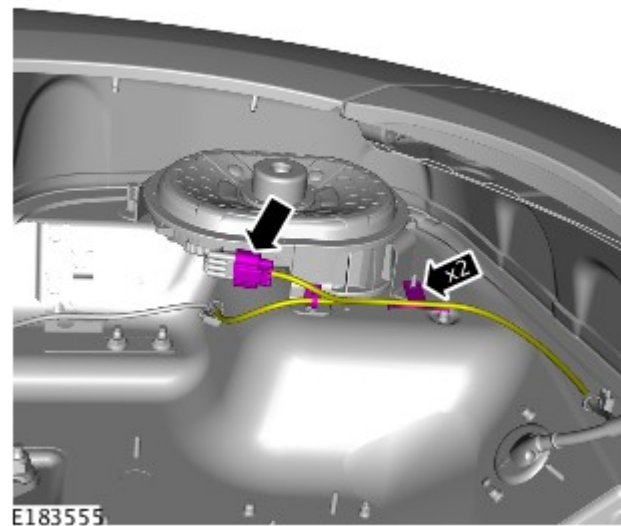

Disconnect the connectors.

6.

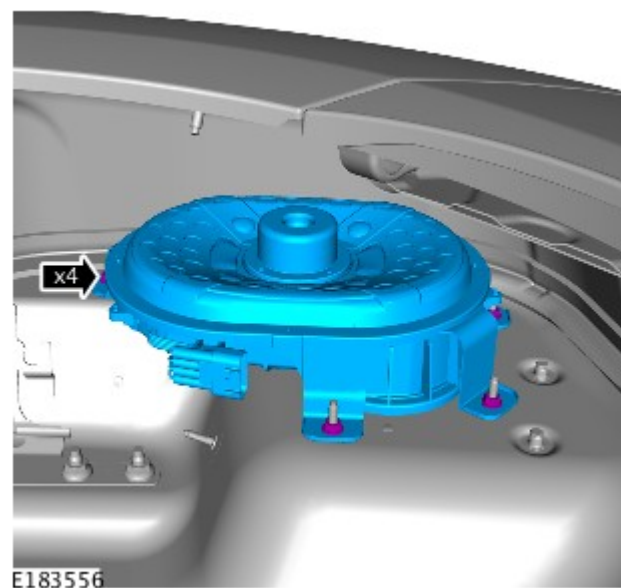

Remove the subwoofer speaker.

Torque: 6 Nm

INSTALLATION

1.

To install, reverse the removal procedure.