


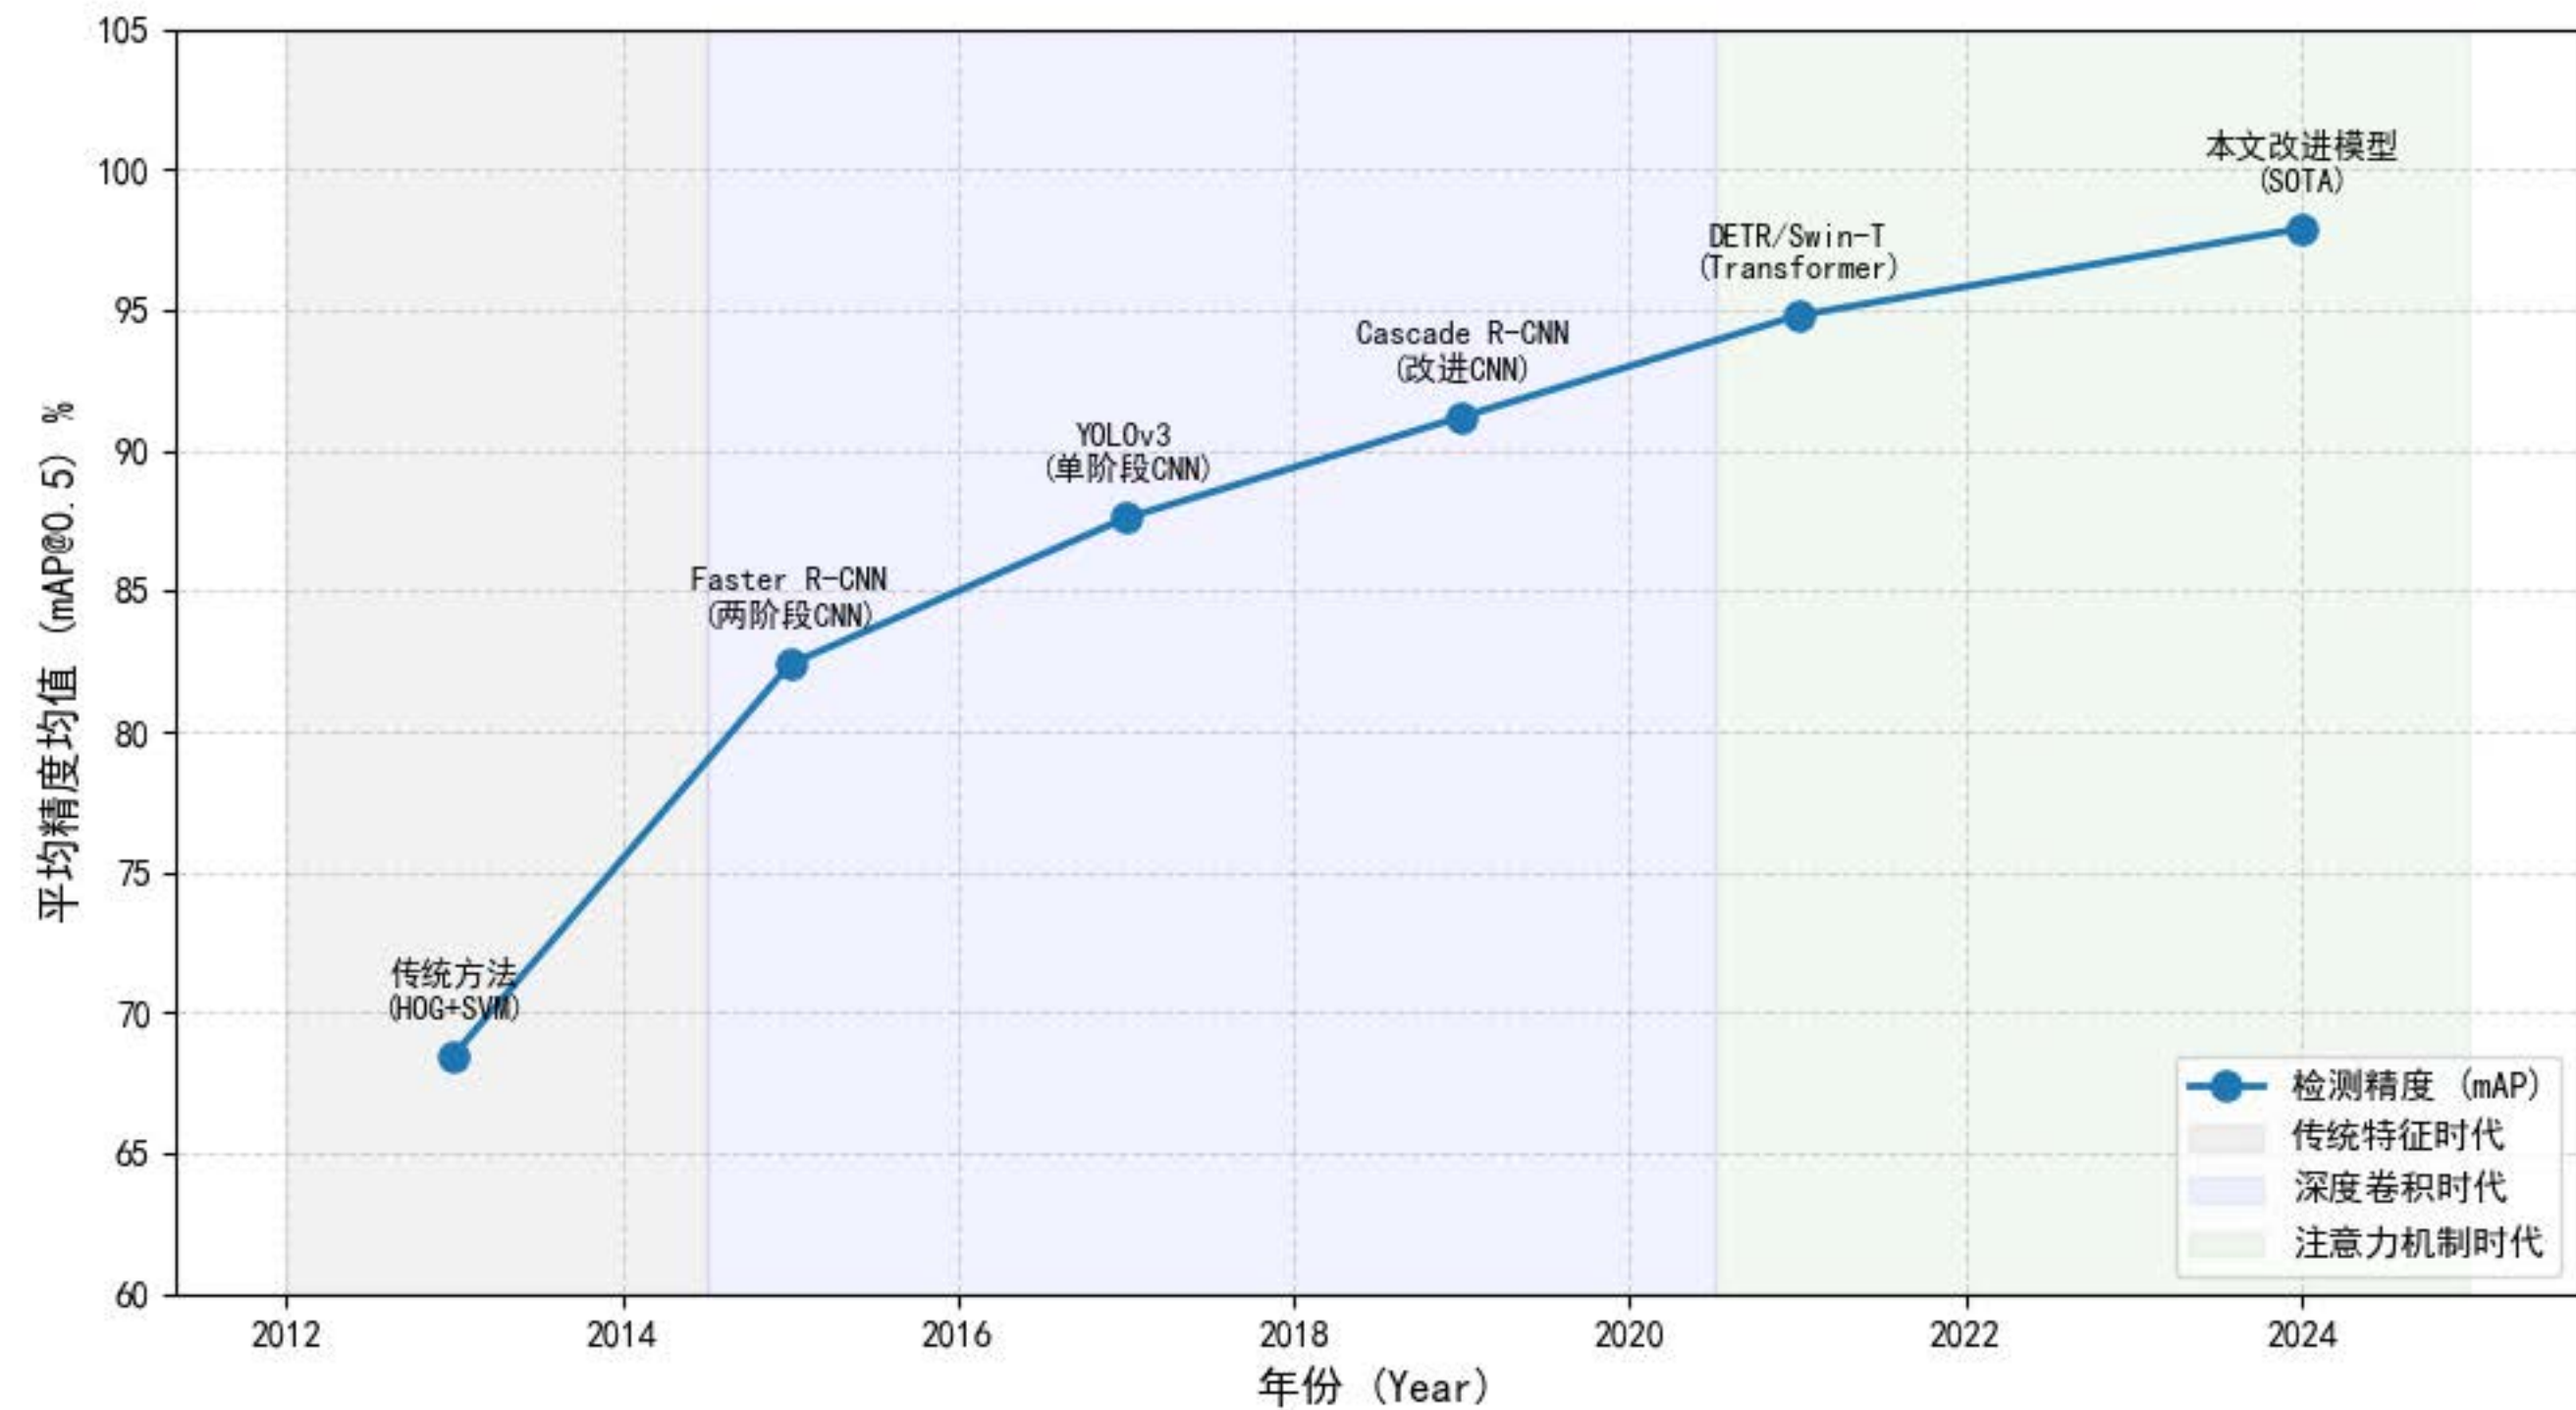
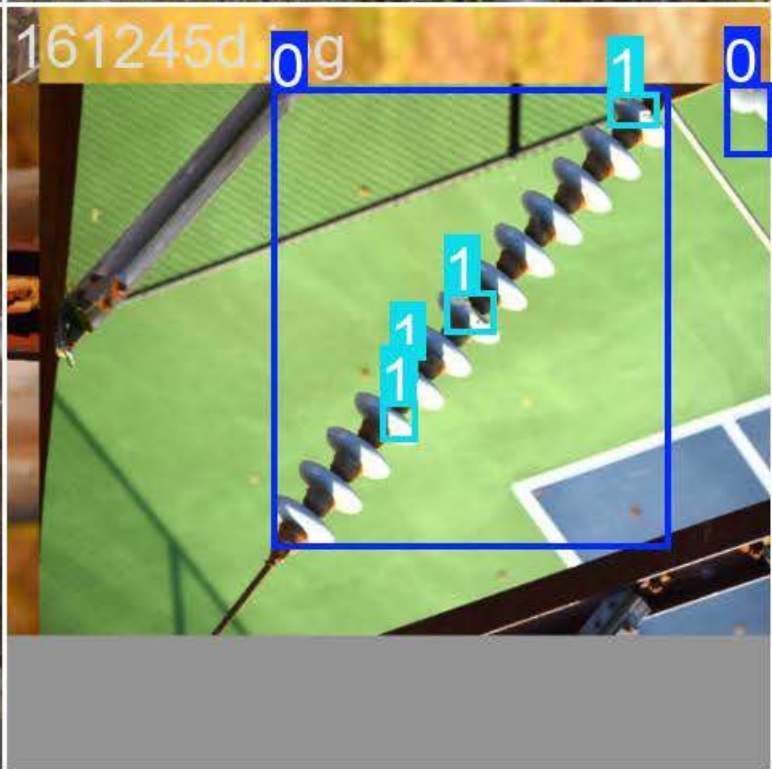
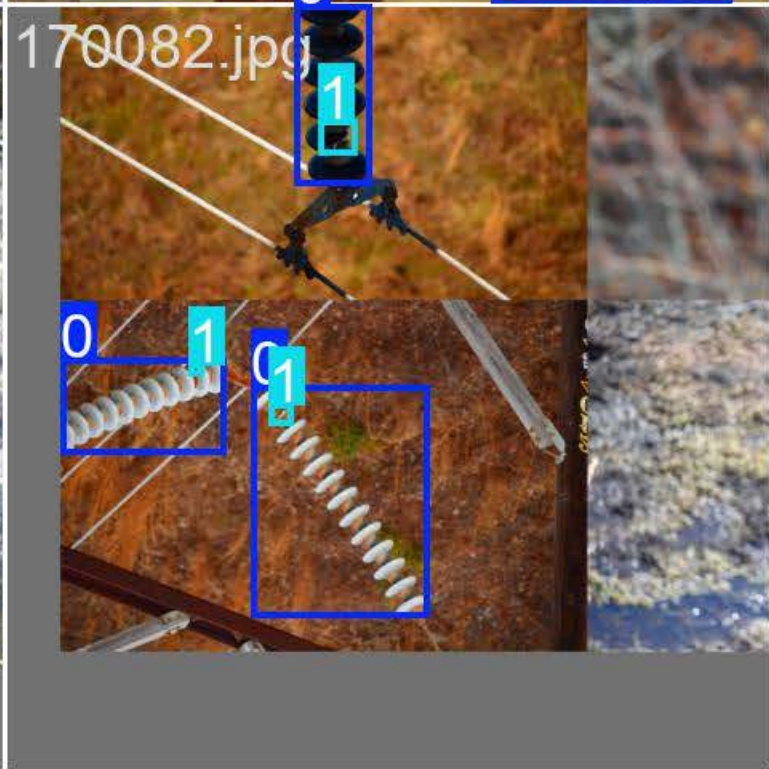
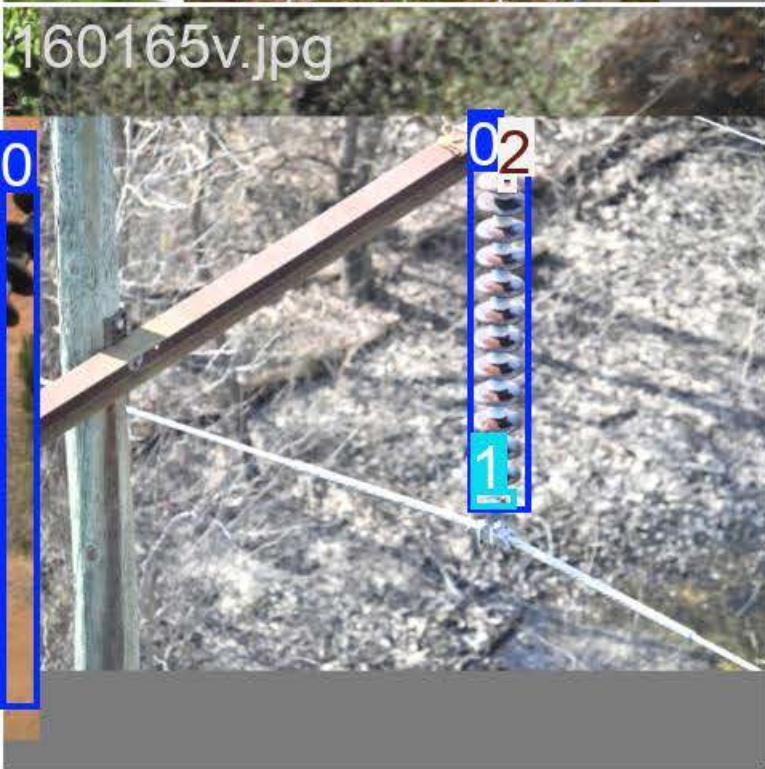
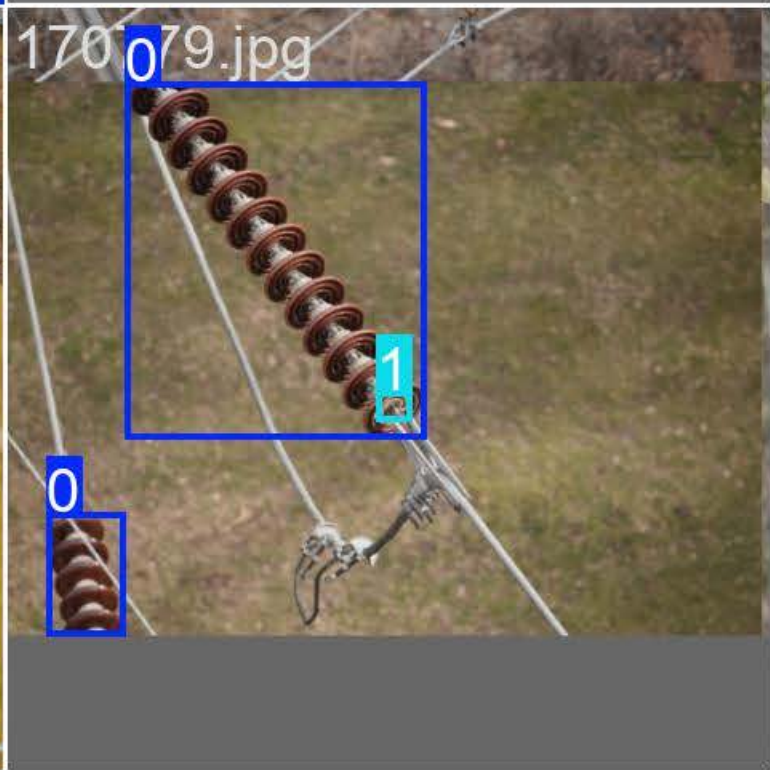
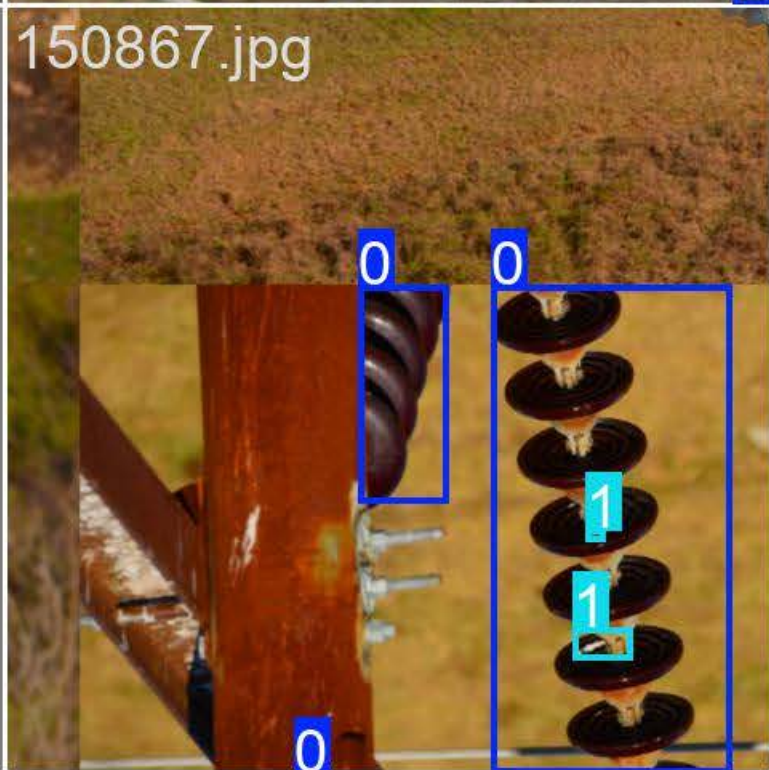
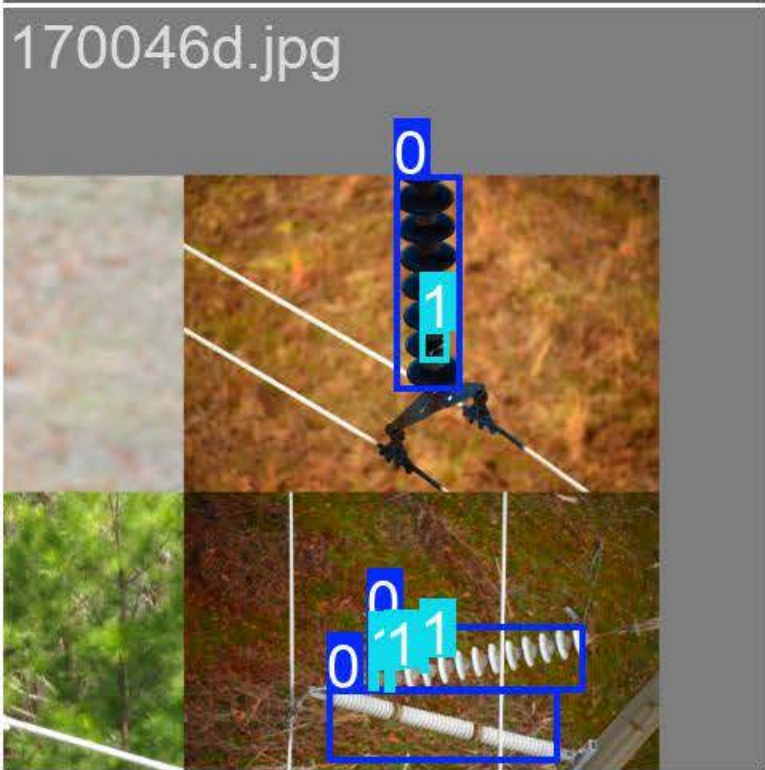
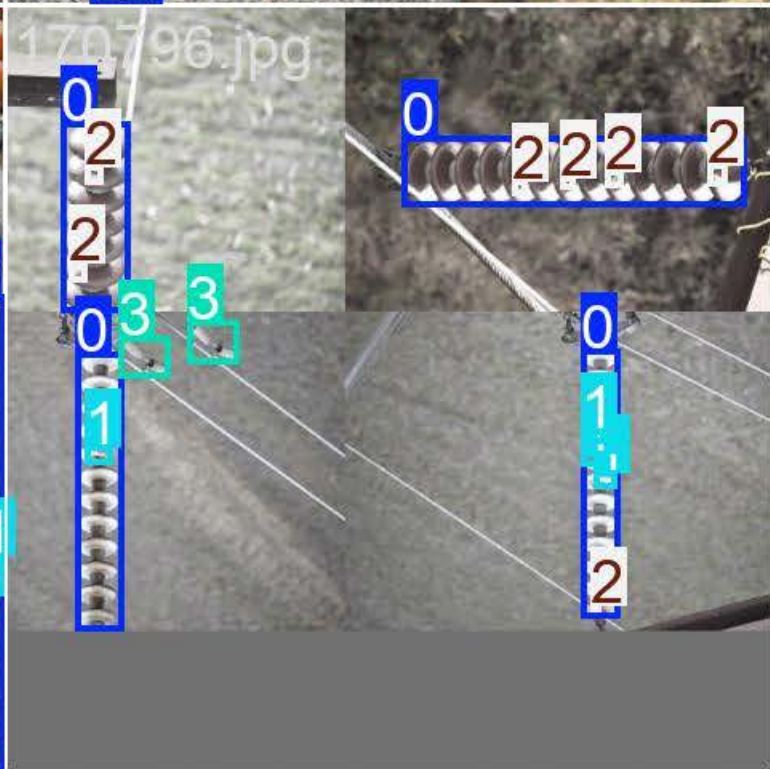
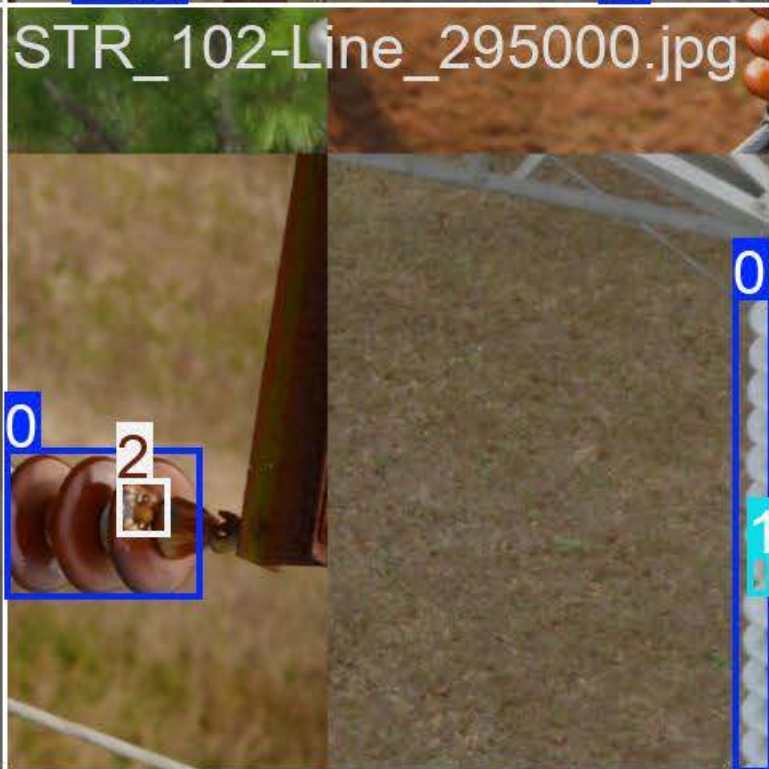
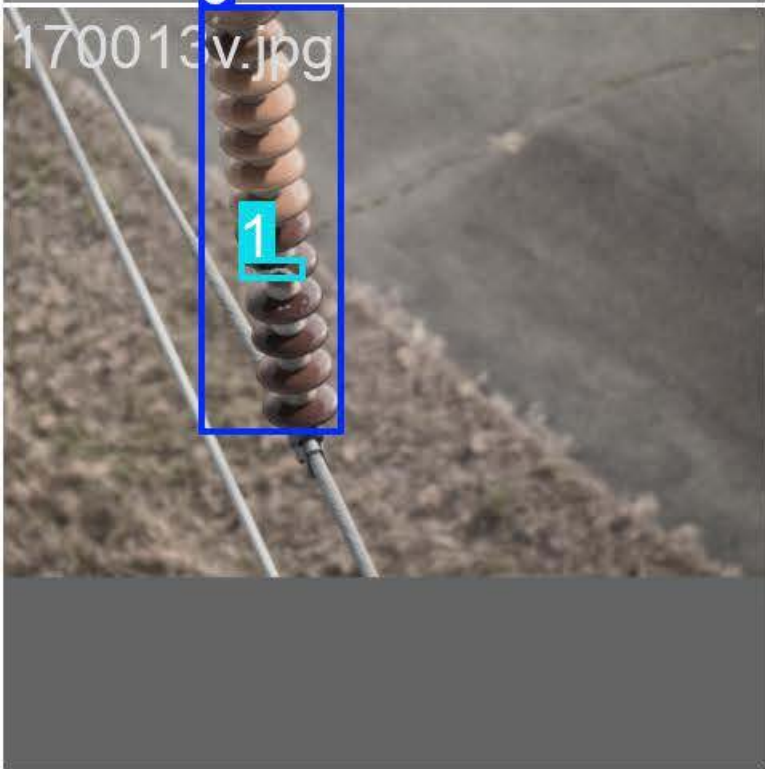
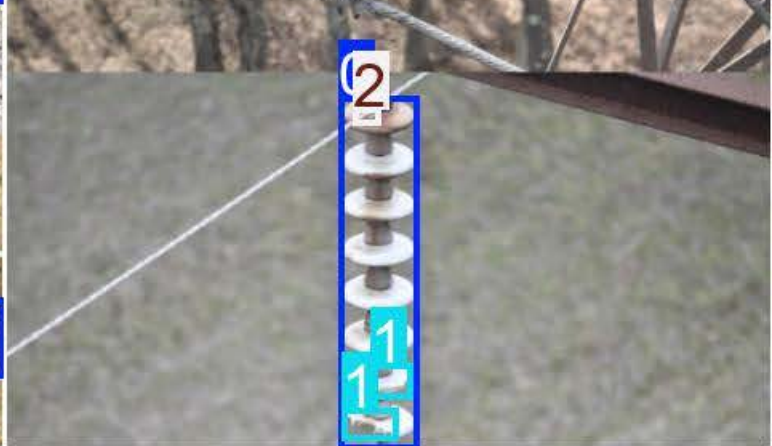
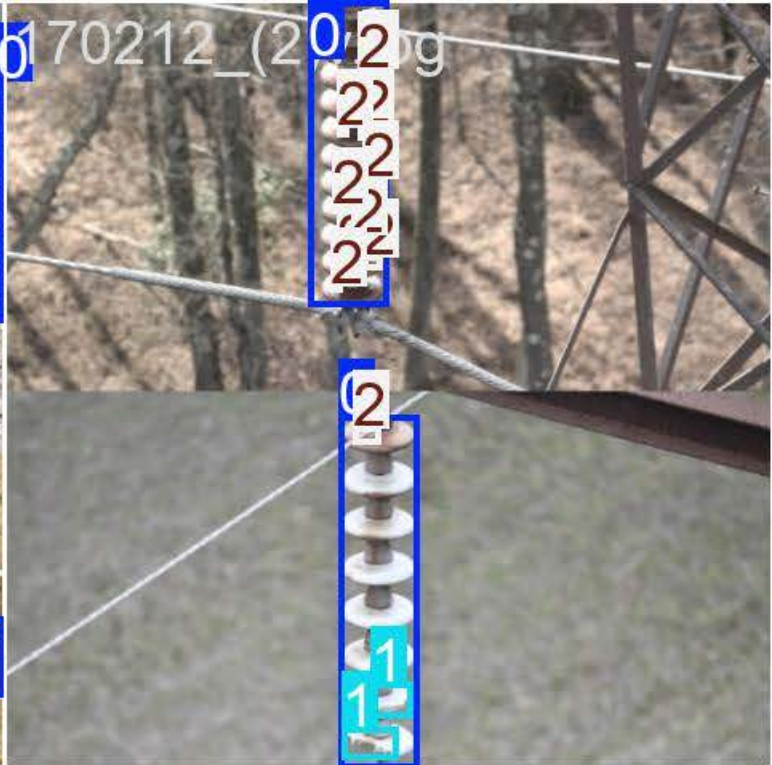


绝缘子缺陷检测模型性能演进趋势

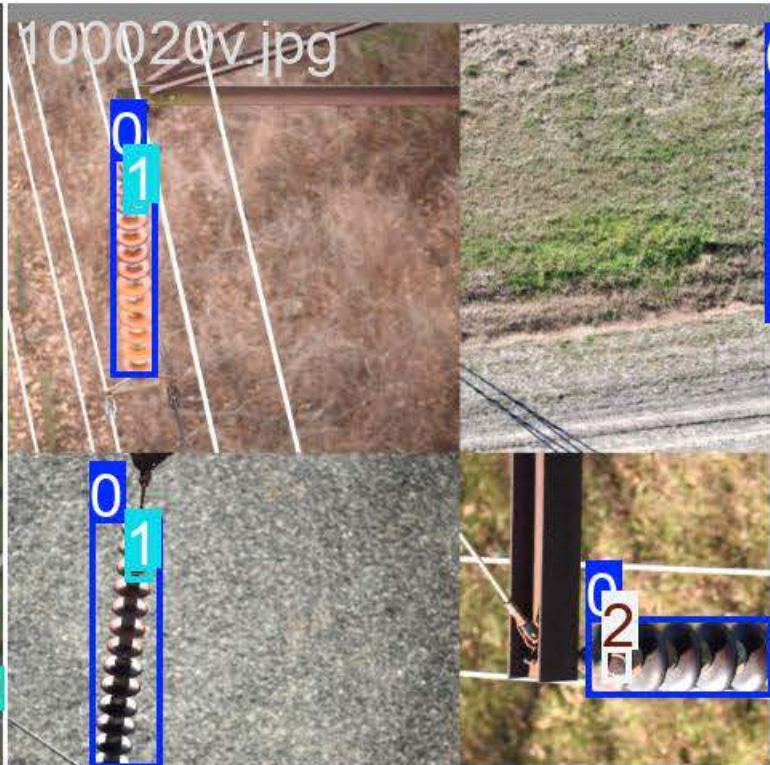

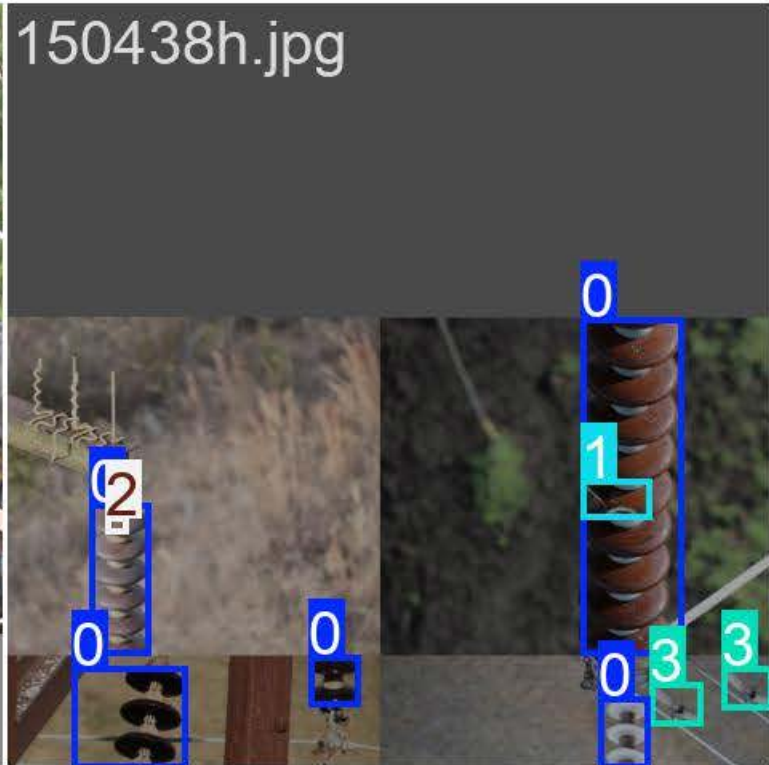


100020v.jpg

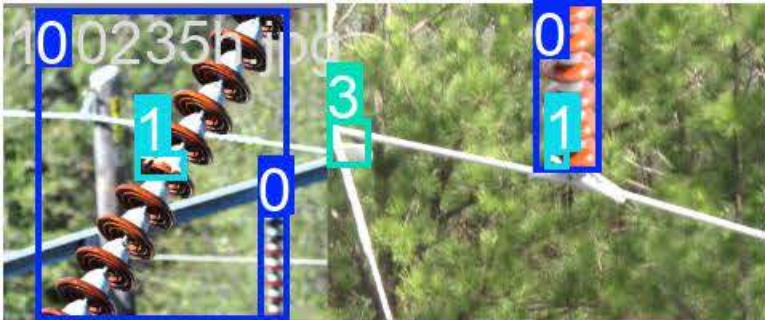


170779.jpg







170796.jpg

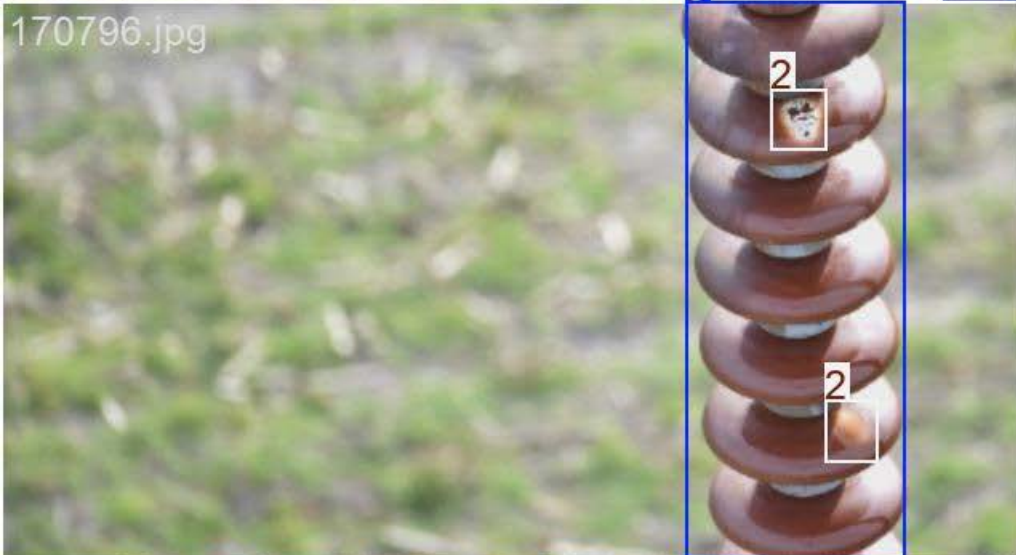


170313_(2)d.jpg

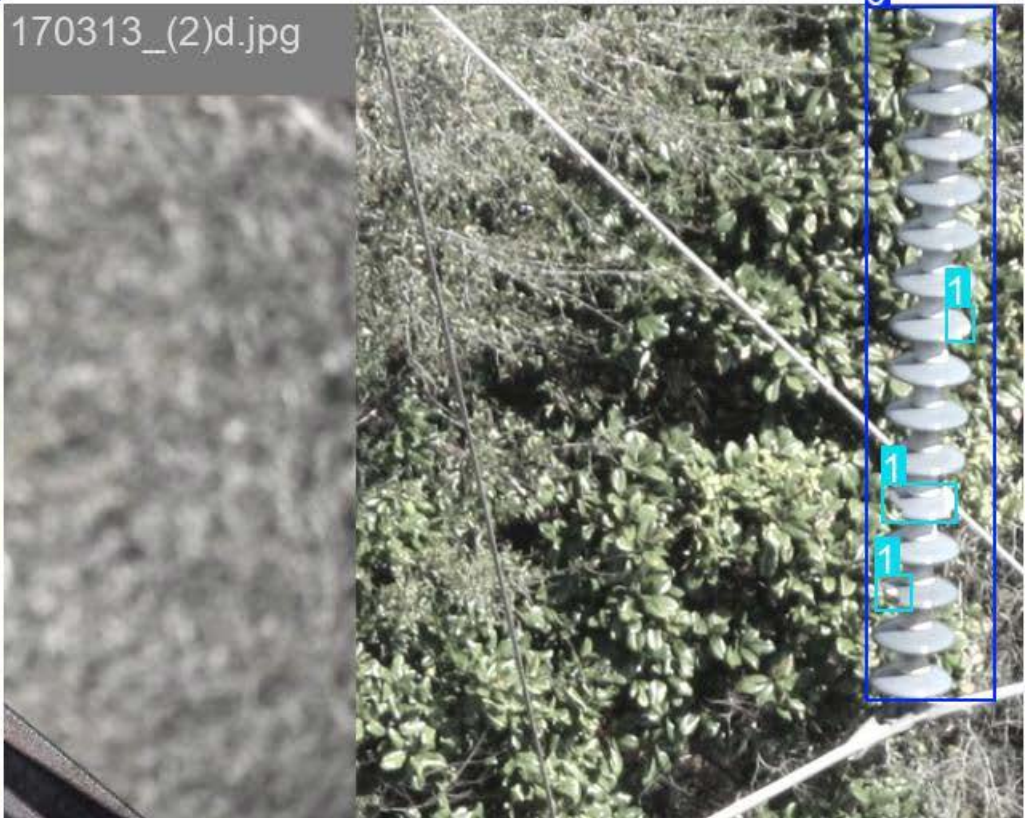


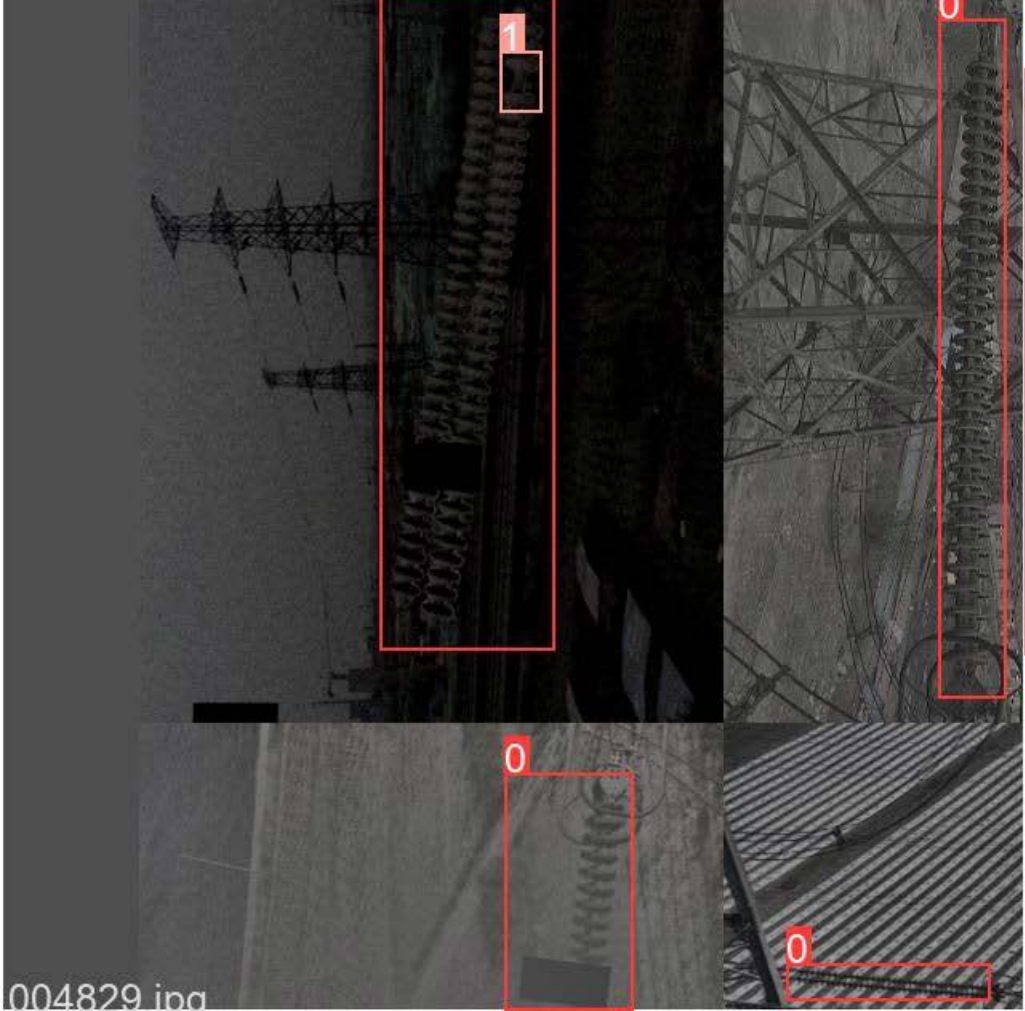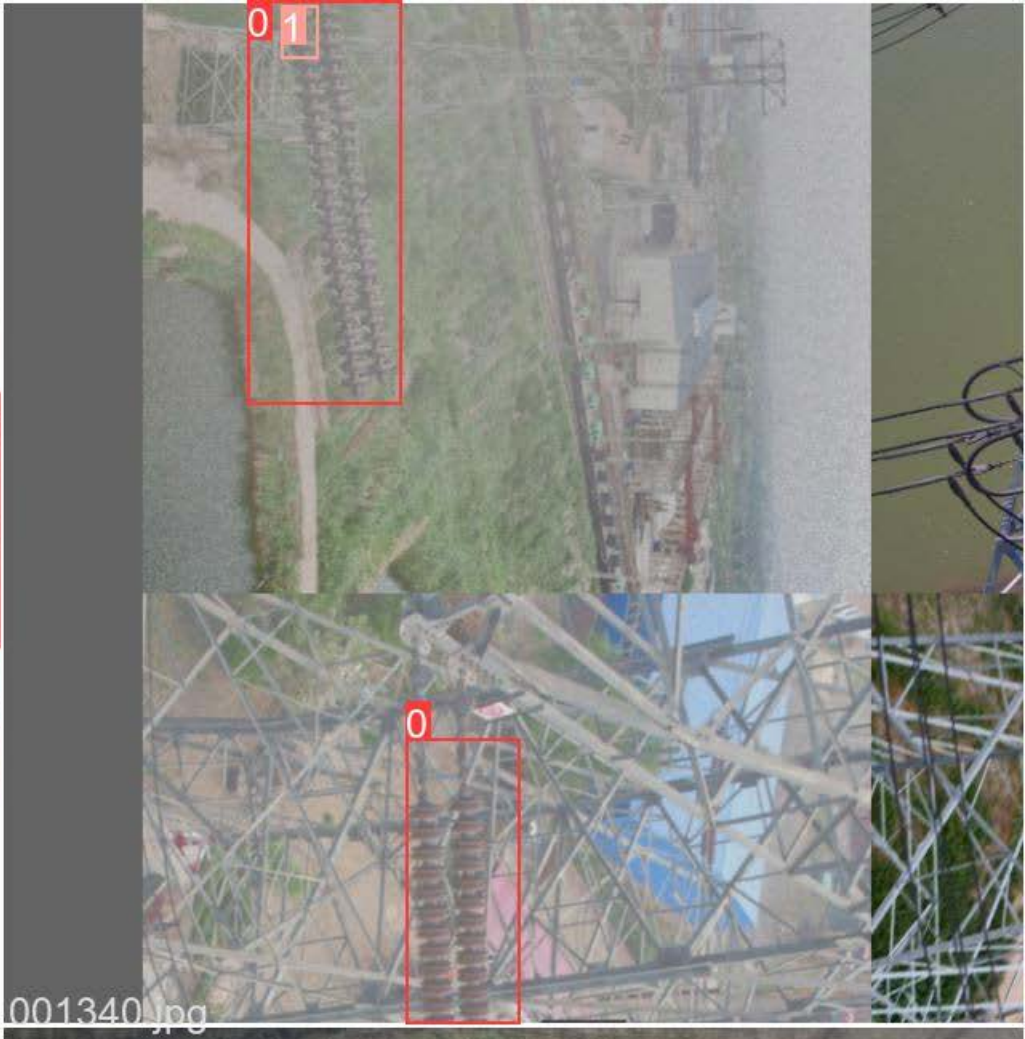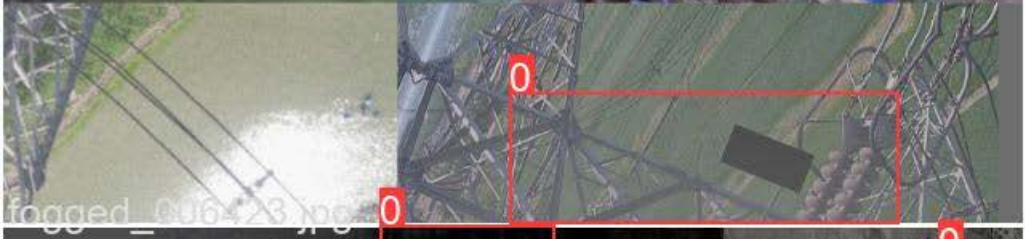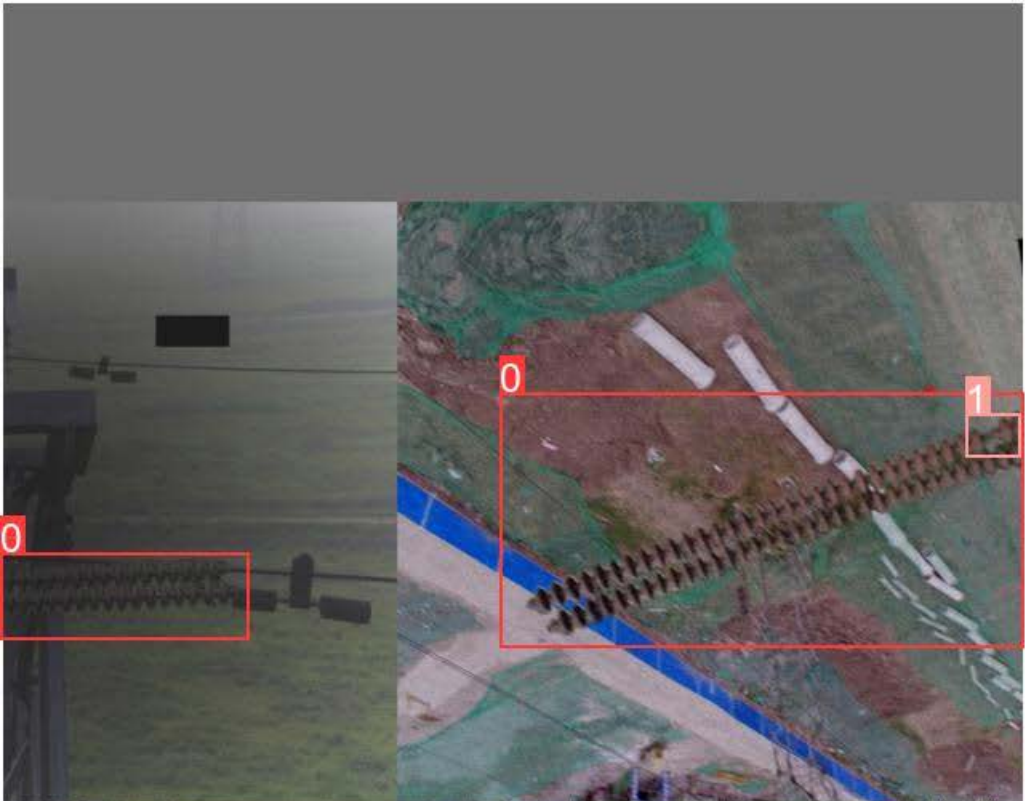


train/box_loss

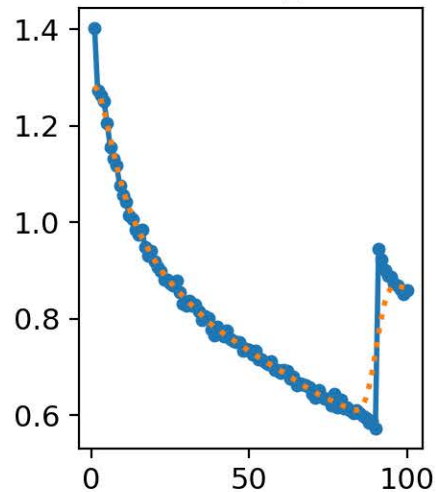


train/cls_loss

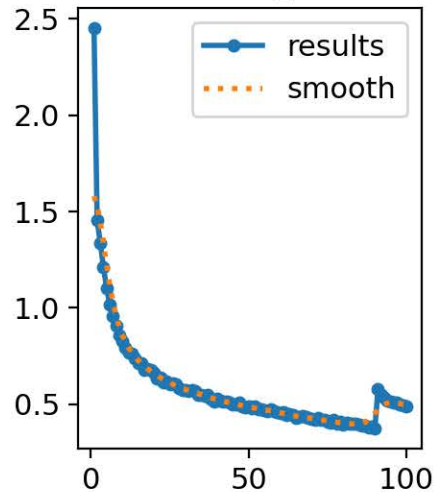


train/dfl_loss

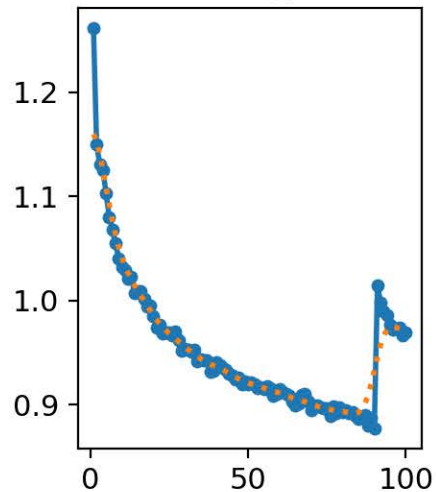


metrics/precision(B)

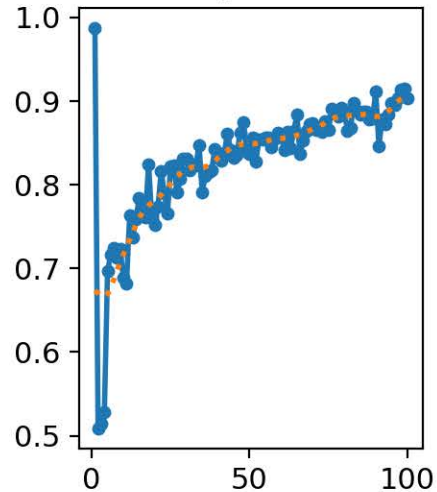


metrics/recall(B)

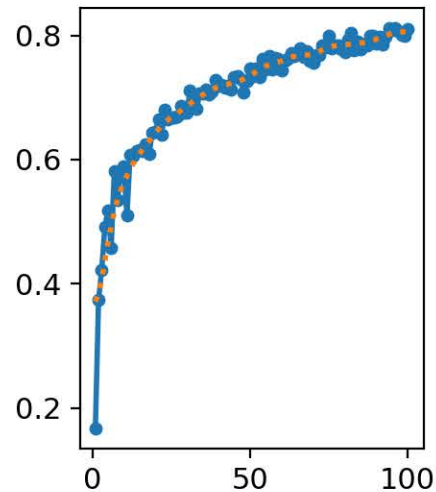


val/box_loss

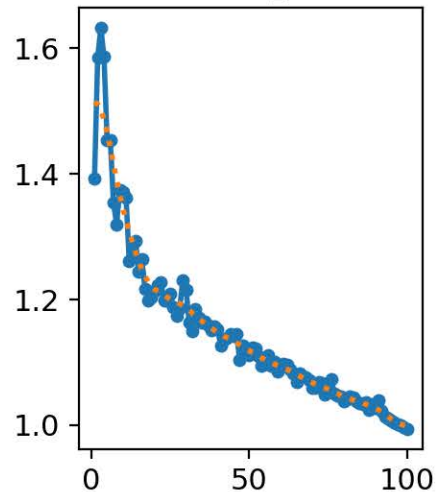


val/cls_loss

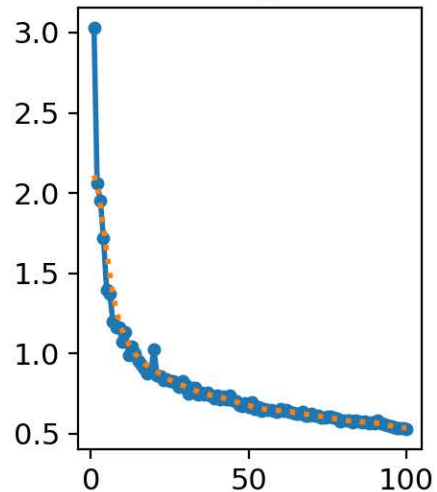


val/dfl_loss

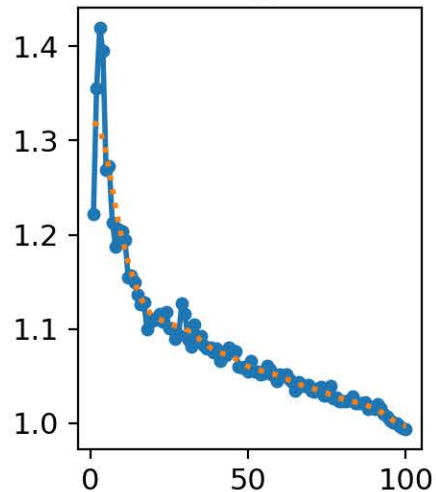


metrics/mAP50(B)

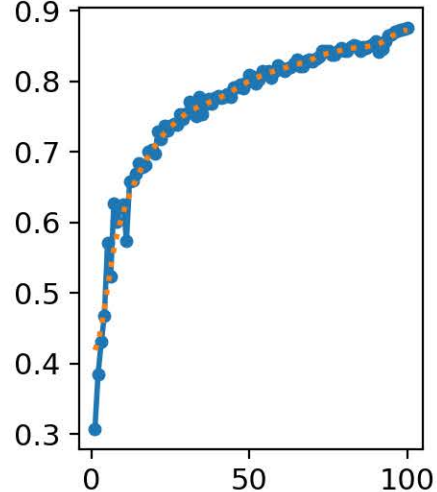


metrics/mAP50-95(B)

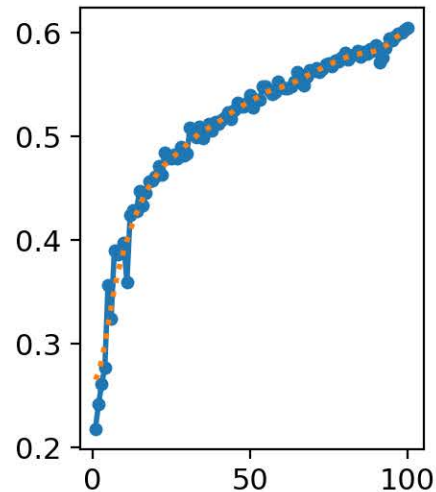


Confusion Matrix

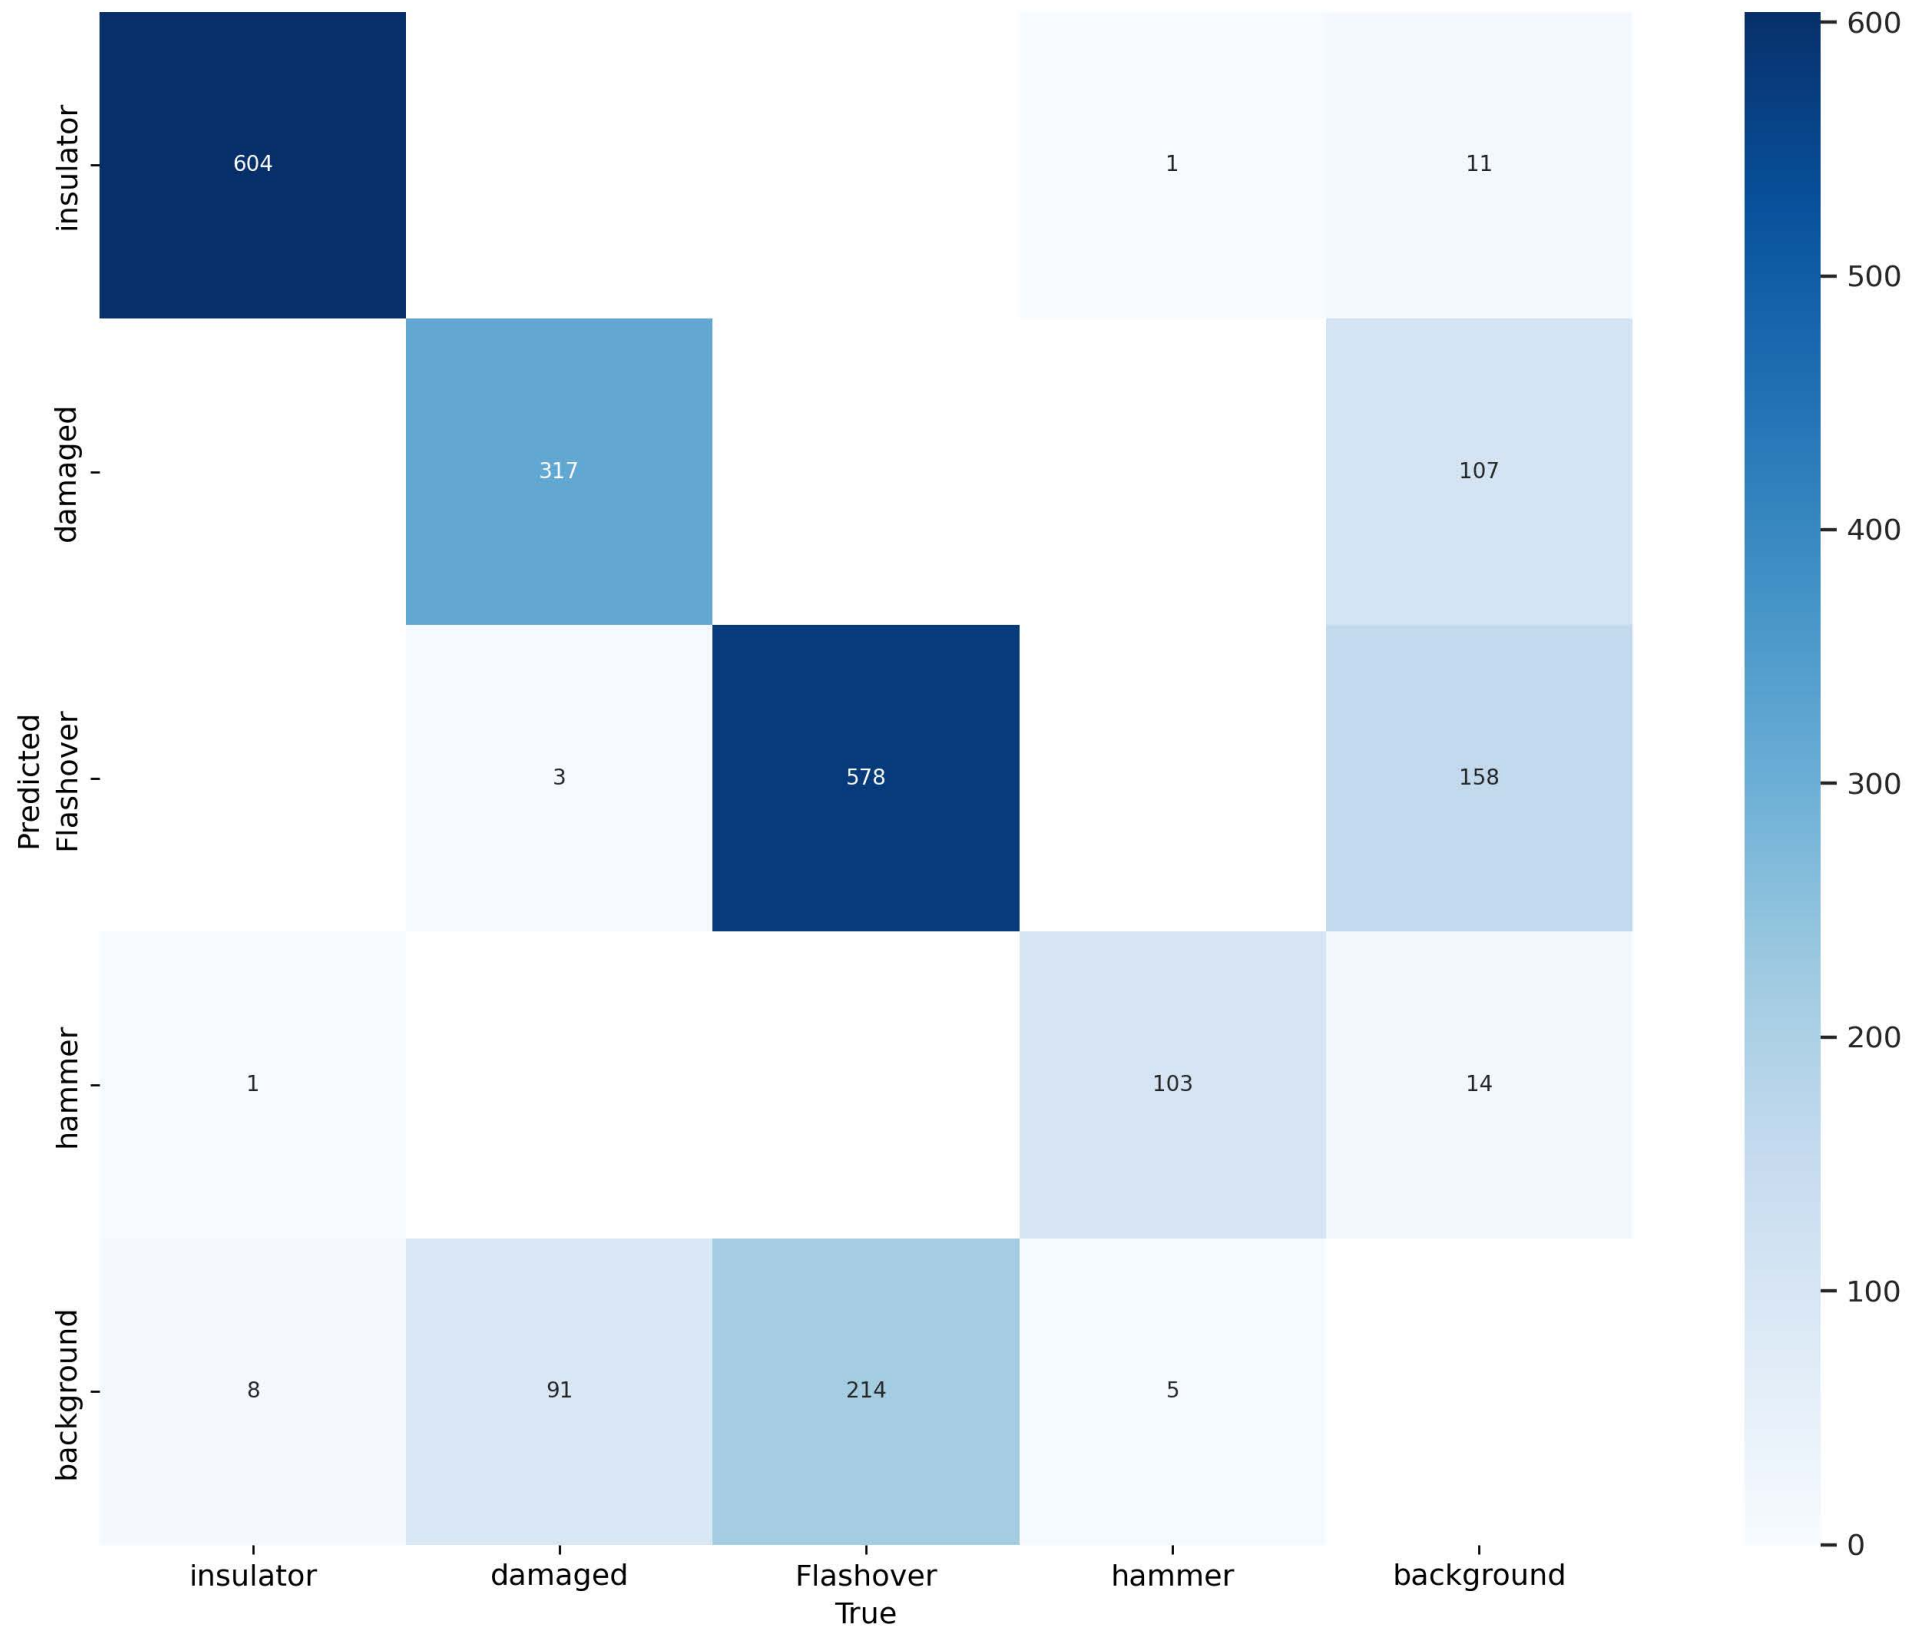

Confusion Matrix Normalized

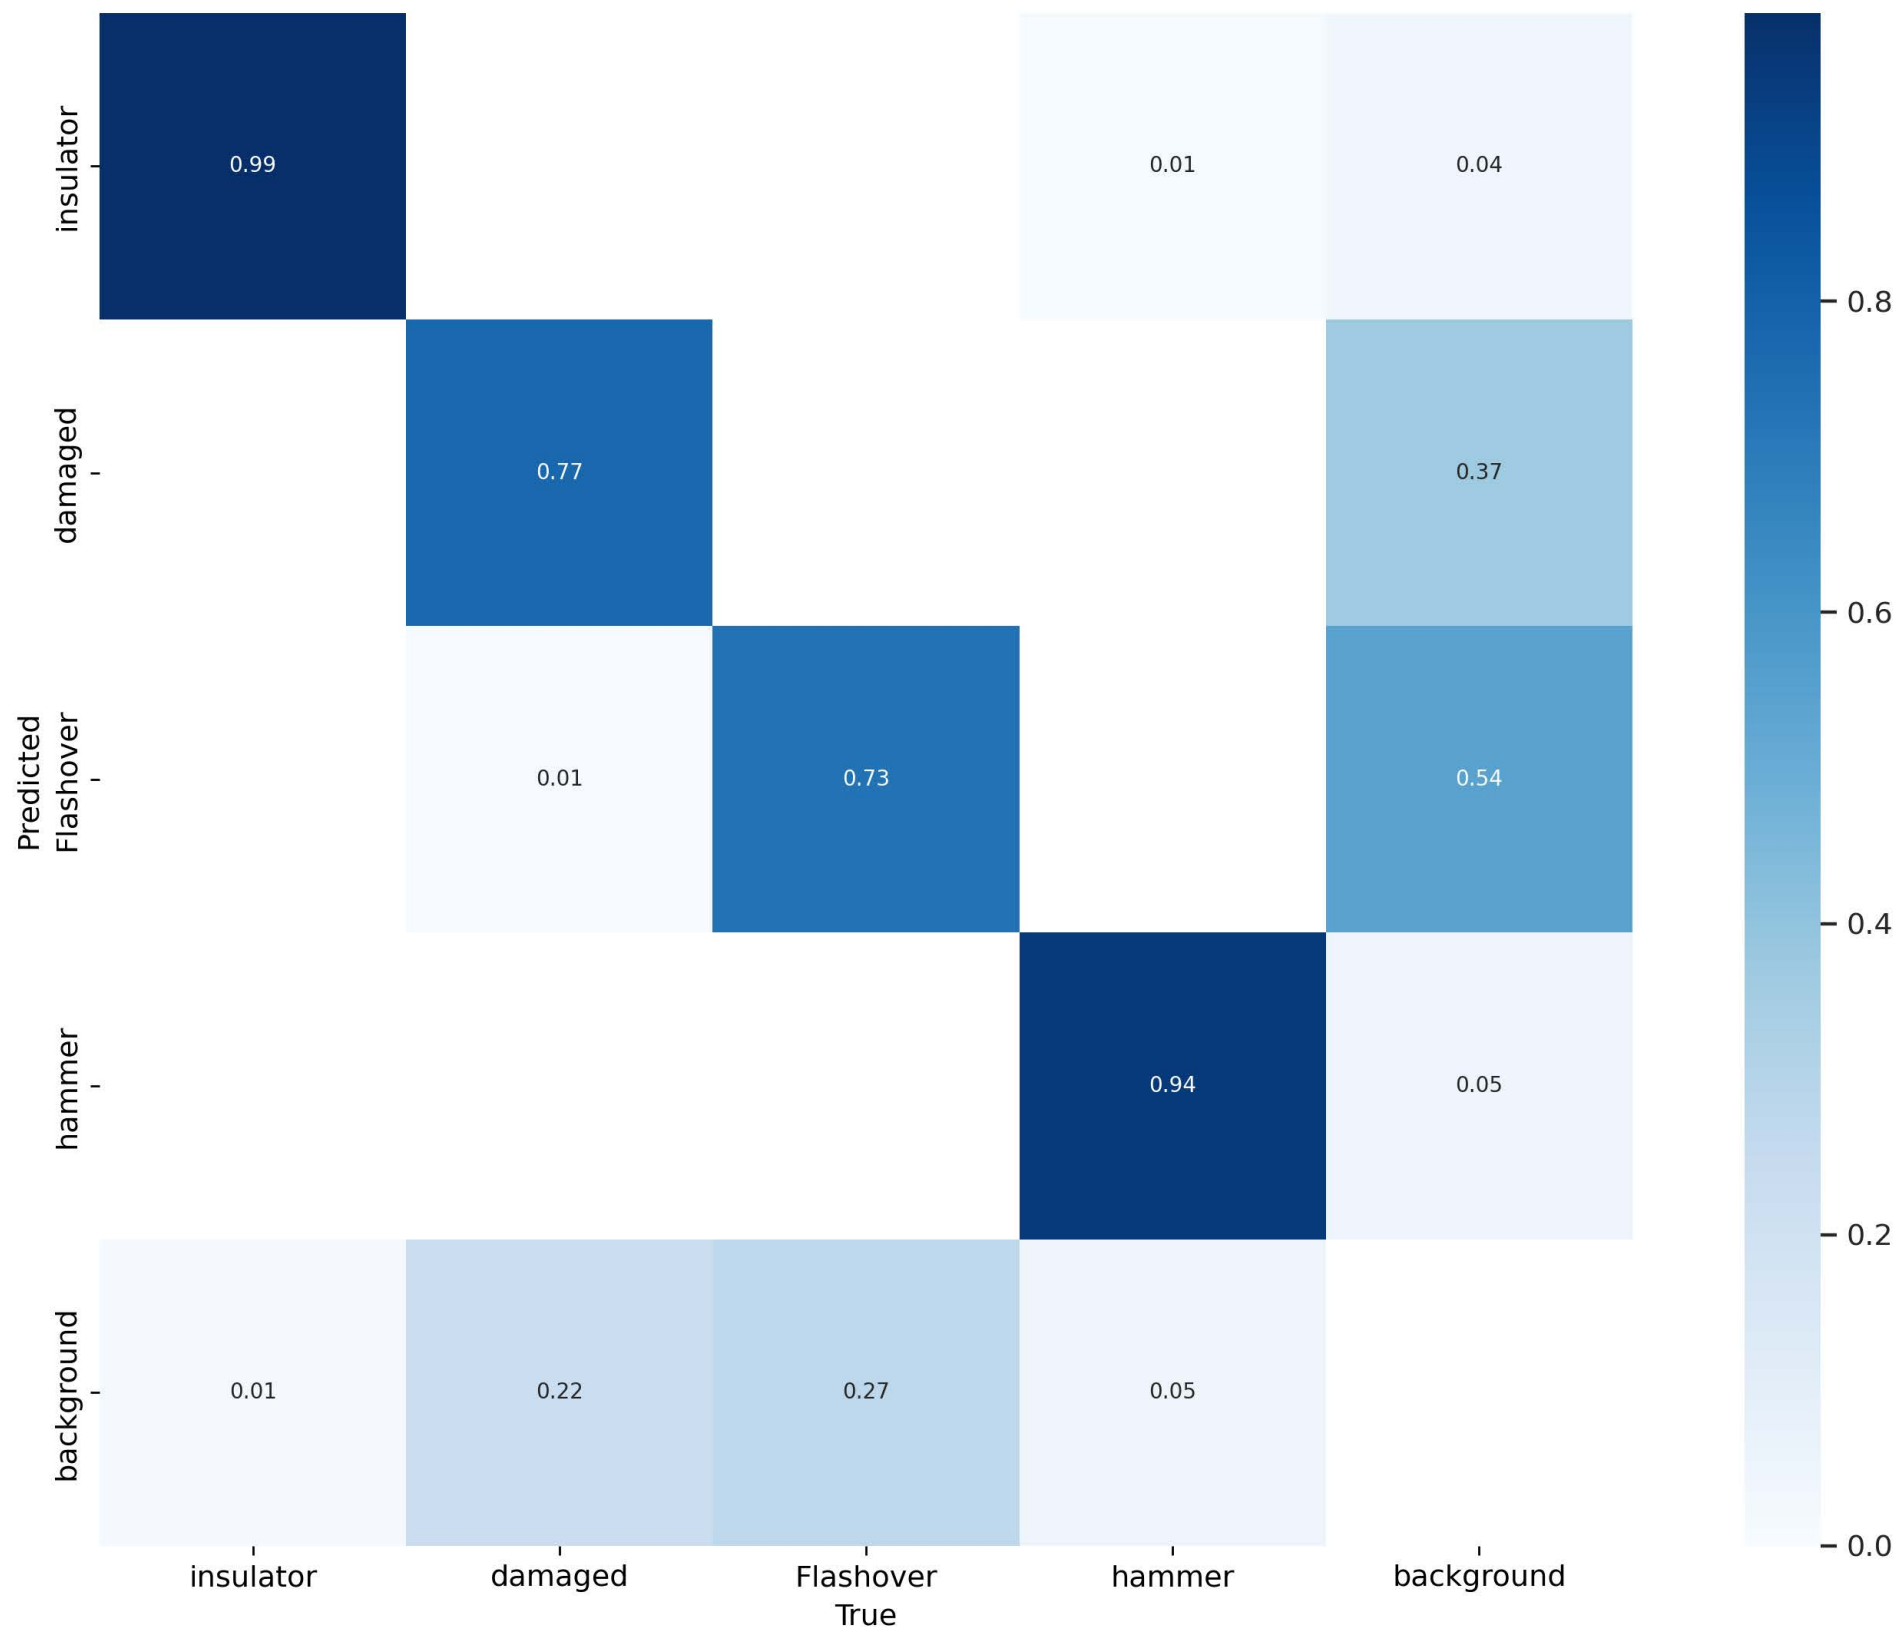

Precision-Recall Curve

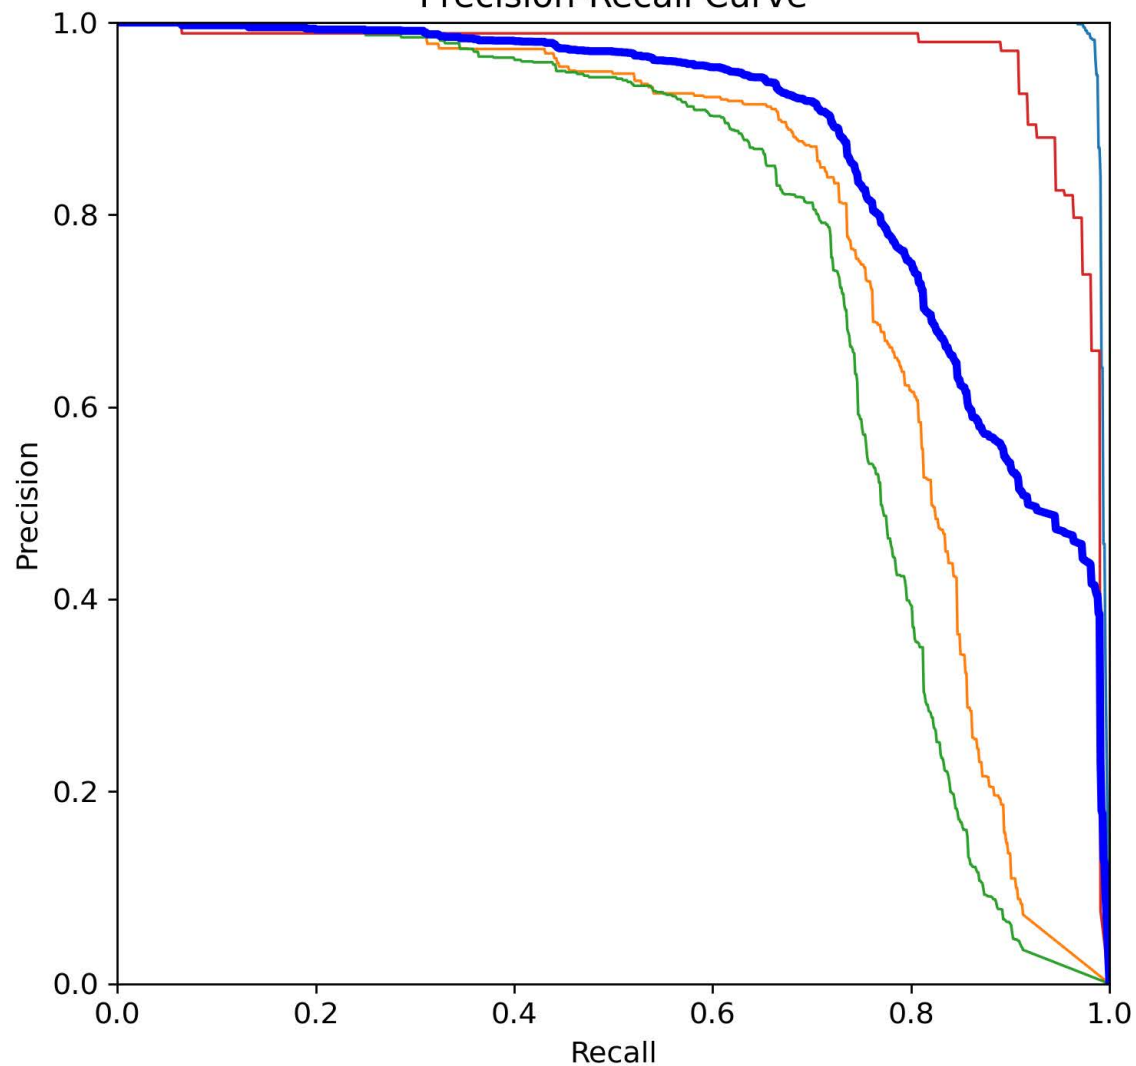

- insulator 0.994
- damaged 0.791
- Flashover 0.751
- hammer 0.969
- all classes 0.876 mAP@0.5

F1-Confidence Curve

