






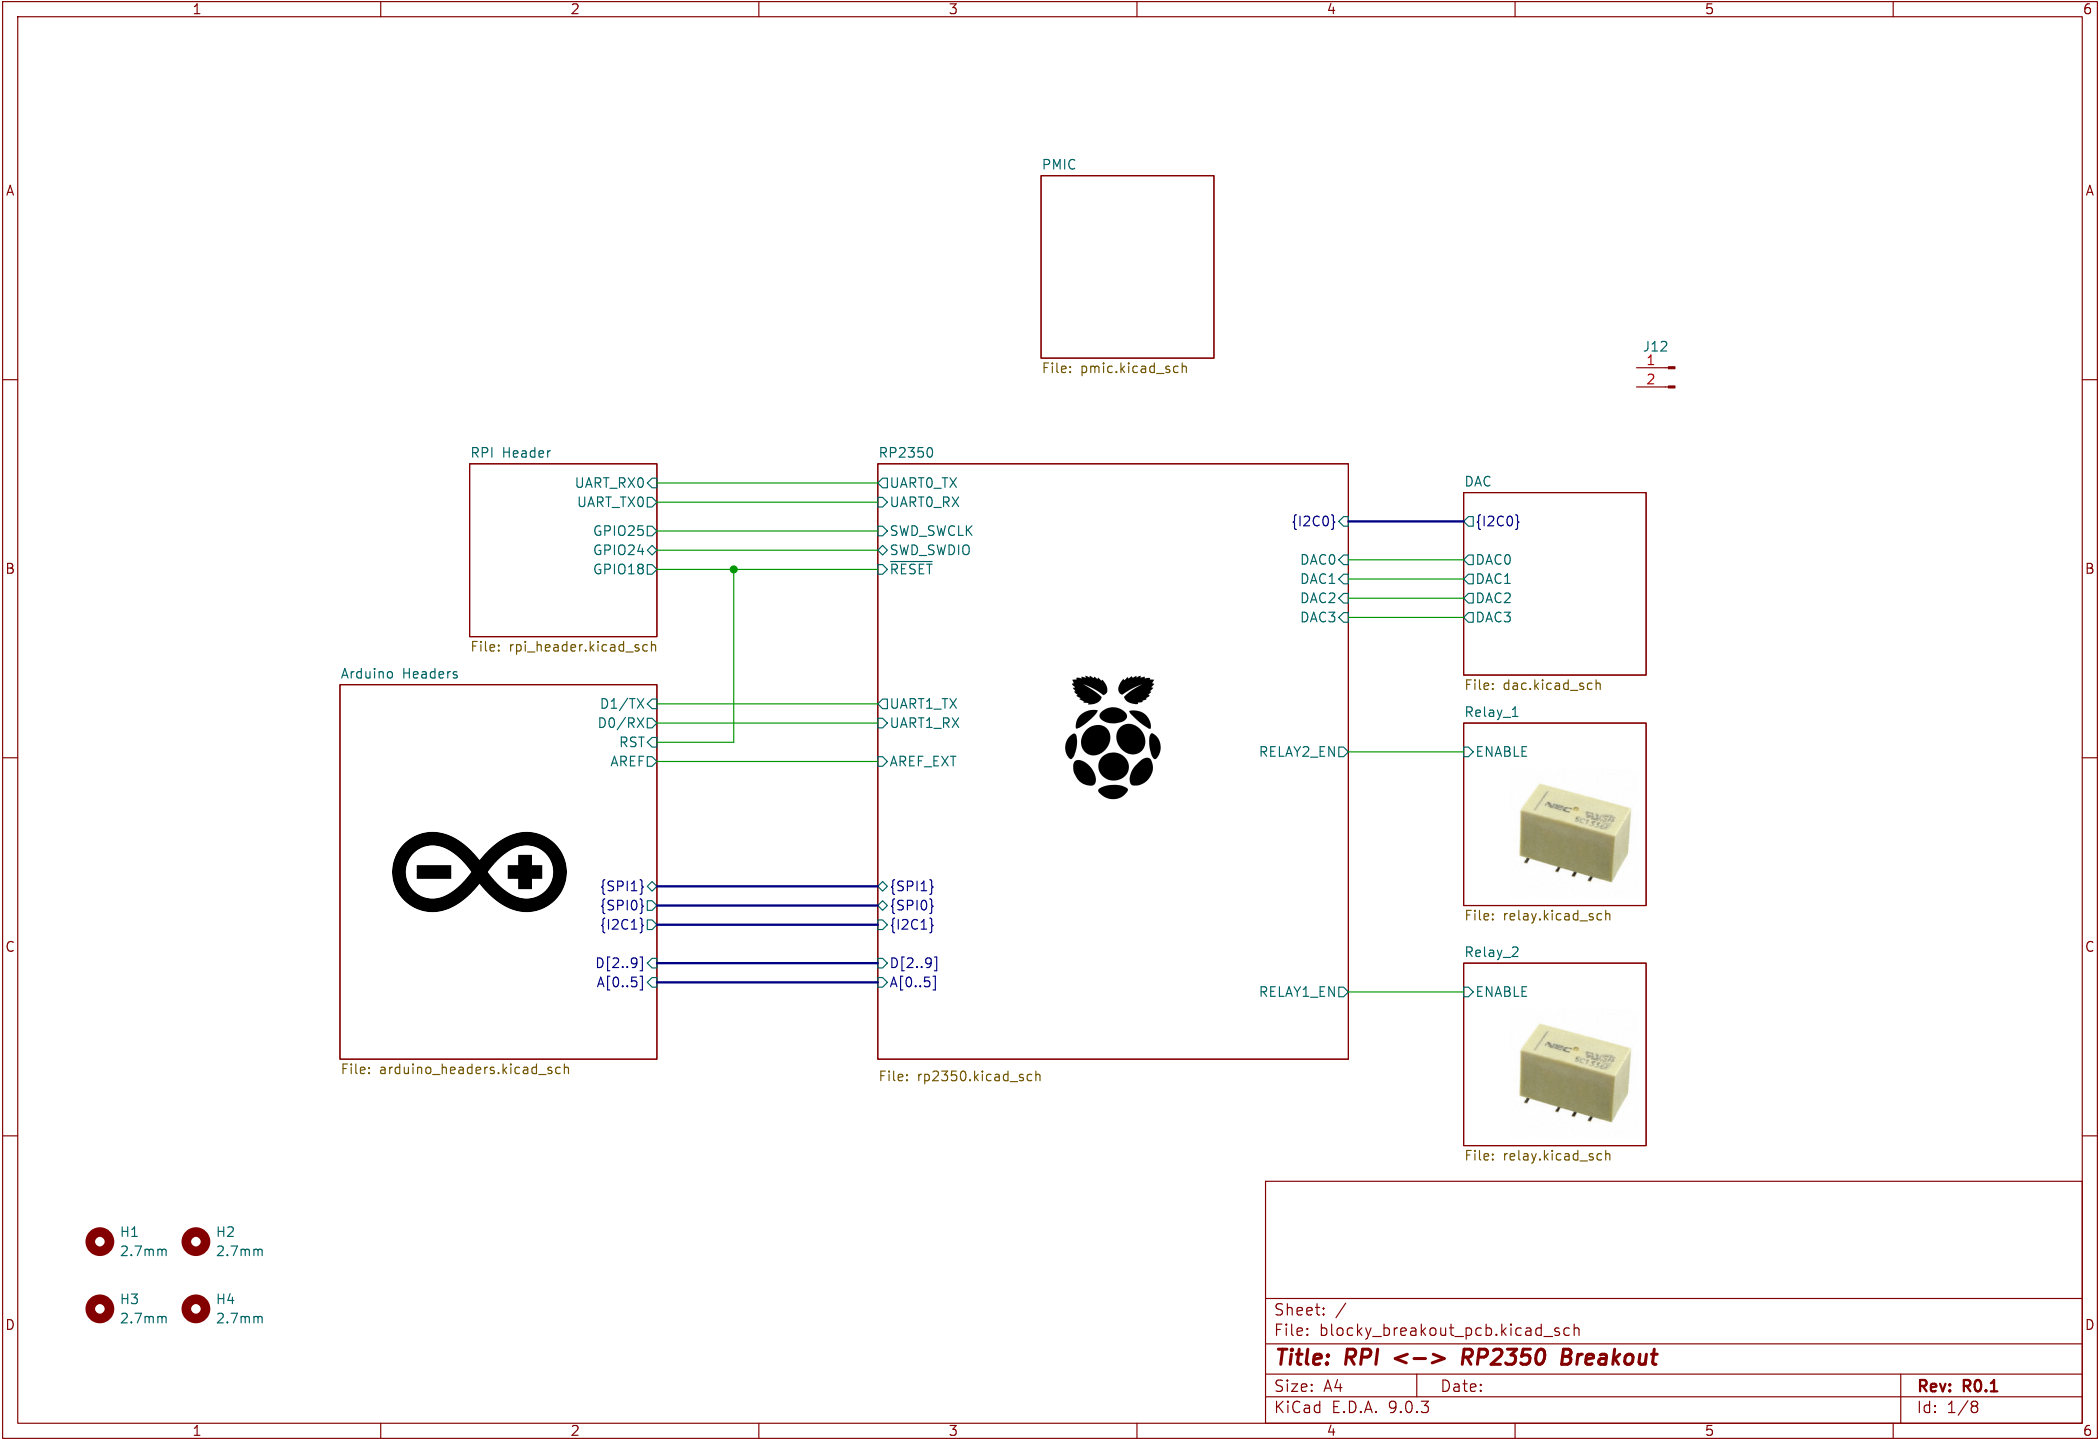


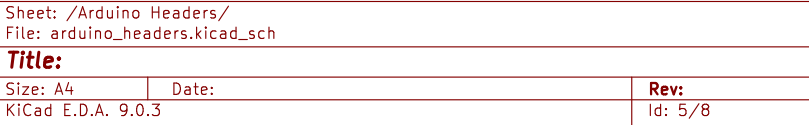


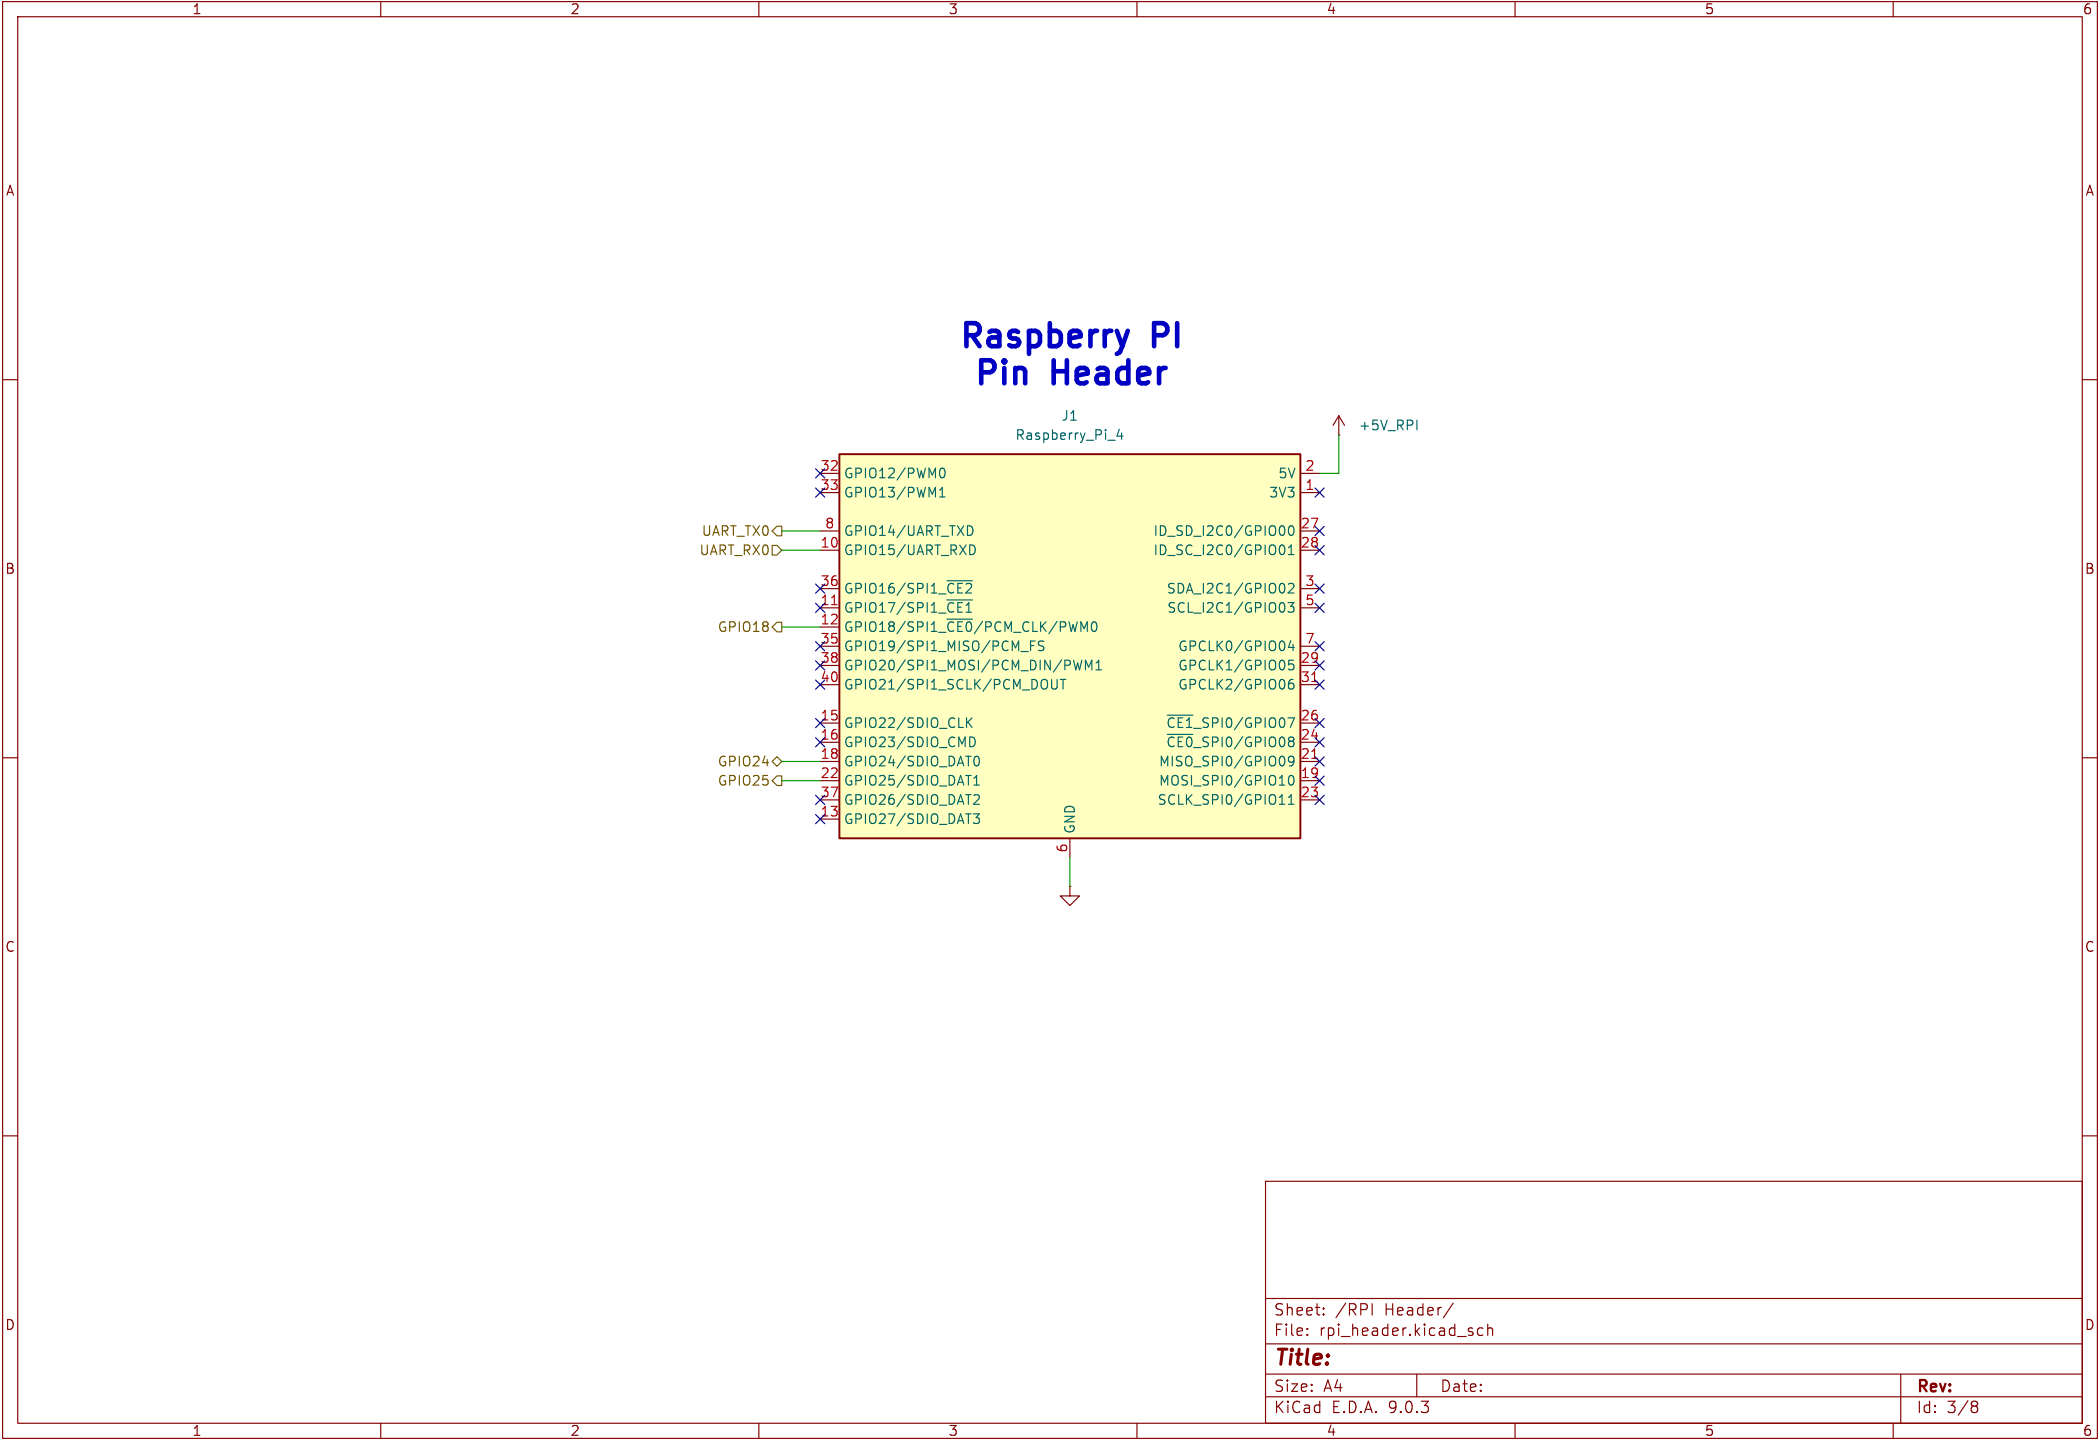


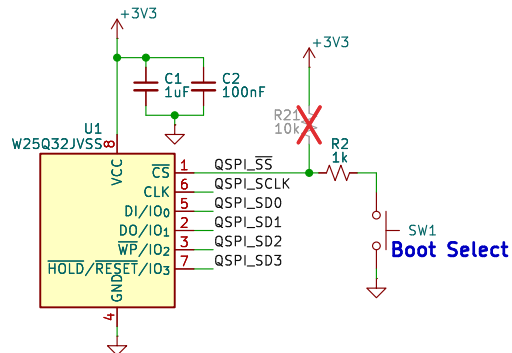


Flash Memory

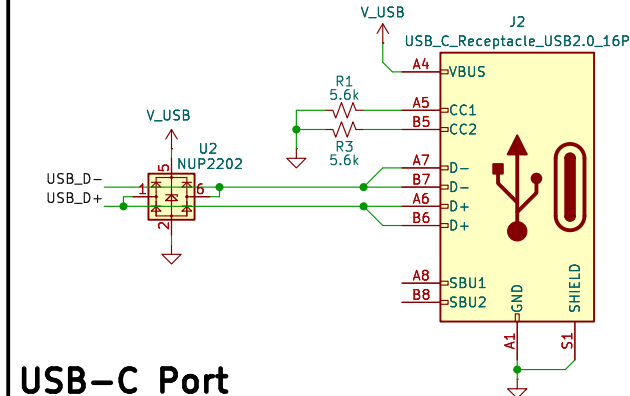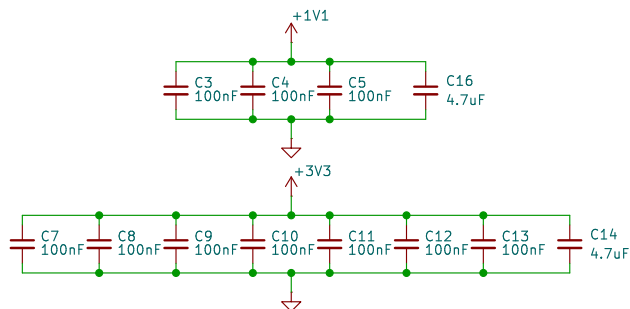


USB-C Port

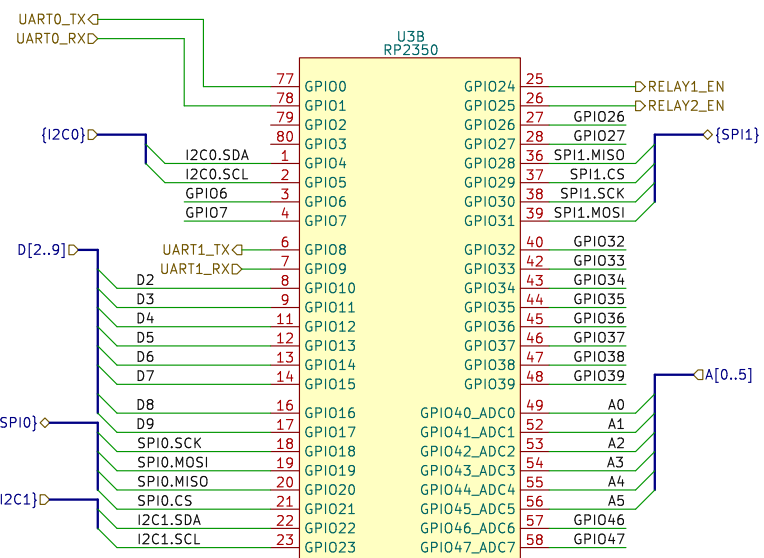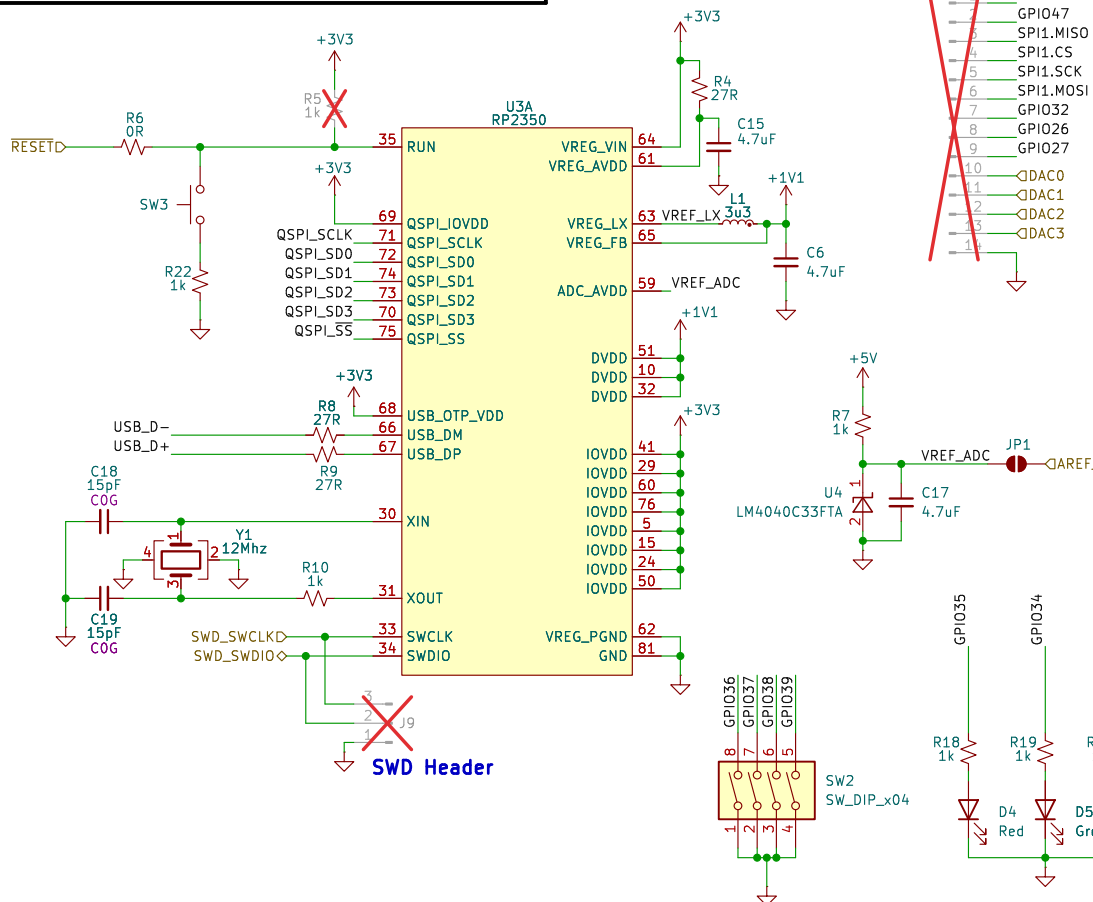

Sheet: /RP2350/		File: rp2350.kicad_sch	
Title:			
Size: A4	Date:		
KiCad E.D.A. 9.0.3	Id: 2/8		

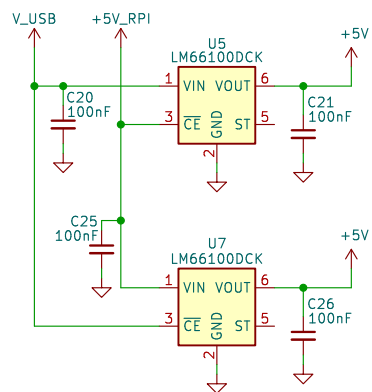

5V "or" circuit

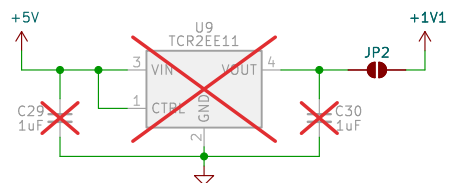


1.1V @ 200mA

Only pop as replacement
for RP2350 internal Vreg

Absolute max power consumption for a
Pi5 is 10W. Standard pi supply is
15.3W (which we would specify as a
requirement).

From here we have 5.3W, ~1A for any
USB-A peripherals and our hardware.

I think it's reasonable for us to
assume we have around 300mA to use.

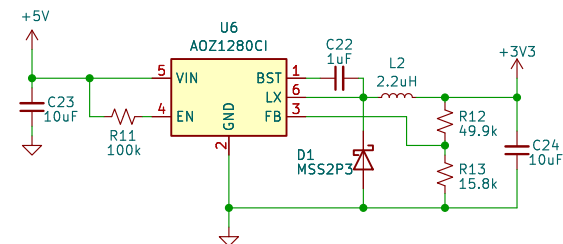

3.3V @ 1.2A

Sheet: /PMIC/
File: pmic.kicad_sch


Title:

Size: A4 Date:

KiCad E.D.A. 9.0.3

Rev:

Id: 4/8

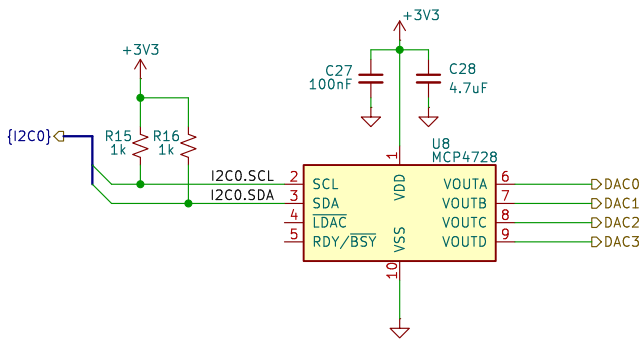

Sheet: /DAC/
File: dac.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.3

Rev:

Id: 6/8

